

version 7.0.



FCC PART 15C

TEST REPORT

For

Techfaith Wireless Technology Group Limited

No.10A, Tower D2, IT Park, Electronic Town, Jiu Xian Qiao North Road, Chaoyang District, Beijing, China

FCC ID: UJQT700

Report Type: Original Report		Product Type: GSM/WCDMA O obile Rad
Test Engineer:	Ares Liu	Ann. lin
Report Number:	R2DG131217003-	00F
Report Date:	2014-04-14	
	Ivan Cao	han Can
Reviewed By:	RF Leader	
Test Laboratory:	No.69 Pulongcun,	58891

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2) This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
OBJECTIVE	3
Related Submittal(s)/Grant(s) Test Methodology	3 3
TEST FACILITY	
SYSTEM TEST CONFIGURATION	
JUSTIFICATION	
EUT Exercise Software	
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE	5
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	6
FCC§15.203 - ANTENNA REQUIREMENT	7
APPLICABLE STANDARD	
ANTENNA CONNECTED CONSTRUCTION	7
FCC §15.207 – AC LINE CONDUCTED EMISSION	
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER SETUP TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST RESULTS SUMMARY	
TEST DATA	
FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTYEUT SETUP	
EMI TEST RECEIVER SETUP	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS	
TEST RESULTS SUMMARY	
TEST DATA	
FCC§15.225(E) - FREQUENCY STABILITY	
APPLICABLE STANDARD	
TEST PROCEDURE TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
ECC 915 215(C) 20 DD EMISSION DANDWIDTH	21

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Techfaith Wireless Technology Group Limited*'s product, model number: *T700 (FCC ID: UJQT700)* (the "EUT") in this report was a *GSM /WCDMA mobile pad*, which was measured approximately: 21.3 cm (L) x 13.5 cm (W) x 2.0 cm (H), rated input voltage: DC 3.7 V from lithium battery or DC 5V from adapter.

Report No.: R2DG131217003-00F

Adapter information: ToughShield Model: STC-A22O50I1500C40 Input: AC 100-240V, 50/60Hz, 0.3A

Output: DC 5.0V, 1.5A

Objective

This Type approval report is prepared on behalf of *Techfaith Wireless Technology Group Limited* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: UJQT700

FCC Part 15C DTS submissions with FCC ID: *UJQT700* for Wifi.

FCC Part15C DTS submissions with FCC ID: UJQT700 for Bluetooth LE mode.

FCC Part 15C DSS submissions with FCC ID: UJQT700 for Bluetooth BDR, EDR mode.

FCC Part 22H & 24E PCB submissions with FCC ID: UJQT700.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

FCC Part 15.225 Page 3 of 22

^{*} All measurement and test data in this report was gathered from production sample serial number: 131217003 (Assigned by BACL.Dongguan). The EUT was received on 2013-11-19.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Report No.: R2DG131217003-00F

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at http://ts.nist.gov/standards/scopes/5000690.htm

FCC Part 15.225 Page 4 of 22

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a test mode

EUT Exercise Software

No software was performed under test.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
N/A	Earphone	N/A	N/A

Report No.: R2DG131217003-00F

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	no	no	1.2	EUT	Earphone

Block Diagram of Test Setup

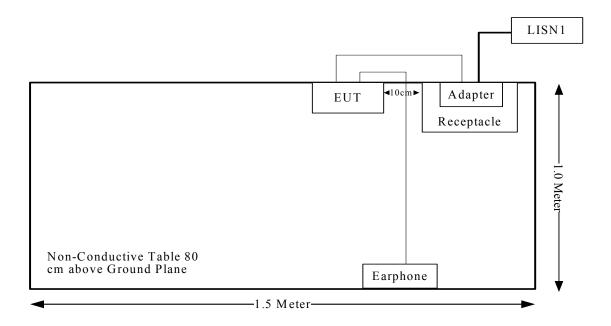

FCC Part 15.225 Page 5 of 22

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207	AC Line Conducted Emission	Compliance
\$15.225 \$15.209 \$15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20 dB Emission Bandwidth	Compliance

Report No.: R2DG131217003-00F

FCC Part 15.225 Page 6 of 22

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Report No.: R2DG131217003-00F

Antenna Connected Construction

The EUT has an internal antenna, which was Conformance with this requirement, please refer to the internal photos.

Result: Compliance.

FCC Part 15.225 Page 7 of 22

FCC §15.207 – AC LINE CONDUCTED EMISSION

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

Report No.: R2DG131217003-00F

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 1, then:
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} U_{cispr})$, exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz), and conducted disturbance at telecommunication port using AAN is 5.03 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	$U_{ m cispr}$
Conducted disturbance at mains port using AMN (9 kHz to 150 kHz)	3.8 dB
(150 kHz to 30 MHz)	3.4 dB
Conducted disturbance at mains port using voltage probe (9 kHz to 30 MHz)	2.9 dB
Conducted disturbance at telecommunication port using AAN (150 kHz to 30 MHz)	5.0 dB
Conducted disturbance at telecommunication port using CVP (150 kHz to 30 MHz)	3.9 dB
Conducted disturbance at telecommunication port using CP (150 kHz to 30 MHz)	2.9 dB

EUT Setup

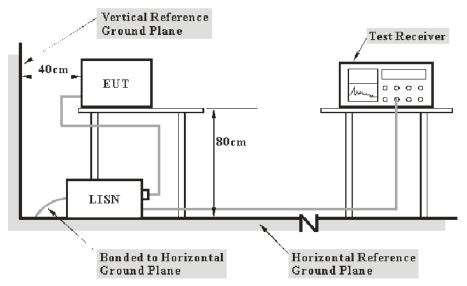

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

FCC Part 15.225 Page 8 of 22

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207.

Report No.: R2DG131217003-00F

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-19
R&S	Two-line V-network	ENV216	3560.6550.12	2014-01-22	2015-01-21
R&S	L.I.S.N	ESH3-Z5	100113	N/A	N/A
DCCL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

According FCC publication number 174176, for a device with a permanent antenna operating at or below 30 MHz, the measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) perform the AC line conducted tests with the permanent antenna to determine compliance with the Section 15.207 limits outside the transmitter's fundamental emission band; (2) retest with a dummy load in lieu of the permanent antenna to determine compliance with the Section 15.207 limits within the transmitter's fundamental emission band.

FCC Part 15.225 Page 9 of 22

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

 V_C : corrected voltage amplitude V_R : reading voltage amplitude

A_c: attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

Report No.: R2DG131217003-00F

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

12.7 dB at 1.430284 MHz in the Line conducted mode

Test Data

Environmental Conditions


Temperature:	25.6 °C
Relative Humidity:	64 %
ATM Pressure:	100.8 kPa

The testing was performed by Ares Liu on 2014-04-14.

FCC Part 15.225 Page 10 of 22

Test Mode: Transmitting

AC 120V, 60 Hz, Line:

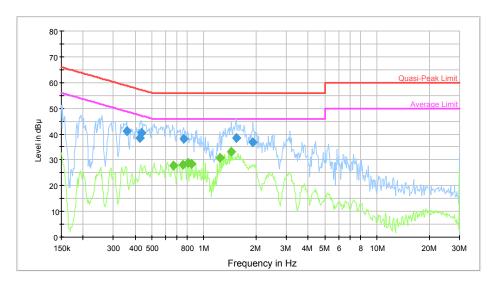


Report No.: R2DG131217003-00F

Frequency (MHz)	Cord. Reading (dBµV)	Correction Factor (dB)	Margin (dB)	Limit (dBµV)	Detector (PK/AV/QP)
0.357511	41.2	10.1	17.6	58.8	QP
0.426011	38.6	10.0	18.7	57.3	QP
0.436318	40.6	10.0	16.5	57.1	QP
0.768247	38.1	9.8	17.9	56.0	QP
1.536622	38.6	9.7	17.4	56.0	QP
1.920710	36.7	9.7	19.3	56.0	QP
0.665597	27.8	9.9	18.2	46.0	AV
0.756101	28.2	9.8	17.8	46.0	AV
0.805868	28.7	9.8	17.3	46.0	AV
0.852094	28.5	9.8	17.5	46.0	AV
1.239175	30.8	9.7	15.2	46.0	AV
1.430284	33.3	9.7	12.7	46.0	AV

FCC Part 15.225 Page 11 of 22

120 V, 60 Hz, Neutral:

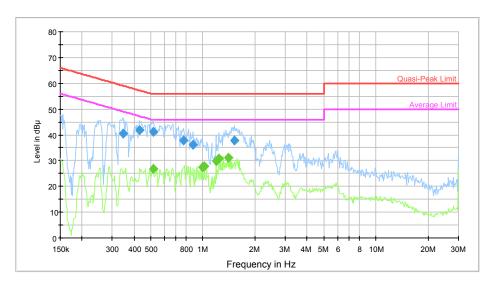

Report No.: R2DG131217003-00F

Frequency (MHz)	Cord. Reading (dBµV)	Correction Factor (dB)	Margin (dB)	Limit (dBµV)	Detector (PK/AV/QP)
0.346296	40.5	10.4	18.5	59.1	QP
0.429420	41.8	10.2	15.5	57.3	QP
0.515791	41.2	10.0	14.8	56.0	QP
0.774393	38.0	9.8	18.0	56.0	QP
0.879690	36.3	9.8	19.7	56.0	QP
1.524426	37.8	9.8	18.2	56.0	QP
0.515791	26.9	10.0	19.1	46.0	AV
0.999305	27.6	9.8	18.4	46.0	AV
1.023481	27.8	9.8	18.2	46.0	AV
1.190776	29.7	9.8	16.3	46.0	AV
1.239175	30.9	9.8	15.1	46.0	AV
1.407671	31.2	9.8	14.8	46.0	AV

FCC Part 15.225 Page 12 of 22

FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Report No.: R2DG131217003-00F

- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 1, then:
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} U_{\text{cispr}})$, exceeds the disturbance limit:
- non compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


30M~200MHz: 5.0 dB 200M~1GHz: 6.2 dB 1G~6GHz: 4.45 dB 6G~18GHz: 5.23 dB

Table 1 – Values of U_{cispr}

Measurement				
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB			
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB			
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB			

FCC Part 15.225 Page 13 of 22

EUT Setup

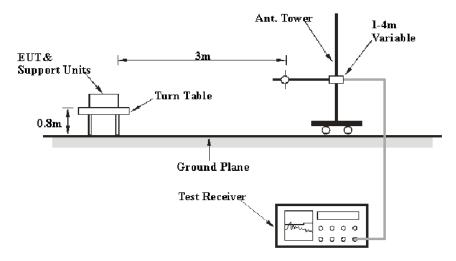

Report No.: R2DG131217003-00F

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to 120VAC/60Hz power source.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9kHz – 150 kHz	300 Hz	1 kHz	QP
150kHz – 30 MHz	10 kHz	30 kHz	QP
30MHz – 1000 MHz	100 kHz	300 kHz	QP

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Meter Reading + Antenna Loss+ Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

Margin = Limit - Corr. Ampl.

FCC Part 15.225 Page 14 of 22

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2013-05-06	2014-05-05
Sunol Sciences	Antenna	ЈВ3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-05
The Electro- Mechanics Company	Passive Loop Antenna	6512	9706-1206	2011-11-30	2014-11-29

Report No.: R2DG131217003-00F

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 with the worst margin reading of:

7.0 dB at 40.67 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	26.3 °C
Relative Humidity:	62 %
ATM Pressure:	100.8 kPa

^{*} The testing was performed by Ares Liu on 2014-04-14

FCC Part 15.225 Page 15 of 22

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test mode: Transmitting

1) Spurious Emissions (9 kHz~30 MHz):


Evaguanav	Re	ceiver	Rx Antenna	Cable	Amplifier	Corrected	Limit	Mongin
Frequency	Reading	Detector	Factor	loss	Gain	Amplitude	Lillit	Margin
MHz	dΒμV	PK/QP/AV	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dB
13.56	33.7	QP	32.08	0.35	21.44	44.69	124.00	79.31
13.553	19.3	QP	32.08	0.35	21.44	30.29	90.50	60.21
13.686	7.3	QP	32.08	0.35	21.44	18.29	90.50	72.21
13.409	9.6	QP	32.07	0.35	21.43	20.59	80.50	59.91
13.815	9.1	QP	32.09	0.35	21.44	20.10	80.50	60.40
22.65	7.4	QP	31.17	0.42	21.45	17.54	69.50	51.96

Report No.: R2DG131217003-00F

FCC Part 15.225 Page 16 of 22

2) Spurious Emissions (30 MHz ~1 GHz):

Horizontal:

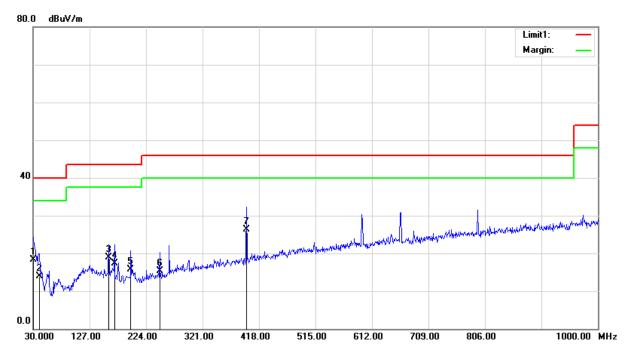


Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	16.85	QP	1.45	18.30	40.00	21.70
40.6700	20.59	QP	-6.69	13.90	40.00	26.10
159.9800	26.14	QP	-7.24	18.90	43.50	24.60
169.6800	25.33	QP	-8.03	17.30	43.50	26.20
197.8100	22.94	QP	-7.24	15.70	43.50	27.80
247.2800	22.90	QP	-7.60	15.30	46.00	30.70
396.6600	29.75	QP	-3.45	26.30	46.00	19.70

FCC Part 15.225 Page 17 of 22

Report No.: R2DG131217003-00F

Vertical:

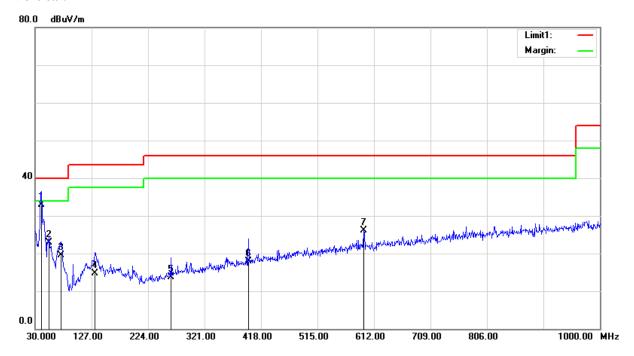

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
40.6700	39.69	QP	-6.69	33.00	40.00	7.00
54.2500	35.70	QP	-12.80	22.90	40.00	17.10
74.6200	31.41	QP	-11.91	19.50	40.00	20.50
132.8200	20.88	QP	-6.18	14.70	43.50	28.80
263.7700	20.14	QP	-6.34	13.80	46.00	32.20
396.6600	21.35	QP	-3.45	17.90	46.00	28.10
594.5400	26.27	peak	-0.18	26.09	46.00	19.91

FCC Part 15.225 Page 18 of 22

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Report No.: R2DG131217003-00F

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to PC, than to an external AC power supply and loop antenna was connected to a Spectrum Analyzer. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable AC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2013-08-01	2014-07-31
The Electro- Mechanics Company	Passive Loop Antenna	6512	9706-1206	2011-11-30	2014-11-29

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.4 °C
Relative Humidity:	66 %
ATM Pressure:	100.8 kPa

The testing was performed by Ares Liu on 2014-04-14.

FCC Part 15.225 Page 19 of 22

Test Mode: Transmitting

Test Result: Pass

	$f_0 = 13.56 \text{ MHz}$					
Temperature	Voltage	Measured frequency	Frequency	Limit		
C	V _{DC}	MHz	Error			
-20	3.7	13.559974	-0.0002%	±0.01%		
-10	3.7	13.559971	-0.0002%	±0.01%		
0	3.7	13.559966	-0.0003%	±0.01%		
10	3.7	13.559976	-0.0002%	±0.01%		
20	3.7	13.559970	-0.0002%	±0.01%		
30	3.7	13.559966	-0.0003%	±0.01%		
40	3.7	13.559974	-0.0002%	±0.01%		
50	3.7	13.559978	-0.0002%	±0.01%		
20	3.5	13.559987	-0.0001%	±0.01%		

Report No.: R2DG131217003-00F

FCC Part 15.225 Page 20 of 22

FCC §15.215(c) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Per FCC §15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Report No.: R2DG131217003-00F

Test Procedure

- 1 Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2 Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3 Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15
The Electro- Mechanics Company	Passive Loop Antenna	6512	9706-1206	2011-11-30	2014-11-29

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data Environmental Conditions

Temperature:	26.4 °C
Relative Humidity:	66 %
ATM Pressure:	100.8 kPa


The testing was performed by Ares Liu on 2014-04-14.

FCC Part 15.225 Page 21 of 22

Test Mode: Transmitting

20 dB Emission Bandwidth

Report No.: R2DG131217003-00F

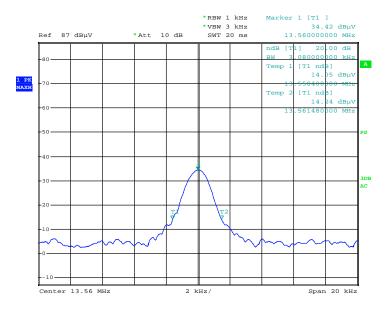

88 Date: 14.APR.2014 10:54:26

*****END OF REPORT****

FCC Part 15.225 Page 22 of 22