

TEST REPORT

of

FCC Part 22 Subpart H and Part 24 Subpart E
FCC ID: UK4JFCM-1000

Equipment Under Test : Vehicle Fleet Management Service System
Model Name : JFCM-1000
Serial No. : N/A
Applicant : Jastec Co., Ltd.
Manufacturer : Jastec Co., Ltd.
Date of Test(s) : 2012. 10. 17 ~ 2012. 10. 24
Date of Issue : 2012. 11. 15

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2012. 11. 15

Alvin Kim

Approved By



Date

2012. 11. 15

Feel Jeong

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

	<u>TABLE OF CONTENTS</u>	Page
1. General Information -----	3	
2. RF radiated output power & spurious radiated emission -----	7	
3. Conducted Output Power -----	13	
4. Occupied Bandwidth 99 % -----	16	
5. Peak-Average Ratio -----	22	
6. Spurious Emissions At Antenna Terminal-----	25	
7. Band Edge -----	32	
8. Frequency Stability -----	37	
9. RF Exposure Evaluation-----	40	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General information

1.1. Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

-Wireless Div. 3FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 428 5700

FAX : +82 31 427 2371

1.2. Details of applicant

Applicant : Jastec Co., Ltd.
Address : 92-7 Kumgok-Dong, Boondang-Gu, Seongnam-Si, Gyeonggi-Do, 463-804, Korea
Contact Person : Kim, Dae-Hwan
Phone No. : +82 70 7606 1694
Fax No. : +82 31 716 0379

1.3. Description of EUT

Kind of Product	Vehicle Fleet Management Service System
Model Name	JFCM-1000
Serial Number	N/A
Power Supply	DC 24 V * power source used on vehicle
Rated Power	CDMA800: 24 dB m CDMA1900: 24 dB m
Frequency Range	CDMA800: 824.70 MHz ~ 848.31 MHz CDMA1900: 1 851.25 MHz ~ 1 908.75 MHz
Antenna Gain	CDMA800: 0.43 dB i CDMA1900: 2.69 dB i
Support Mode	1xRTT
Emission Designator	CDMA800 (1xRTT): 1M28F9W CDMA1900 (1xRTT): 1M30F9W
H/W Version	v0.4
S/W Version	v0.03

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.4. Maximum output power

The transmitter has a maximum ERP & EIRP and Average output power as follows:

-Cellular Band

Frequency Range (MHz)	Modulation	Channel	Average Output Power		E.R.P.	
			dB m	mW	dB m	mW
824.70	1xRTT RC2 9 (Loopback)	1013	24.27	267.30	25.77	377.57
836.52		384	23.93	247.17	27.36	544.50
848.31		777	23.67	232.81	25.07	321.37

-PCS Band

Frequency Range (MHz)	Modulation	Channel	Average Output Power		E.I.R.P.	
			dB m	mW	dB m	mW
1 851.25	1xRTT RC3 55 (Loopback)	25	23.87	243.78	24.57	286.42
1 880.00		600	24.52	283.14	24.39	274.79
1 908.75		1175	23.56	226.99	23.17	207.49

1.5. Worst case configuration

-Test mode

CDMA (800 / 1900)

We found out the test mode with the highest power level in the section of output power after we investigated average output power of all the modulations and (or) data rates for each mode. So we chose below test mode as a representative of worst case.

- CDMA 1xRTT

1.6. Sample calculation for offset

Where relevant, the following sample calculation is provided:

1.6.1. Conducted test

offset value (dB) = Directional Coupler (dB) + Attenuator (dB) + Cable loss (dB)

1.6.2. Radiation test

E.R.P. & E.I.R.P = [S.G level + Amp.](dB m) - Cable loss(dB) + Ant. gain (dB d/dB i)

1.7. Test equipment list

Equipment	Manufacturer	Model	S/N	Cal Date	Cal Interval	Cal Due.
Signal Generator	R&S	SMBV100A	255834	Jul, 02. 2012	Annual	Jul, 02. 2013
Signal Generator	R&S	SMR40	100272	Aug. 23, 2012	Annual	Aug. 23, 2013
Spectrum Analyzer	Agilent	E4440A	MY43362142	Mar. 29, 2012	Annual	Mar. 29, 2013
Spectrum Analyzer	R&S	FSV30	100768	Mar. 29, 2012	Annual	Mar. 29, 2013
Mobile Test Unit	Agilent	E5515C	GB43345198	Mar. 29, 2012	Annual	Mar. 29, 2013
Attenuator	AEROFLEX / INMET	26A-10dB	1	Apr. 02, 2012	Annual	Apr. 02, 2013
Low Pass Filter	Mini-Circuits	NLP-1200+	V8979400903-1	Jul. 12, 2012	Annual	Jul. 12, 2013
High Pass Filter	Wainwright	WHK3.0/18G-10SS	344	Jul. 12, 2012	Annual	Jul. 12, 2013
High Pass Filter	Wainwright	WHKX1.5/15G-6SS	4	Mar. 30, 2012	Annual	Mar. 30, 2013
DC Power Supply	Agilent	U8002A	MY50020026	Mar. 29, 2012	Annual	Mar. 29, 2013
Preamplifier	H.P.	8447F	2944A03909	Jul. 03, 2012	Annual	Jul. 03, 2013
Preamplifier	R&S	SCU 18	10117	Jan. 02, 2012	Annual	Jan. 02, 2013
Preamplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	Jul. 12, 2012	Annual	Jul. 12, 2013
Test Receiver	R&S	ESU26	100109	Feb. 21, 2012	Annual	Feb. 21, 2013
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	396	May. 12, 2011	Biennial	May. 12, 2013
Horn Antenna	R&S	HF906	100326	Nov. 23, 2010	Biennial	Nov. 23, 2012
Horn Antenna	SCHWARZBECK MESSELEKTRONIK	BBHA9170	BBHA9170431	Aug. 24, 2012	Biennial	Aug. 24, 2014
Dipole Antenna	SCHWARZBECK MESSELEKTRONIK	VHA/UHA	9103/9105	May 24, 2011	Biennial	May. 24, 2013
Antenna Master	INNCO	MM4000	N/A	N.C.R.	N/A	N.C.R.
Turn Table	INNCO	DS 1200S	N/A	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.4 m)	N/A	N.C.R.	N/A	N.C.R.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.8. Summary of test results

The EUT has been tested according to the following specifications:

APPLIED STANDARD : FCC Part 22 Subpart H, Part 24 Subpart E		
Section in FCC part	Test Item	Result
§2.1046 §22.913(2) §24.232(c)	RF Radiated Output Power	Complied
§2.1053 §22.917(a) §24.238(a)	Spurious Radiated Emission	Complied
§2.1046	Conducted Output Power	Complied
§2.1049	Occupied Bandwidth	Complied
§24.232(d)	Peak-Average Ratio	Complied
§2.1051 §22.917(a) §24.238(a)	Spurious Emission at Antenna Terminal	Complied
§2.1055 §22.355 §24.235	Frequency Stability	Complied
§22.917(a) §24.238(a)	Band Edge	Complied
§1.1307 §2.1091	RF Exposure Evaluation	Complied

1.9. Test report revision


Revision	Report number	Description
0	F690501/RF-RTL005919	Initial
1	F690501/RF-RTL005919-1	Modify radiation test procedure.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


2. RF radiated output power & spurious radiated emission

2.1. Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

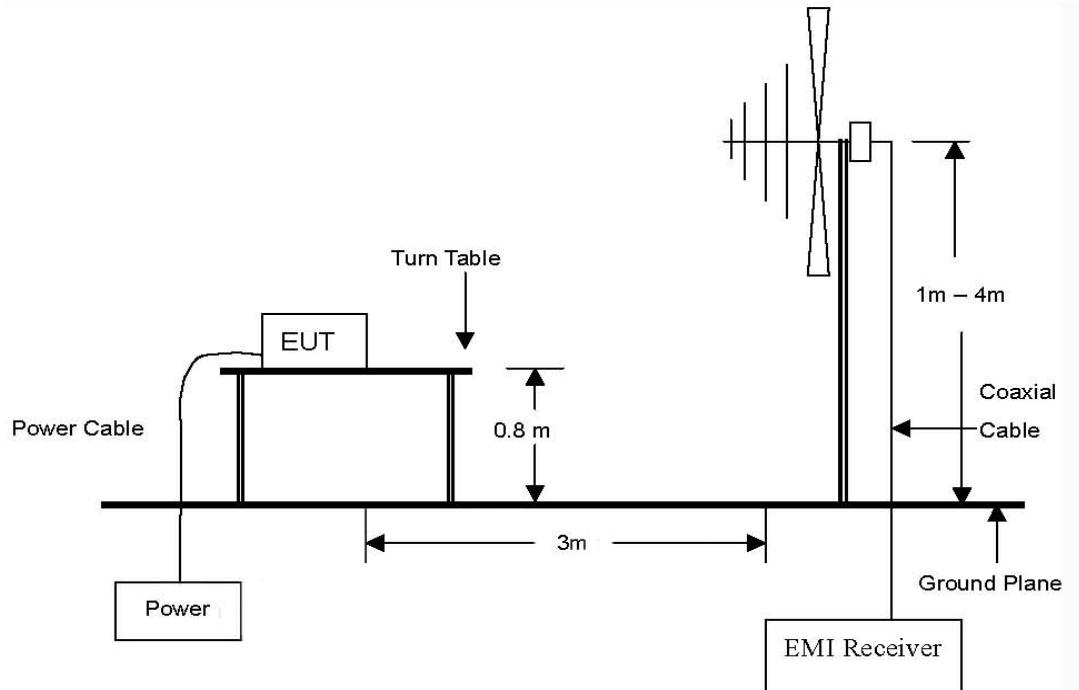


The diagram below shows the test setup that is utilized to make the measurements for emission .The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

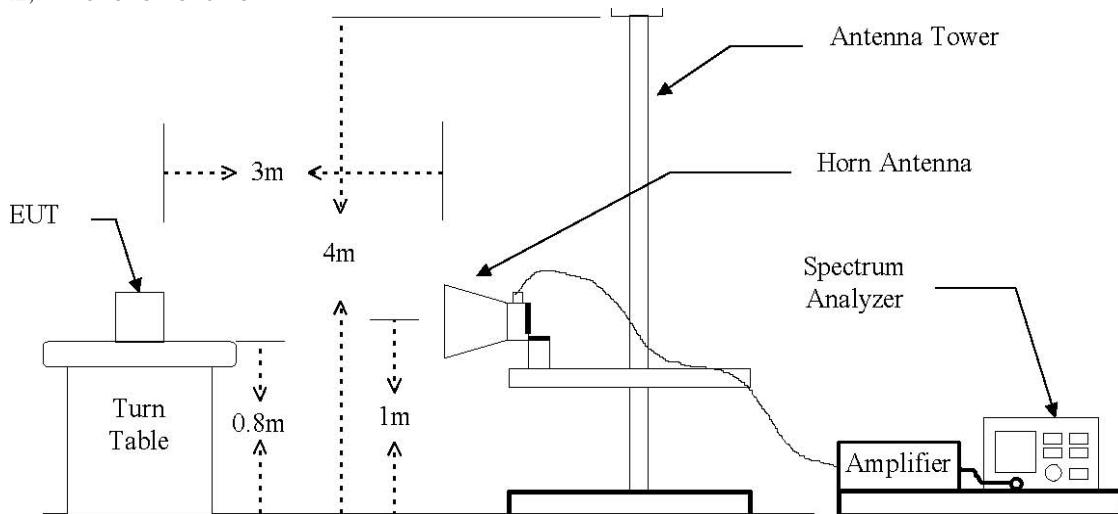

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

The diagram below shows the test setup for substituted method

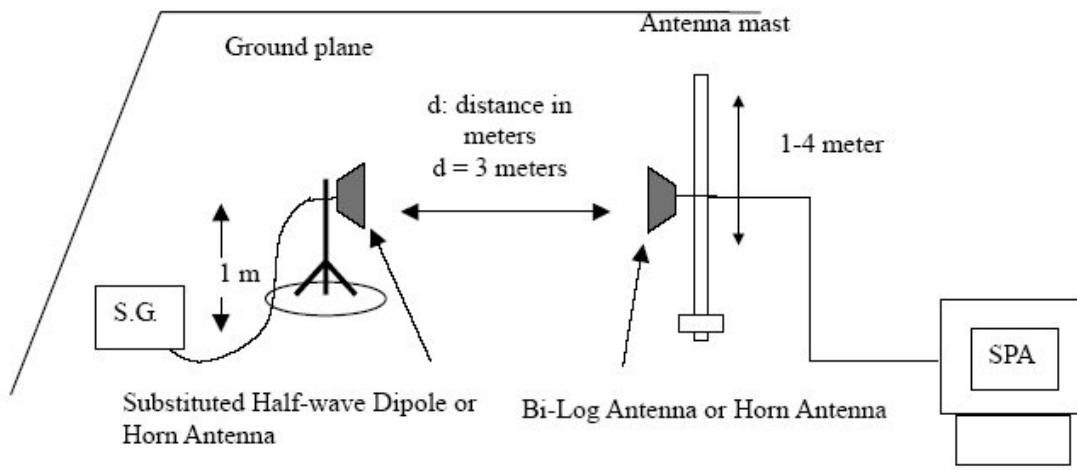

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.2. Limit

2.2.1. RF radiated output power

FCC §22.913(2), the ERP of mobile transmitters must not exceed 7 watts. FCC §24.232(c) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

2.2.2. Spurious Radiated emission

§ 22.917(a) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least $43+10\log(P)$ dB.

2.3. Test procedure : Based on ANSI/TIA 603C: 2004

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 3 MHz and the video bandwidth was set to 3 MHz.
5. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
7. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824 ~ 849 MHz) or horn antenna (1 850 ~ 1 910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring received, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dB m, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4. Test result for RF radiated output power

Ambient temperature : (24 ± 2) °C

Relative humidity : 47 % R.H.

CDMA800 1xRTT mode

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
824.70	V	32.63	3.42	-3.44	25.77	377.57
824.70	H	27.12	3.42	-3.44	20.26	106.17
836.52	V	34.19	3.38	-3.45	27.36	544.50
836.52	H	26.06	3.38	-3.45	19.23	83.75
848.31	V	31.83	3.34	-3.42	25.07	321.37
848.31	H	25.72	3.34	-3.42	18.96	78.70

CDMA1900 1xRTT mode

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
1 851.25	V	21.88	4.87	7.56	24.57	286.42
1 851.25	H	21.47	4.87	7.56	24.16	260.62
1 880.00	V	20.04	4.91	7.63	22.76	188.80
1 880.00	H	21.67	4.91	7.63	24.39	274.79
1 908.75	V	20.41	4.94	7.70	23.17	207.49
1 908.75	H	20.41	4.94	7.70	23.17	207.49

Remark:

1. E.R.P. & E.I.R.P = S.G level (dB m) - Cable loss (dB) + Ant. gain (dB d/dB i)
2. The E.R.P. & E.I.R.P was measured in three orthogonal EUT position (x-axis, y-axis and z-axis). Worst cases are z -axis.

2.5. Spurious radiated emission

- Measured output Power: 27.36 dB m = 0.544 5 W
- Modulation Signal: CDMA800 1xRTT
- Distance: 3 meters
- Limit: $-(43 + 10\log_{10}(W)) = 40.36 \text{ dB c}$

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	dB c	Margin (dB)
Low Channel (824.70 MHz)							
1 648.76	V	-44.14	4.54	6.44	-42.24	-69.60	29.24
1 648.86	H	-47.94	4.54	6.44	-46.04	-73.40	33.04
2 474.10	V	-57.83	5.68	7.98	-55.53	-82.89	42.53
2 474.29	H	-56.77	5.68	7.98	-54.47	-81.83	41.47
Middle Channel (836.52 MHz)							
1 672.39	V	-45.72	4.58	6.50	-43.80	-71.16	30.80
1 672.35	H	-54.49	4.58	6.50	-52.57	-79.93	39.57
2 510.31	V	-52.56	5.72	8.02	-50.26	-77.62	37.26
2 510.53	H	-51.43	5.72	8.02	-49.13	-76.49	36.13
High Channel (848.31 MHz)							
1 695.97	V	-45.23	4.61	6.56	-43.28	-70.64	30.28
1 696.03	H	-54.50	4.61	6.56	-52.55	-79.91	39.55
2 544.93	V	-56.73	5.75	8.07	-54.41	-81.77	41.41
2 543.35	H	-55.53	5.75	8.07	-53.21	-80.57	40.21

Remark:

1. E.R.P. & E.I.R.P = S.G level (dB m) - Cable loss (dB) + Ant. gain (dB d/dBi)
2. No more harmonic above 3rd harmonic for all channel.

- Measured output Power : 24.57 dB m = 0.286 4 W
- Modulation Signal : CDMA1900 1xRTT
- Distance : 3 meters
- Limit : $-(43 + 10\log_{10}(W)) = 37.57$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P. (dB m)	dB c	Margin (dB)
Low Channel(1 851.25 MHz)							
3 703.25	V	-35.98	7.14	11.85	-31.27	-55.84	18.27
3 703.51	H	-39.77	7.14	11.85	-35.06	-59.63	22.06
5 552.85	V	-47.42	9.24	12.12	-44.54	-69.11	31.54
5 553.30	H	-56.66	9.24	12.12	-53.78	-78.35	40.78
Middle Channel(1 880.00 MHz)							
3 759.74	V	-31.89	7.23	11.85	-27.27	-51.84	14.27
3 758.52	H	-39.46	7.23	11.85	-34.84	-59.41	21.84
5 638.82	V	-53.38	9.36	12.08	-50.66	-75.23	37.66
5 639.51	H	-55.71	9.36	12.08	-52.99	-77.56	39.99
High Channel(1 908.75 MHz)							
3 816.63	V	-30.66	7.33	11.84	-26.15	-50.72	13.15
3 817.53	H	-41.29	7.33	11.84	-36.78	-61.35	23.78
5 726.25	V	-56.06	9.46	12.04	-53.48	-78.05	40.48
5 726.96	H	-54.88	9.46	12.04	-52.30	-76.87	39.30

Remark:

1. E.R.P. & E.I.R.P = S.G level (dB m) - Cable loss (dB) + Ant. gain (dB d/dB i)
2. No more harmonic above 3rd harmonic for all channel.

3. Conducted Output Power

3.1. Limit

Requirements: CFR 47, Section §2.1046

3.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the Mobile Communication Test Unit through sufficient attenuation.
2. The EUT was set up for the max. output power with pseudo random data modulation.
3. The power was measured with Mobile Communication Test unit.



3.3. Test Settings

- CDMA2000 1xRTT

- Protocol Rev > 6 (IS-2000-0)
- System ID: 8; NID:65535; Reg. Ch. #: 384(Cell) & 600(PCS)
- Radio Config (RC) > Please see following table for details
- FCH Service Option (SO) Setup > Please see following table for details
- Traffic Data Rate > Full
- TDSO SCH info > F-SCH parameters > F-SCH Data Rate > 153.6kbps
 >R-SCH Parameters > R-SCH Data Rate > 153.6kbps
- RVS Power Ctrl > All Up bits (Maximum TxPout)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.4. Test Result

Ambient temperature : (24 ± 2) °C

Relative humidity : 47 % R.H.

- Cellular Band

Radio Configuration (RC)	Service Option (SO)	Average Output Power (dB m)		
		Ch. 1013 / 824.70 MHz	Ch. 384 / 836.52 MHz	Ch. 777 / 848.31 MHz
RC1 (Fwd1, Rvs1)	1 (Voice)			
	2 (Loopback)	24.23	23.93	23.69
	3 (Voice)			
	6 (SMS)			
	55 (Loopback)	24.22	23.90	23.68
	68 (Voice)			
	70 (Voice)			
RC2 (Fwd2, Rvs2)	9 (Loopback)	24.27	23.93	23.67
	14 (SMS)			
	17 (Voice)			
	55 (Loopback)	24.18	23.92	23.68
	32768 (Voice)			
RC3 (Fwd3, Rvs3)	1 (Voice)			
	2 (Loopback)	24.02	23.86	23.69
	3 (Voice)			
	6 (SMS)			
	55 (Loopback)	23.99	23.90	23.69
	32 (+F-SCH)	24.05	23.93	23.68
	32 (+SCH)	24.00	23.88	23.70
	68 (Voice)			
	70 (Voice)			
RC4 (Fwd4, Rvs3)	1 (Voice)			
	2 (Loopback)	23.98	23.91	23.69
	3 (Voice)			
	6 (SMS)			
	55 (Loopback)	23.96	23.93	23.70
	32 (+F-SCH)	24.13	23.84	23.67
	32 (+SCH)	24.18	23.83	23.67
	68 (Voice)			
RC5 (Fwd5, Rvs4)	70 (Voice)			
	9 (Loopback)	24.01	23.90	23.68
	14 (SMS)			
	17 (Voice)			
	55 (Loopback)	24.04	23.91	23.69
	32768 (Voice)			

- The measurement is average output power for Low, Middle and High channel.

- The **service option 9 of RC2** of worst case is bigger than other power compared with each service option.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- PCS Band

Radio Configuration (RC)	Service Option (SO)	Average Output Power (dB m)		
		Ch. 1013 / 824.70 MHz	Ch. 384 / 836.52 MHz	Ch. 777 / 848.31 MHz
RC1 (Fwd1, Rvs1)	1 (Voice)			
	2 (Loopback)	23.76	24.45	23.76
	3 (Voice)			
	6 (SMS)			
	55 (Loopback)	23.79	24.45	23.72
	68 (Voice)			
	70 (Voice)			
RC2 (Fwd2, Rvs2)	9 (Loopback)	23.77	24.44	23.71
	14 (SMS)			
	17 (Voice)			
	55 (Loopback)	23.75	24.45	23.63
	32768 (Voice)			
RC3 (Fwd3, Rvs3)	1 (Voice)			
	2 (Loopback)	23.87	24.51	23.63
	3 (Voice)			
	6 (SMS)			
	55 (Loopback)	23.87	24.52	23.56
	32 (+F-SCH)	23.80	24.39	23.87
	32 (+SCH)	23.73	24.35	23.88
RC4 (Fwd4, Rvs3)	68 (Voice)			
	70 (Voice)			
	1 (Voice)			
	2 (Loopback)	23.88	24.51	23.50
	3 (Voice)			
	6 (SMS)			
	55 (Loopback)	23.87	24.50	23.45
RC5 (Fwd5, Rvs4)	32 (+F-SCH)	23.75	24.26	23.88
	32 (+SCH)	23.56	24.30	23.87
	68 (Voice)			
	70 (Voice)			
	9 (Loopback)	23.87	24.52	23.41
	14 (SMS)			
	17 (Voice)			
	55 (Loopback)	23.86	24.49	23.37
	32768 (Voice)			

- The measurement is average output power for Low, Middle and High channel.
- The **service option 55 of RC3** of worst case is bigger than other power compared with each service option.


4. Occupied Bandwidth 99 %

4.1. Limit

Requirements: CFR 47, Section §2.1049.

4.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The resolution bandwidth of the spectrum analyzer was set.
3. OBW was measured with Mobile Communication Test unit for each channel.

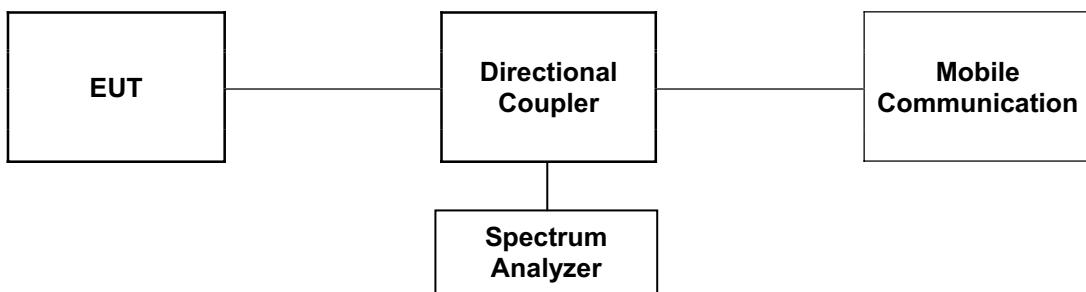

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.3 Test Results

Ambient temperature : (24 ± 2) °C

Relative humidity : 47 % R.H.


Band	Mode	Frequency (MHz)	Occupied Bandwidth (MHz)
CDMA800	1xRTT RC2 9 (Loopback)	824.70	1.283
		836.52	1.279
		848.31	1.280
CDMA1900	1xRTT RC3 55 (Loopback)	1 851.25	1.286
		1 880.00	1.284
		1 908.75	1.303

Please refer to the following plots.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

CDMA800**1xRTT**

Low Channel

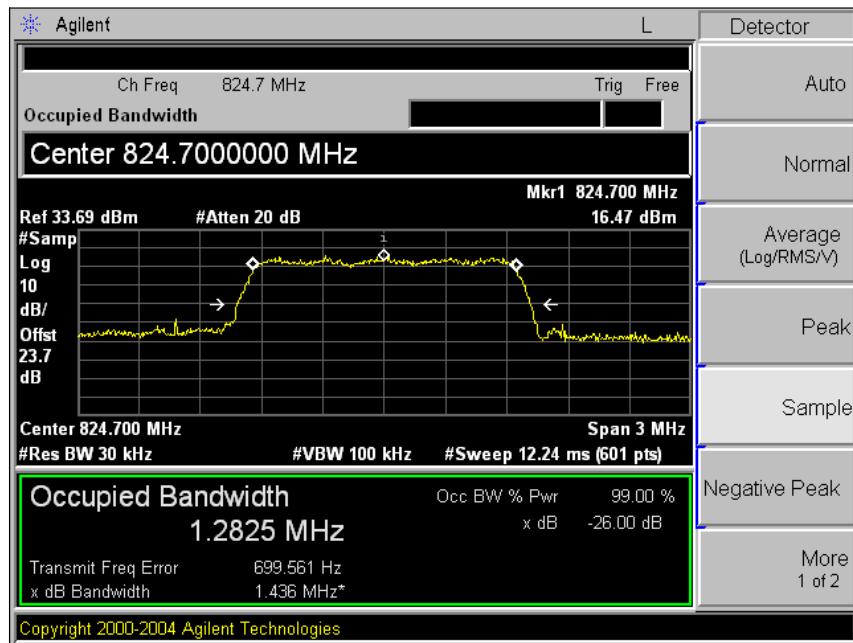


Middle Channel

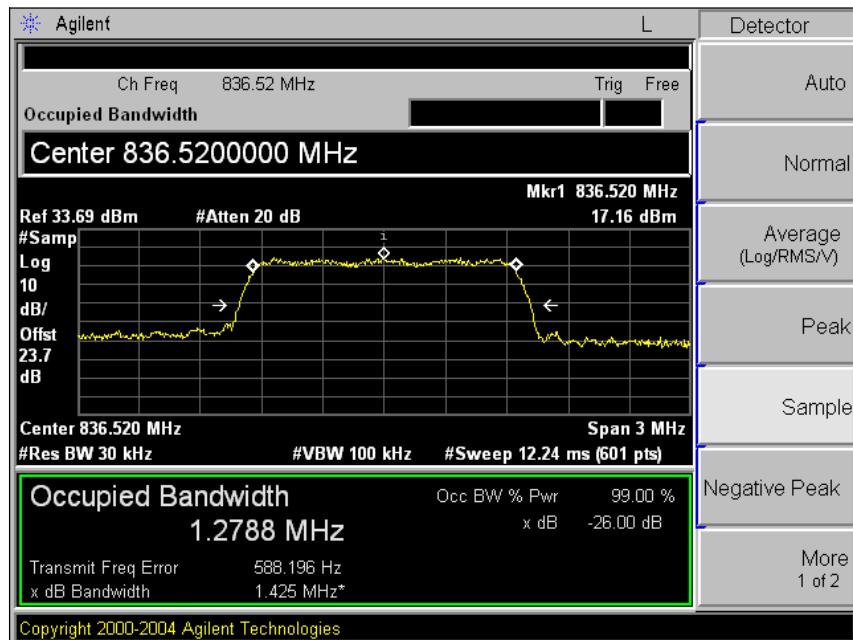

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

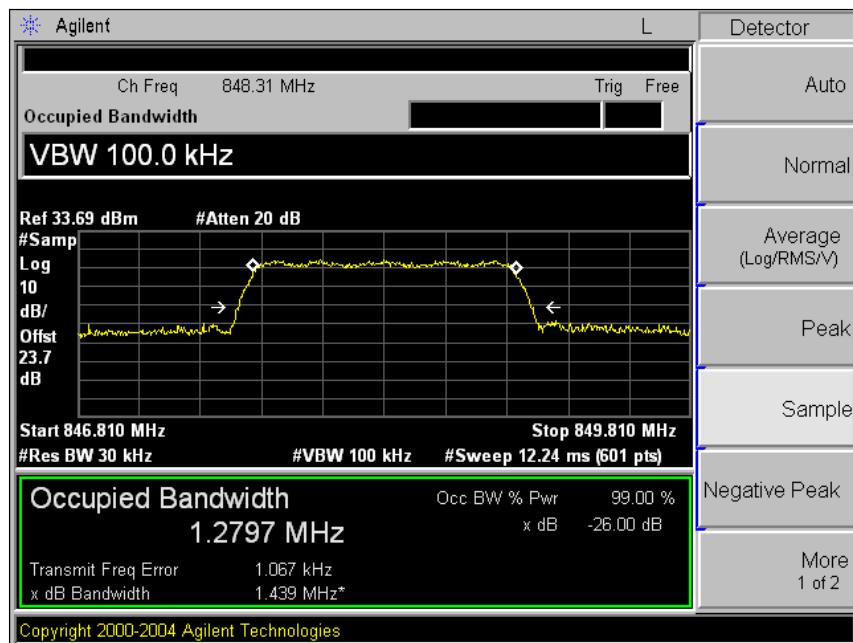


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

CDMA1900**1xRTT**

Low Channel

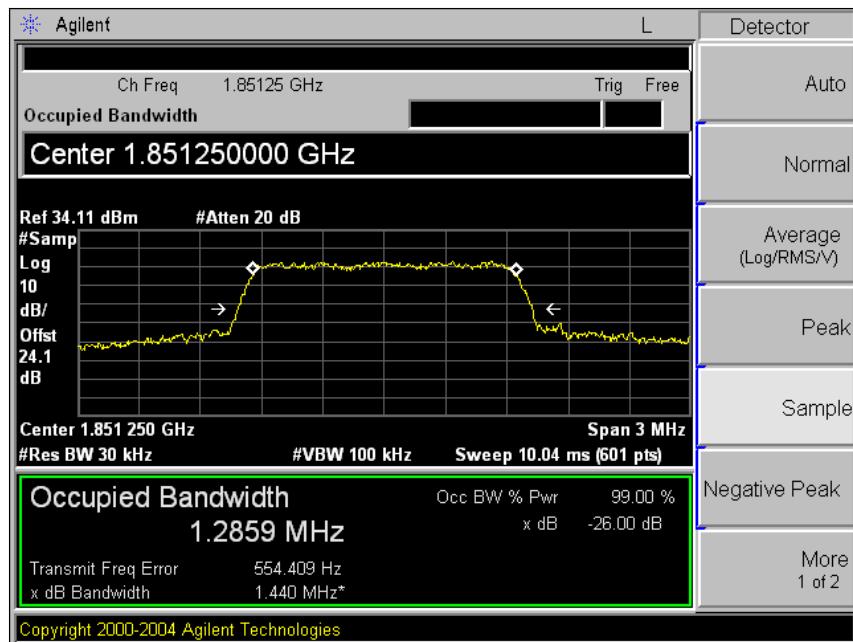


Middle Channel

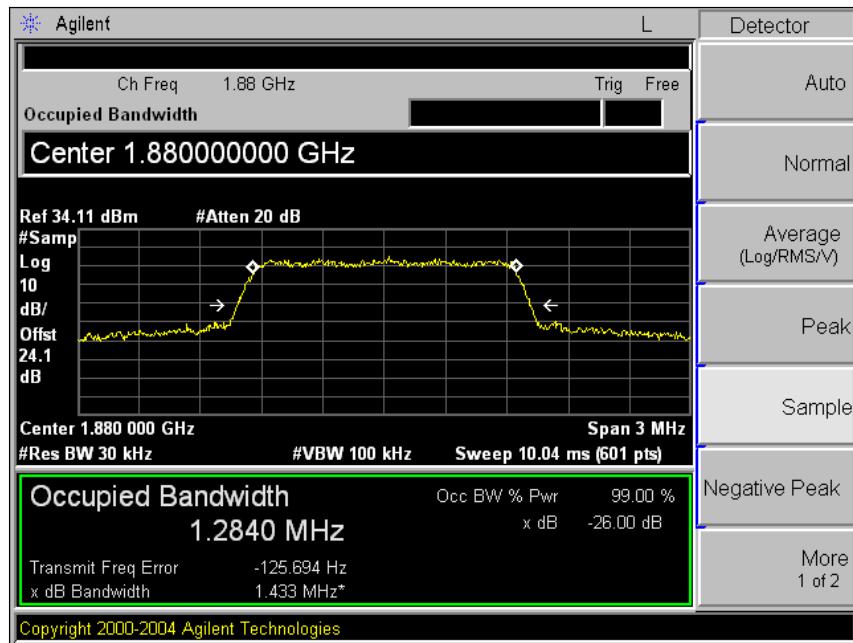

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

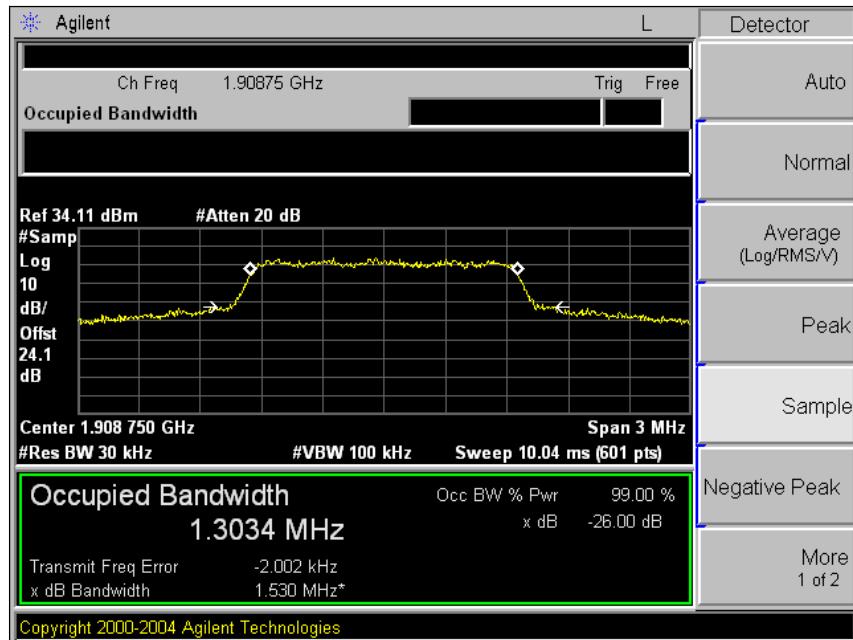

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


5. Peak-Average Ratio

5.1. Limit

§24.232(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The CCDF function of the spectrum analyzer was set.
3. PAR was measured with Mobile Communication Test unit for each channel.

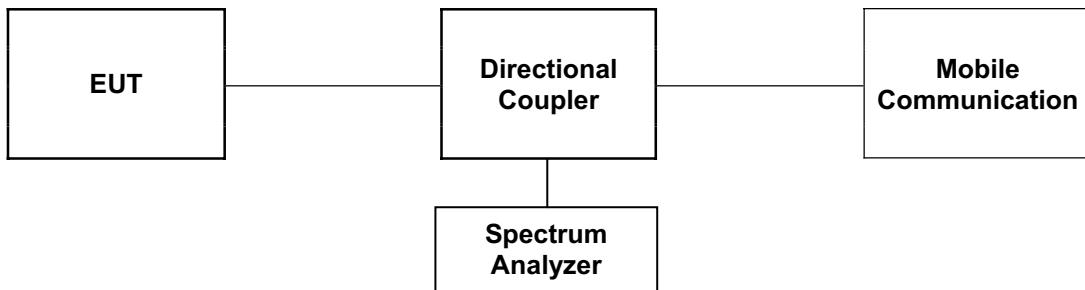

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.3 Test Results

Ambient temperature : (24 \pm 2) °C


Relative humidity : 47 % R.H.

Please refer to the following plots.


CDMA1900

1xRTT

Low Channel

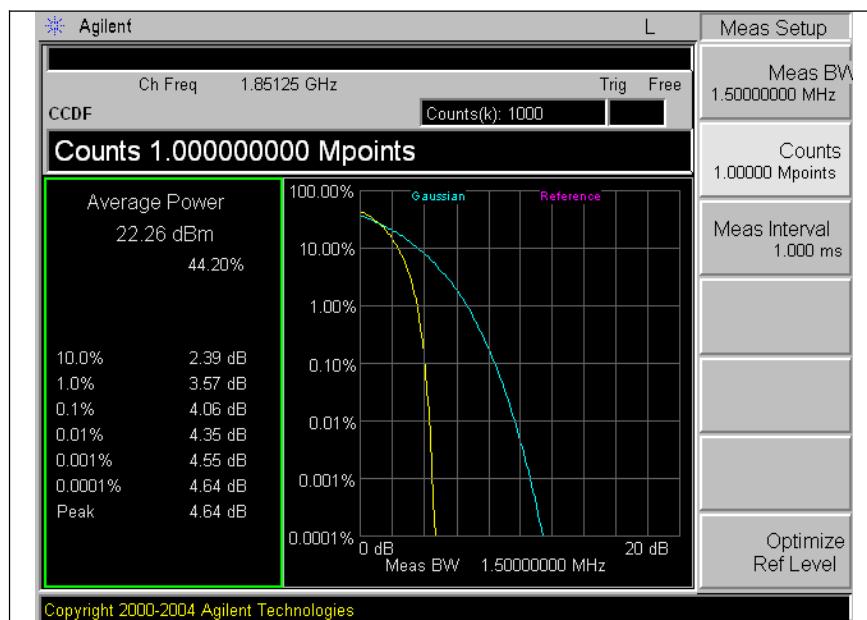


Middle Channel

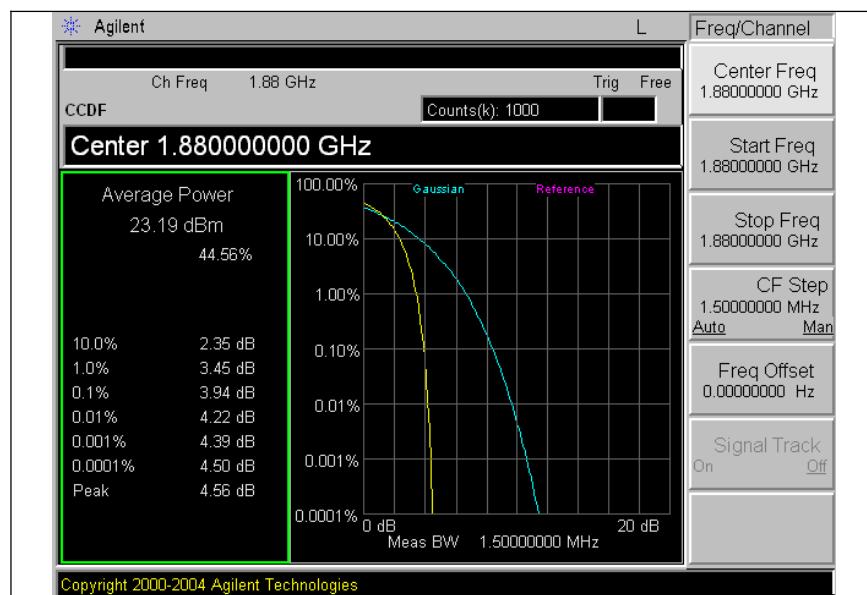

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

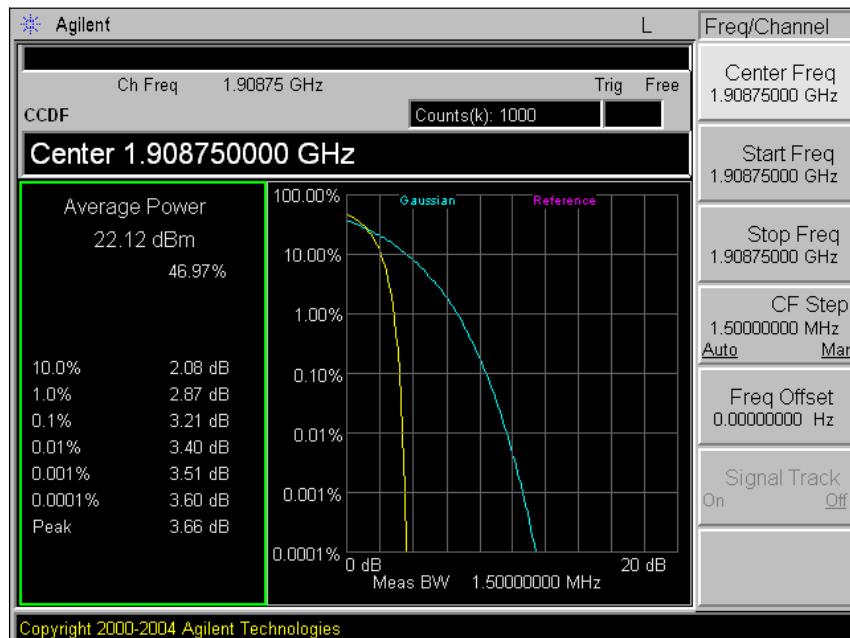

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


6. Spurious Emissions at Antenna Terminal

6.1. Limit

§22.917(a) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least $43 + 10\log(P)$ dB.

6.2. Test Procedure

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1 MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

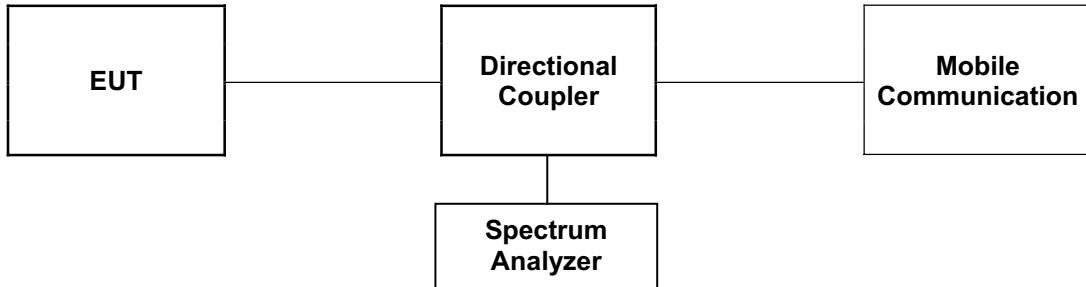

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.3. Test Results


Ambient temperature : $(24 \pm 2)^\circ\text{C}$
Relative humidity : 47 % R.H.

Please refer to the following plots.

CDMA800

1xRTT

Low Channel

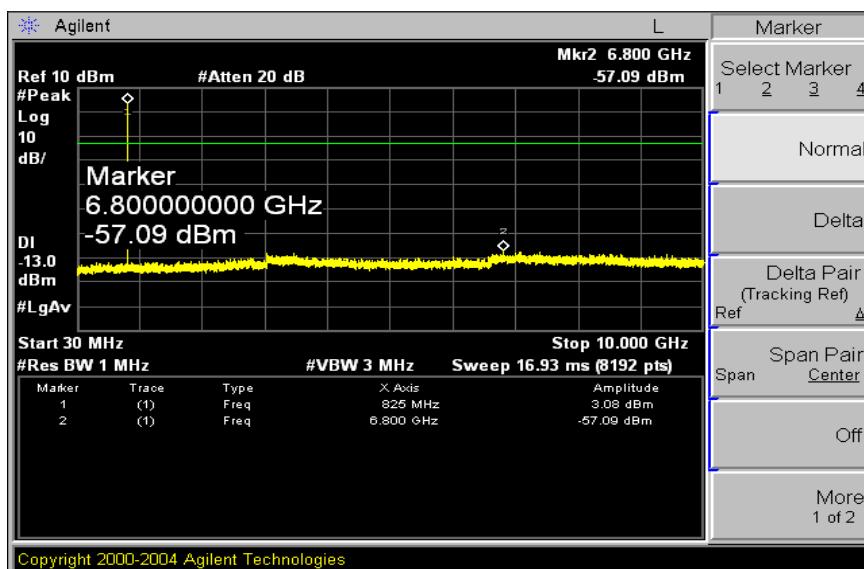

Note:


Offset (dB) = Directional Coupler (dB) + Attenuator(dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	Spurious offset (dB)	Reading values (dB m)	Result (dB m)
6 800.0	Noise Level	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

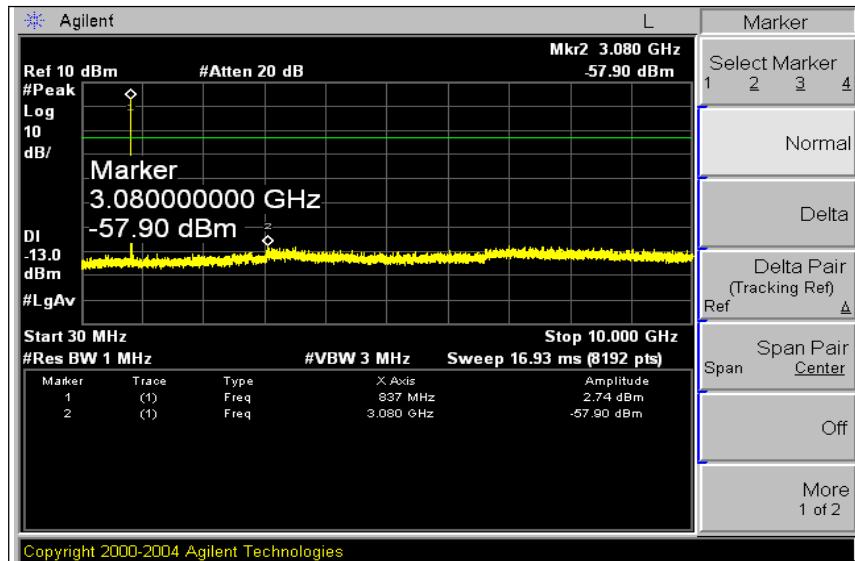

Note:


Offset (dB) = Directional Coupler (dB) + Attenuator(dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	Spurious offset (dB)	Reading values (dB m)	Result (dB m)
3 080.0	Noise Level	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

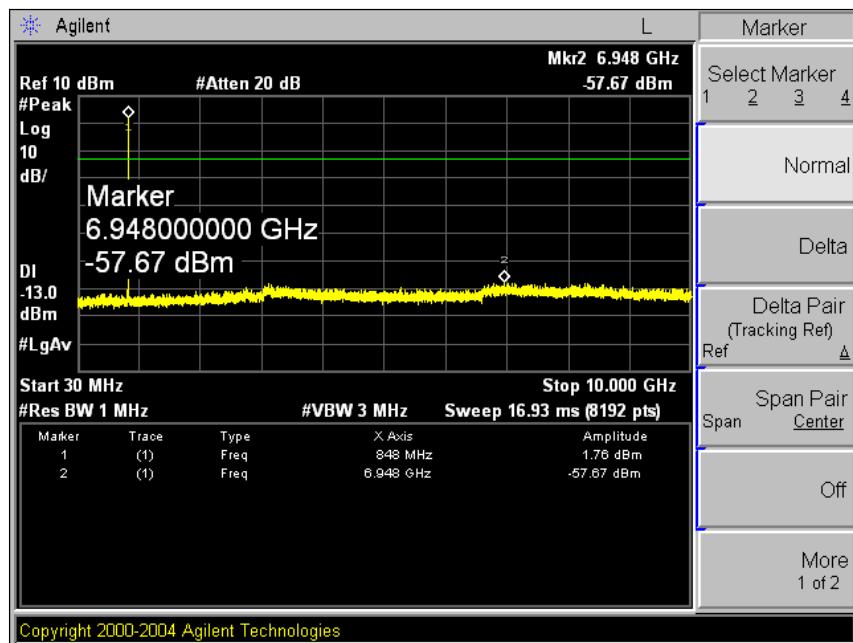

Note:

Offset (dB) = Directional Coupler (dB) + Attenuator(dB) + Cable loss (dB)


Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	Spurious offset (dB)	Reading values (dB m)	Result (dB m)
6 948.0	Noise level	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

CDMA1900**1xRTT**

Low Channel

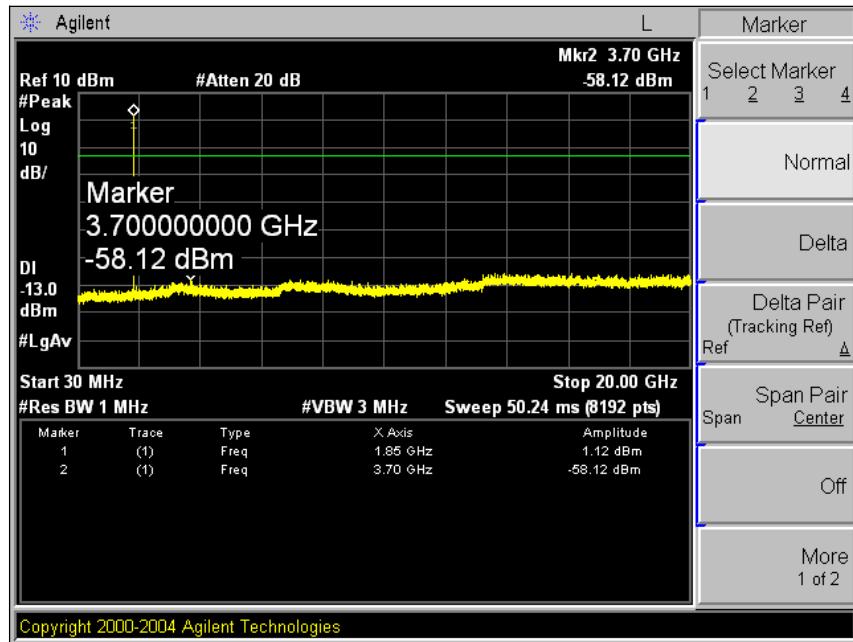

Note:


Offset (dB) = Directional Coupler (dB) + Attenuator(dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	Spurious offset (dB)	Reading values (dB m)	Result (dB m)
3 700.0	26.18	-58.12	-31.94

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

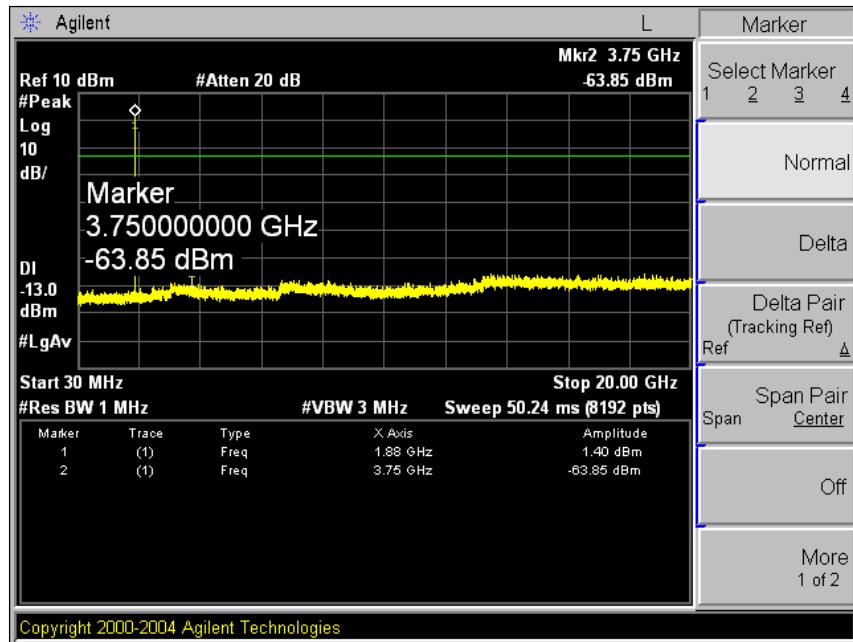

Note:


Offset (dB) = Directional Coupler (dB) + Attenuator(dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	Spurious offset (dB)	Reading values (dB m)	Result (dB m)
3 750.0	26.18	-63.85	-37.67

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

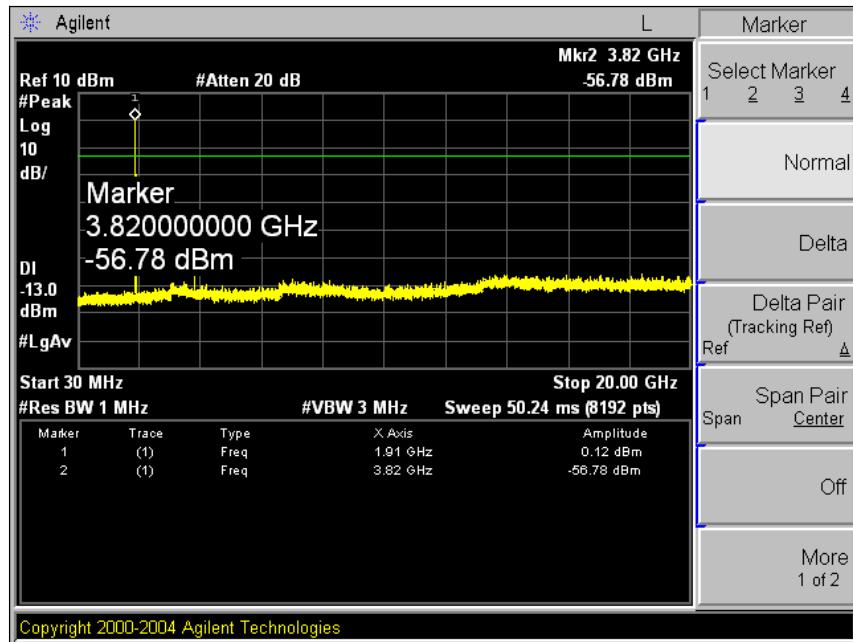

Note:

Offset (dB) = Directional Coupler (dB) + Attenuator(dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	Spurious offset (dB)	Reading values (dB m)	Result (dB m)
3 820.0	26.18	-56.78	-30.60

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


7. Band Edge

7.1. Limit

§22.917(a) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least $43+10\log(P)$ dB.

7.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The center of the spectrum analyzer was set to block edge frequency.

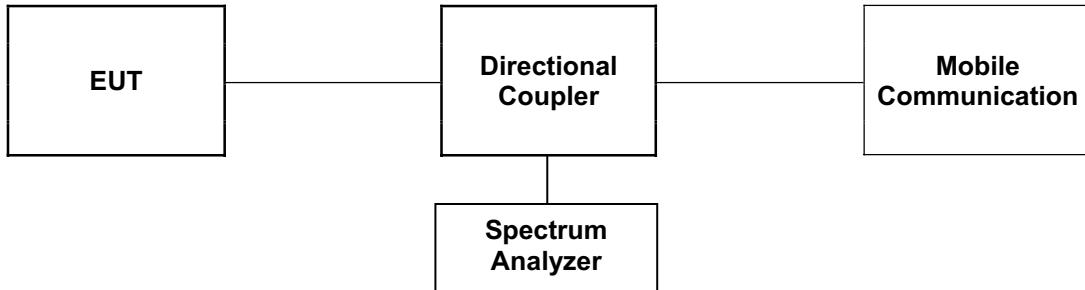

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7.3. Test Results

Ambient temperature : $(24 \pm 2)^\circ\text{C}$


Relative humidity : 47 % R.H.

Please refer to the following plots.


CDMA800 (band edge)

1xRTT


Low Channel

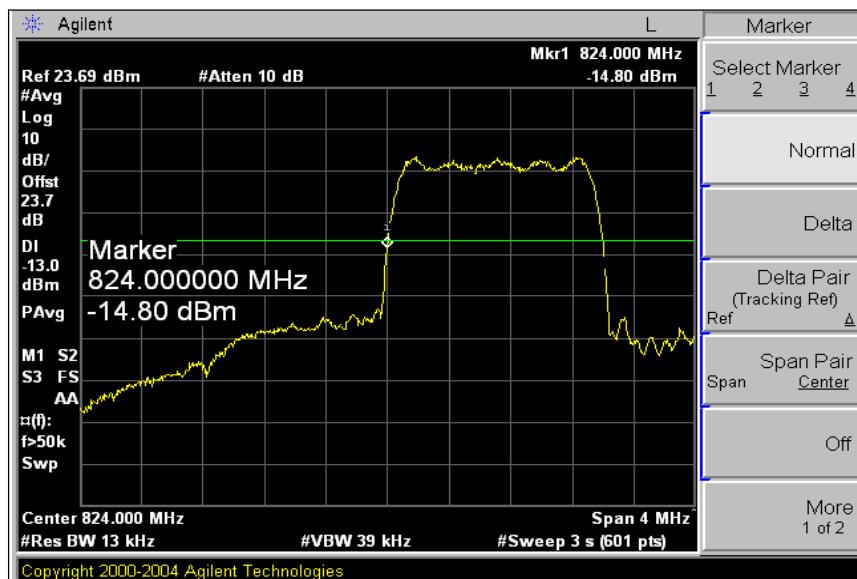

High Channel

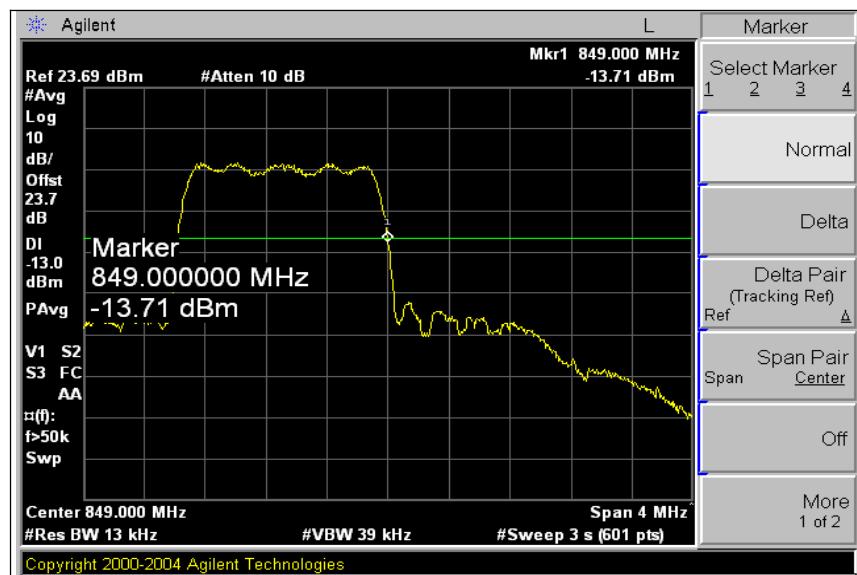

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

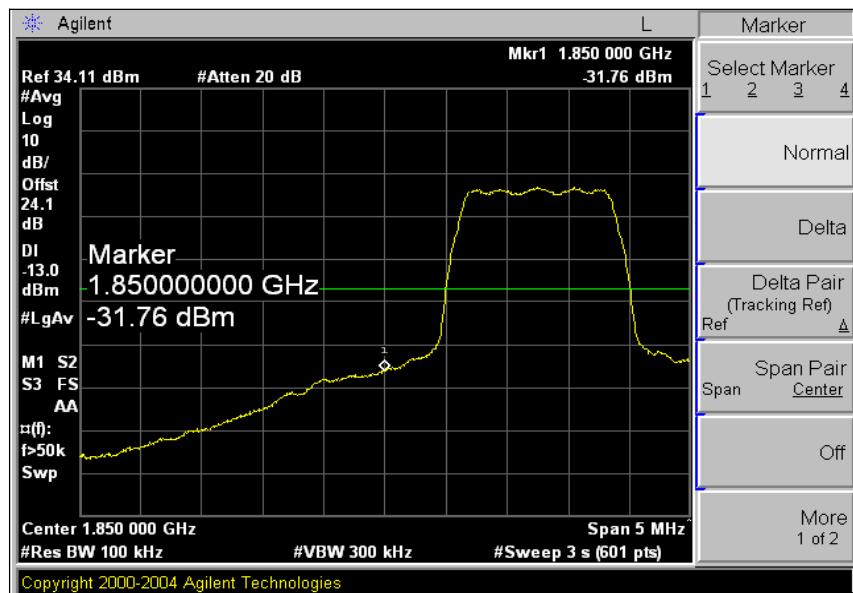CDMA1900 (Band edge)
1xRTT
Low Channel

High Channel


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

CDMA800 (4 MHz SPAN)**1xRTT**

Low Channel



High Channel




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

CDMA1900 (4 MHz SPAN)**1xRTT**

Low Channel



High Channel

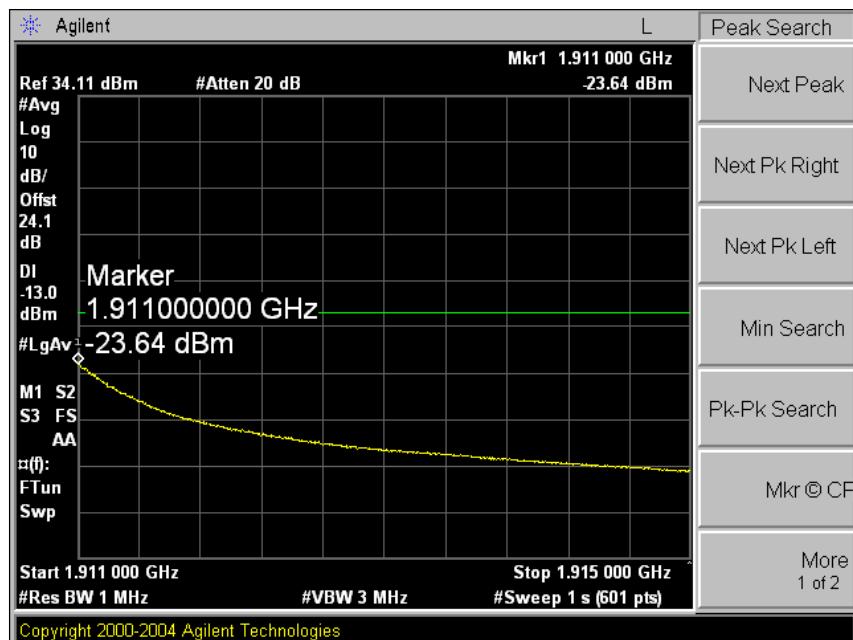

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8. Frequency Stability

8.1. Limit

Requirements: FCC § 2.1055 (a), § 2.1055 (d) & following:


According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

§24.235 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

8.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators.
2. The EUT was placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

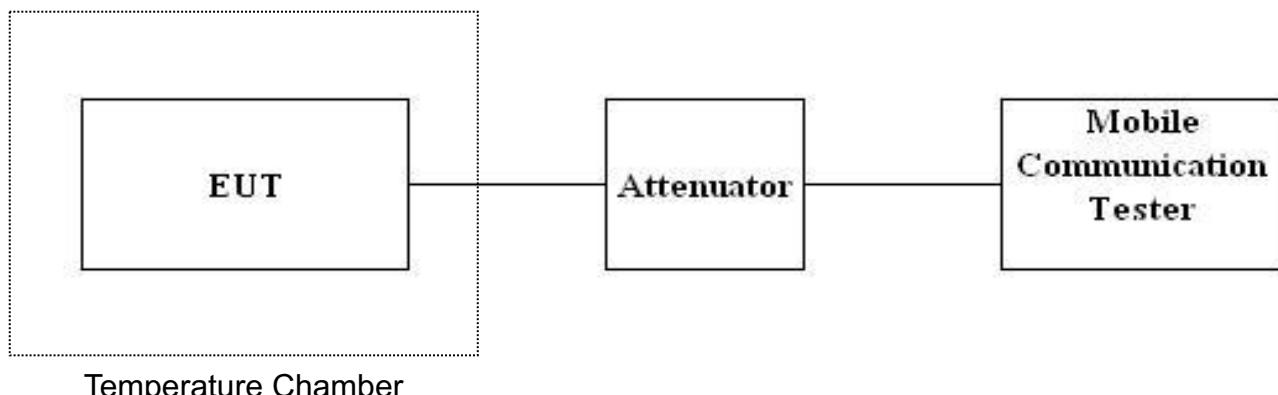

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8.3. Test Results

Ambient temperature : (24 \pm 2) °C
Relative humidity : 47 % R.H.

CDMA800 1xRTT mode at middle channel

Reference Frequency: 836.52 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
-30	24.0	3	0.001 195
-20		3	0.001 195
-10		4	0.002 391
0		-3	-0.005 977
10		-9	-0.013 150
20		2	Ref
30		5	0.003 586
40		-3	-0.005 977
50		3	0.001 195
Frequency Stability versus power Supply			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	27.6 (+15 %)	2	0.000000
	20.4 (-15 %)	3	0.001195

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

CDMA1900 1xRTT mode at middle channel

Reference Frequency: 1 880.0 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
-30	24.0	-5	-0.009 043
-20		-4	-0.008 511
-10		-6	-0.009 574
0		6	-0.003 191
10		-6	-0.009 574
20		12	Ref
30		10	-0.001 064
40		-5	-0.009 043
50		17	0.002 660
Frequency Stability versus power Supply			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	27.6 (+15 %)	10	-0.001 064
	20.4 (-15 %)	12	0.000 000

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9. RF Exposure Evaluation

9.1 Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational /Control Exposures				
300 – 1 500	--	--	F/300	6
1 500 – 100 000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
<u>300 – 1 500</u>	--	--	<u>F/1500</u>	<u>30</u>
<u>1 500 – 100 000</u>	--	--	<u>1</u>	<u>30</u>

9.1.1. Friis transmission formula: $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where P_d = power density in mW/cm^2

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

$\pi = 3.1416$

R = distance between observation point and center of the radiator in cm

P_d the limit of MPE, 1 mW/cm^2 . If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9.1.2. Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

9.1.3. Output Power into Antenna & RF Exposure Evaluation Distance

Mode: CDMA800 1xRTT

Channel	Channel Frequency (MHz)	Measured E.R.P. (dB m)	Duty Cycle (%)	Power Density at 20 cm (mW/cm ²)	LIMITS (mW/cm ²)
Low	824.70	25.77	100	0.123 234	0.549 80
Middle	836.52	27.36	100	0.177 717	0.557 68
High	848.31	25.07	100	0.104 889	0.565 54

Note :

1. The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit .

Mode: CDMA1900 1xRTT

Channel	Channel Frequency (MHz)	Measured E.I.R.P. (dB m)	Duty Cycle (%)	Power Density at 20 cm (mW/cm ²)	LIMITS (mW/cm ²)
Low	1 851.25	24.57	100	0.056 981	1
Middle	1 880.00	24.39	100	0.054 667	1
High	1 908.75	23.17	100	0.041 279	1

Note :

1. The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit .