

ISED CABid: ES1909

Test Report No:

Lab. Company Number: 4621A

NIE: 72560RRF.005A1

Test Report

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

(*) Identification of item tested	XS4 Mini ANSI electronic Lock Series including all mechanical variants
(*) Trademark	SALTO
(*) Model and /or type reference	C20M (Type reference: E1721)
Other identification of the product	FCC ID: UKCC20M IC: 10088A-C20M
(*) Features	Features: Bluetooth LE HW version: 1.0 SW version: 0196 (Control FW), 0186 (FUS FW) 0187 (BLE FW), 0000 (Motor FW)
Applicant	SALTO SYSTEMS, S.L. Arkotz 9, Polígono Lanbarren 20180, Oiartzun, Gipuzkoa, SPAIN
Test method requested, standard	USA FCC Part 15.247 (10-1-21 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-21 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager
Date of issue	2023-01-10
Report template No	FDT08_24 (*) "Data provided by the client"

Index

INDEX	2
ACRONYMS	3
COMPETENCES AND GUARANTEES	3
GENERAL CONDITIONS	4
UNCERTAINTY	4
DATA PROVIDED BY THE CLIENT	4
USAGE OF SAMPLES	5
TEST SAMPLE DESCRIPTION	6
IDENTIFICATION OF THE CLIENT	7
TESTING PERIOD AND PLACE	7
DOCUMENT HISTORY	7
ENVIRONMENTAL CONDITIONS	7
REMARKS AND COMMENTS	8
TESTING VERDICTS	9
SUMMARY	9
APPENDIX A: TEST RESULTS. BLUETOOTH LOW ENERGY 4.2 (1M)	10

Acronyms

Acronym ID	Acronym Description
# of Tx Chains	Number of Transmission Chains
26Ebw	Emission Bandwidth
BW	Bandwidth
Detector	Detector used
Equipment	Equipment Type
Freq	Frequency
Freq Rng	Frequency Range
Inband Peak Lvl	Inband Peak Level
Lvl	Level
MP	Measurement Point
Mod	Modulation
Occ Ch BW	Occupied Channel Bandwidth
PSD	Power Spectrum Density
Peak Power	Maximum Peak Conducted Output Power
Pol	Polarization
Port	Active Port
Unwanted Freq	Unwanted Emissions Frequency
Unwanted Lvl	Unwanted Emissions Level

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the radiated emissions of EUT from 30 MHz to 1 GHz is:
Measurement uncertainty $\leq \pm 5,35$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 1 GHz to 17 GHz is:
Measurement uncertainty $\leq \pm 4,32$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 17 GHz to 26 GHz is:
Measurement uncertainty $\leq \pm 5,51$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the conducted testing of EUT is:

RF Peak Output Power: Measurement uncertainty $\leq \pm 0,80$ dB

Power Spectral Density: Measurement uncertainty $\leq \pm 0,99$ dB

6dB Bandwidth: Measurement uncertainty $\leq \pm 2,84$ %

Occupied Channel Bandwidth: Measurement uncertainty $\leq \pm 1,17$ %

Conducted Band-edge spurious emissions: Measurement uncertainty $\leq \pm 1,76$ dB

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a XS4 Mini ANSI Electronic Lock Series with RFID Mifare (ISO 14443A standard based) and Bluetooth LE technology.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	72560C_1.1	XS4 Mini ANSI electronic Lock	C20M	--	2022-06-06	Element Under Test
S/02	72560C_9.1	XS4 Mini ANSI electronic Lock (conducted sample)	C20M	--	2022-07-14	Element Under Test

Notes referenced to samples during the project:

Id	Type
S/01	Sample for radiated test
S/02	Sample for conducted test

Test sample description

Ports..... :	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾		
	--		[]	[]	[]		
Supplementary information to the ports..... :	--						
Rated power supply :	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	[]	AC:	[]	[]	[]	[]	[]
	[X]	DC: 4.5 Vdc (3 x LR03 batteries), Max: 5V, Min: 3.2 V (perform opening) / 3V (operate)					
Rated Power :	--						
Clock frequencies :	27.12 MHz, 32 MHz, 32.768 kHz						
Other parameters..... :	N/A						
Software version :	0196 (Control FW) + 0186 (FUS FW) + 0187 (BLE FW) + 0000 (Motor FW)						
Hardware version..... :	1.0						
Dimensions in cm (W x H x D) :	6.8 x 12.45 x 3.9 cm						
Mounting position..... :	[]	Table top equipment					
	[]	Wall/Ceiling mounted equipment					
	[]	Floor standing equipment					
	[]	Hand-held equipment					
	[X]	Other: Door mounting					
Modules/parts :	Module/parts of test item		Type		Manufacturer		
	SoC + Antenna		BLE		ST + JOHANSON		
Accessories (not part of the test item) :	Description		Type		Manufacturer		
	--						
Documents as provided by the applicant :	Description		File name		Issue date		
	User manual						
	FW Explanation						
	--						

⁽³⁾ Only for Medical Equipment

Identification of the client

SALTO SYSTEMS, S.L.
Arkotz 9, Polígono Lanbarren
20180 Oiartzun (Gipuzkoa), SPAIN

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2022-06-13
Date (finish)	2022-11-25

Document history

Report number	Date	Description
72560RRF.005	2022-12-21	First release.
72560RRF.005A1	2023-01-10	Test report is modified due to a typo. This modification test report cancels and replaces the test report 72560RRF.005.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Javier Miguel Nadales Lisbona, Miguel Manuel López Guzmán and Pablo Redondo Reyes.

Used instrumentation:

Control No.	Equipment	Model	Manufacturer	Next Calibration
4825	SEMIANECHOIC ABSORBER LINED CHAMBER	FACT 3 200 STP	ETS LINDGREN	N/A
4826	SHIELDED ROOM	S101	ETS LINDGREN	N/A
4578	HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	ETS LINDGREN	2023-04-30
6496	HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK	2023-08-24
6144	PRE-AMPLIFIER G>40dB 10MHz-6GHz	BLNA 0160-01N	BONN ELEKTRONIK	2023-03-17
5705	PRE-AMPLIFIER G>40dB 1-18 GHz	BLMA 0118-1M	BONN ELEKTRONIK	2023-07-21
6165	EMI TEST RECEIVER 9kHz-7GHz	ESR7	ROHDE AND SCHWARZ	2023-11-08
4716	SIGNAL AND SPECTRUM ANALYZER 2Hz-50GHz	FSW50	ROHDE AND SCHWARZ	2024-08-12
4657	HORN ANTENNA 18-40GHz	BBHA 9170	SCHWARZBECK	2023-05-05
8856	PRE-AMPLIFIER G>30dB 17-40GHz	BLMA 1840-4A	BONN ELEKTRONIK	2023-11-02
4848	SOFTWARE FOR EMC/RF TESTING	EMC32	ROHDE AND SCHWARZ	N/A
7794	SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz	FSV40	ROHDE AND SCHWARZ	2023-02-26
8848	OPEN SWITCH UNIT UP TO 7.5 GHz	OSP-B157W8 PLUS	ROHDE & SCHWARZ	2023-08-20
7798	SOFTWARE FOR EMC/RF TESTING	WMS32	ROHDE AND SCHWARZ	N/A

Testing verdicts

Fail	F
Inconclusive	I
Not applicable	N/A
Not measured	N/M
Pass	P

Summary

Bluetooth Low Energy 4.2 (1M)

Requirement – Test case	FCC PART 15 / RSS-247	Verdict	Remark
FCC 15.247 (a) (2) / RSS-247 5.2 (a) 6 dB Bandwidth		P	--
FCC 15.247 (e) / RSS-247 5.2 (b) Power spectral density		P	--
FCC 15.247 (b) / RSS-247 5.4 (d) Maximum Peak Conducted output power		P	--
FCC 15.247 (d) / RSS-247 5.5 Band-edge emissions compliance (Transmitter)		P	--
FCC 15.247 (d) / RSS-247 5.5 Emission limitations radiated (Transmitter)		P	--
<u>Supplementary information and remarks:</u> None.			

Appendix A: Test results. Bluetooth Low Energy 4.2 (1M)

TEST CONDITIONS	12
TEST CASES DETAILS	15
<i>Occupied Channel Bandwidth 99%</i>	15
<i>RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6 dB Bandwidth</i>	19
<i>RSS-247 5.2 (b) / FCC 15.247 (e) Power spectral density</i>	23
<i>RSS-247 5.4 (d) / FCC 15.247 (b) (3) Maximum Peak Conducted output power</i>	27
<i>RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter)</i>	31
<i>RSS-247 5.5 / FCC 15.247 (d) Emission limitations radiated (Transmitter)</i>	37

TEST CONDITIONS

(*): Data provided by the client.

POWER SUPPLY (*):

Vnominal:	4.5Vdc
Type of Power Supply:	3 x LR03 batteries

ANTENNA (*):

Type of Antenna:	Integral antenna.
Maximum Declared Antenna Gain:	+1.5 dBi

TEST FREQUENCIES (*):

Low Channel:	2402 MHz
Middle Channel:	2440 MHz
High Channel:	2480 MHz

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

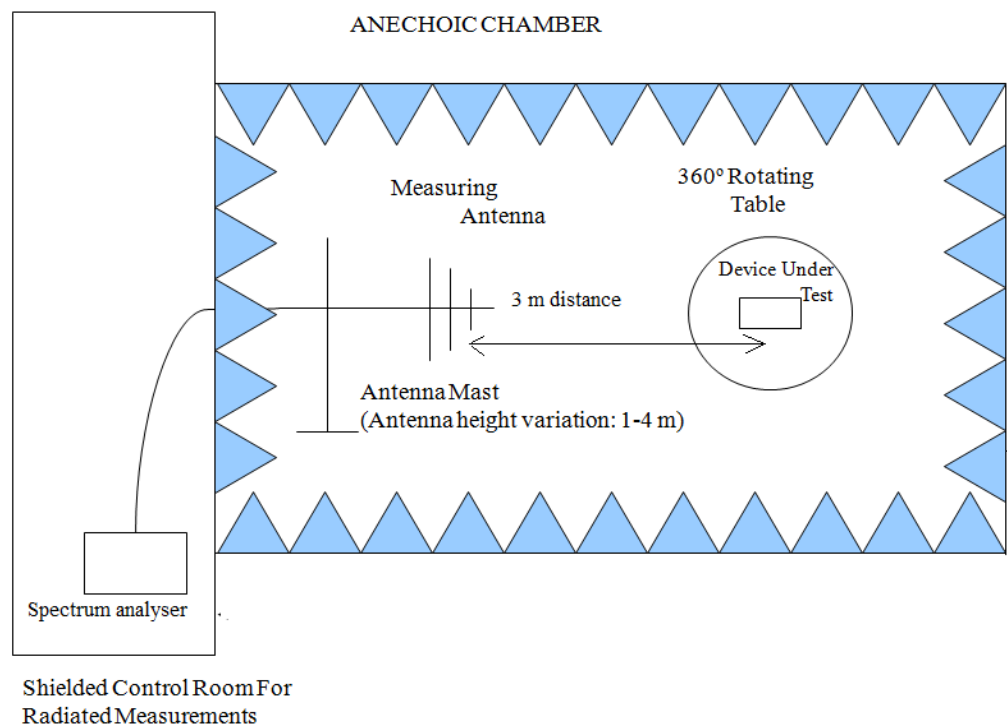

Radiated measurements setup from 1 GHz to 17 GHz:

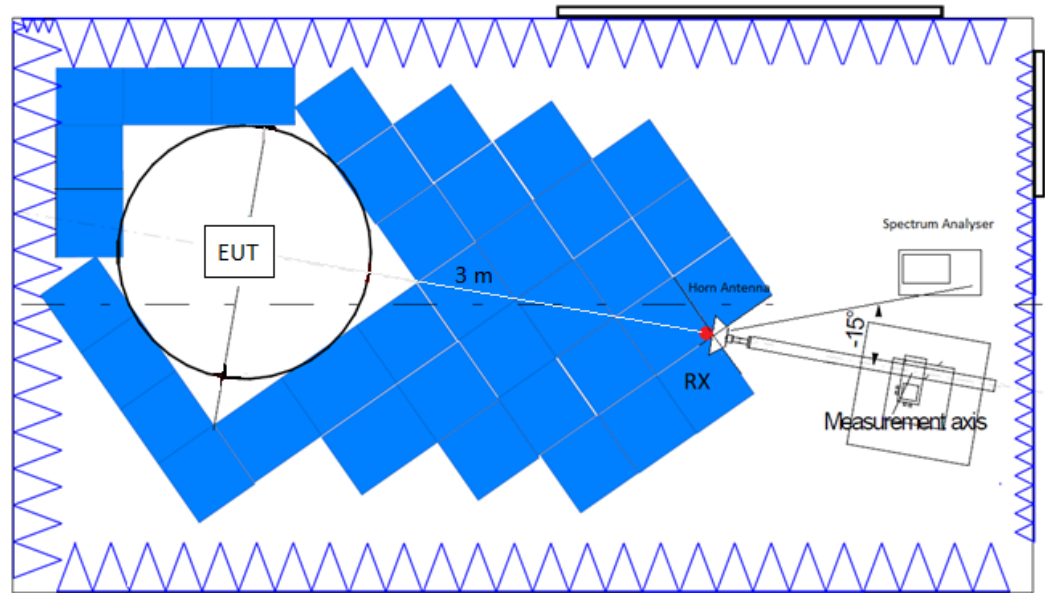

Radiated measurements setup $f > 17$ GHz:

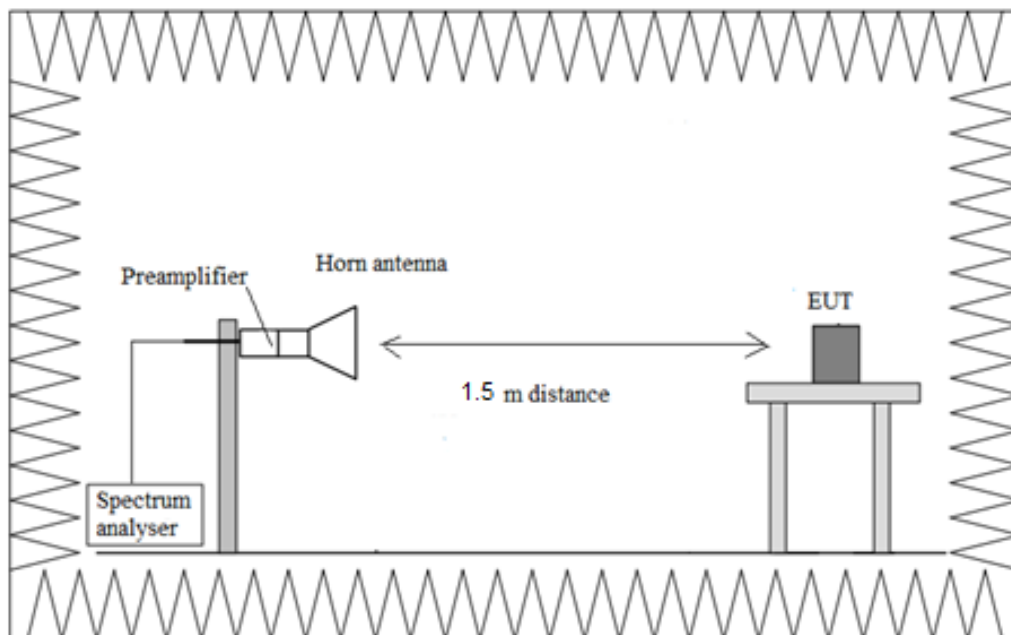

TEST CASES DETAILS

Occupied Channel Bandwidth 99%

Results



Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

Freq (MHz)	Occ Ch BW (MHz)
2402.00000	0.990
2440.00000	0.990
2480.00000	0.990

Attachments



Frequency MHz = 2402.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = BTLE 4.2 (GFSK 1 Mbit/s), Number of Transmission Chains = 1, Active Port = 1

Plots:

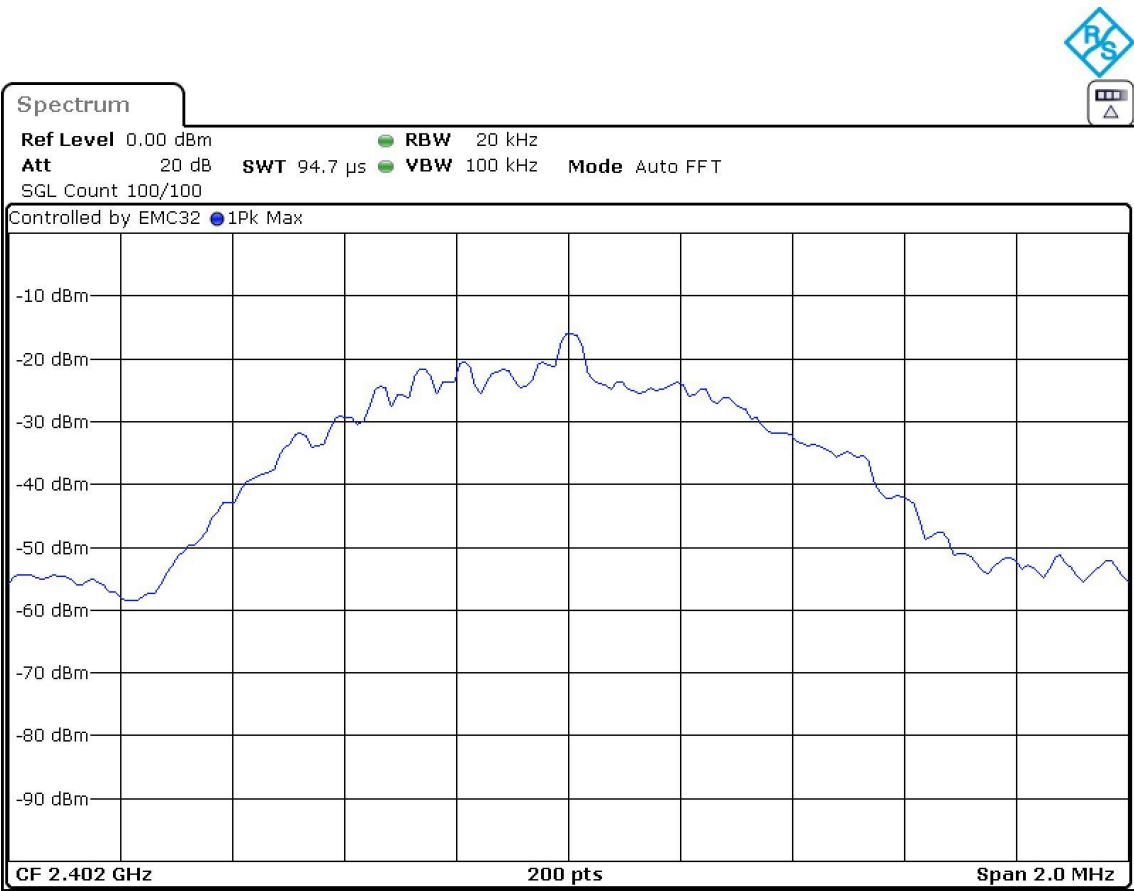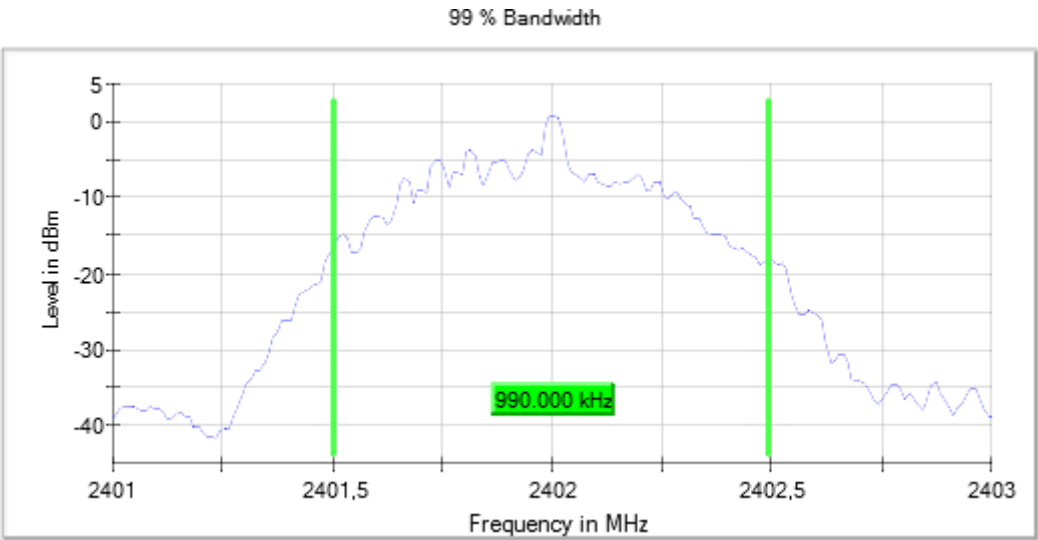



Frequency MHz = 2440.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = BTLE 4.2 (GFSK 1 Mbit/s), Number of Transmission Chains = 1, Active Port = 1

Plots:

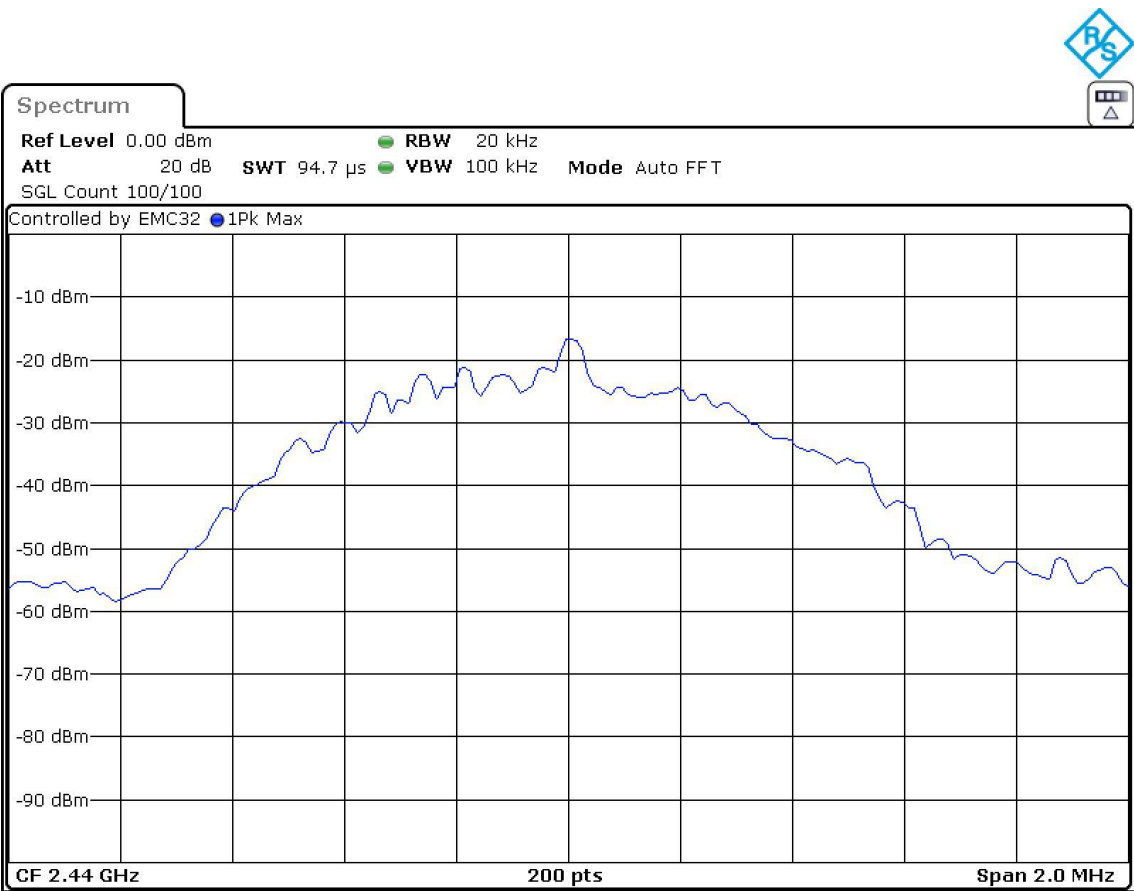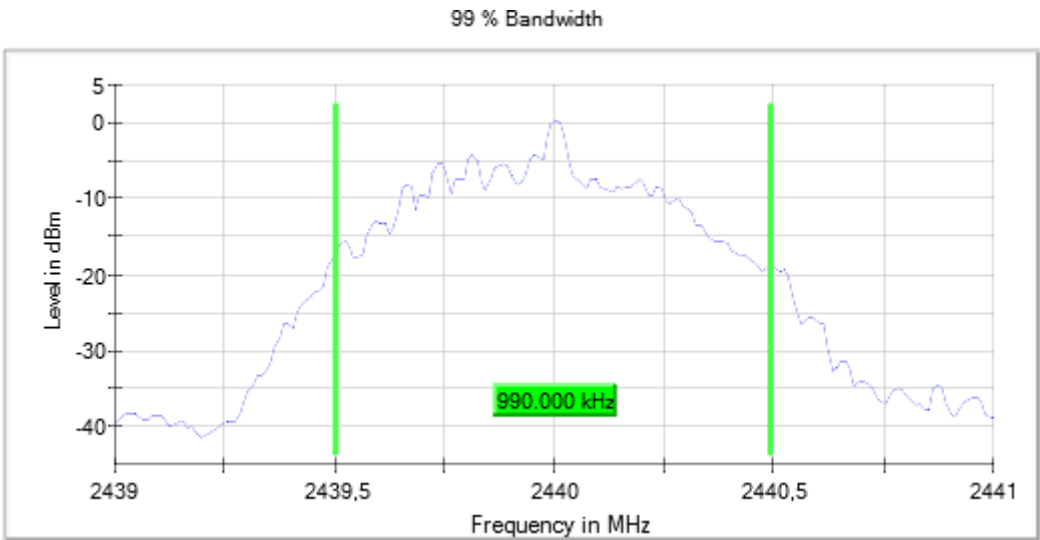

Frequency MHz = 2480.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1,
Modulation = BTLE 4.2 (GFSK 1 Mbit/s), Number of Transmission Chains = 1, Active Port = 1

Plots:

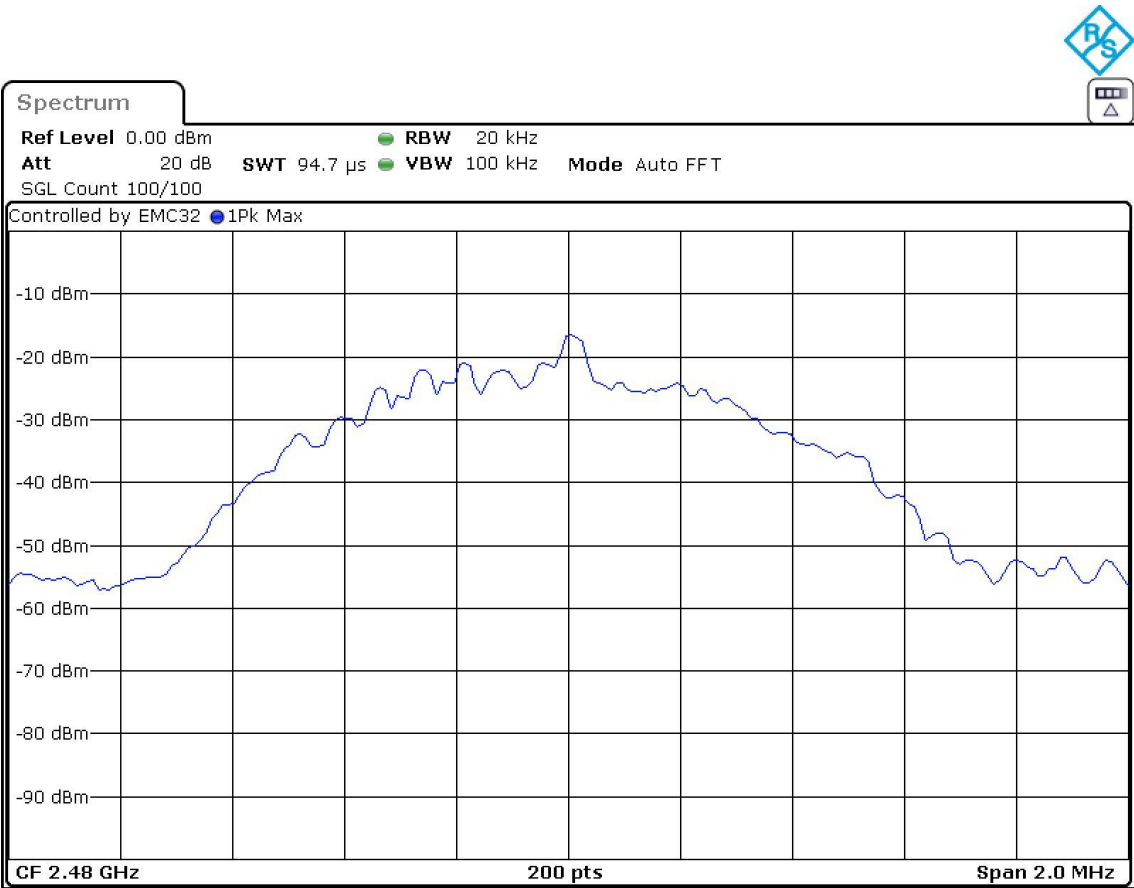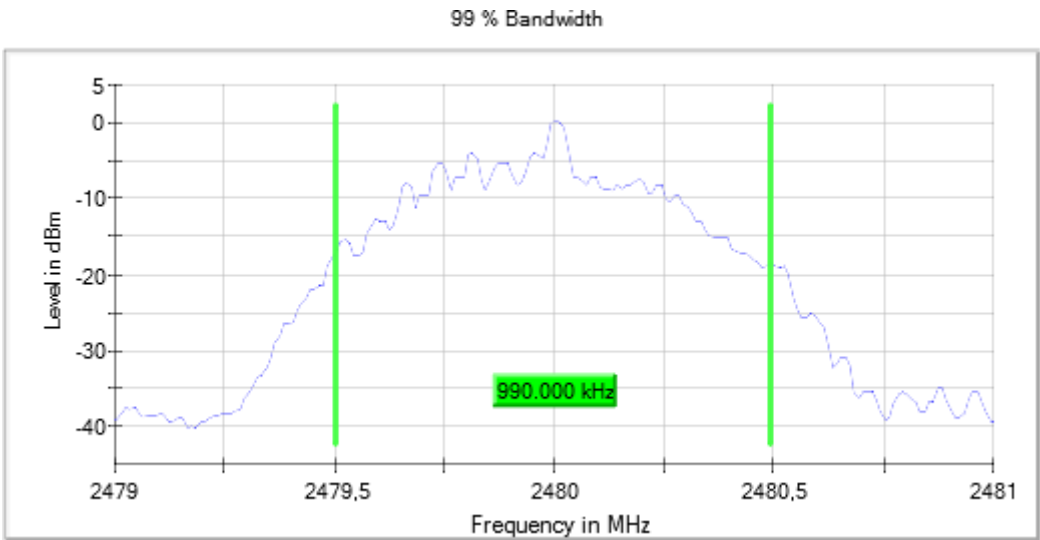

RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6 dB Bandwidth

Limits

The minimum 6 dB bandwidth shall be at least 500 kHz.

Results

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

Freq (MHz)	6 dB Bandwidth (MHz)
2402.00000	0.693
2440.00000	0.693
2480.00000	0.693



Verdict

Pass

Attachments



Frequency MHz = 2402.00000, Bandwidth MHz = 1, Modulation = BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

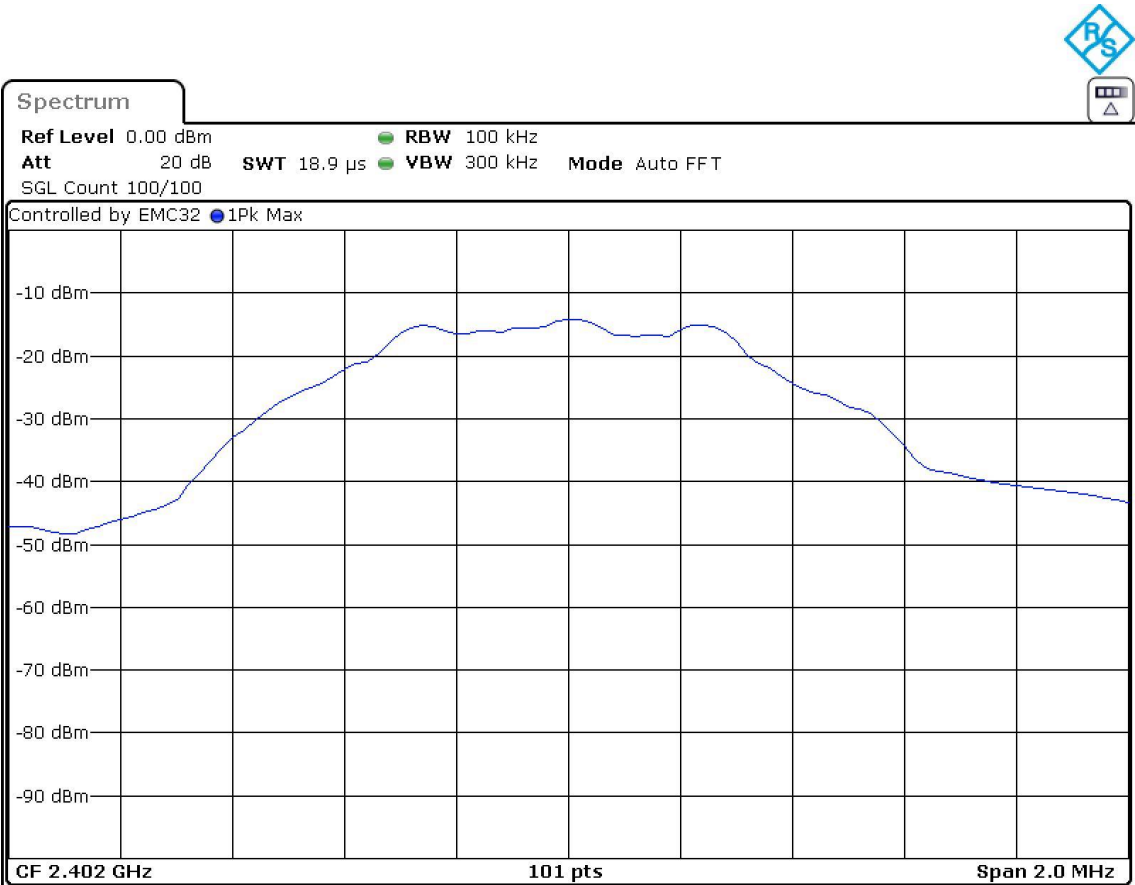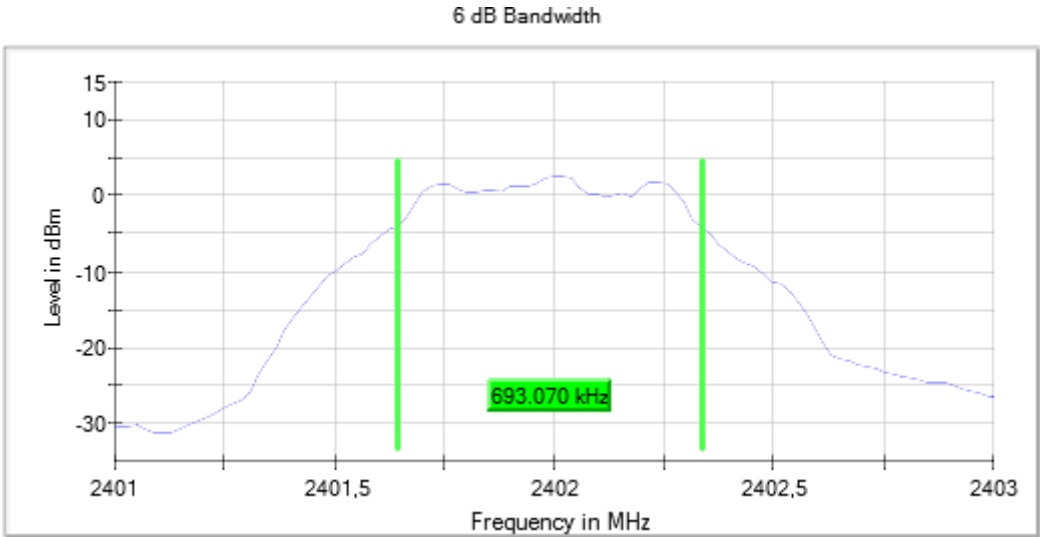


Frequency MHz = 2440.00000, Bandwidth MHz = 1, Modulation = BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

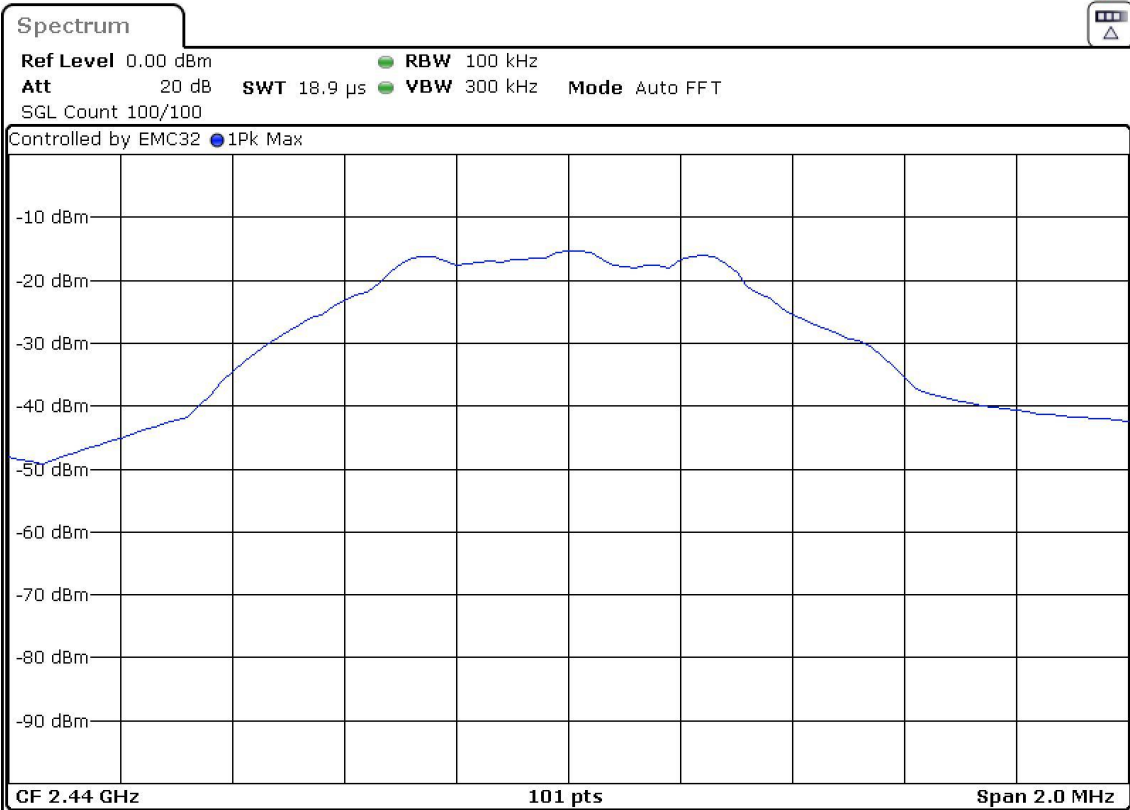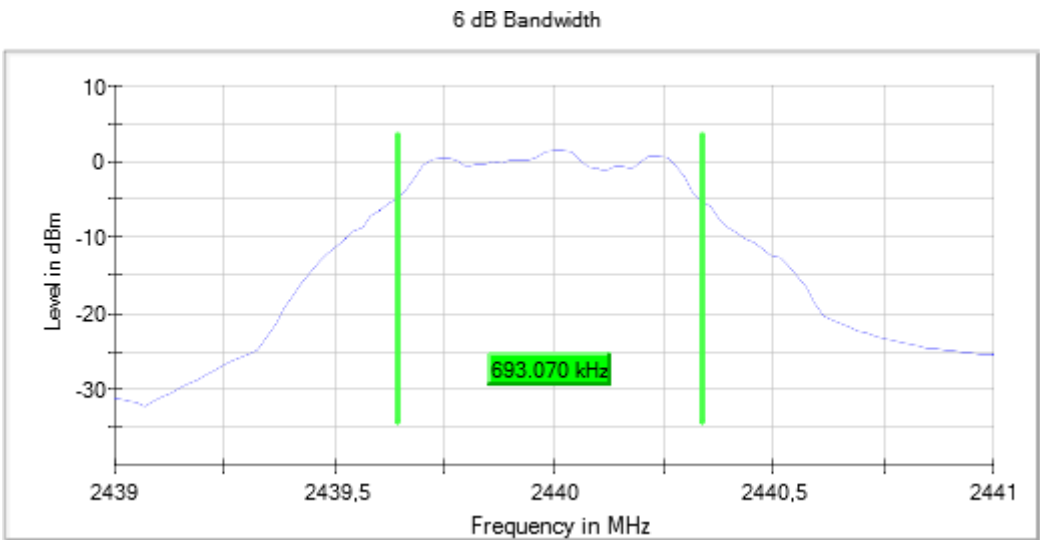

Frequency MHz = 2480.00000, Bandwidth MHz = 1, Modulation = BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

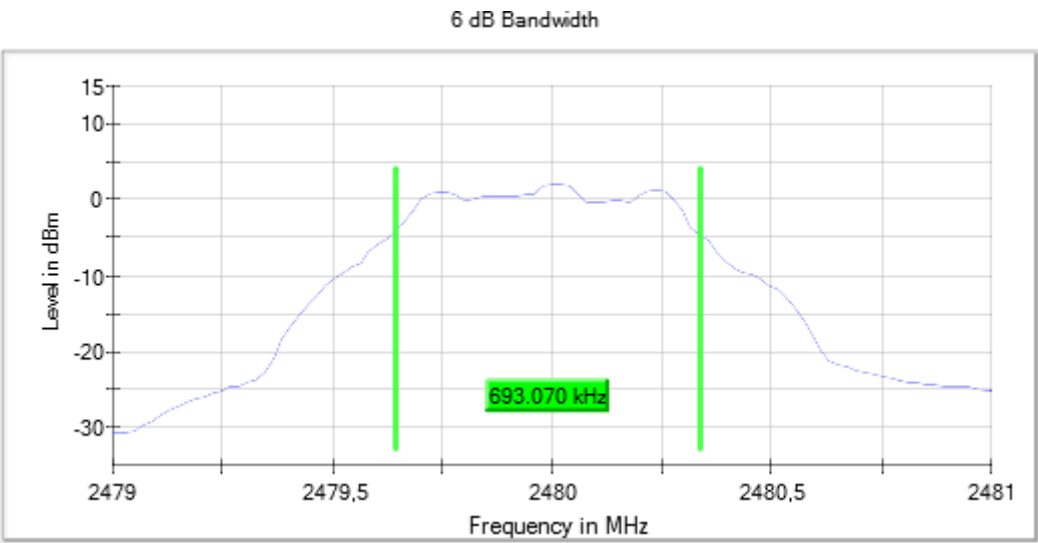

RSS-247 5.2 (b) / FCC 15.247 (e) Power spectral density

Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Results

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

Freq (MHz)	PSD (dBm)
2402.00000	-3.486
2440.00000	-4.015
2480.00000	-3.790



Verdict

Pass

Attachments



Frequency MHz = 2402.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

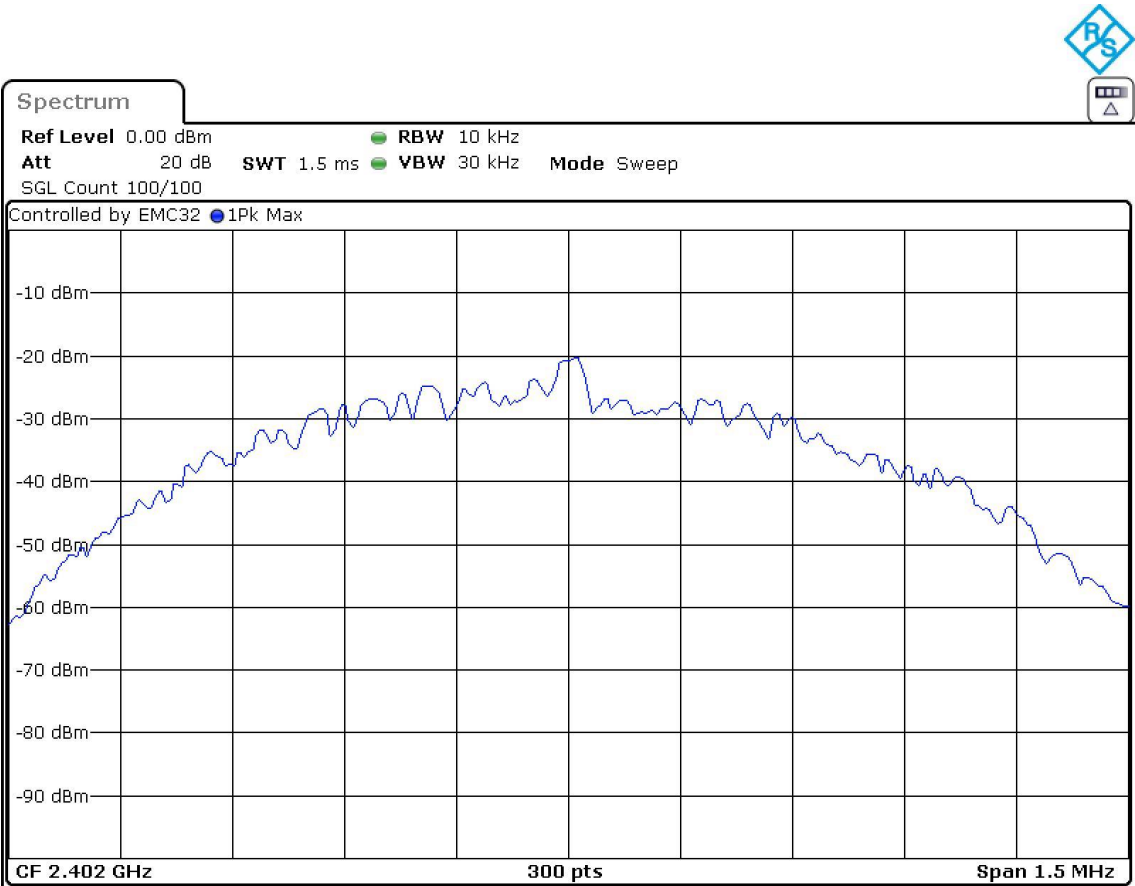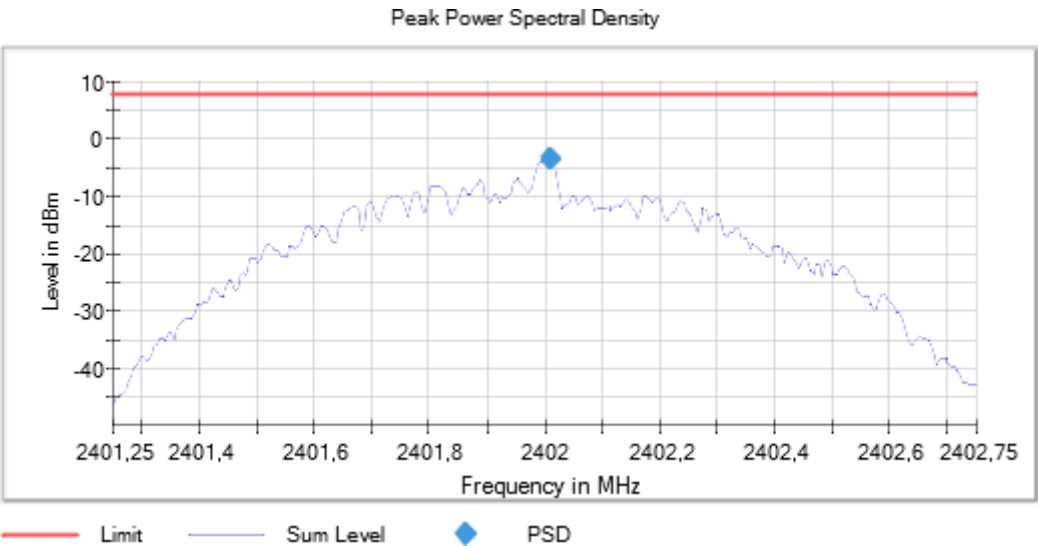



Frequency MHz = 2440.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1,
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

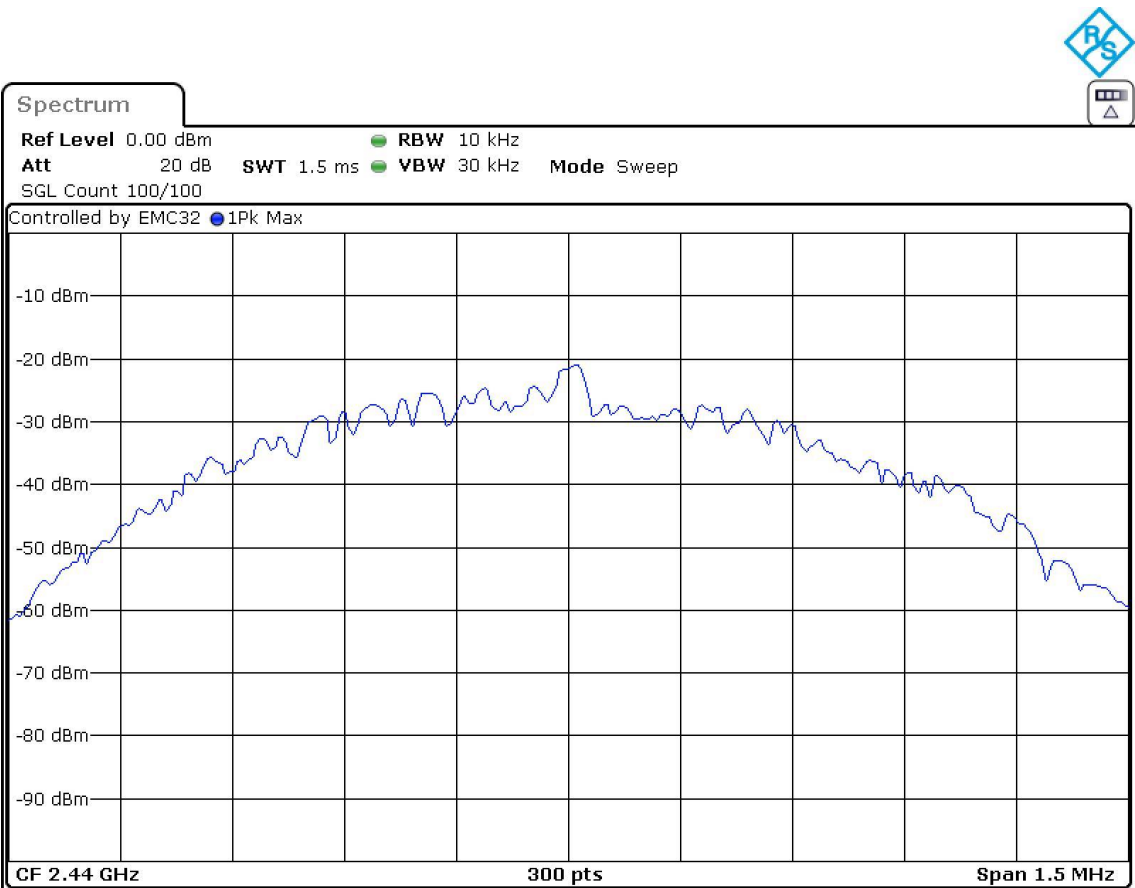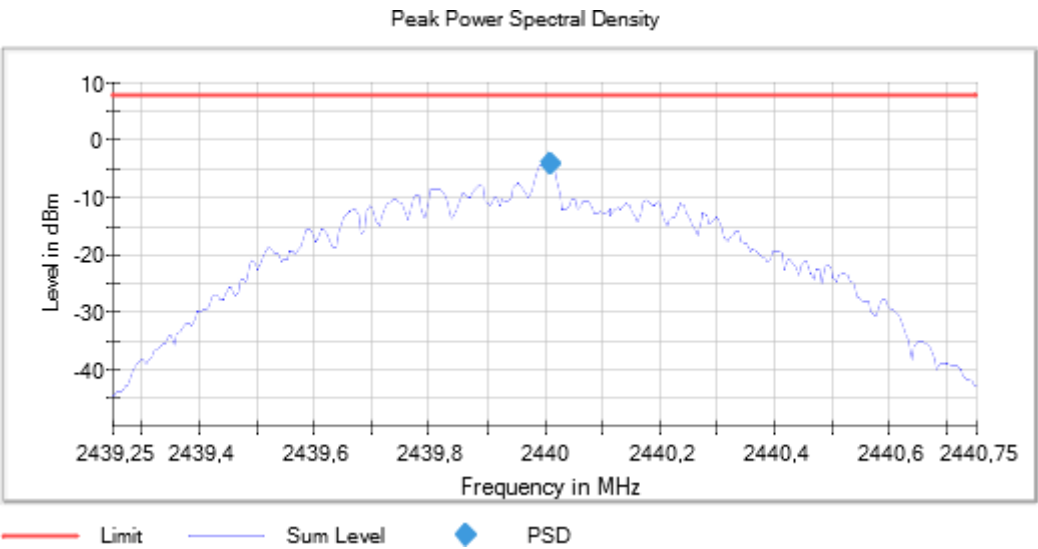

Frequency MHz = 2480.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1,
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

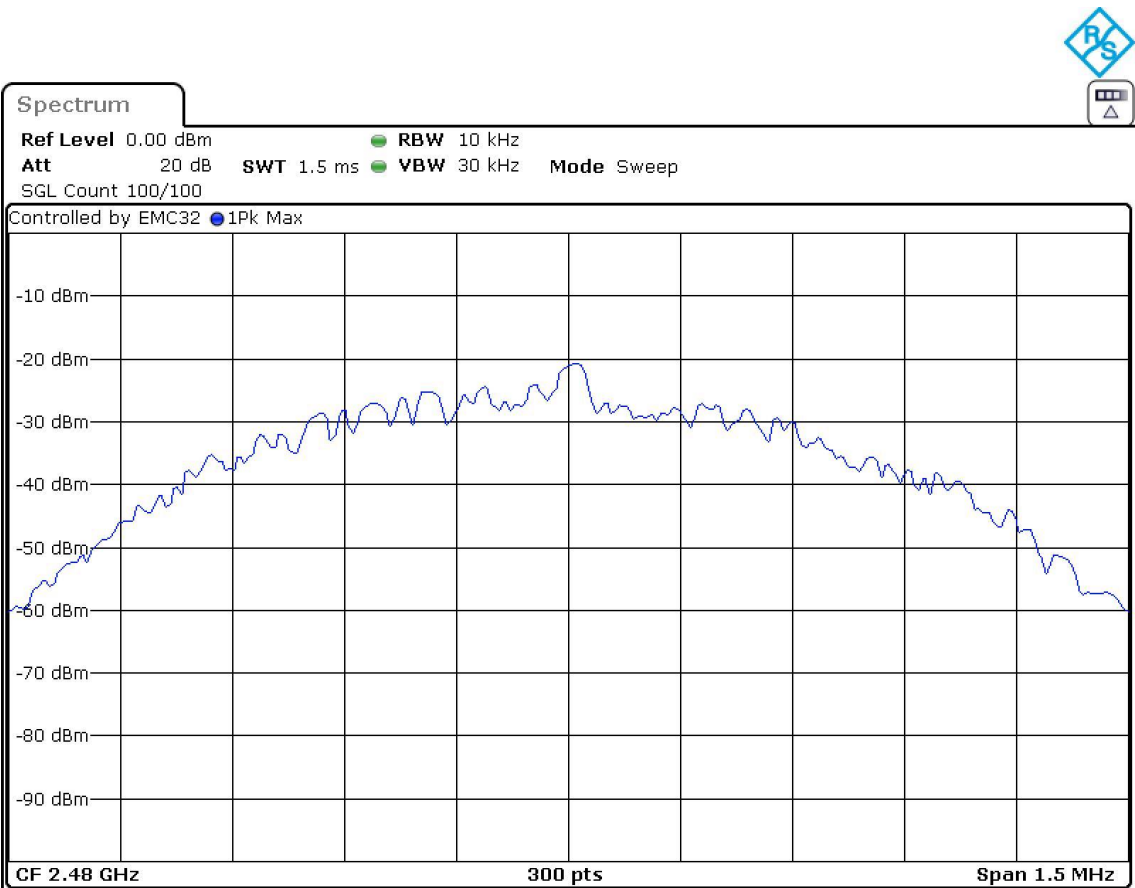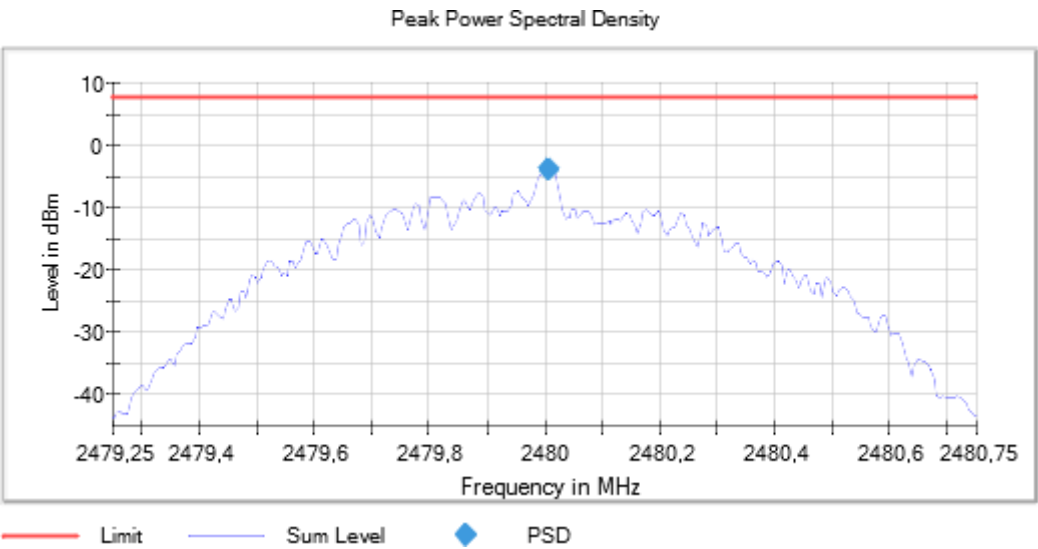

RSS-247 5.4 (d) / FCC 15.247 (b) (3) Maximum Peak Conducted output power

Limits

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).
The e.i.r.p. shall not exceed 4 W (36 dBm) (RSS-247).

The maximum peak conducted output power level in the fundamental emission was measured using the method according to point 11.9.1.1 "RBW ≥ DTS bandwidth" of ANSI C.63.10-2013.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: +1.5 dBi

Results

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

Freq (MHz)	Maximum Conducted Power (dBm)	Maximum EIRP Power (dBm)
2402.00000	2.598	4.098
2440.00000	1.763	3.263
2480.00000	2.280	3.780



Verdict

Pass

Attachments


Frequency MHz = 2402.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1,
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

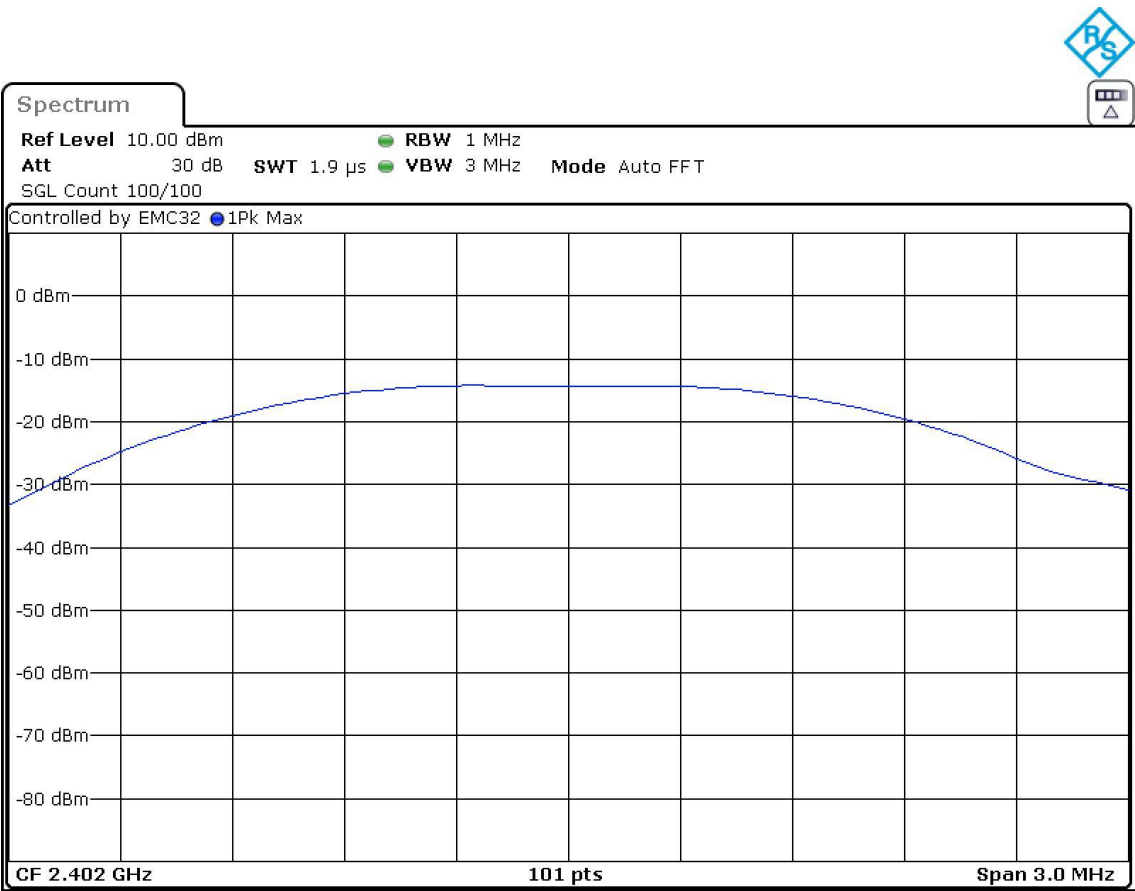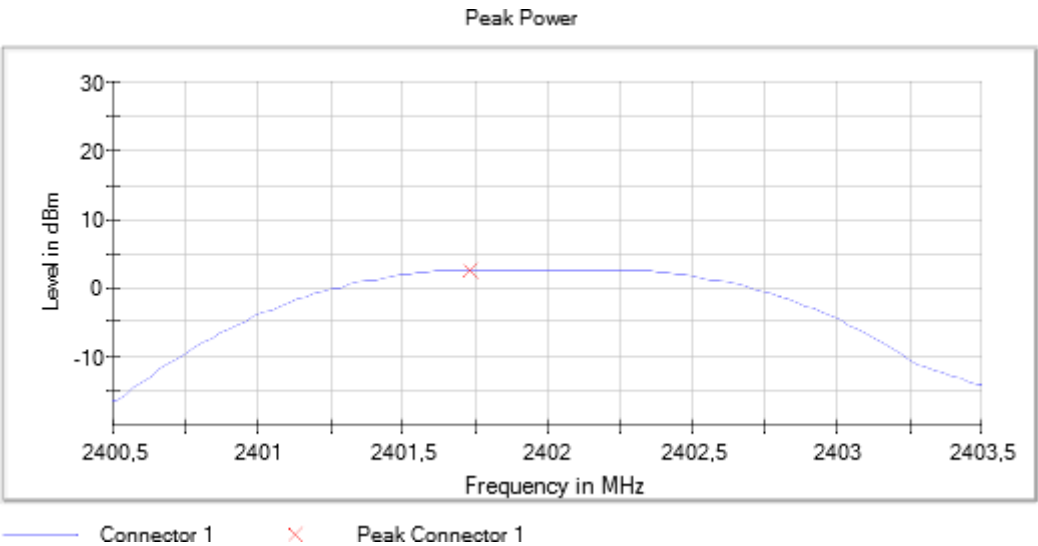


Frequency MHz = 2440.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1,
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

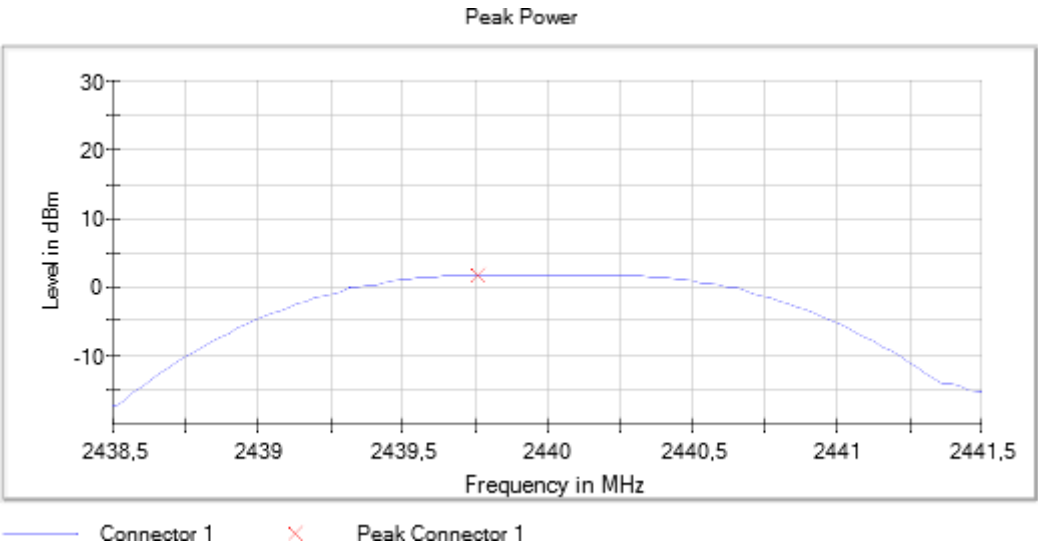

Frequency MHz = 2480.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1,
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

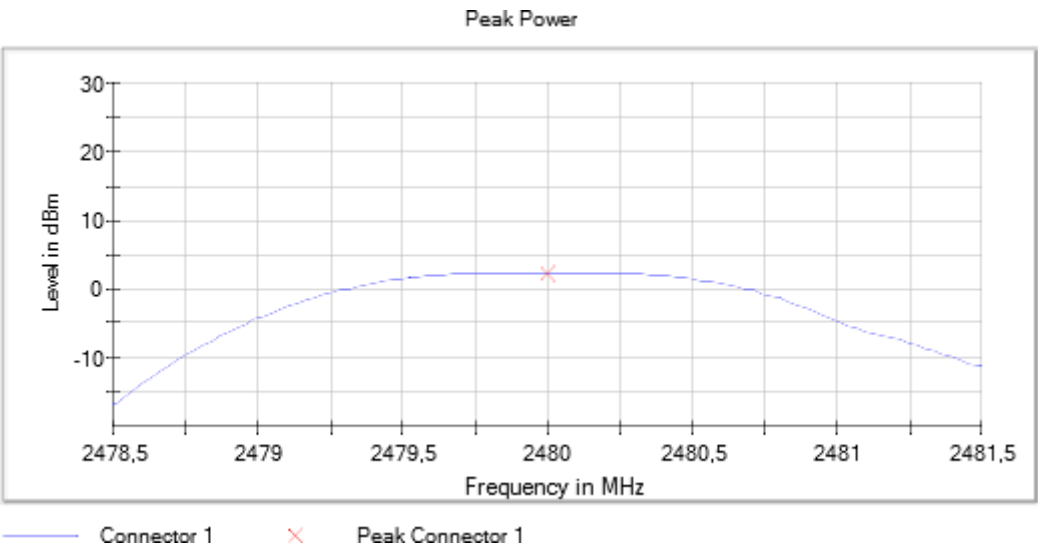

RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

Freq (MHz)	Inband Peak Level (dBm)	Measured Freq (MHz)	Level (dBm)	Limit (dBm)
2402.00000	2.783	2387.875000	-49.053	-17.217
		2387.825000	-49.305	
		2339.125000	-49.849	
		2310.725000	-49.953	
		2399.875000	-49.954	
		2399.925000	-49.985	
		2399.825000	-49.991	
		2386.025000	-50.060	
		2371.525000	-50.083	
		2386.275000	-50.135	
		2392.325000	-50.163	
		2387.925000	-50.182	
		2371.575000	-50.184	
		2339.175000	-50.185	
		2392.375000	-50.264	

Freq (MHz)	Inband Peak Level (dBm)	Measured Freq (MHz)	Level (dBm)	Limit (dBm)
2480.00000	1.838	2483.625000	-49.388	-18.162
		2483.675000	-49.518	
		2485.025000	-49.541	
		2484.025000	-49.672	
		2483.975000	-49.734	
		2487.525000	-49.767	
		2488.425000	-49.769	
		2487.675000	-49.780	
		2487.625000	-49.783	
		2488.475000	-49.785	
		2484.975000	-49.802	
		2484.625000	-49.853	
		2488.075000	-49.860	
		2484.675000	-49.871	
		2483.575000	-49.877	



Verdict


Pass

Attachments

Frequency (MHz) = 2402.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth (MHz) = 1, Modulation: BTLE 4.2 (GFSK 1 Mbit/s)



Plots:

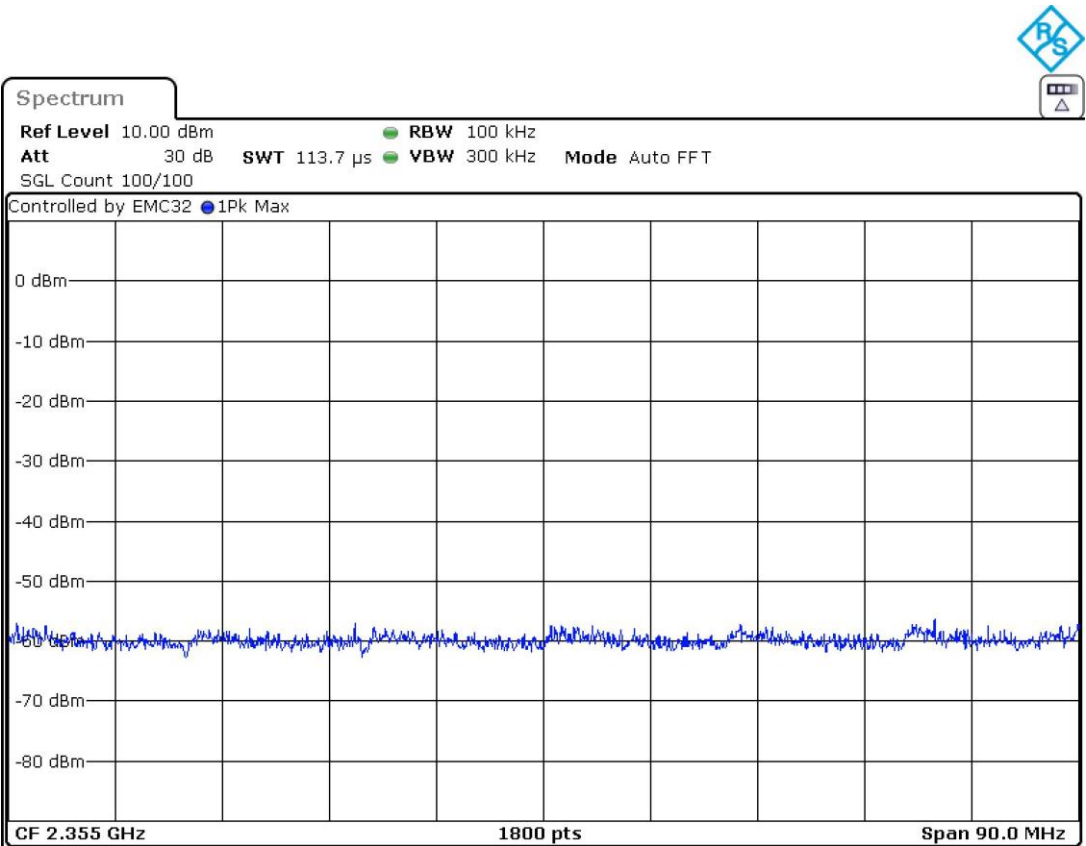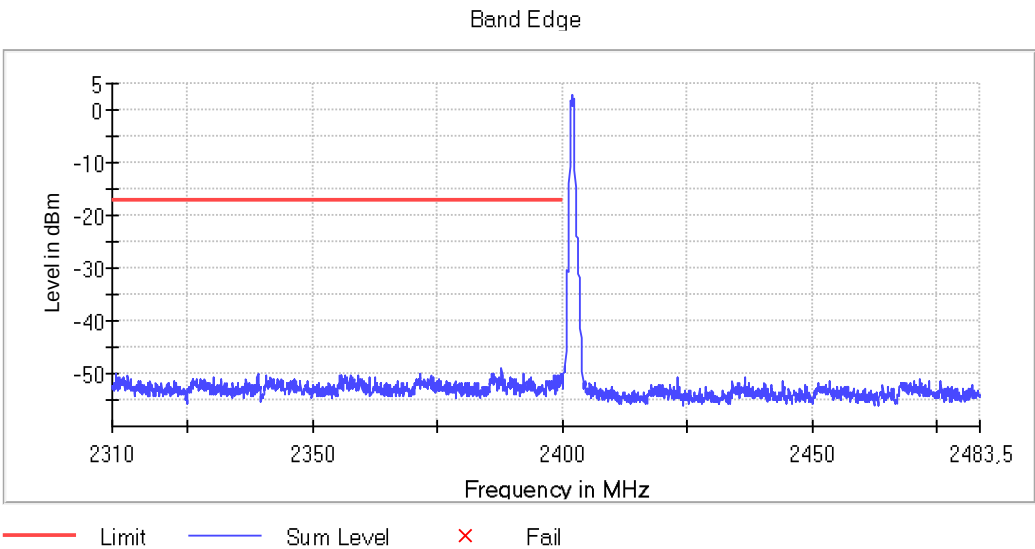


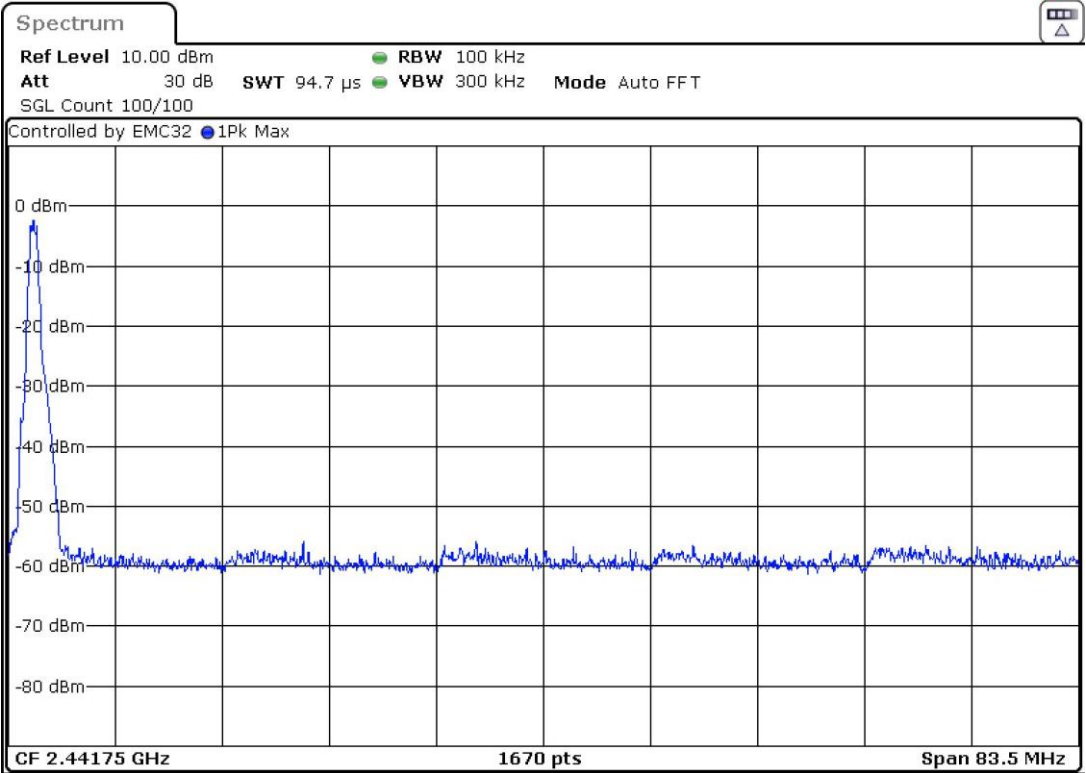

Frequency (MHz) = 2480.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth (MHz) = 1, Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

Plots:

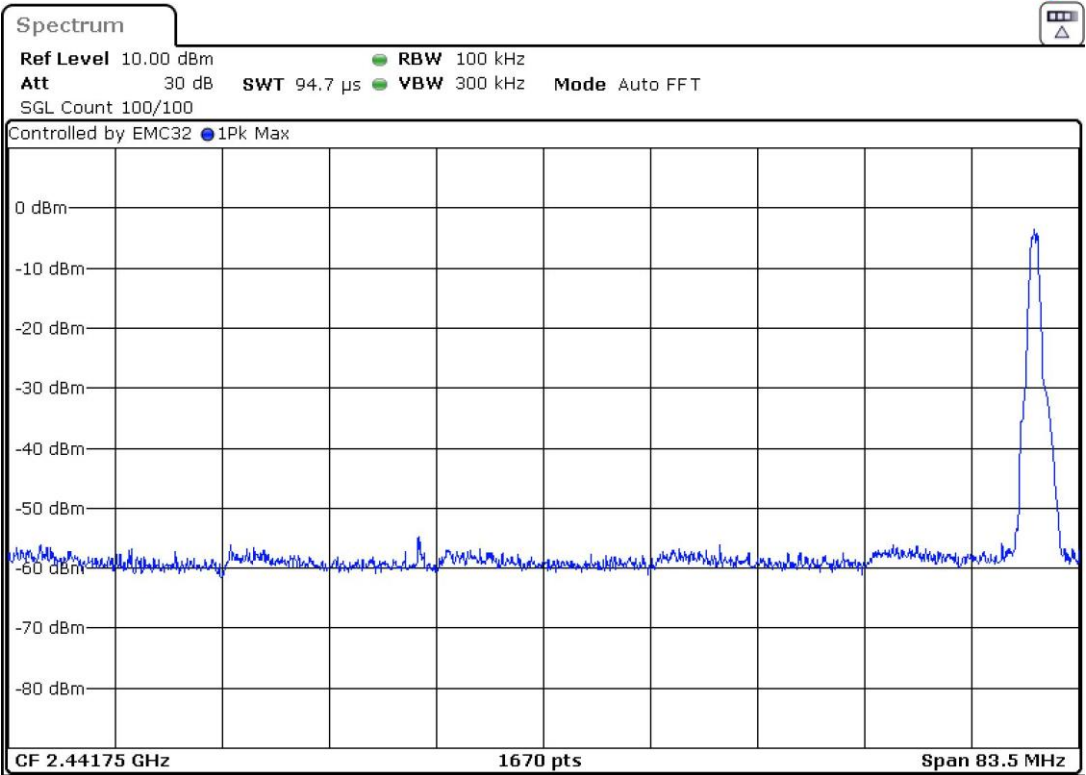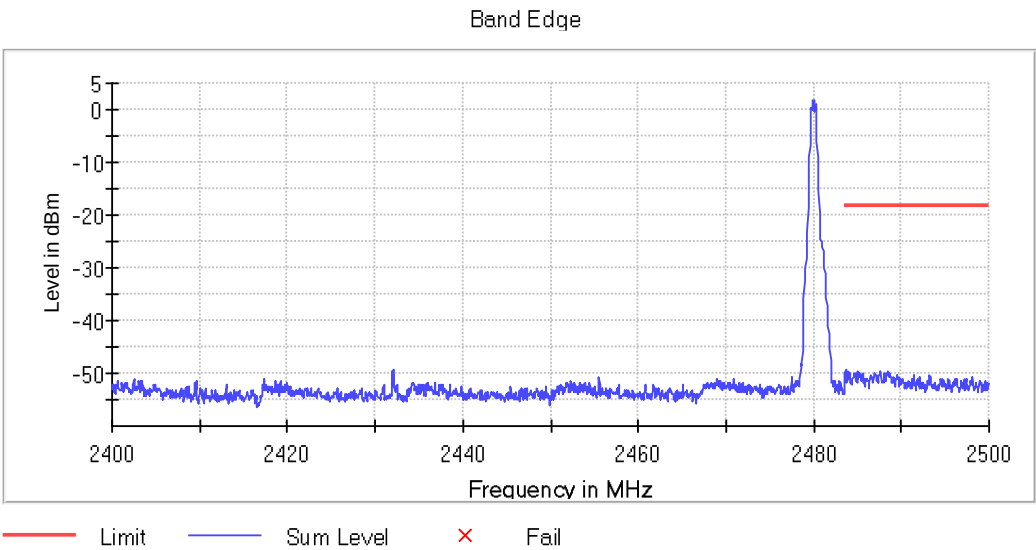

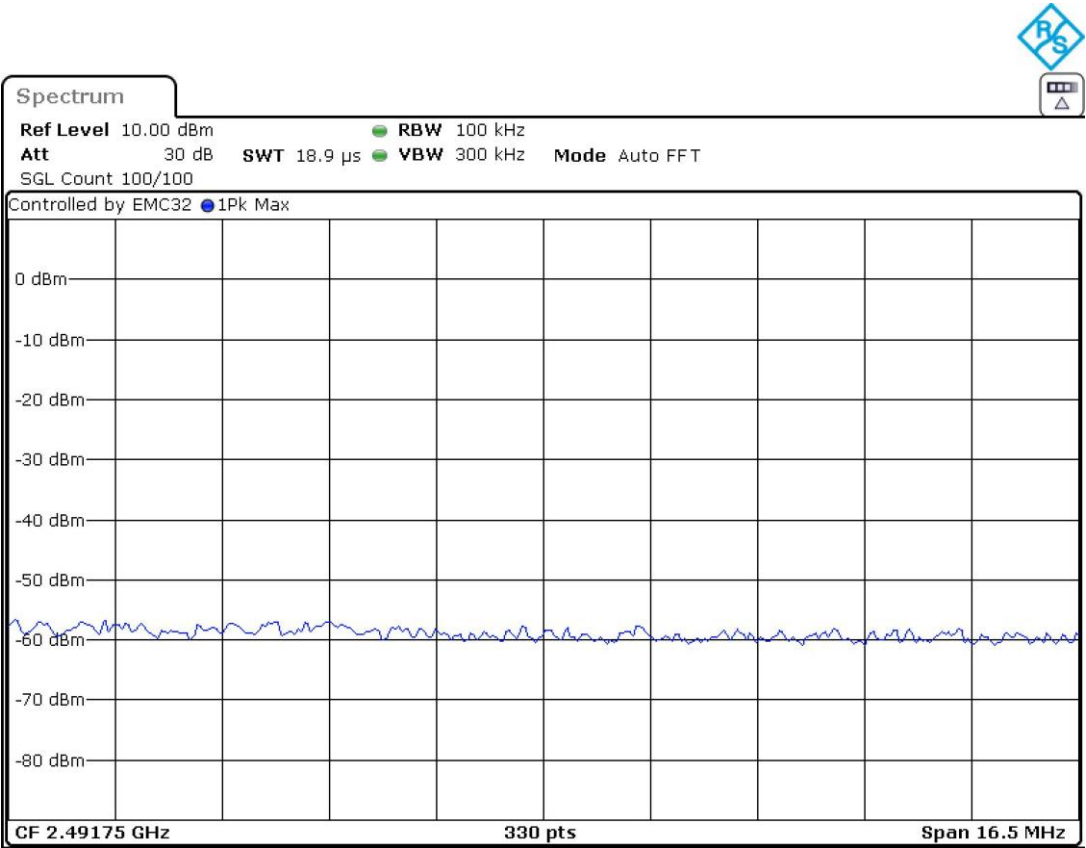

RSS-247 5.5 / FCC 15.247 (d) Emission limitations radiated (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table, specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

Results

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

Frequency range 30 MHz – 1 GHz:

The spurious signals detected do not depend on the operating channel.

No spurious frequencies detected at less than 20 dB below the limit.

Frequency range 1 GHz – 26 GHz:

The results below show the maximum measured levels in the 1 – 26 GHz range including the restricted bands 2.31 – 2.39 GHz and 2.4835 – 2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for compliance checking with the average limit.

- Low Channel:

Spurious frequencies found at less than 20 dB below the limit:

Freq (MHz)	Freq Rng (GHz)	Unwanted Freq (MHz)	Unwanted Lvl (dB μ V/m)	Pol	Detector
2402.00000	[3,17]	4803.3400	40.84	H	Peak
		7205.3200	52.53	H	Peak
	[17, 26]	19213.9100	43.68	H	Peak

- Middle Channel:

Spurious frequencies found at less than 20 dB below the limit:

Freq (MHz)	Freq Rng (GHz)	Unwanted Freq (MHz)	Unwanted Lvl (dB μ V/m)	Pol	Detector
2440.00000	[3,17]	4879.3600	44.31	H	Peak
		7320.8200	51.91	H	Peak
	[17, 26]	17078.6600	46.38	V	Peak
		19518.2000	42.70	H	Peak

- High Channel:

Spurious frequencies found at less than 20 dB below the limit:

Freq (MHz)	Freq Rng (GHz)	Unwanted Freq (MHz)	Unwanted Lvl (dB μ V/m)	Pol	Detector
2440.00000	[3,17]	4959.8600	49.74	H	Peak
		7439.1200	49.83	H	Peak
		14879.1400	53.25	V	Peak
	[17, 26]	17357.9300	45.18	V	Peak
		19840.6700	43.99	H	Peak

Verdict

Pass


Attachments

Spectrum Analyzer Parameters:

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESR 7] 30 MHz - 1 GHz	9,7 kHz	PK+	100 kHz	1 s	0 dB
Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [FSW 50] 1 GHz - 3 GHz	200 kHz	PK+ ; AVG	1 MHz	1 s	0 dB
Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [FSW 50] 3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	0 dB
Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [FSW 50] 17 GHz - 26 GHz	90 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [0.03, 1]


Plots:

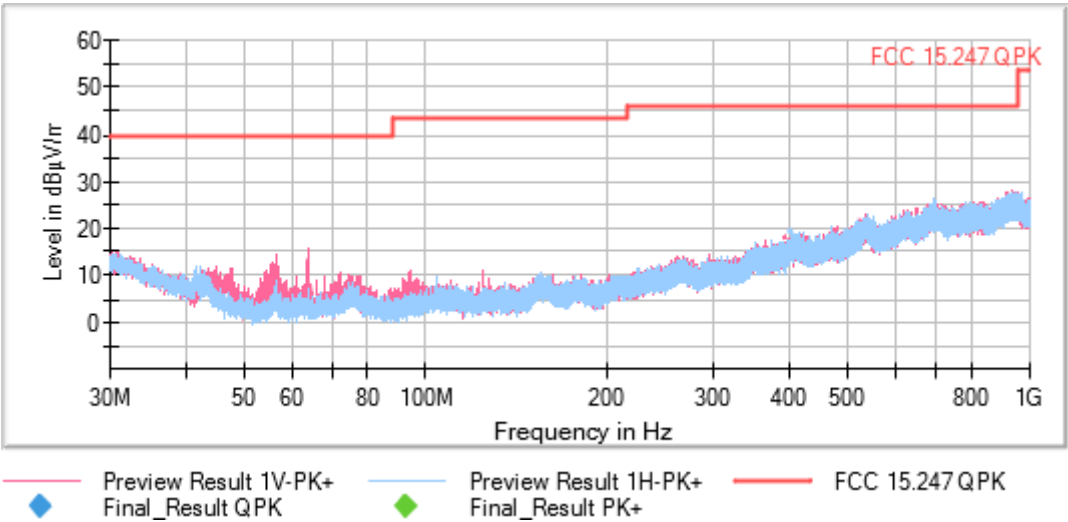


This plot is valid for all channels

Frequency MHz = 2402.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE
4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [1, 3]


Plots:

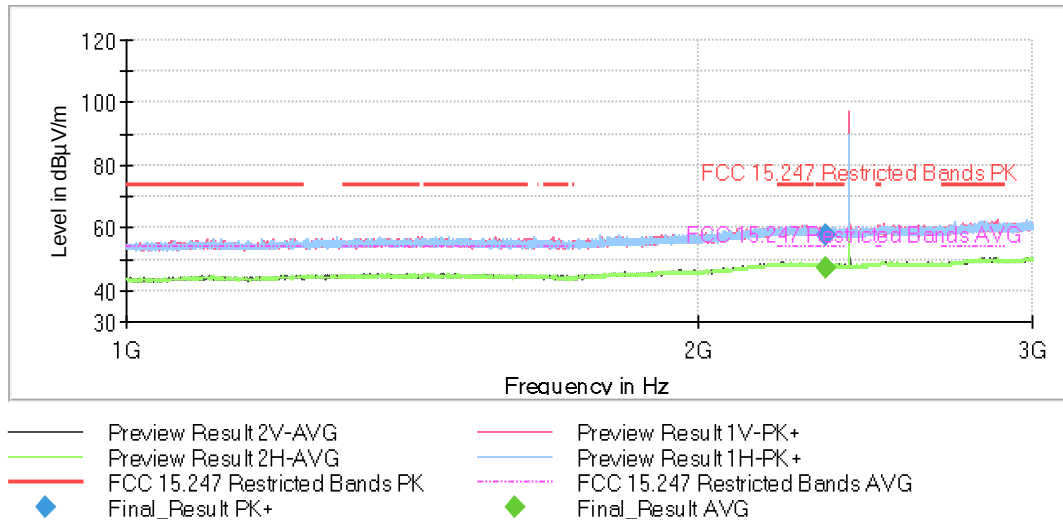

Full Spectrum

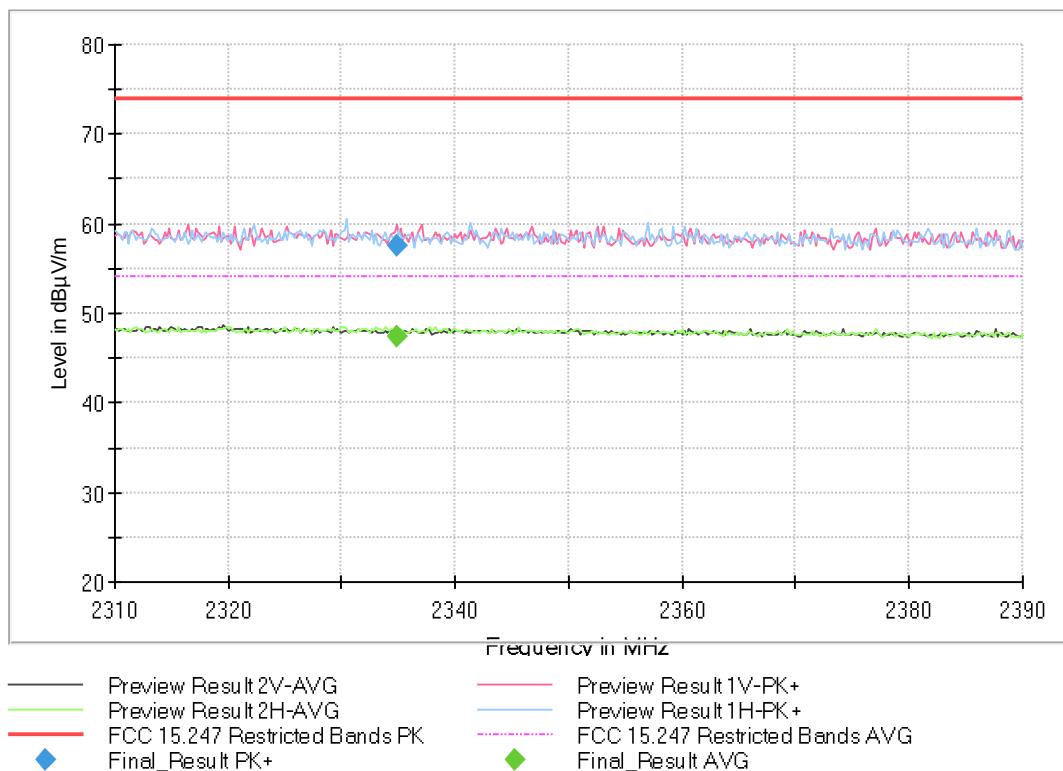


Full Spectrum

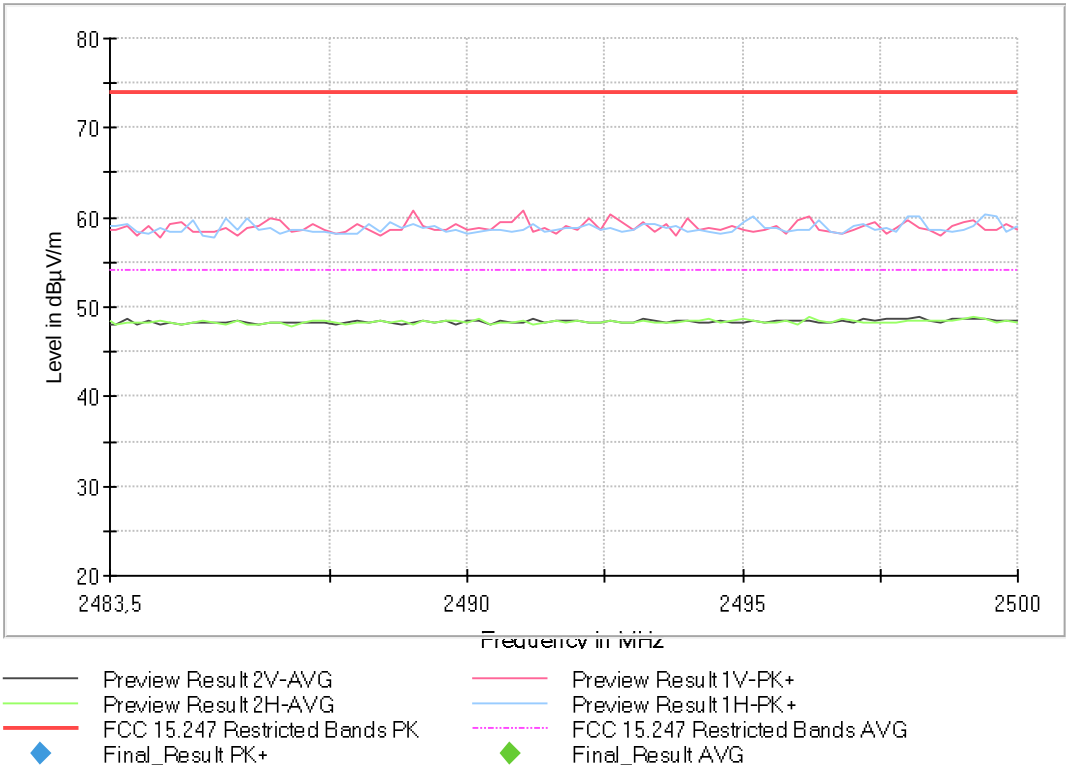


Frequency MHz = 2440.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [1, 3]

Plots:

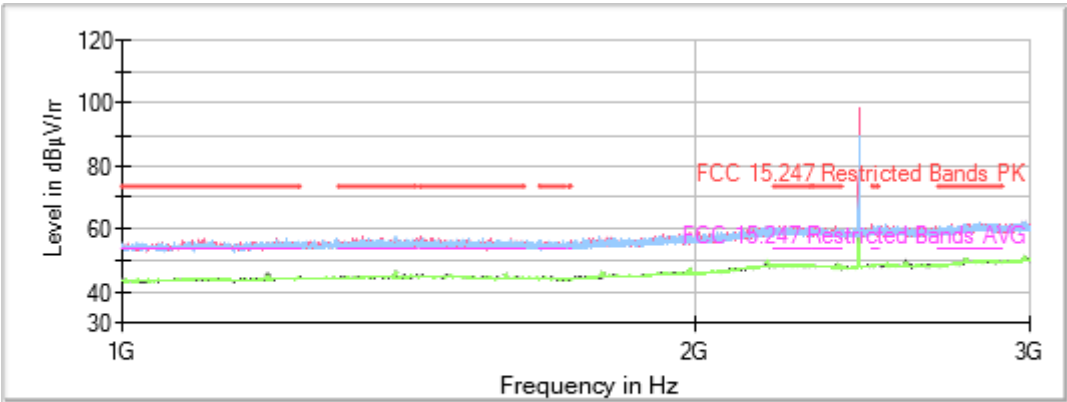


Full Spectrum

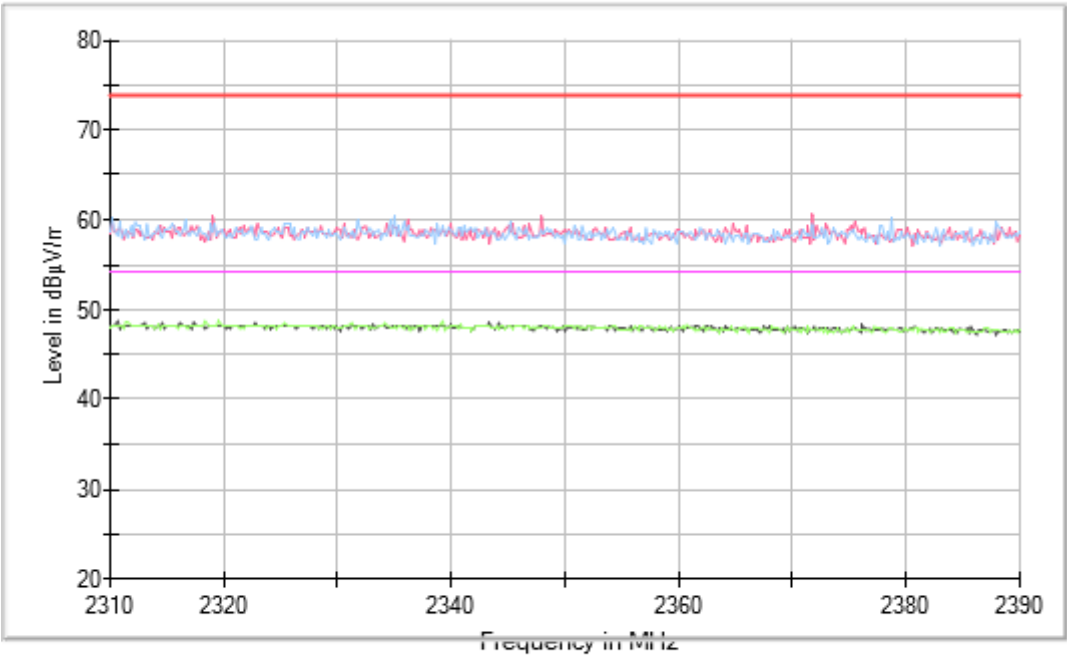





Frequency MHz = 2480.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE
 4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [1, 3]

Plots:

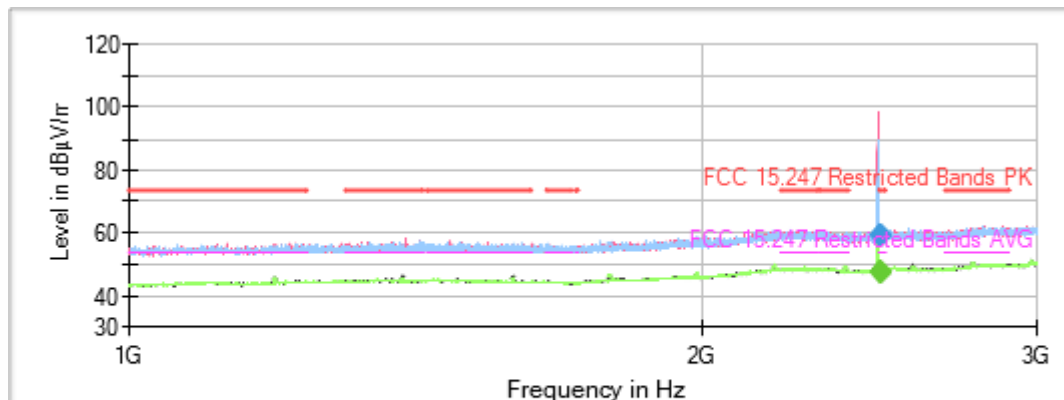


Full Spectrum

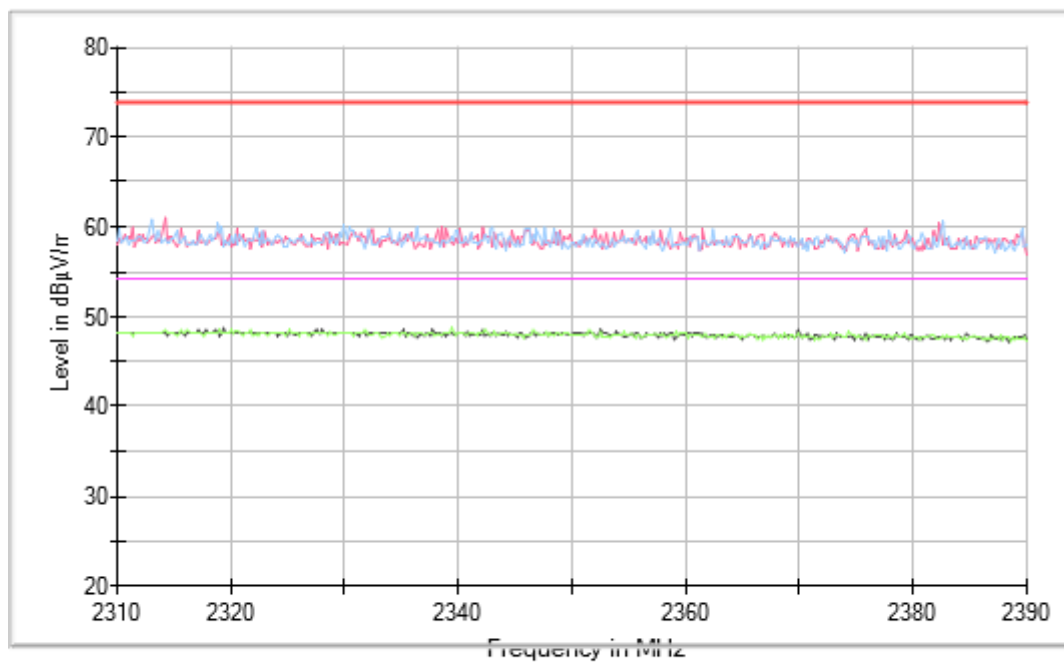

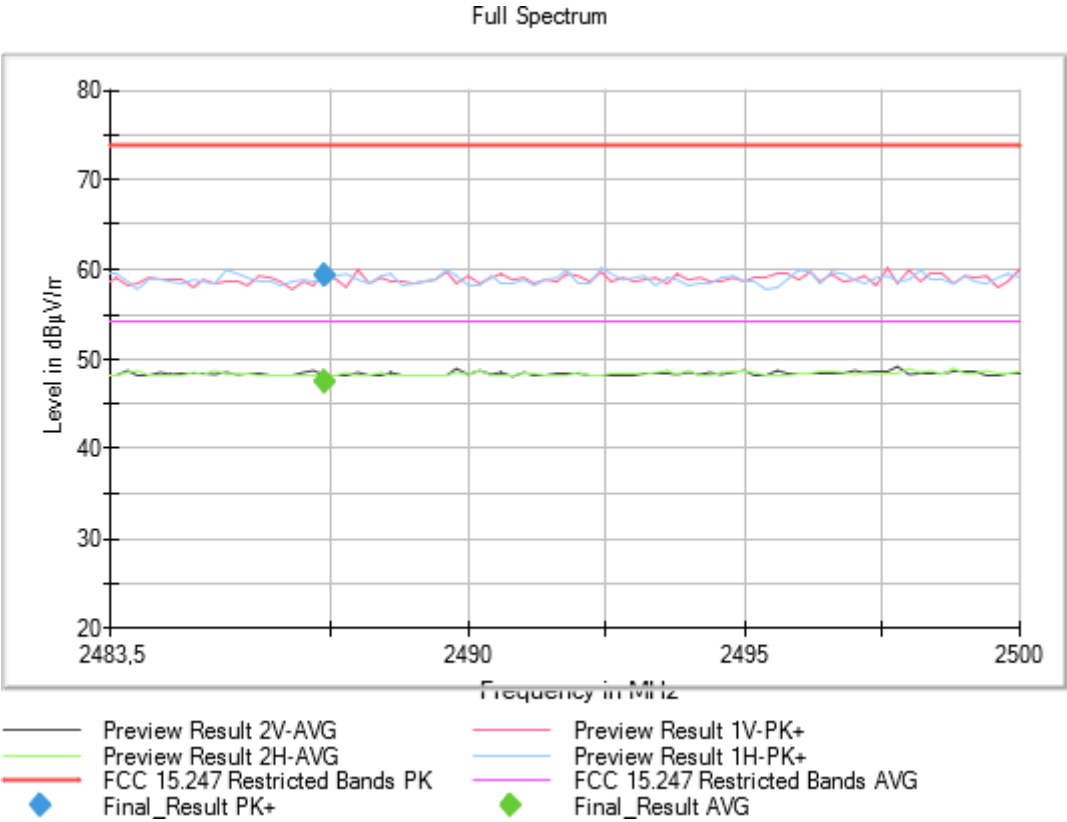


Frequency MHz = 2402.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [3, 17]

Plots:

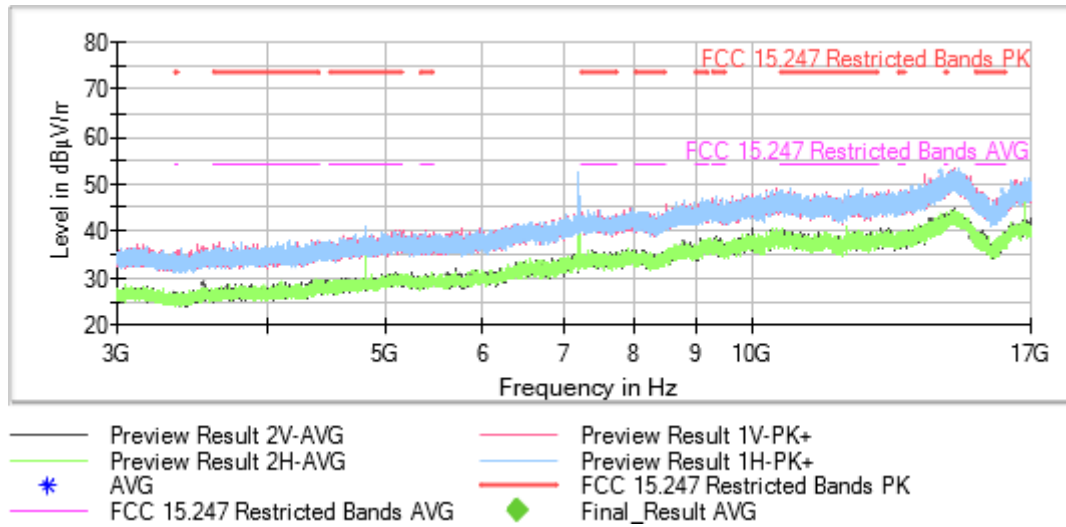


Frequency MHz = 2440.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [3, 17]

Plots:

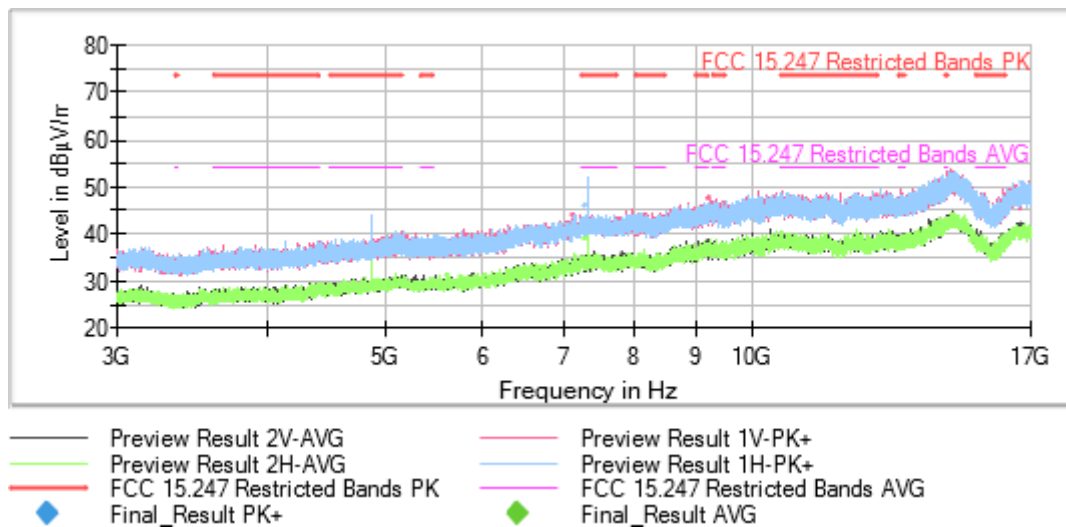


Frequency MHz = 2480.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE
4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [3, 17]

Plots:

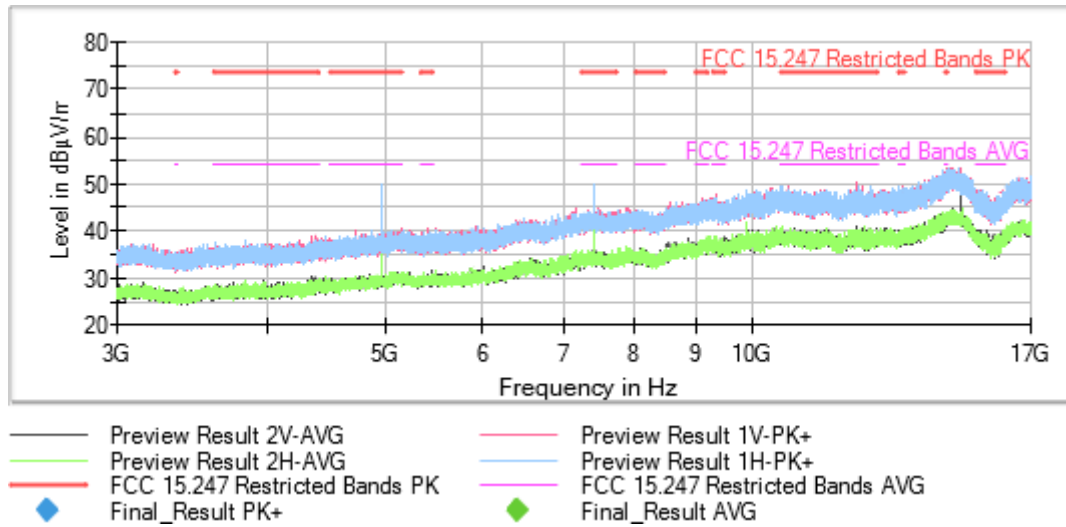


Frequency MHz = 2402.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE
4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [17, 26]

Plots:

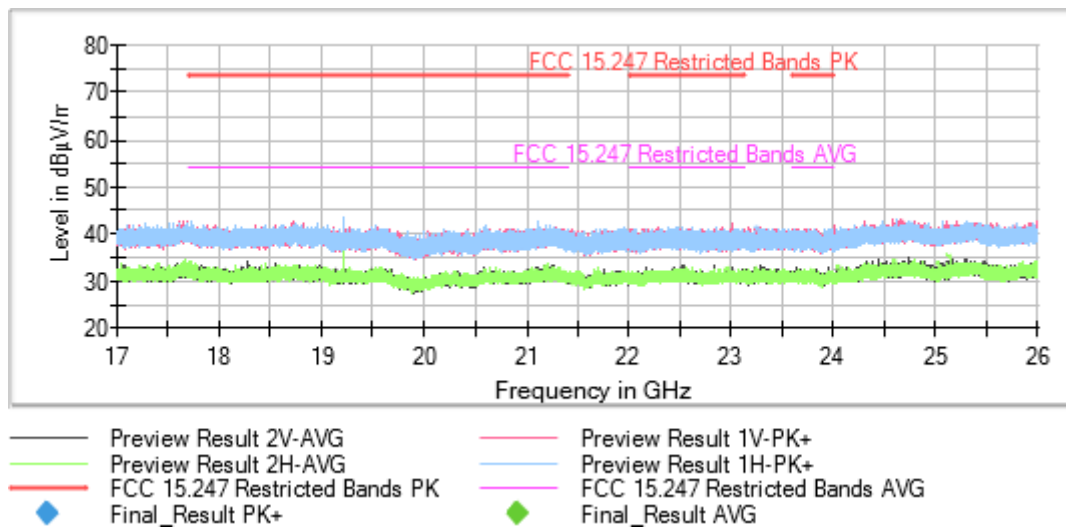

Frequency MHz = 2440.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE
 4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [17, 26]

Plots:

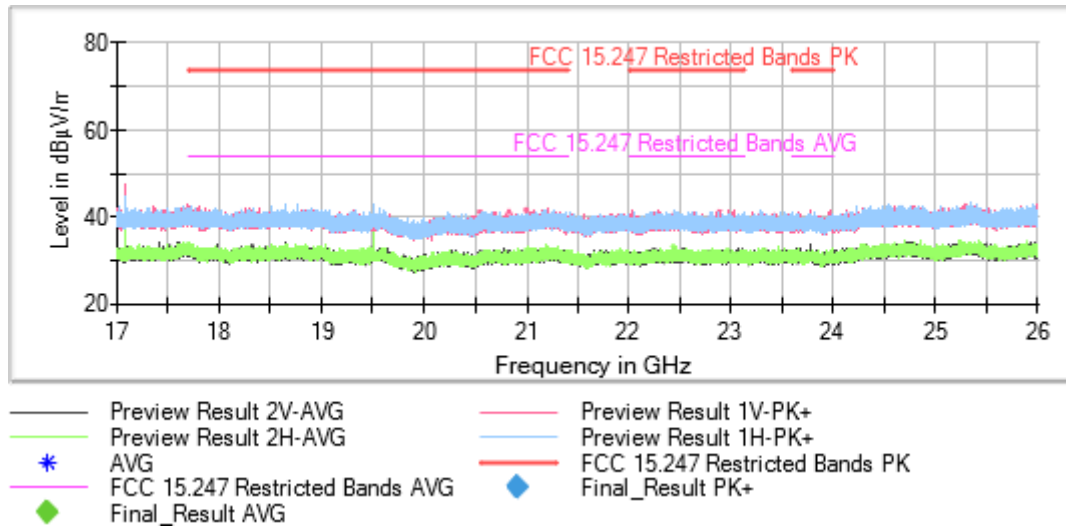

Frequency MHz = 2480.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE
 4.2 (GFSK 1 Mbit/s), Frequency Range GHz = [17, 26]

Plots:

