



Test report No:
NIE: 61481RRF.001A2

Test report

USA FCC Part 15.225, 15.209
CANADA RSS-210, RSS-Gen

(*) Identification of item tested	Electronic Cylinder including all mechanical variants
(*) Trademark	SALTO Neo
(*) Model and /or type reference	N0B (type reference: G1824)
Other identification of the product	HW version: 1.1 SW version: 0158 (Control Firmware) + 0148 (Motor Firmware) + 0136 (BGM111 Firmware) FCC ID: UKCN0B IC: 10088A-N0B
(*) Features	Contains a certified Bluetooth module (BGM111)
Applicant	SALTO Systems, S.L. Arkotz 9, Polígono Lanbarren 20180, Oiartzun, Gipuzkoa, SPAIN
Test method requested, standard	USA FCC Part 15.225 (10–1–18 Edition): Operation within the band 13.110 -14.010. USA FCC Part 15.209 (10–1–18 Edition): Radiated emission limits, general requirements. CANADA RSS-210 Issue 9 (August 2016). CANADA RSS-Gen Issue 5 (April 2018). ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager
Date of issue	2020-06-03
Report template No	FDT08_22 (*) "Data provided by the client"

Index

Competences and guarantees3

General conditions.....3

Uncertainty.....3

Data provided by the client3

Usage of samples4

Test sample description.....4

Identification of the client5

Testing period and place5

Document history.....5

Environmental conditions6

Remarks and comments.....7

Testing verdicts.....8

Summary8

Appendix A: Test results.....9

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a new generation electronic cylinder, with Bluetooth Smart (BGM111 module) and ISO14443A & ISO15693 standard based technology - Mifare.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
61481/001	Electronic Cylinder including all mechanical variants	N0B (type reference: G1824)	--	2019/05/22

Sample S/01 has undergone the following test(s): All tests indicated in Appendix A for NFC ISO 14443A.

- Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
61481/002	Electronic Cylinder including all mechanical variants	N0B (type reference: G1824)	--	2019/05/22

Sample S/02 has undergone the following test(s): All tests indicated in Appendix A for NFC ISO 15693.

Test sample description

Ports..... :	Port name and description	Cable				
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾	
	-		☐	☐	☐	
Supplementary information to the ports..... :	-					
Rated power supply	Voltage and Frequency		Reference poles			
			L1	L2	L3	N
	☒	DC: 6 Vdc				
Rated Power	-					
Clock frequencies	-					
Other parameters..... :	-					
Software version	0158 (Control Firmware) + 0148 (Motor Firmware) + 0136 (BGM111 Firmware)					

Hardware version.....:	1.1		
Dimensions in cm (W x H x D).....:	-		
Mounting position.....:	☒	Wall/Ceiling mounted equipment	
Modules/parts	Module/parts of test item	Type	Manufacturer
	BGM111	BLE Module	Silicon Labs
Accessories (not part of the test item)	Description	Type	Manufacturer
	-		
Documents as provided by the applicant.....:	Description	File name	Issue date
	-		

Identification of the client

SALTO Systems, S.L.
Arkotz 9, Polígono Lanbarren,
20180, Oiartzun, Gipuzkoa, SPAIN

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2019-05-22
Date (finish)	2020-06-01

Document history

Report number	Date	Description
61481RRF.001	2019-12-16	First release
61481RRF.001A1	2020-05-11	First modification: correction on maximum field strength of fundamental emission value on page 13. This modification test report cancels and replaces the test report 61481RRF.001
61481RRF.001A2	2020-06-03	Second modification: inclusion of OBW and 20dB BW measurements and Frequency tolerance of the carrier signal measurements. This modification test report cancels and replaces the test report 61481RRF.001A1

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C
	Max. = 35 °C
Relative humidity	Min. = 20 %
	Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C
	Max. = 35 °C
Relative humidity	Min. = 20 %
	Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Verónica García Capilla, Miguel Ángel Torres, and Francisco José Alcaide.

Used instrumentation:

Conducted measurements

		Last Calibration	Due Calibration
1.	EMI Test Receiver ROHDE AND SCHWARZ ESR7	2019/10	2021/10
2.	Climatic chamber HERAEUS VM 04/35	2018/06	2020/06
3.	DC power supply R&S NGPE 40/40	2018/02	2021/02

Radiated measurements:

		Last Calibration	Due Calibration
1.	Shielded Room ETS LINDGREN S101	N.A.	N.A.
2.	Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N.A.	N.A.
3.	EMI Receiver ROHDE AND SCHWARZ ESU26	2018/02	2020/02
4.	EMI Test Receiver ROHDE AND SCHWARZ ESR7	2018/10	2020/10
5.	Active Loop Antenna HEWLETT PACKARD 11966A	2018/06	2020/06
6.	RF Pre-amplifier, 38 dB, 30 MHz-6 GHz BONN ELEKTRONIK BLNA 0360-01N	2018/07	2019/07
7.	Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E	2017/04	2020/04

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

FCC Part 15.225, 15.209 CANADA RSS-210, RSS-Gen		
Requirement – Test case	Verdict	Remark
15.225 Subclause (a) / RSS-210 Clause B.6 (a). Field strength of emissions within the band 13.553 - 13.567 MHz	P	
15.225 Subclause (b) / RSS-210 Clause B.6 (b). Field strength of emissions within the band 13.410 - 13.553 MHz and 13.567 – 13.710 MHz	P	
15.225 Subclause (c) / RSS-210 Clause B.6 (c). Field strength of emissions within the band 13.110 - 13.410 MHz and 13.710 – 14.010 MHz	P	
15.225 Subclause (d) / RSS-210 Clause B.6 (d). Field strength of emissions outside of the band 13.110 MHz -14.010 MHz	P	
15.225 Subclause (e) / RSS-210 Clause B.6. Frequency tolerance of the carrier signal	P	
<u>Supplementary information and remarks:</u>		

Appendix A: Test results.

TEST CONDITIONS.....	11
Occupied Bandwidth.....	14
Section 15.225 Subclause (a) / RSS-210 Clause B.6 (a). Field strength of emissions within the band 13.553 - 13.567 MHz.....	16
Section 15.225 Subclause (b) / RSS-210 Clause B.6 (b). Field strength of emissions within the band 13.410 - 13.553 MHz and 13.567 - 13.710 MHz.....	18
Section 15.225 Subclause (c) / RSS-210 Clause B.6 (c). Field strength of emissions within the band 13.110 - 13.410 MHz and 13.710 - 14.010 MHz.....	22
Section 15.225 Subclause (d) / RSS-210 Clause B.6 (d). Field strength of emissions outside of the band 13.110 - 14.010 MHz.....	26
Section 15.225 Subclause (e) / RSS-210 Clause B.6. Frequency tolerance of the carrier signal	31

TEST CONDITIONS

POWER SUPPLY (V):

Vn: 6 Vdc (*)
Vmin: 5.1 Vdc
Vmax: 6.9 Vdc

Type of Power Supply: DC voltage from batteries.

The subscripts 'n', 'min' and 'max' mean nominal, minimum and maximum respectively.

ANTENNA:


Type of Antenna: Integral (PCB).
Maximum Declared Antenna Gain: N/A.

TEST FREQUENCY:


Nominal Operating Frequency: 13.56 MHz

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyzer through a coupling device.

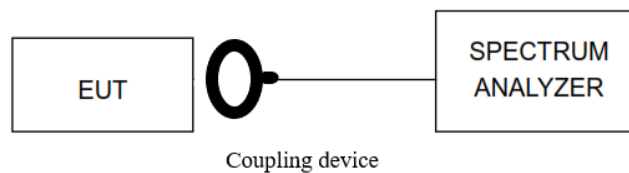

For frequency stability test the EUT was placed inside a climatic chamber and connected to a frequency meter using a low loss cable and a coupling device. An external DC power supply was connected to the EUT for voltage variation test.

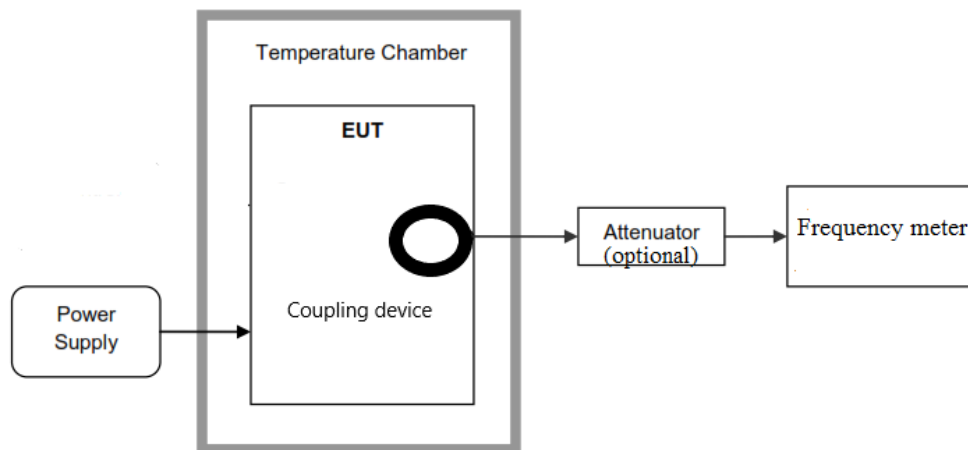

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Loop antenna for the range between 9 kHz to 30 MHz and Bilog antenna for the range between 30 MHz to 200 MHz) is situated at a distance of 3 m.

For radiated emissions in the range 9 kHz to 30 MHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 40 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and in the range between 30 MHz and 200 MHz the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

In the range between 9 kHz and 30 MHz the measurements were made in the three different orientation planes of the loop antenna to determine the maximum received field.


In the range between 30 MHz and 200 MHz the measurements were made in both horizontal and vertical planes of polarization.

The test was performed with the equipment transmitting first with only the 13.56 MHz radio and repeated with Bluetooth Low Energy 2.4 GHz radio transmitting simultaneously to check the impact of the co-location of the other radio interfaces. The results and plots below show the worst results obtained.

Radiated measurements setup 9 kHz to 30 MHz:

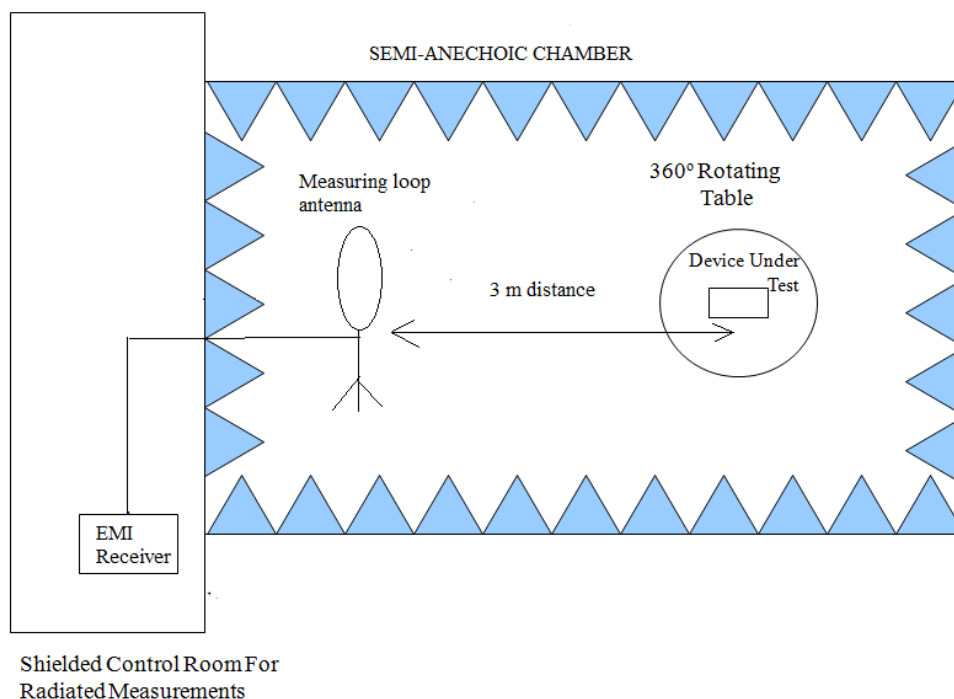

Radiated measurements setup 30 MHz to 200 MHz:

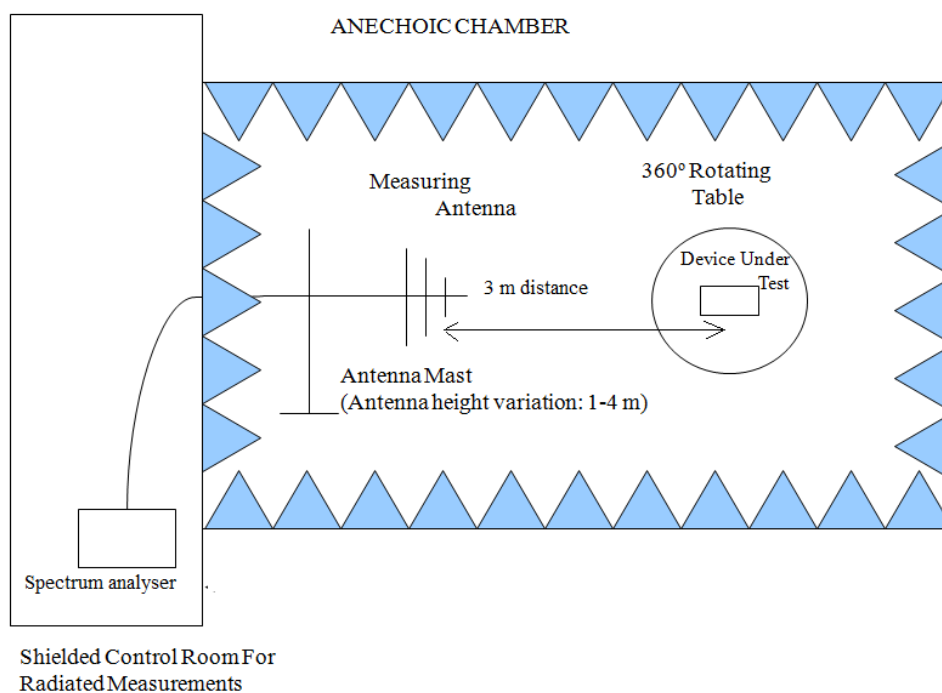


Occupied Bandwidth

RESULTS:

99 % Occupied Bandwidth and 20 dB Bandwidth.

- NFC mode ISO 14443A


Operation Mode	99% Occupied Bandwidth (kHz)	20 dB Bandwidth (kHz)
NFC mode ISO 15693	900.0	227.0
Measurement uncertainty (kHz)	<±0.40	

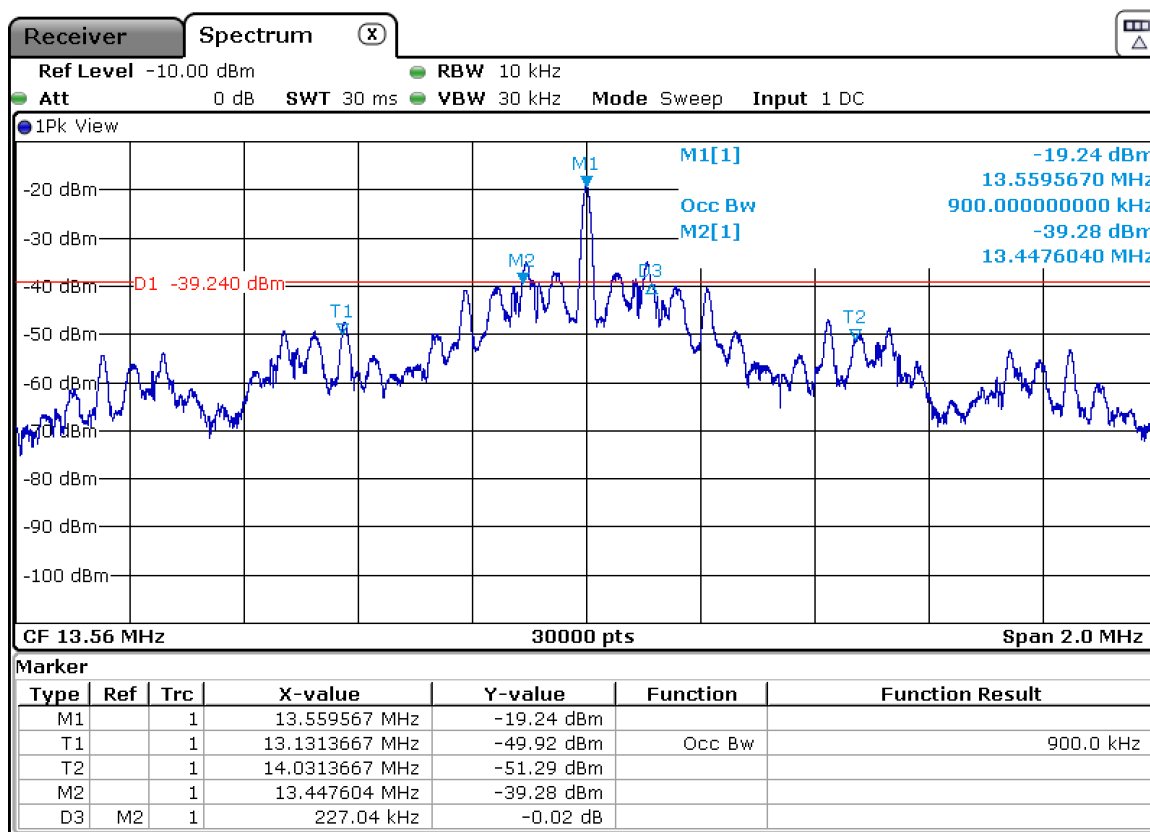

Verdict: PASS

NFC mode ISO 15693

Operation Mode	99% Occupied Bandwidth (kHz)	20 dB Bandwidth (kHz)
NFC mode ISO 15693	63.78	7.73
Measurement uncertainty (kHz)	<±0.40	

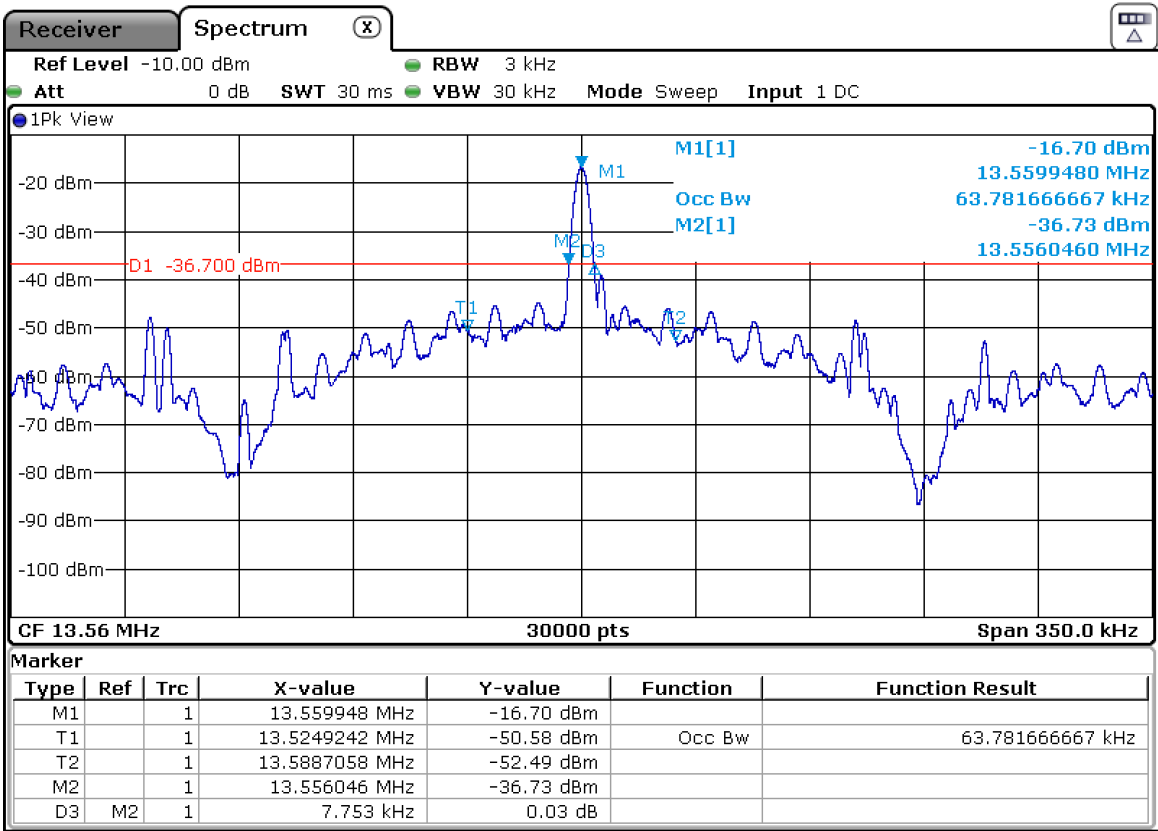

Section 15.225 Subclause (a) / RSS-210 Clause B.6 (a). Field strength of emissions within the band 13.553 - 13.567 MHz

SPECIFICATION:

The field strength of any emissions within the band 13.553 – 13.567 MHz shall not exceed 15,848 microvolts/meter (84 dBμV/m) at 30 meters.


RESULTS:

Measurement distance: 3 meters.

- NFC mode ISO 14443A**

The maximum field strength of fundamental emission:

Frequency (MHz)	Maximum field strength (dBμV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBμV/m) extrapolated to 30 m (40 dB/decade)
13.561	48.17	8.17
Measurement uncertainty (dB)	<±3.44	

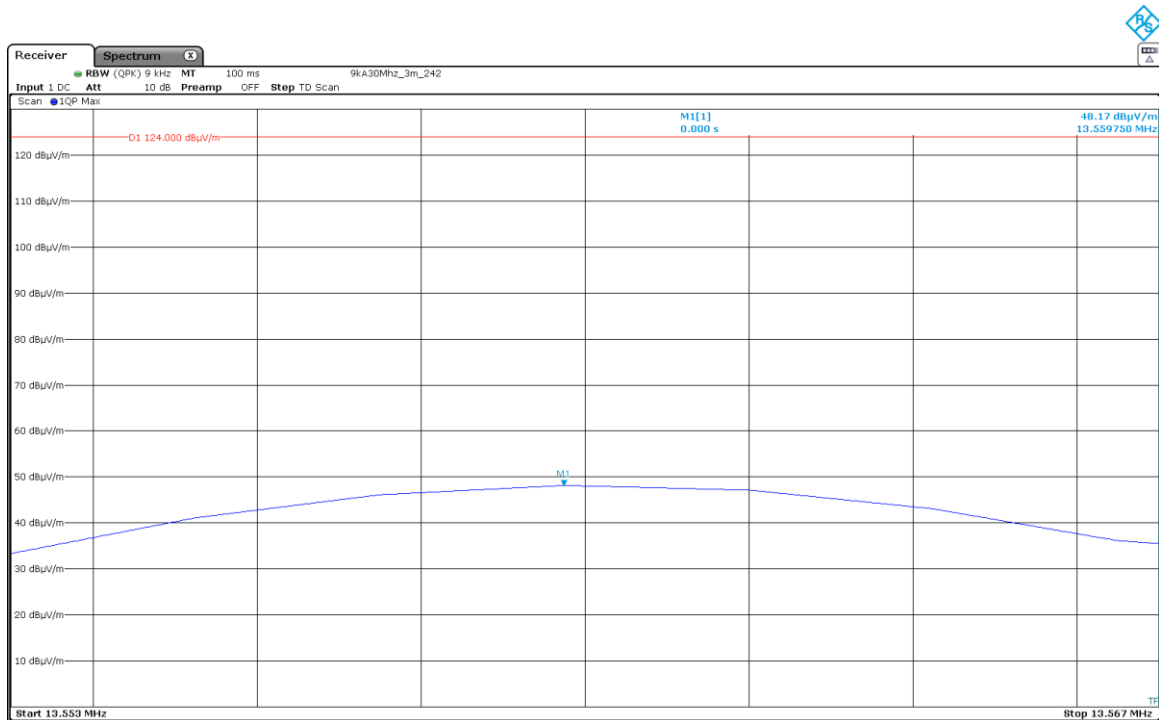


The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

NFC mode ISO 15693

The maximum field strength of fundamental emission:

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.561	50.43	10.43
Measurement uncertainty (dB)	<±3.44	

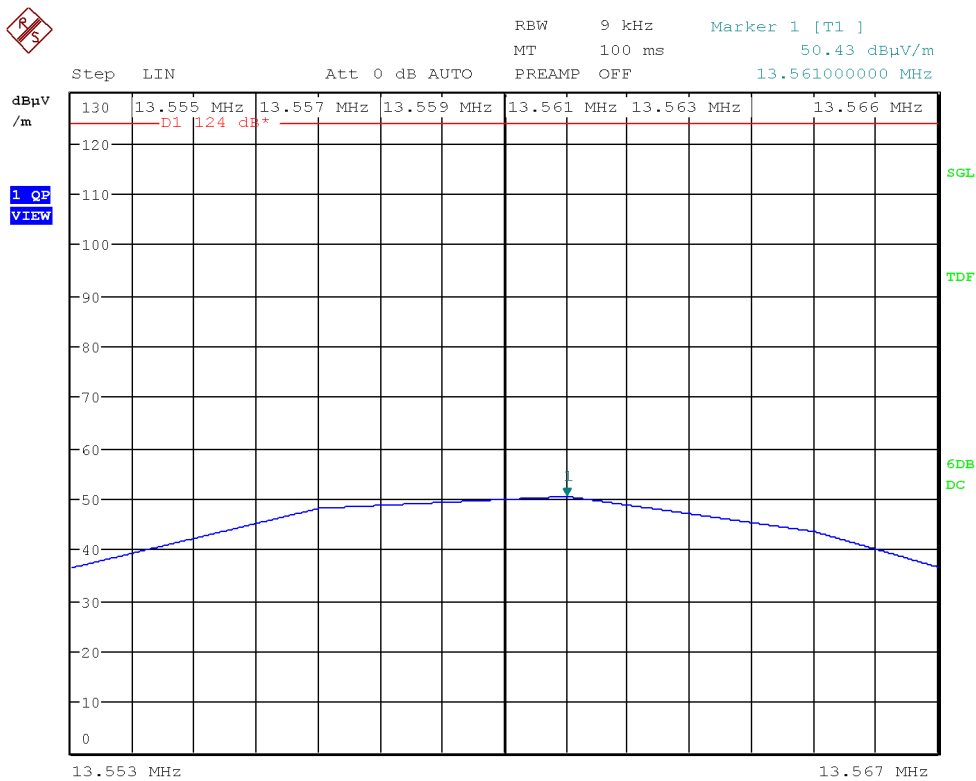

The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

Section 15.225 Subclause (b) / RSS-210 Clause B.6 (b). Field strength of emissions within the band 13.410 - 13.553 MHz and 13.567 - 13.710 MHz

SPECIFICATION:

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (50.47 dBμV/m) at 30 meters.


RESULTS:

Measurement distance: 3 meters.

- Band 13.410 - 13.553 MHz

- NFC mode ISO 14443A

Frequency (MHz)	Maximum field strength (dBμV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBμV/m) extrapolated to 30 m (40 dB/decade)
13.553	35.53	-4.47
Measurement uncertainty (dB)	<±3.44	

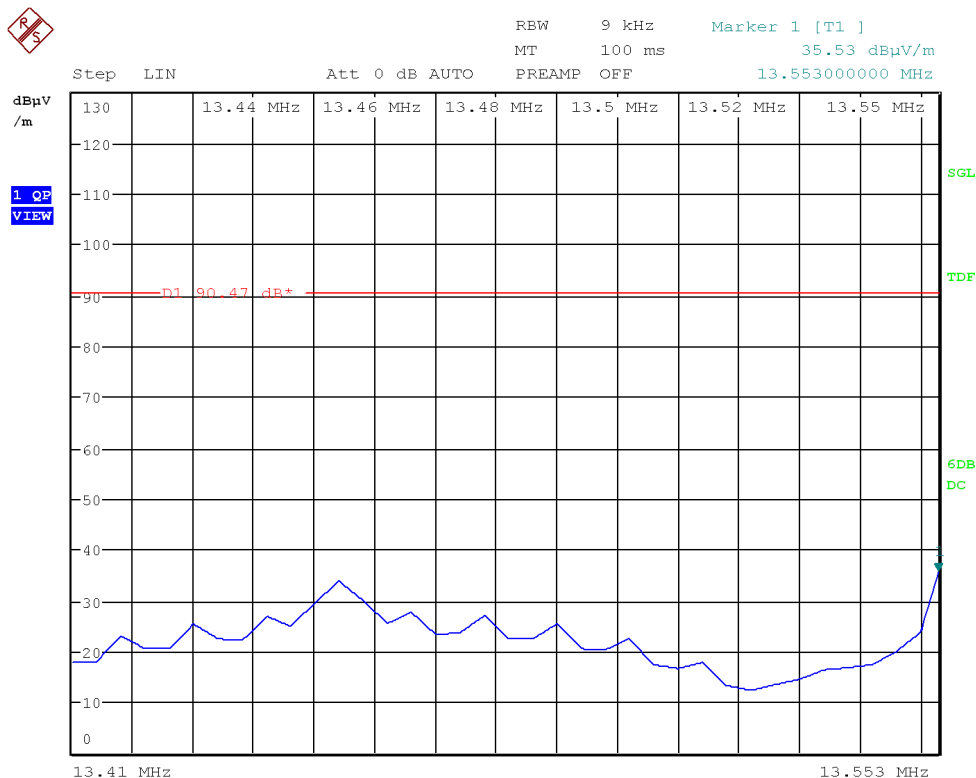


The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

NFC mode ISO 15693

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.553	36.38	-3.62
Measurement uncertainty (dB)	<±3.44	

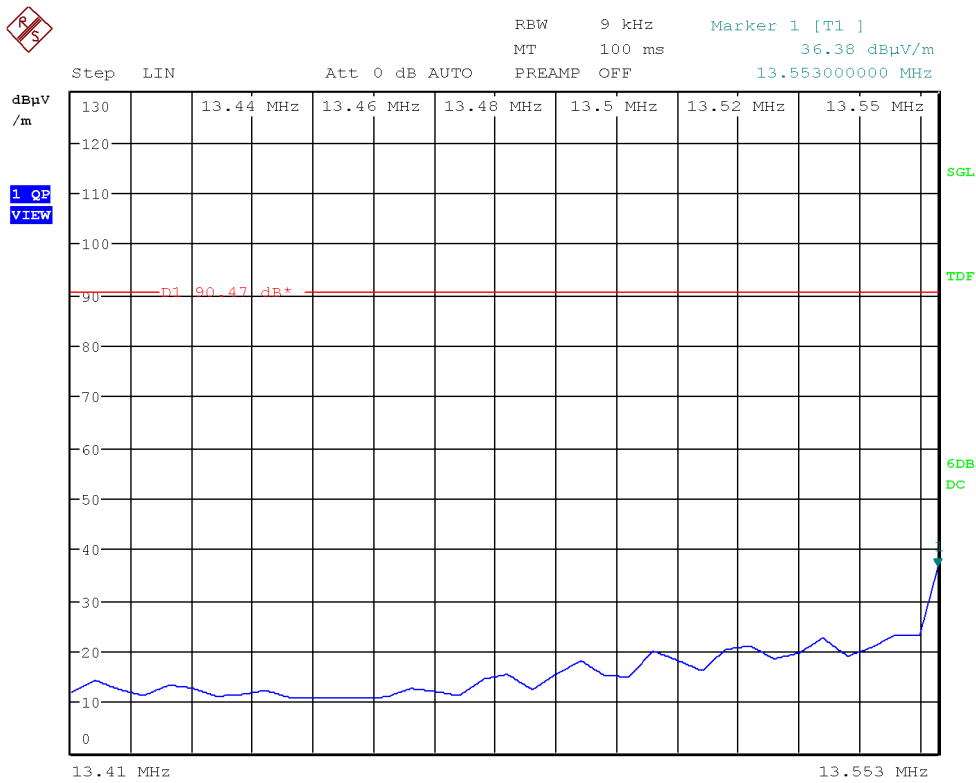


The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

- Band 13.567-13.710 MHz

- NFC mode ISO 14443A

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.567	35.74	-4.26
Measurement uncertainty (dB)	<±3.44	

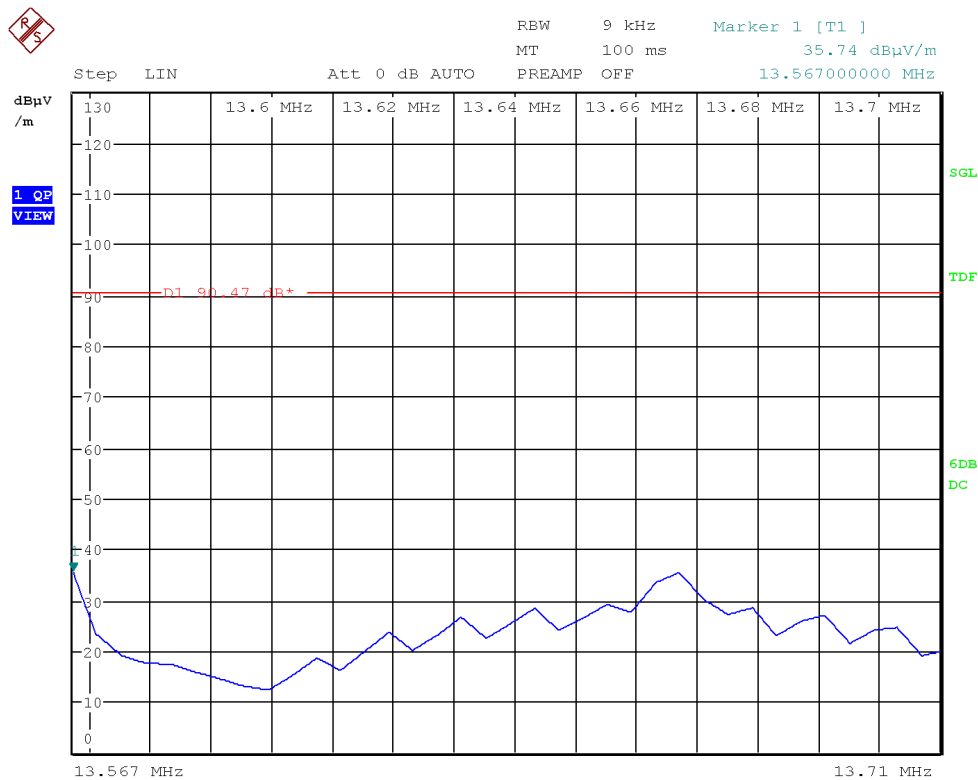


The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

NFC mode ISO 15693

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.567	36.47	-3.53
Measurement uncertainty (dB)	<±3.44	

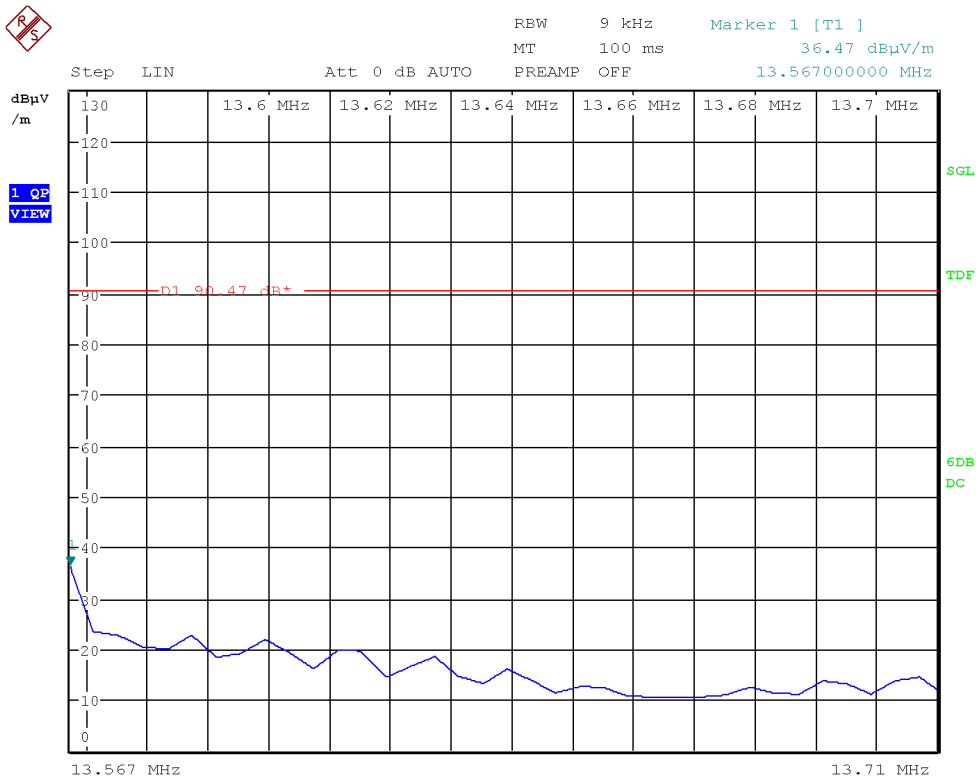

The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

Section 15.225 Subclause (c) / RSS-210 Clause B.6 (c). Field strength of emissions within the band 13.110 - 13.410 MHz and 13.710 - 14.010 MHz

SPECIFICATION:

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter (40.51 dBμV/m) at 30 meters.


RESULTS:

Measurement distance: 3 meters.

- Band 13.110-13.410 MHz

- NFC mode ISO 14443A

Frequency (MHz)	Maximum field strength (dBμV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBμV/m) extrapolated to 30 m (40 dB/decade)
13.350	29.48	-10.52
Measurement uncertainty (dB)	<±3.44	

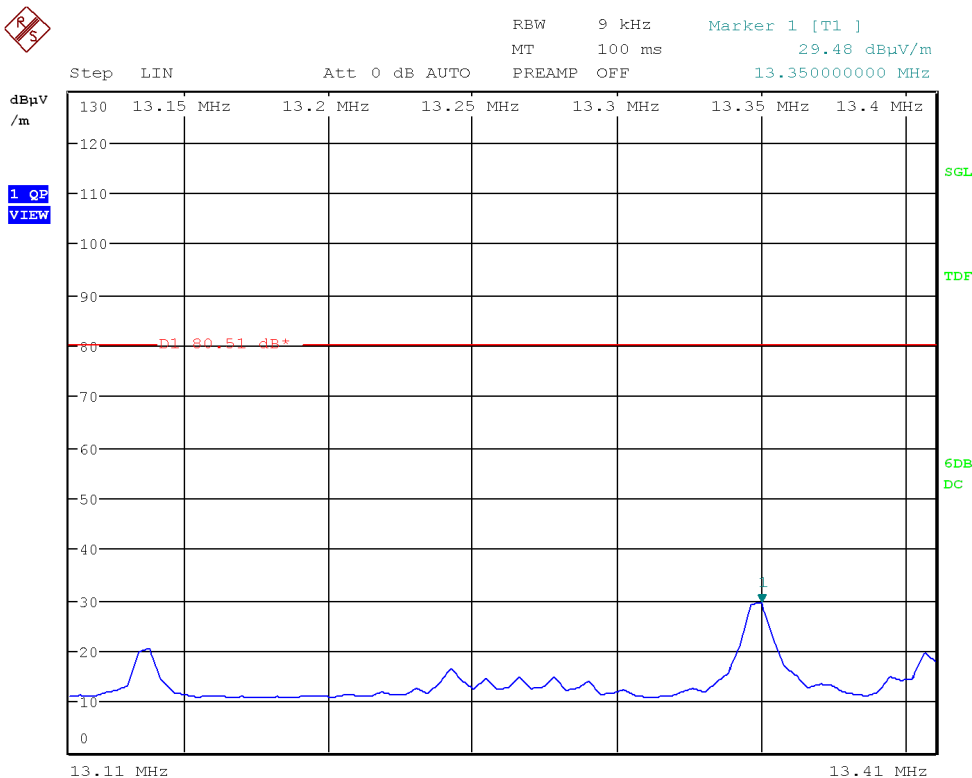


The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

NFC mode ISO 15693

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.402	14.12	-25.88
Measurement uncertainty (dB)	<±3.44	

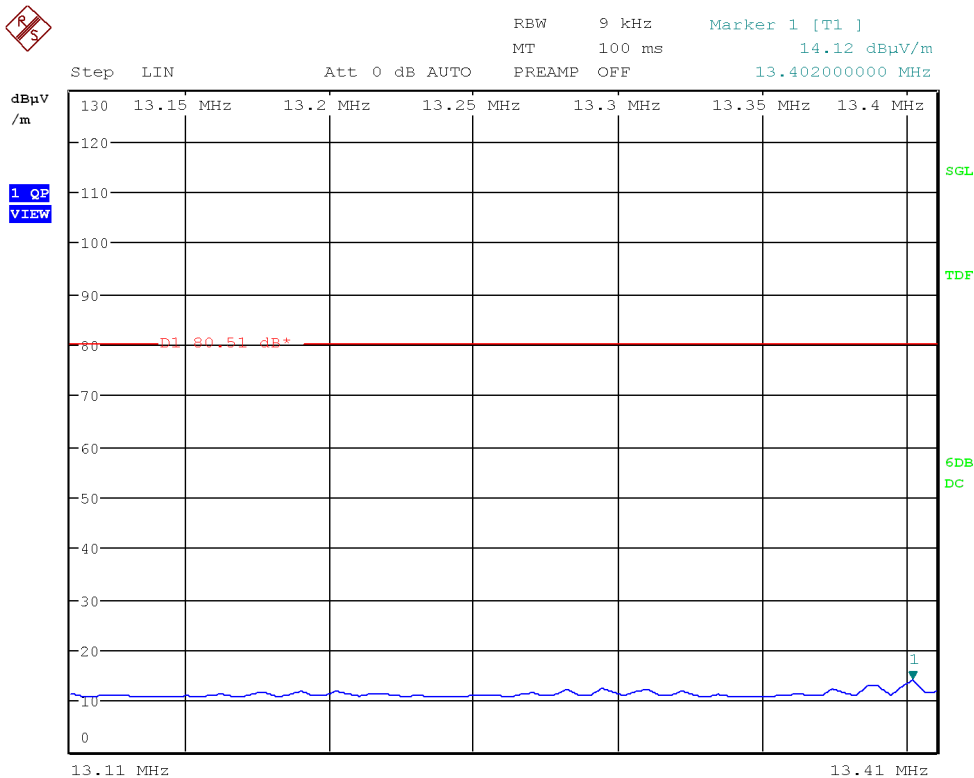


The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

- Band 13.710-14.010 MHz

- NFC mode ISO 14443A

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.770	32.89	-7.11
Measurement uncertainty (dB)	±3.44	

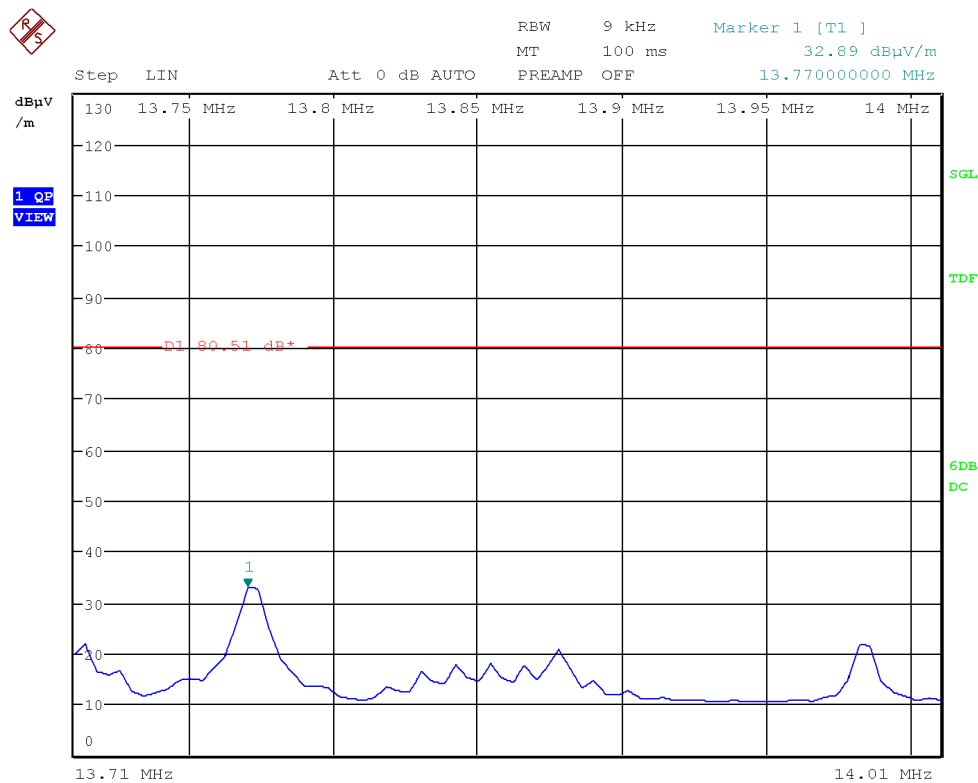


The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

- NFC mode ISO 15693

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.718	14.7	-25.3
Measurement uncertainty (dB)	±3.44	

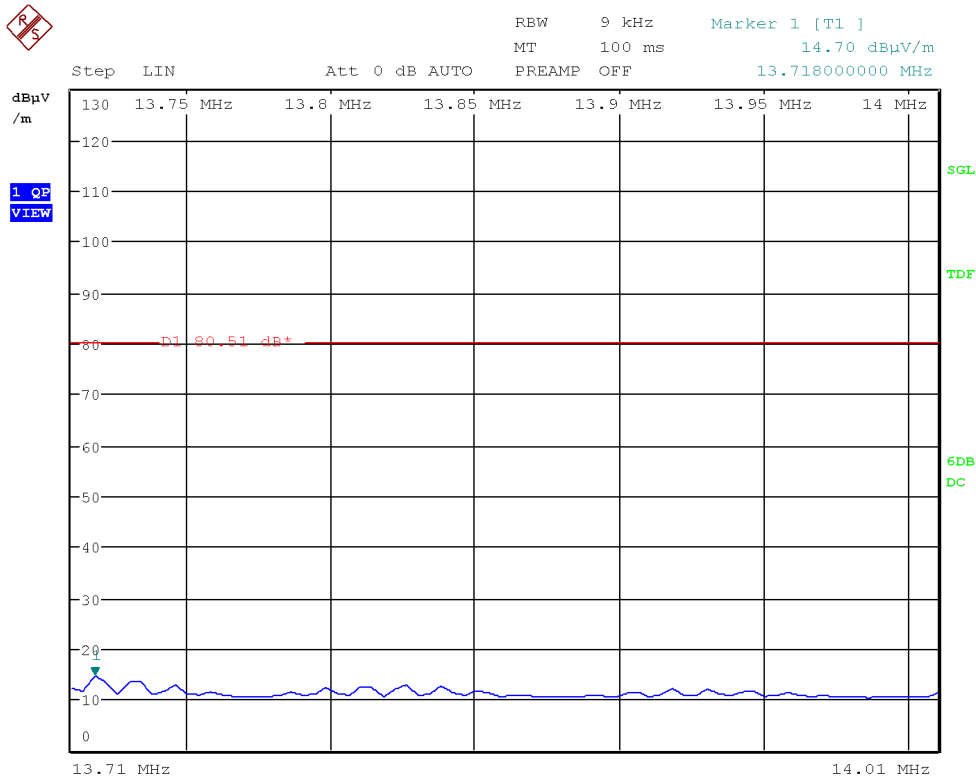

The limit shown in the above plot is extrapolated to 3 meters

Verdict: PASS

Section 15.225 Subclause (d) / RSS-210 Clause B.6 (d). Field strength of emissions outside of the band 13.110 - 14.010 MHz

SPECIFICATION:

Field strength of any emissions appearing outside of the band 13.110 MHz - 14.010 MHz band shall not exceed the general radiated emission limits in 15.209/RSS-Gen:

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	29.54	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

RESULTS:

All tests were performed in a semi-anechoic chamber at a distance of 3 m.


The spectrum was inspected from 9 kHz to 200 MHz searching for spurious signals.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifier gain.

- Frequency range 9 kHz - 30 MHz:

- NFC mode ISO 14443A

No spurious frequencies were found at less than 20 dB below the limit.

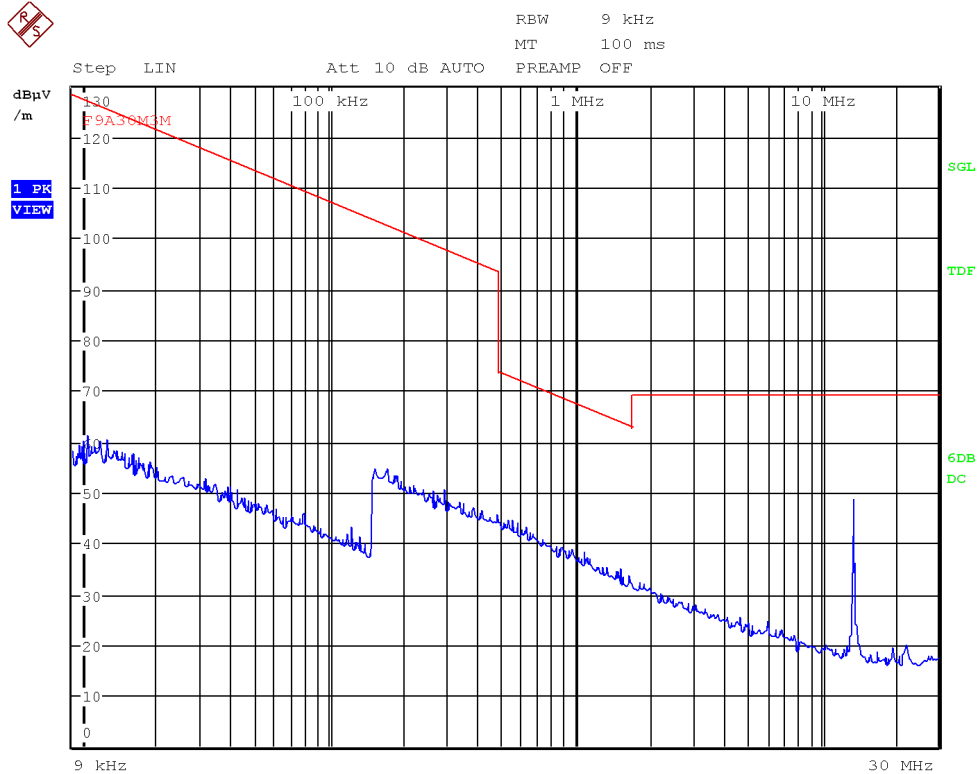

The limits shown in the above plot are extrapolated to 3 meters. The highest peak corresponds to the carrier level.


Resolution bandwidth:

200 Hz for $9 \text{ kHz} \leq f \leq 150 \text{ kHz}$

9 kHz for $150 \text{ kHz} \leq f \leq 30 \text{ MHz}$

- **NFC mode ISO 15693**

No spurious frequencies were found at less than 20 dB below the limit.

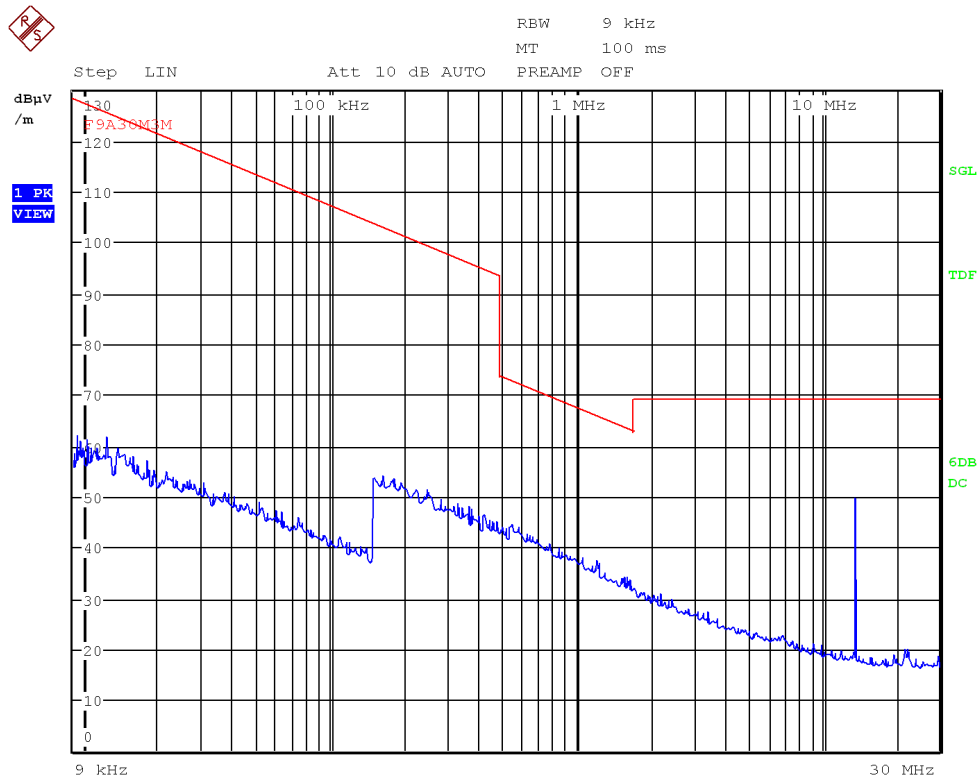


The limits shown in the above plot are extrapolated to 3 meters. The highest peak corresponds to the carrier level.

Resolution bandwidth:
 200 Hz for $9 \text{ kHz} \leq f \leq 150 \text{ kHz}$
 9 kHz for $150 \text{ kHz} \leq f \leq 30 \text{ MHz}$

- Frequency range 30 - 200 MHz

- **NFC mode ISO 14443A**

No spurious frequencies at less than 20 dB below the limit.

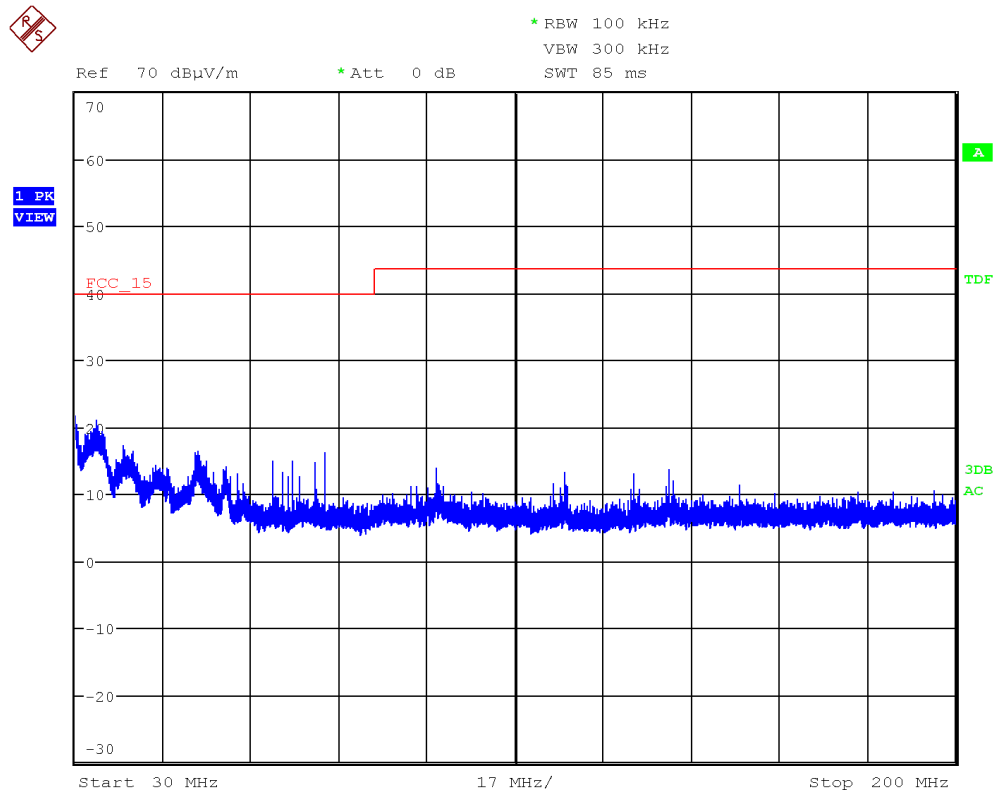


The above plot shows the results of the scan using peak detector.

Verdict: PASS

- **NFC mode ISO 15693**

No spurious frequencies at less than 20 dB below the limit.

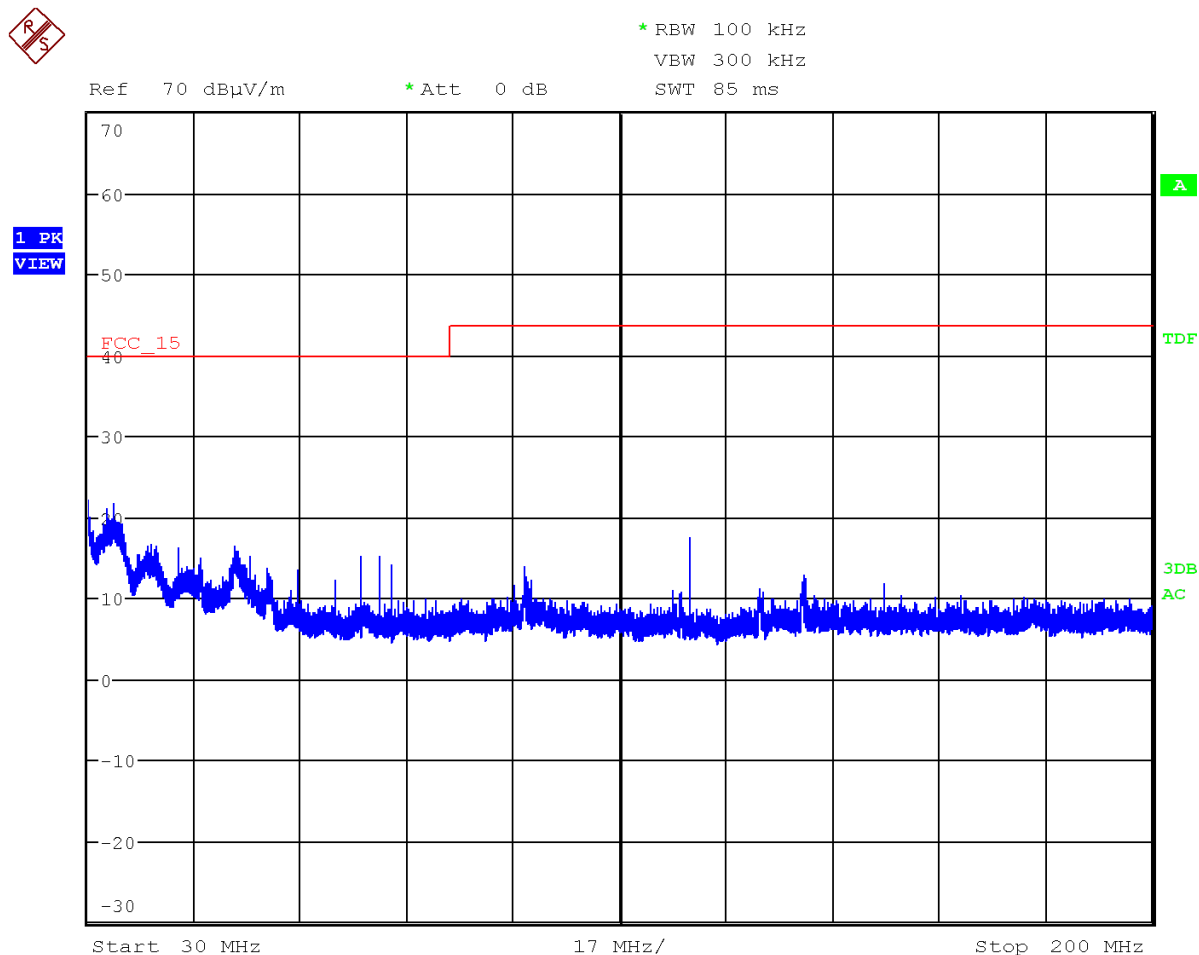

The above plot shows the results of the scan using peak detector.

Verdict: PASS

Section 15.225 Subclause (e) / RSS-210 Clause B.6. Frequency tolerance of the carrier signal

SPECIFICATION:

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

RESULTS:

Nominal Operating Frequency: 13.56 MHz.

- **NFC mode ISO 14443A**

- Frequency stability over temperature variations:

Temperature (°C)	Frequency Error (KHz)	Frequency Error (%)
+50	0.001310	0.000010
+40	0.001794	0.000013
+30	0.004165	0.000031
+20	0.003521	0.000026
+10	0.000735	0.000005
0	0.000933	0.000007
-10	0.001820	0.000013
-20	0.001023	0.000008

- Frequency stability over voltage variations:

DC Supply	Voltage (V)	Frequency Error (Hz)	Frequency Error (%)
Vmax	6.9	0.006568	0.000048
Vmin	5.1	0.005468	0.000040

Verdict: PASS

- **NFC mode ISO 15693**

- Frequency stability over temperature variations:

Temperature (°C)	Frequency Error (KHz)	Frequency Error (%)
+50	0.165000	0.001217
+40	0.175000	0.001291
+30	0.125000	0.000922
+20	1.355000	0.009993
+10	0.035000	0.000258
0	-0.015000	0.000111
-10	-0.045000	0.000332
-20	-0.075000	0.000553

- Frequency stability over voltage variations:

DC Supply	Voltage (V)	Frequency Error (Hz)	Frequency Error (%)
Vmax	6.9	0.115000	0.000848
Vmin	5.1	0.140000	0.001032

Verdict: PASS