






Installation guide

XS4 Original+ for EURO mortise locks & tubular latches


SALTO
inspired access

- (Eng) Installation guide
 (E) Guía de instalación
 (D) Montageanleitung
 (F) Guide d'installation
 (I) Guida all'installazione
 (P) Guia de instalação

Ei 450 xx series

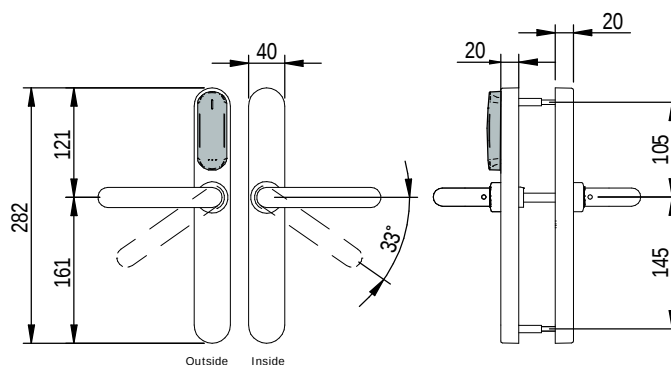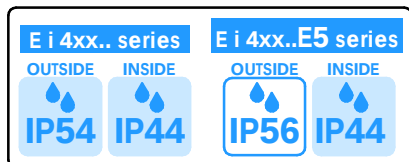

BOLT
(Depending on door thickness)

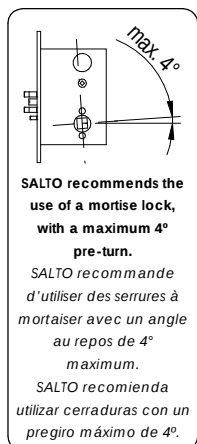

Mortise Lock
Not included!

* Required only for doors that exceed 60mm [2-3/8"] thickness

* Sólo para puertas de espesor mayor de 60mm [2-3/8"]

SALTO LT2Lxx
Tubular Latch

"A2" version has to be installed always with the SALTO LT2L tubular latch.

La versión "A2" solo se puede instalar con el picaporte tubular SALTO LT2L.

Outside
Exterior
Inside
Interior


i	t Door thickness	L	
3	32 - 47mm	35 mm	-
4	45 - 60 mm	50 mm	-
6	60 - 75 mm	30 mm	x2
7	75 - 90 mm	45 mm	x2
9	90 - 105 mm	30 mm	x4
1	105 - 120 mm	45 mm	x4
2	32 - 53 mm	35 mm	-
A		35 mm	-
B		45 mm	-
5		45 mm	-

SALTO LT2Lxx
Tubular latch
With Ei4xxA2.. Only!

To be used only with SALTO compatible escutcheons!

A utiliser uniquement avec les ensembles plaques-béquilles SALTO compatibles!

¡Utilizar solamente con escudos SALTO compatibles!




MODELS: ELECTRONIC INFO. W40M - W40T - W40MH

Installation guide


XS4 Original+ for EURO mortise locks & tubular latches

SALTO
inspiredaccess

(Eng) Select handing (F) Choisir le sens de la bêteille (E) Seleccione mano

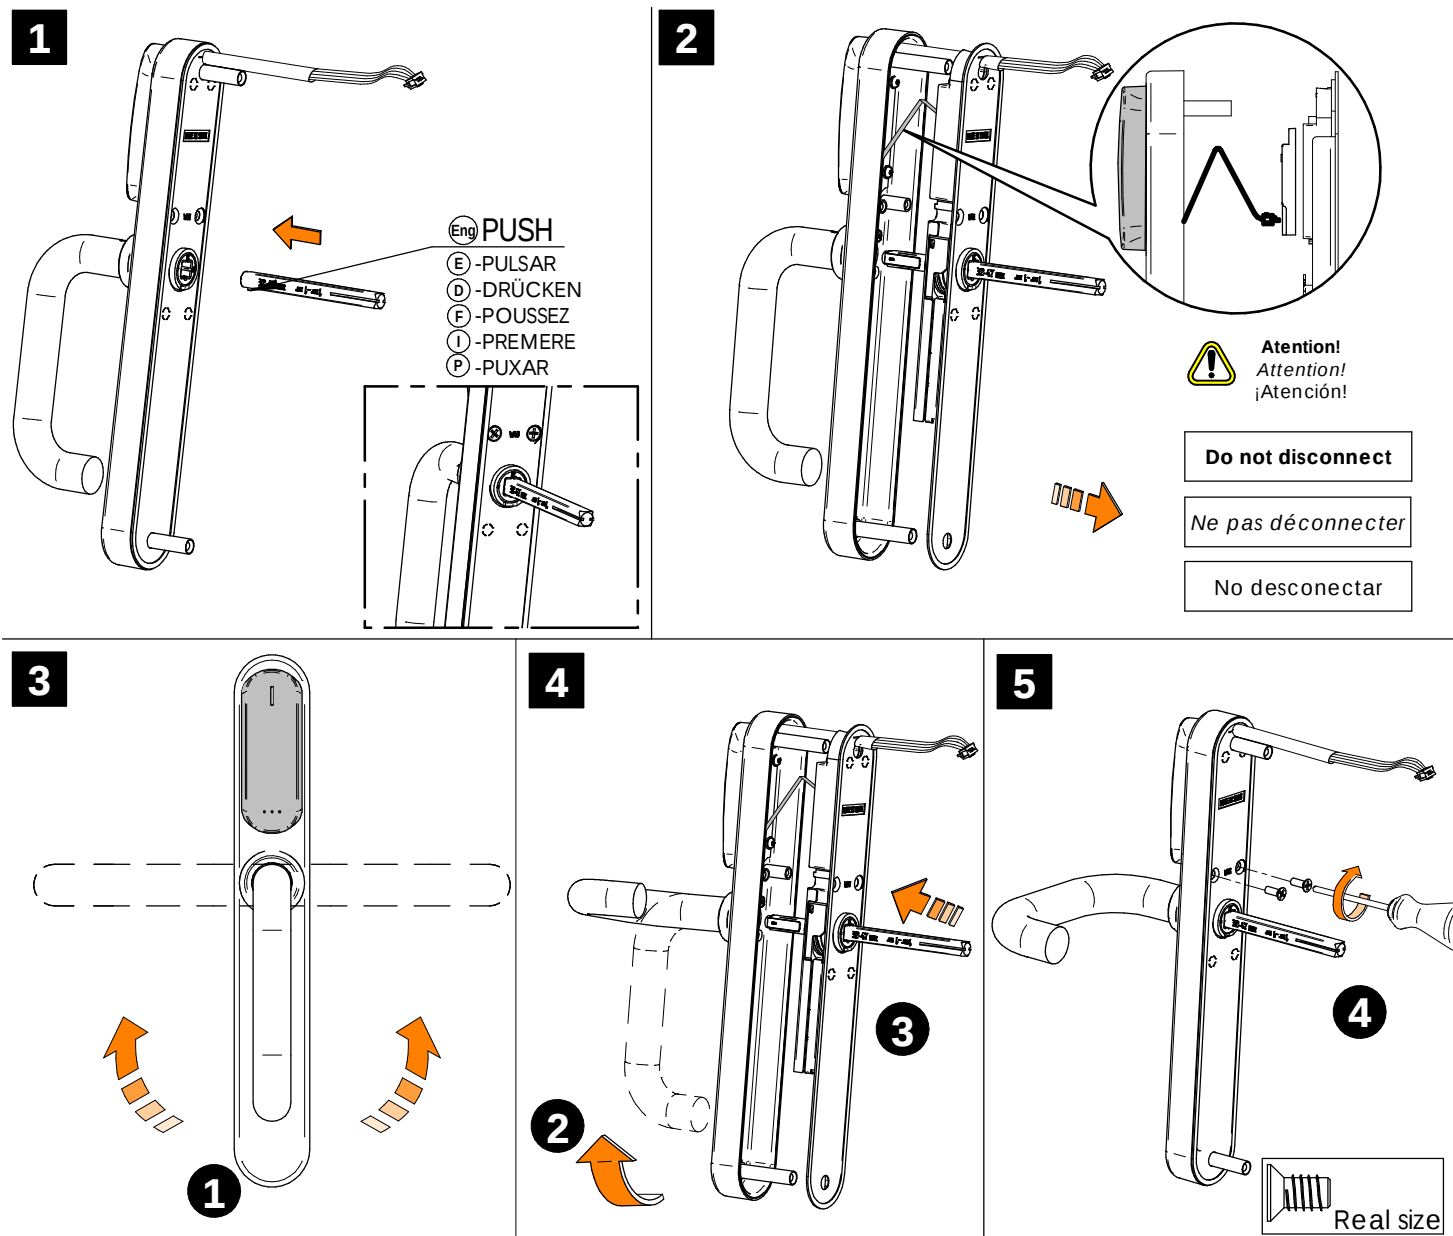


(Eng) Installation (F) Installation (E) Instalación

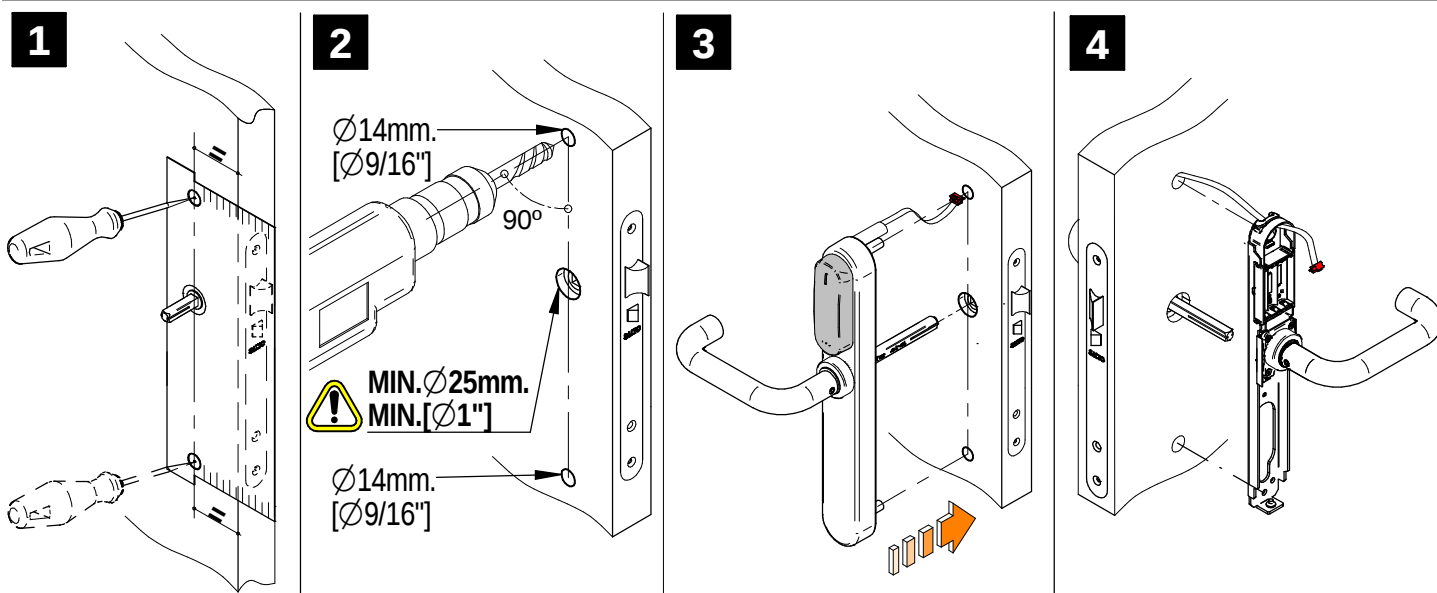

Installation guide

XS4 Original+ for EURO mortise locks & tubular latches

SALTO
inspiredaccess

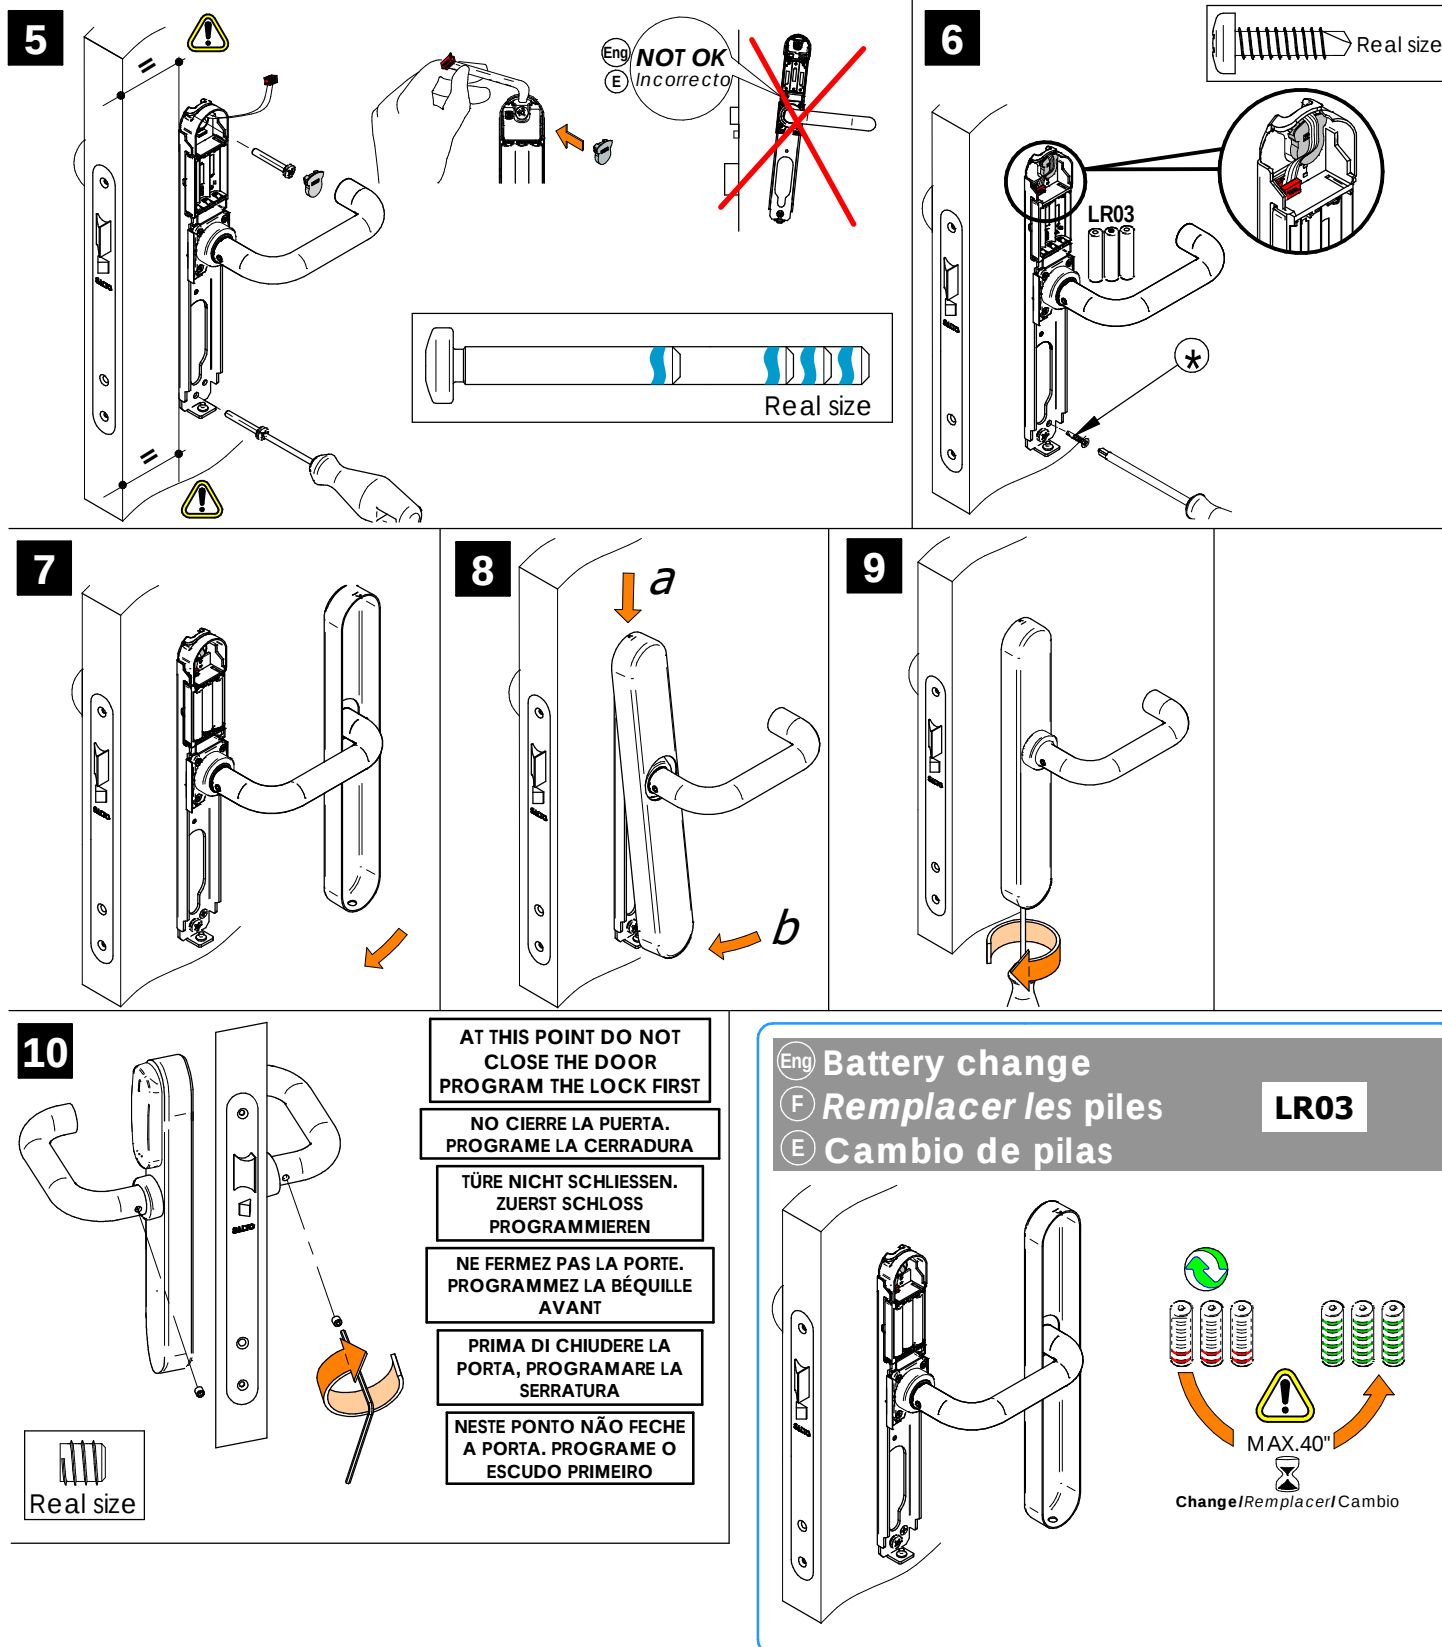

(*) **NOTE:** Distance 7F on models 56 - 57 - 66 and P6 does not permit to use of the self-drilling screw to improve the escutcheon vertical alignment.

(*) **NOTA:** La distancia 7F en modelos 56 - 57 - 66 y P6 no permite utilizar el tornillo que mejora el alineamiento vertical del escudo.

(*) **HINWEIS:** Bei Abstand 7F der Modelle 56,57,66 und P6 ist die Verwendung der selbstschneidenden Schraube zur Verbesserung der vertikalen Ausrichtung des Beschlags nicht erlaubt.

(*) **REMARQUE:** La distance de 7F sur les modèles 56 - 57 - 66 et P6 ne permet pas d'utiliser la vis auto-foreuse pour améliorer l'alignement vertical de l'ensemble plaques béquilles.

(*) **NOTA:** la distanza 7F su i modelli 56 - 57 - 66 e P6 non consente l'uso della vite autoforante per migliorare l'allineamento verticale della placca.

(*) **NOTA:** A distância 7F nos modelos 56 - 57 - 66 e P6 não permite a utilização do parafuso auto-perfurante para melhorar o alinhamento vertical do escudo.


Installation guide

XS4 Original+ for EURO mortise locks & tubular latches

SALTO
inspiredaccess

Ei451 xx

Ei461 xx



Eng HOTEL GUEST ROOM LOCK


E HABITACION HOTEL

D HOTELZIMMERSCHLOSS

E PIÈCE D'HÔTEL

I CAMERE HOTEL

P QUARTO DE HOTEL

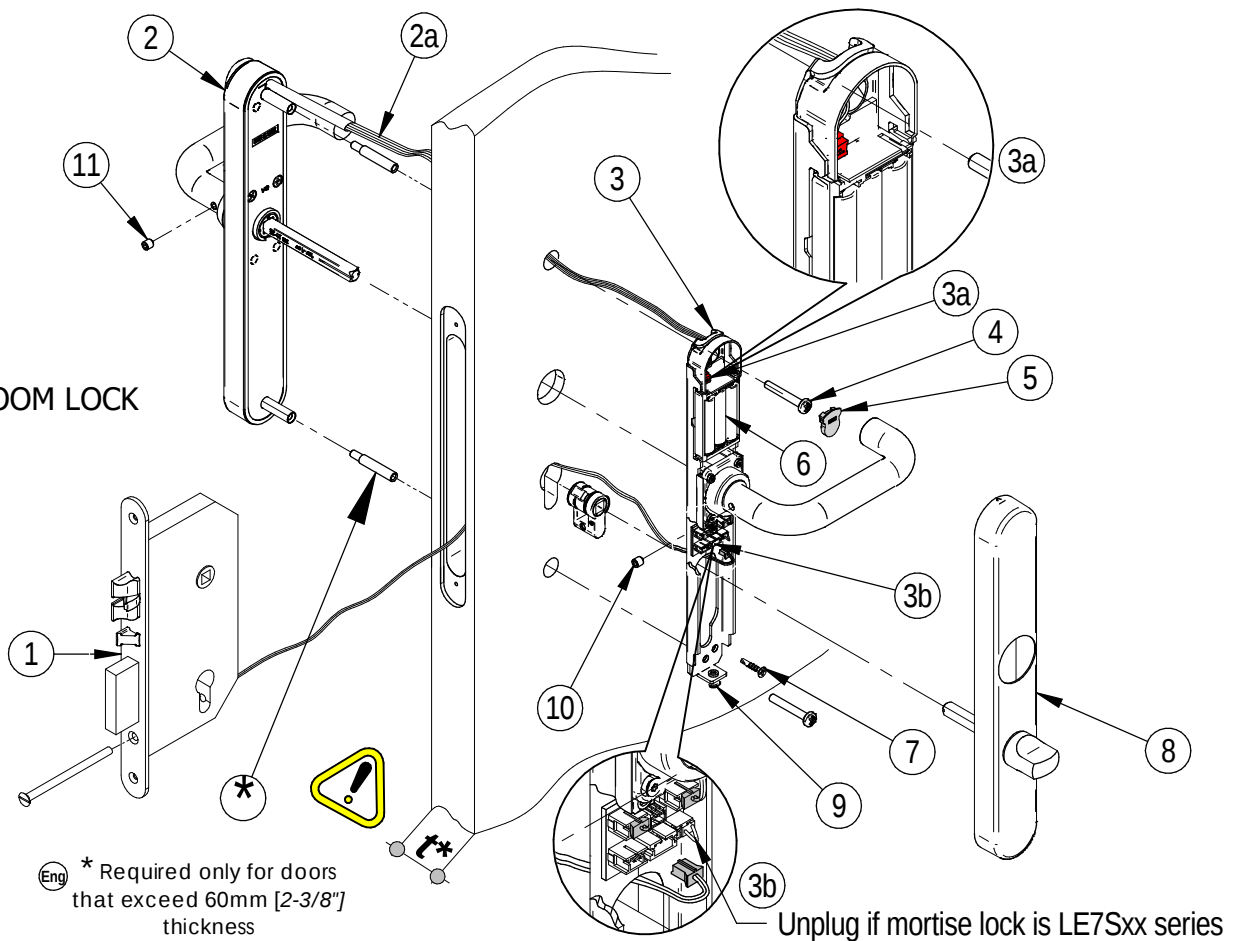

E T4xx.. series

