

ISED CABid: ES1909

Test report No:
 NIE: 66344RRF.008

Partial Test Report

USA FCC Part 15.31, 15.247, 15.209

CANADA RSS-247, RSS-Gen

(*) Identification of item tested	XS4 Original+ Electronic Lock Series including all mechanical variants
(*) Trademark	SALTO
(*) Model and /or type reference	W60M / Type reference: E2131
Other identification of the product	Hw version: 1.0 Sw version: 0174 (Control FW) + 0186 (STM32WB55RG FUS FW) + 0187 (STM32WB55RG BLE STACK FW) + 0179 (motor FW) FCC ID: UKCW60M IC: 10088A-W60M
(*) Features	Bluetooth Smart (STM32WB55RG radio solution)
Applicant	SALTO SYSTEMS, S.L. Arkotz 9, Polígono Lanbarren 20180, Oiartzun, Gipuzkoa, SPAIN
Test method requested, standard	USA FCC Part 15.31 (10-1-20) Edition : Measurements standards. USA FCC Part 15.247 (10-1-20) Edition : Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-20) Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager
Date of issue	2021-10-19
Report template No	FDT08_23 (*) "Data provided by the client"

Index

Competences and guarantees	3
General conditions	3
Uncertainty.....	3
Data provided by the client	3
Usage of samples	3
Test sample description	4
Identification of the client	6
Testing period and place	6
Document history.....	6
Environmental conditions	6
Remarks and comments.....	6
Testing verdicts.....	8
Summary	8
Appendix A: Test results.....	9

Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with the appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consist of a XS4 Original+ Electronic Lock Series with Mifare (ISO14443A & ISO15693 standard based) and Bluetooth Smart (STM32WB55RG radio solution) technology.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of result.

Usage of samples

Samples under test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
66344B/0011	Electronic Lock	W60M	--	2021-09-20

Sample S/01 has undergone the test(s): The tests indicated in the Appendix A.

Test sample description

Ports..... :	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾		
	--		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
Supplementary information to the ports..... :	--						
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: 4.5 Vdc (3 x LR06 batteries)					
Rated Power	--						
Clock frequencies..... :	27.12 MHz, 32 MHz, 32.768 kHz						
Other parameters	N/A						
Software version	0174 (Control FW) + 0186 (STM32WB55RG FUS FW) + 0187 (STM32WB55RG BLE STACK FW) + 0179 (motor FW)						
Hardware version	1.0						
Dimensions in cm (W x H x D)	6.7 x 29.0 x 2.0 cm						
Mounting position	<input type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
	<input checked="" type="checkbox"/>	Other: Door mounting					
Modules/parts..... :	Module/parts of test item		Type	Manufacturer			
	STM32WB55RG (SoC) + 2450AT18B100 (Antenna)		BLE	ST + JOHANSON			
	--						
Accessories (not part of the test item)	Description		Type	Manufacturer			
	--						
Documents as provided by the applicant..... :	Description		File name	Issue date			
	User manual						
	FW Explanation						

⁽³⁾ Only for Medical equipments.

Identification of the client

SALTO SYSTEMS, S.L.

Arkotz 9, Polígono Lanbarren 20180, Oiartzun (Gipuzkoa) - Spain

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-09-21
Date (finish)	2021-09-24

Document history

Report number	Date	Description
66344RRF.008	2021-10-19	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Nicolás Salguero and José Manuel Jiménez.

Used instrumentation:

Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N.A.	N.A.
2. Shielded Room ETS LINDGREN S101	N.A.	N.A.
3. Active Loop Antenna 9 kHz – 30 MHz HEWLETT PACKARD 11966A	2020/07	2022/07
4. Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E	2020/04	2023/04
5. Horn Antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2019/11	2022/11
6. Preamplifier G>40dB 10MHz-6GHz, BONN ELEKTRONIK, BLNA 0160-01N	2021/03	2022/03
7. RF Preamplifier, 40 dB, 1-18 GHz BONN ELEKTRONIK BLMA 0118-1M	2021/06	2022/06
8. EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2020/12	2022/12
9. Spectrum Analyzer ROHDE AND SCHWARZ FSW50	2020/07	2022/07
10. Broadband Horn antenna 18 - 40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2020/05	2023/05
11. Pre-amplifier, G>30 dB, 18-40 GHz BONN ELEKTRONIK BLMA 1840-4A	2021/09	2023/09

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

FCC PART 15 PARAGRAPH / RSS-247 / RSS-Gen		
Requirement – Test case	Verdict	Remark
FCC 15.31 (h), 15.209 (a), 15.247 (d) / RSS-Gen 8.9, RSS-247 5.5: - Emission limitations radiated (Transmitter)	P	(1)
<u>Supplementary information and remarks:</u> (1) Only co-location radiated spurious emission test was requested.		

Appendix A: Test results.

INDEX

TEST CONDITIONS.....	11
Radiated emissions	15

TEST CONDITIONS

POWER SUPPLY:

Vnominal:	4.5 Vdc
Type of Power Supply:	DC external power supply.

ANTENNA:

	Type of Antenna	Maximum Declared Antenna Gain
RFID	Integral, PCB	0 dBi
Bluetooth LE	Integral, Chip	+0.5 dBi

RADIOS AND CHANNELS TESTED:

- Co-Location mode NFC, Bluetooth LE: (Worst case)

	RFID	
Mode:	ISO 14443A: ASK 100%, OOK (subcarrier fc/16) & ISO 15693: ASK 10% - 30%, OOK (subcarrier fc/32)	
Channel Spacing:	N/A	
Frequency Range:	13.553 - 13.567 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	1	13.56

	Bluetooth LE	
Mode:	GFSK (1-DH5)	
Channel Spacing:	2 MHz	
Frequency Range:	2400 - 2483.5 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	17	2440

The EUT was tested in the following operating mode:

- Continuous transmission with a modulated carrier at maximum power in all required channels selecting the supported data rates/modulations types.

During transmitter test the EUT was being controlled by the SW tool to operate in a continuous transmit mode on the test channel as required and in each of the different modulation modes.

Transmission modes selected with each Radio:

The following configurations were selected based on preliminary testing that identified those corresponding to the worst cases:

* Bluetooth Low Energy 1MHz: Transmitter radiated spurious emissions tests were performed with the EUT transmitting in 1 Mbps.

* RFID 13.56 MHz: Transmitter radiated spurious emissions tests were performed with the EUT transmitting in the single channel configuration supported by this radio.

Simultaneous transmission modes selected:

* **Co-Location mode Bluetooth Low Energy, RFID**, with the EUT configured to simultaneously transmit three signals at maximum output power:

Bluetooth Low Energy in 1 Mbps mode / RFID 13.56 MHz ISO 14443A mode.

* **Co-Location mode Bluetooth Low Energy, RFID**, with the EUT configured to simultaneously transmit three signals at maximum output power:

Bluetooth Low Energy in 1 Mbps mode / RFID 13.56 MHz ISO 15693 mode.

RADIATED MEASUREMENTS:


All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m (Loop antenna for the range between 9 kHz to 30 MHz, Bilog antenna for 30 MHz to 1000 MHz and Double ridge horn antenna for 1 GHz-17 GHz) and at distance of 1 m for the frequency range 17 GHz-26 GHz (18 GHz-26 GHz horn antenna).

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz/300 kHz was used for frequencies below 1 GHz and 1MHz/3MHz for frequencies above 1 GHz.


Radiated measurements setup $f < 30$ MHz:

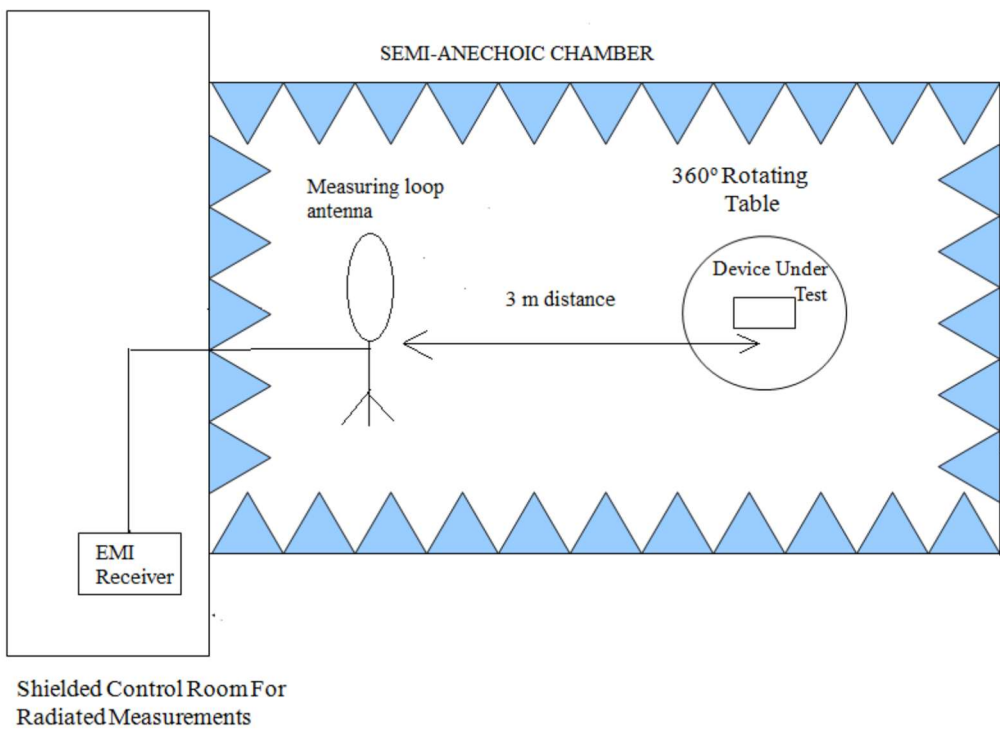


Radiated measurements setup $30 \text{ MHz} < f < 1 \text{ GHz}$:

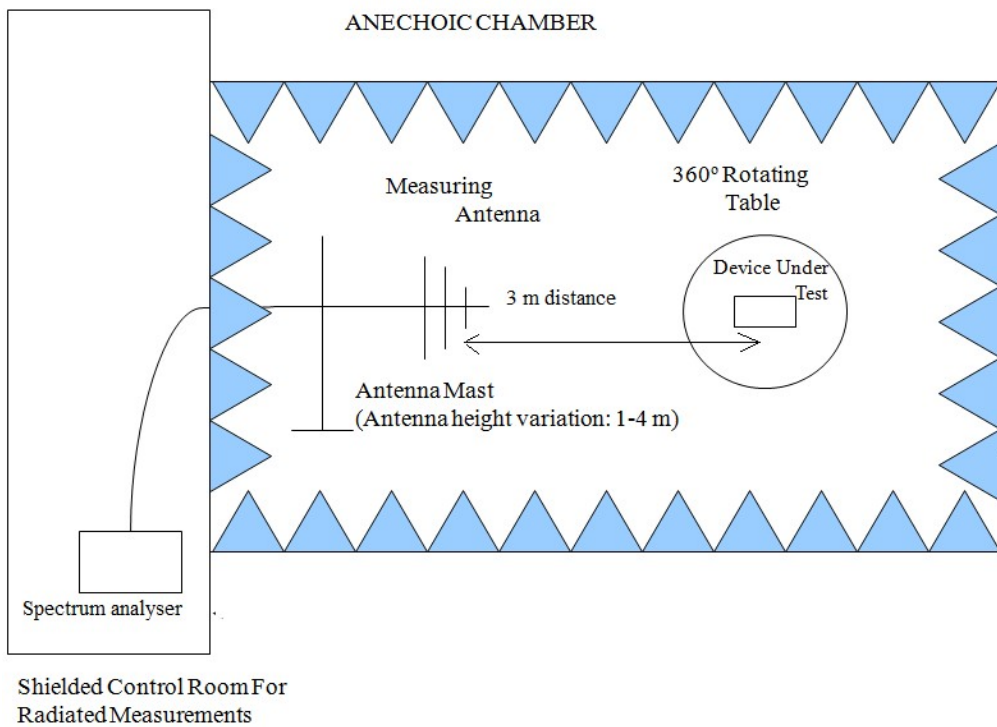

Radiated measurements setup $f > 1$ GHz up to 17 GHz:

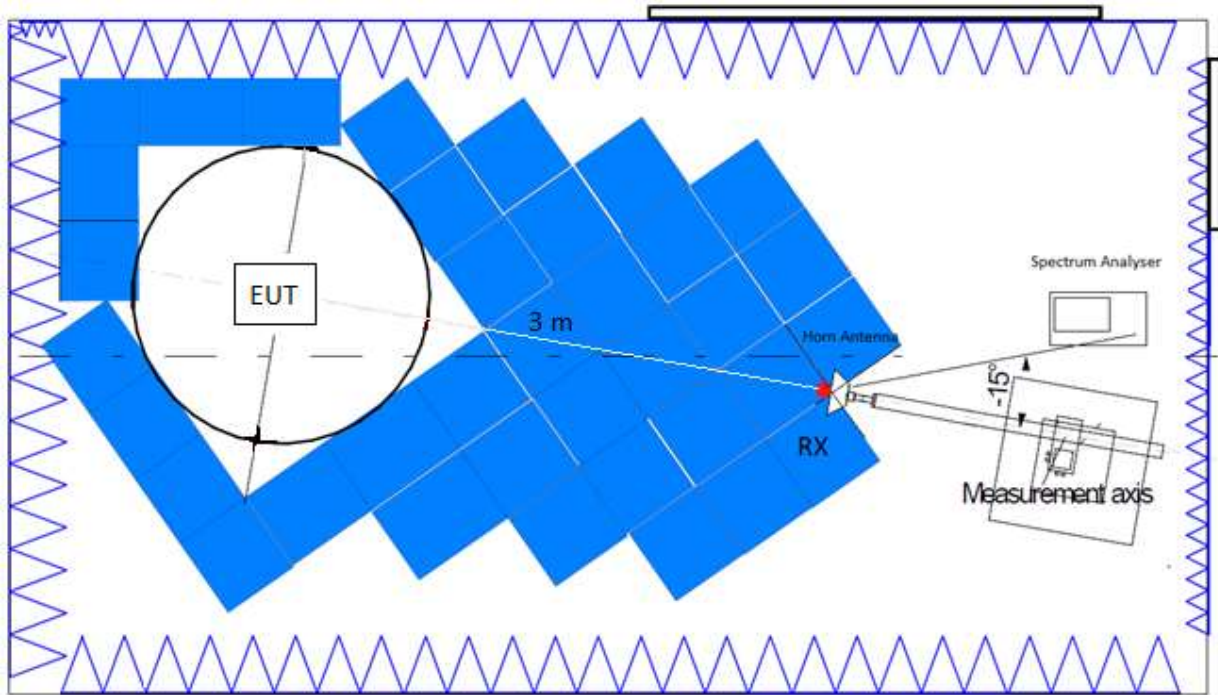

Radiated measurements setup $f > 17$ GHz up to 26 GHz:

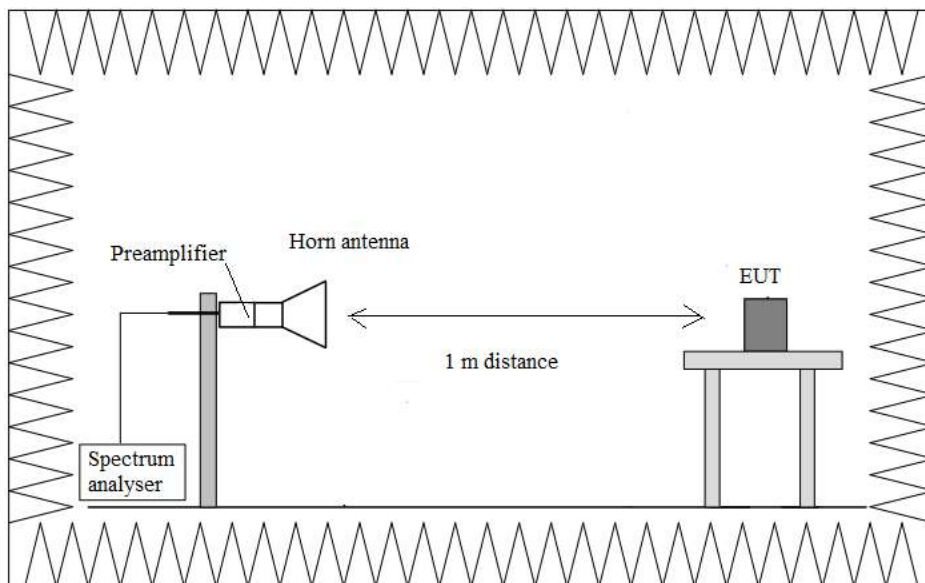

Radiated emissions

SPECIFICATION:

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), appearing outside of the band 13.110 MHz - 14.010 MHz band must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Field strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	29.54	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 9 kHz-1 GHz and at distance of 1m for the frequency range 1 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Test performed on the following worst cases in all relevant tests channels.

- **Colocation Bluetooth Low Energy 1 Mbps, RFID ISO A**

Frequency range 9 kHz - 30 MHz:

The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode.

No spurious frequencies detected closest to the limit.

Measurement uncertainty (dB): $\leq \pm 3.04$

Frequency range 30 MHz - 1 GHz:

The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode.

Spurious frequencies detected closest to the limit:

Spurious frequency (MHz)	Emission Level (dB μ V/m)	Polarization	Detector
40.6700	26.98	V	Quasi-Peak
542.4025	27.29	V	Quasi-Peak

Measurement uncertainty (dB): $\leq \pm 5.07$

Frequency range 1 - 26 GHz:


Spurious frequencies detected closest to the limit:

Spurious frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector
4.8800	51.49	V	Peak
7.3195	53.39	V	Peak
9.7600	51.00	V	Peak
12.2000	53.12	V	Peak
14.6390	54.59	H	Peak
	44.18		Average

Measurement Uncertainty (dB):
 1 GHz to 3 GHz $\leq \pm 4.00$
 3 GHz to 17 GHz $\leq \pm 4.99$
 17 GHz to 26 GHz $\leq \pm 5.08$


Verdict: PASS

FREQUENCY RANGE 9 kHz - 30 MHz (worst case):

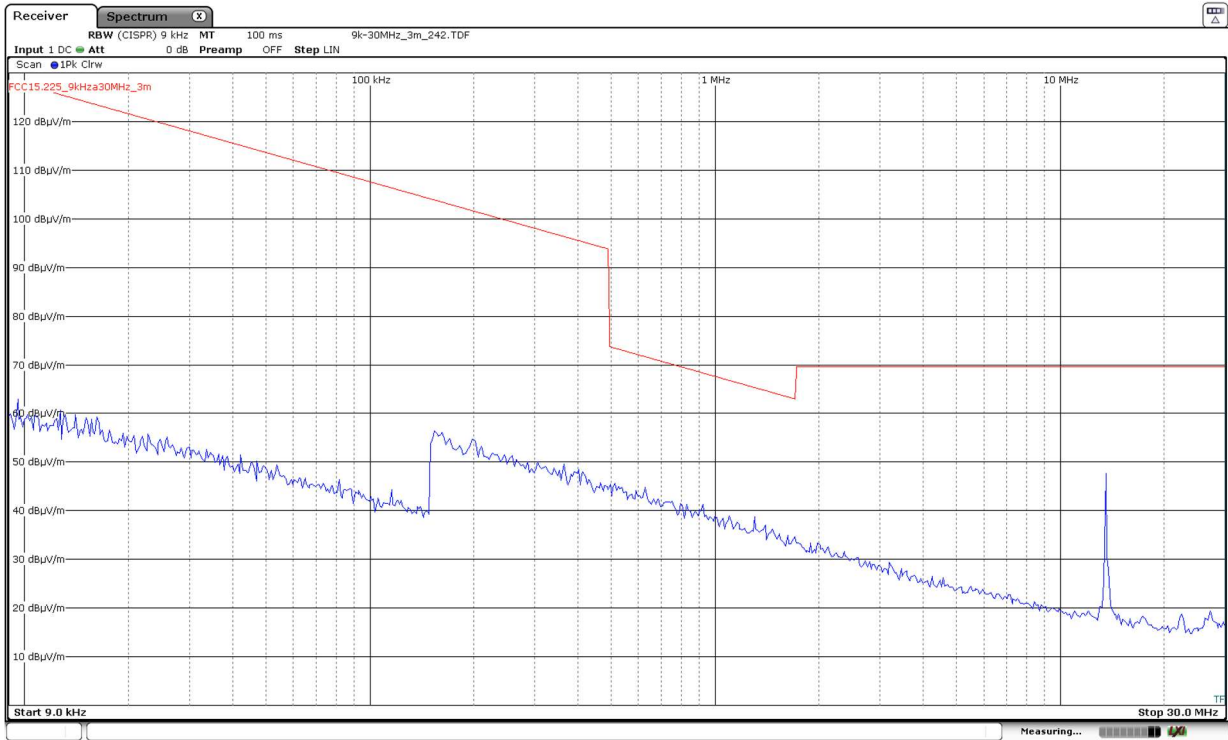


The highest peak is the carrier frequency (RFID 13.56 MHz)

FREQUENCY RANGE 30 MHz - 1 GHz (worst case):

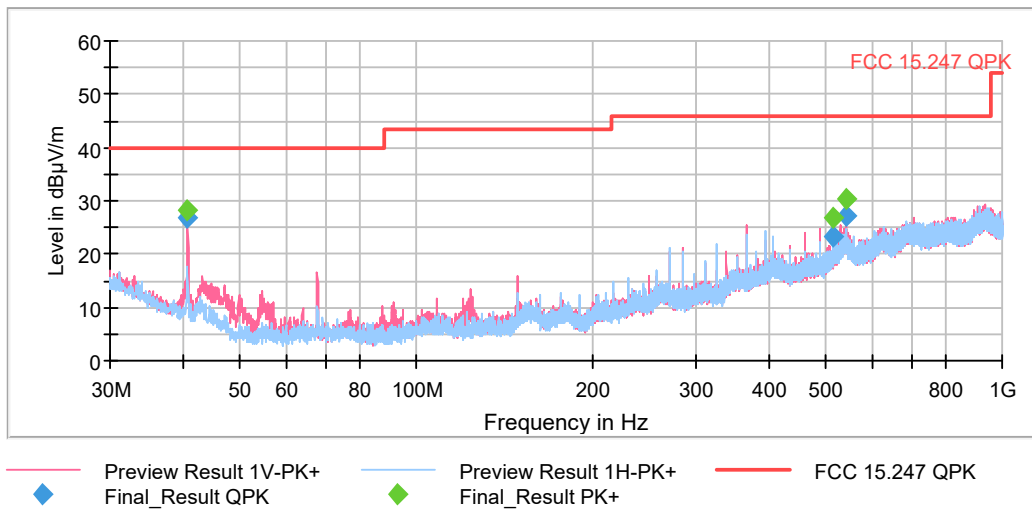


FREQUENCY RANGE 1 - 3 GHz (worst case):

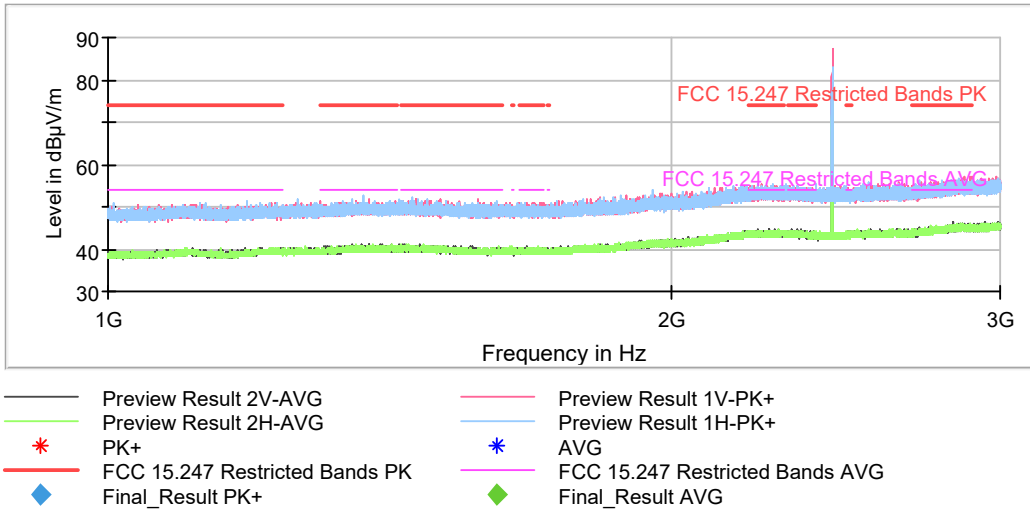


The highest peak is the carrier frequency (Bluetooth LE 2440 MHz)

FREQUENCY RANGE 3 - 17 GHz (worst case):

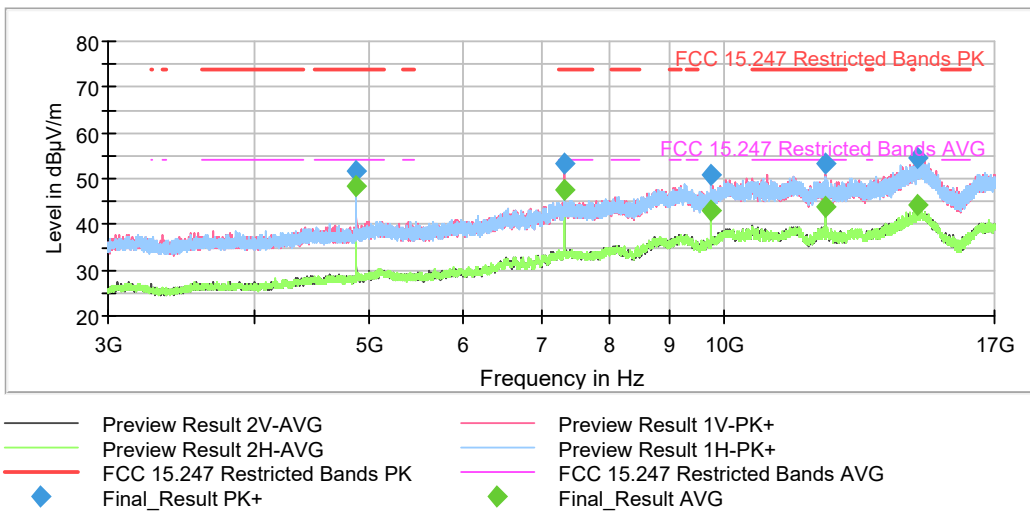

FREQUENCY RANGE 17 - 26 GHz (worst case):

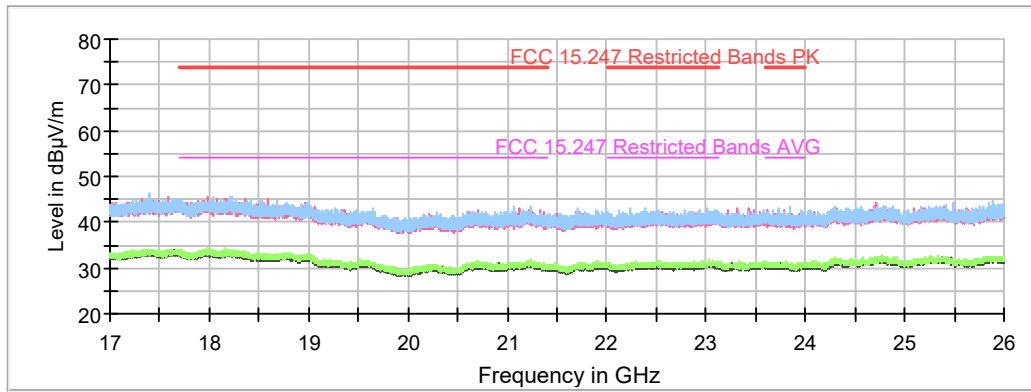

- | | | | | |
|---|--------------------------------|---|---------------------------------|------------------|
| — | Preview Result 2V-AVG | — | Preview Result 1V-PK+ | |
| — | Preview Result 2H-AVG | — | — | |
| — | FCC 15.247 Restricted Bands PK | — | Preview Result 1H-PK+ | |
| ◆ | Final_Result PK+ | ◆ | FCC 15.247 Restricted Bands AVG | |
| | | | ◆ | Final_Result AVG |

- **Colocation Bluetooth Low Energy 1 Mbps, RFID ISO V**

Frequency range 9 kHz - 30 MHz:

The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode.

No spurious frequencies detected closest to the limit.

Measurement uncertainty (dB): $\leq \pm 3.04$

Frequency range 30 MHz - 1 GHz:

The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode.

Spurious frequencies detected closest to the limit:

Spurious frequency (MHz)	Emission Level (dB μ V/m)	Polarization	Detector
40.6700	26.62	V	Quasi-Peak

Measurement uncertainty (dB): $\leq \pm 5.07$

Frequency range 1 - 26 GHz:


Spurious frequencies detected closest to the limit:

Spurious frequency (GHz)	Emission Level (dB μ V/m)	Polarization	Detector
4.8800	55.29	V	Peak
	52.67		Average
7.3195	54.98	V	Peak
	49.82		Average
9.7595	54.08	V	Peak
	39.90		Average
12.2000	49.33	H	Peak
14.6405	53.23	H	Peak

Measurement Uncertainty (dB):
 1 GHz to 3 GHz $\leq \pm 4.00$
 3 GHz to 17 GHz $\leq \pm 4.99$
 17 GHz to 26 GHz $\leq \pm 5.08$


Verdict: PASS

FREQUENCY RANGE 9 kHz - 30 MHz (worst case):

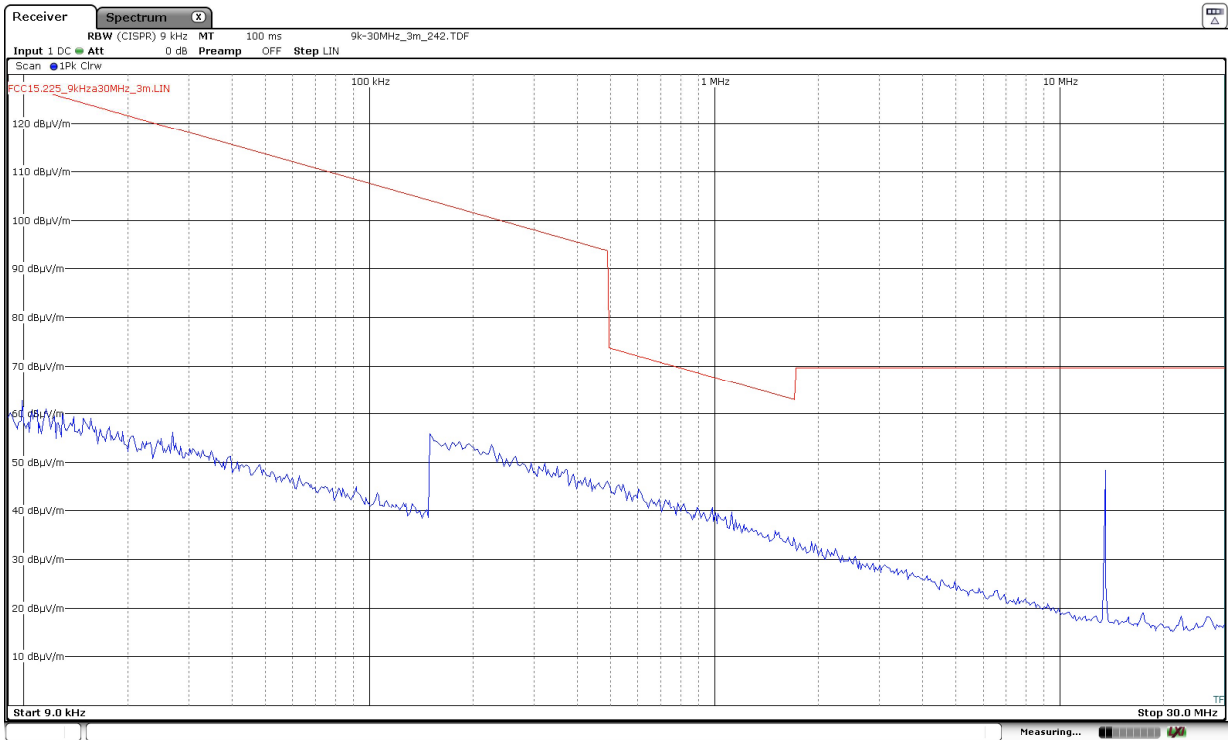


The highest peak is the carrier frequency (RFID 13.56 MHz)

FREQUENCY RANGE 30 MHz - 1 GHz (worst case):

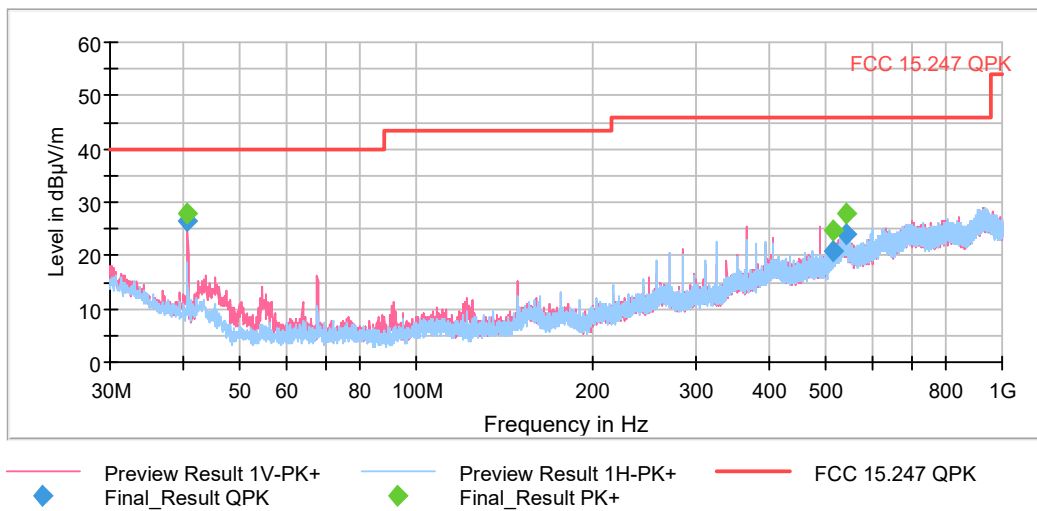


FREQUENCY RANGE 1 - 3 GHz (worst case):

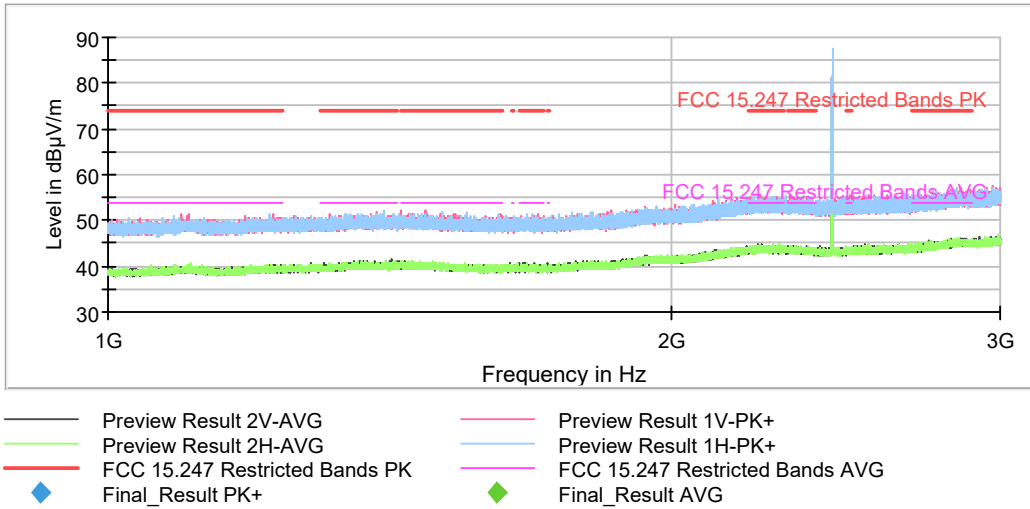


The highest peak is the carrier frequency (Bluetooth LE 2440 MHz)

FREQUENCY RANGE 3 - 17 GHz (worst case):

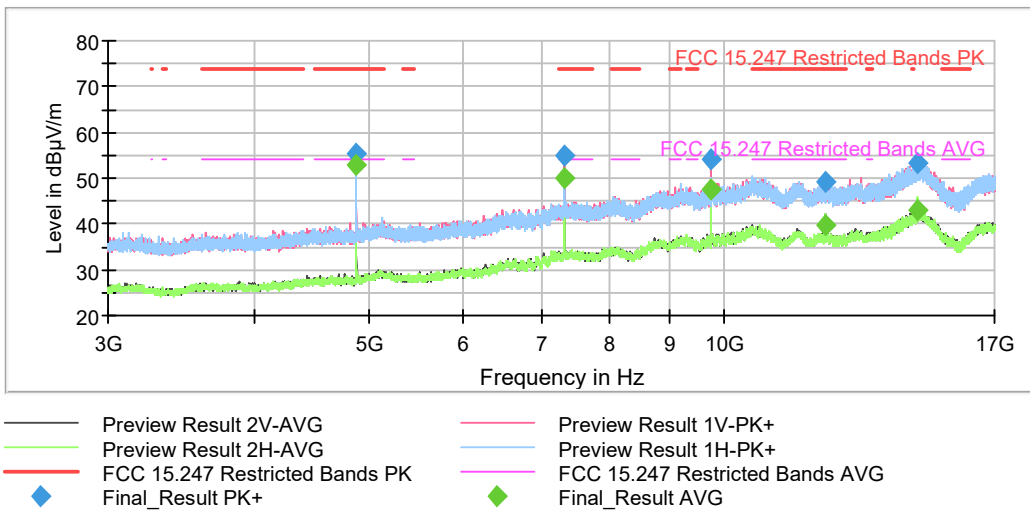

FREQUENCY RANGE 17 - 26 GHz (worst case):

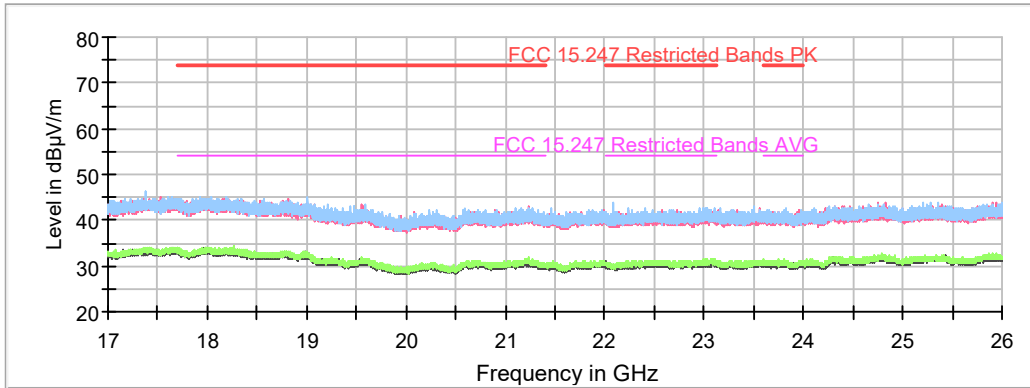

- | | | | |
|---|--------------------------------|---|---------------------------------|
| — | Preview Result 2V-AVG | — | Preview Result 1V-PK+ |
| — | Preview Result 2H-AVG | — | Preview Result 1H-PK+ |
| — | FCC 15.247 Restricted Bands PK | — | FCC 15.247 Restricted Bands AVG |
| ◆ | Final_Result PK+ | ◆ | Final_Result AVG |