

RADIO TEST REPORT – REP006616

Type of assessment:

Transmitters co-location

Applicant:

Eurotech Spa

Via Fratelli Solari, 3/A – 33020 Amaro (UD) – Italy

Model:

DYGATE 10-14-03

FCC ID:

UKMDG1014

IC Registration number:

21442-DG1014

Specifications:

- ◆ **FCC 47 CFR Part 15 Subpart C, §15.209**

Radiated emission limits; general requirements.

- ◆ **RSS-GEN, Issue 5, Apr. 2018, section 8.9**

Transmitter Emission Limits

Date of issue: 2023-01-20

P. Barbieri

Tested by



Signature

D. Guarnone

Reviewed by



Signature

This test report shall not be partially reproduced without the prior written consent of Nemko S.p.A. The phase of sampling of equipment under test is carried out by the customer. Results indicated in this test report refer exclusively to the tested samples and apply to the sample as received. This Test Report, when bearing the Nemko name and logo is only valid when issued by a Nemko laboratory, or by a laboratory having special agreement with Nemko.

Test location(s)

Company name	Nemko Spa
Address	Via del Carroccio, 4
City	Biassono
Province	MB
Postal code	20853
Country	Italy
Telephone	+39 039 220 12 01
Facsimile	+39 039 220 12 21
Website	www.nemko.com
Site number	FCC: 682159; IC: 9109A (10 m semi anechoic chamber)

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Spa ISO/IEC 17025 accreditation.

Copyright notification

Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Test methods	4
1.4 Statement of compliance	4
1.5 Exclusions	4
1.6 Test report revision history	4
Section 2. Summary of test results	5
2.1 FCC Part 15 Subpart C, general requirements test results	5
2.2 ISED RSS-GEN, Issue 5, test results	5
Section 3. Equipment under test (EUT) details	6
3.1 Sample information	6
3.2 EUT information	6
3.3 Technical information	6
3.4 EUT setup diagram	7
3.5 Product description and theory of operation	8
3.6 EUT exercise details	8
Section 4. Engineering considerations	10
4.1 Modifications incorporated in the EUT	10
4.2 Technical judgment	10
4.3 Deviations from laboratory tests procedures	10
Section 5. Test conditions	11
5.1 Atmospheric conditions	11
5.2 Power supply range	11
Section 6. Measurement uncertainty	12
6.1 Uncertainty of measurement	12
Section 7. Test equipment	13
7.1 Test equipment list	13
Section 8. Testing data	14
8.1 FCC 15.209 and RSS-GEN section 8.9 Radiated emission limits; general requirements	14
Section 9. Block diagrams of test set-ups	70
9.1 Radiated emissions set-up for frequencies below 1 GHz	70
9.2 Radiated emissions set-up for frequencies above 1 GHz	70
Section 10. Photos	71
10.1 Photos of the test set-up	71
10.2 Photos of the EUT	72

Section 1. Report summary

1.1 Applicant and manufacturer

Company name	Eurotech Spa
Address	Via Fratelli Solari, 3/A – 33020 Amaro (UD) – Italy

1.2 Test specifications

FCC 47 CFR Part 15 Subpart C, §15.209	Radiated emission limits; general requirements.
RSS-GEN, Issue 5, section 8.9	Transmitter Emission Limits for Licence-Exempt Radio Apparatus

1.3 Test methods

ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
-------------------	--

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.5 below. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.5 Exclusions

As per quote, the purpose of this report is verification of transmitters colocation. Only inter-modulation products within restricted bands were assessed, other requirements were excluded from the scope of this report.

1.6 Test report revision history

Revision #	Date of issue	Details of changes made to test report
REP006616	2023-01-20	Original report issued

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.209	Radiated emission limits; general requirements.	Pass

2.2 ISED RSS-GEN, Issue 5, test results

Part	Test description	Verdict
8.9	Transmitter Emission Limits for Licence-Exempt Radio Apparatus	Pass

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	2022-12-27
Nemko sample ID number	477927

3.2 EUT information

Model	DYGATE 10-14-03
Serial number	A122MF50003

3.3 Technical information

Frequency band	WIFI: 2400 – 2483.5 MHz band WIFI: 5150 – 5725 MHz band WCDMA / LTE North America Bands
Type of modulation	802.11a/b/g/n/ac, WCDMA and LTE standard
Emission classification (F1D, G1D, D1D)	F1D, W7D
EUT power requirements	12 – 24 V DC / 48 W
Antenna information	The EUT uses five dedicated antennas, as following: GNSS: 2J Antennas type 2J4301MPGF WIFI/BT: 2J Antennas type 2J4802P LTE: 2J Antennas type 2J6983MPa

3.4 EUT setup diagram

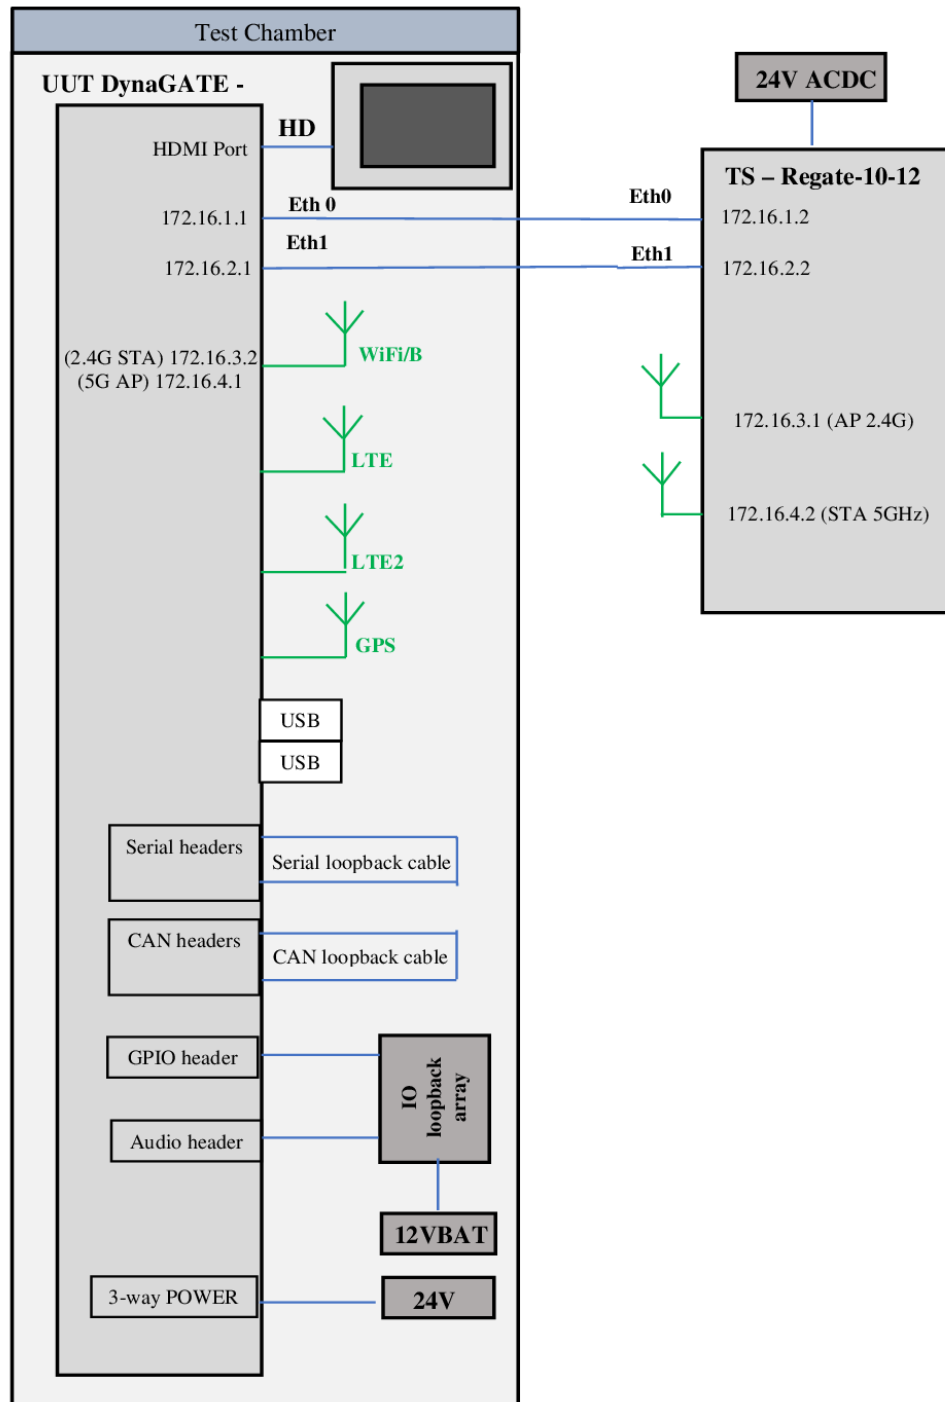



Figure 3.4-1: Setup diagram

3.5 Product description and theory of operation


The EUT is an Edge Gateway for Public Transport and Road Vehicles. Fully compliant with the ITxPT installation requirements, the EUT also provides legacy interfaces (e.g., serial RS-232/485/422) to support the integration in fleets that are still depending on them. The EUT consolidates multiple devices in one; it packs all the functions that would require dedicated GNSS units, Wi-Fi/BT to LTE routers, IP and GSML II camera processors, CAN-FD controllers.

3.6 EUT exercise details


The EUT has been forced in transmission mode using a radio communication tester R&S CM290 and the following software.

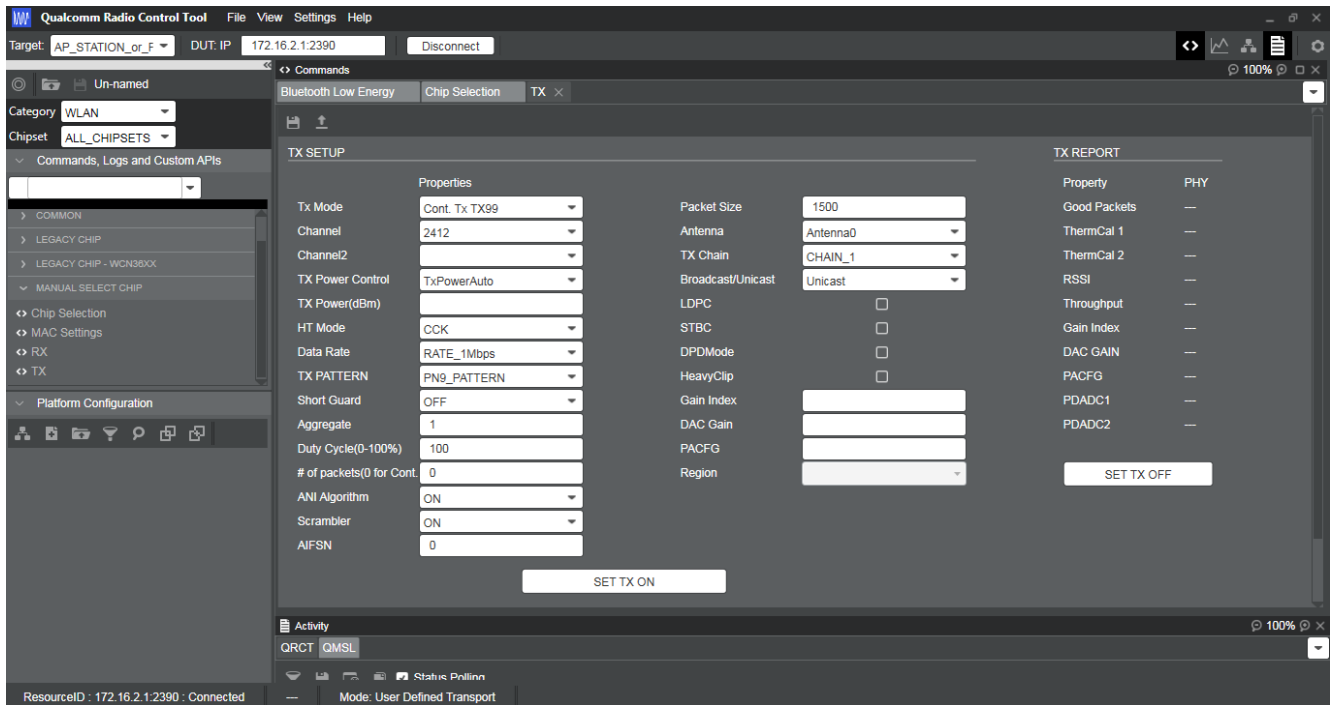

WIFI 2.4 GHz

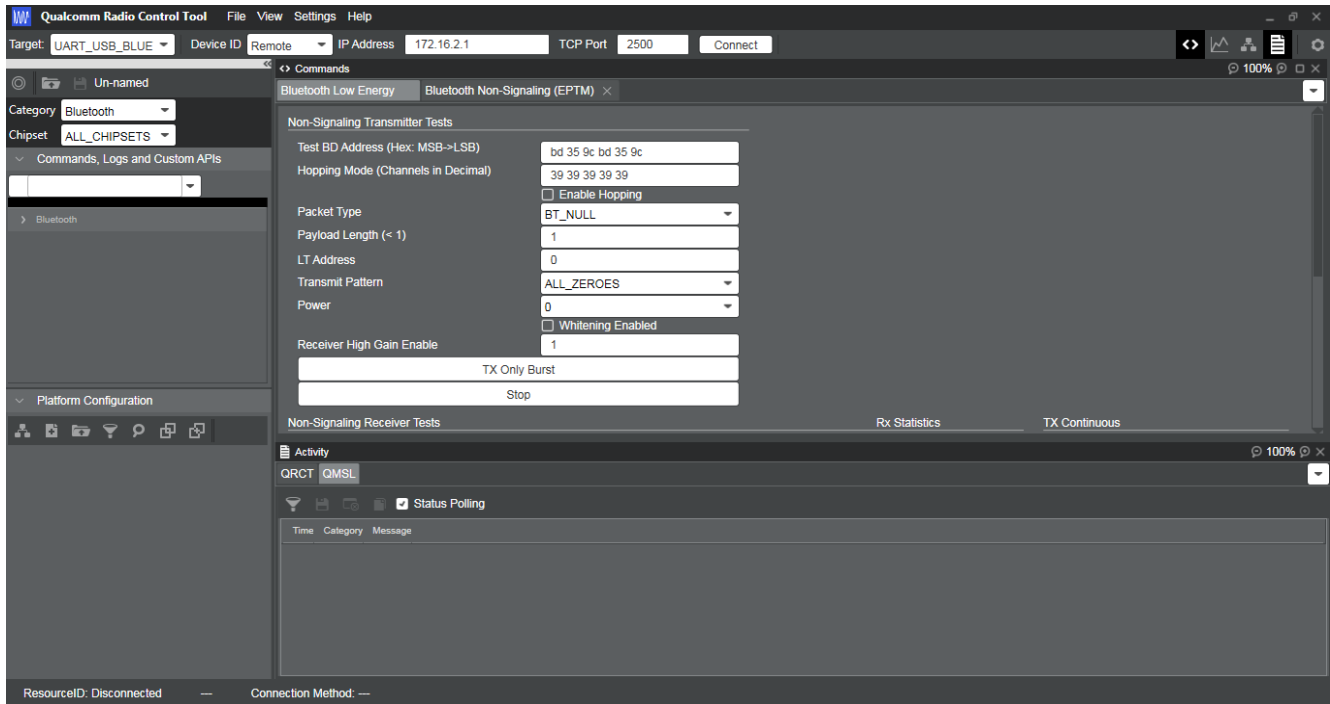

BT

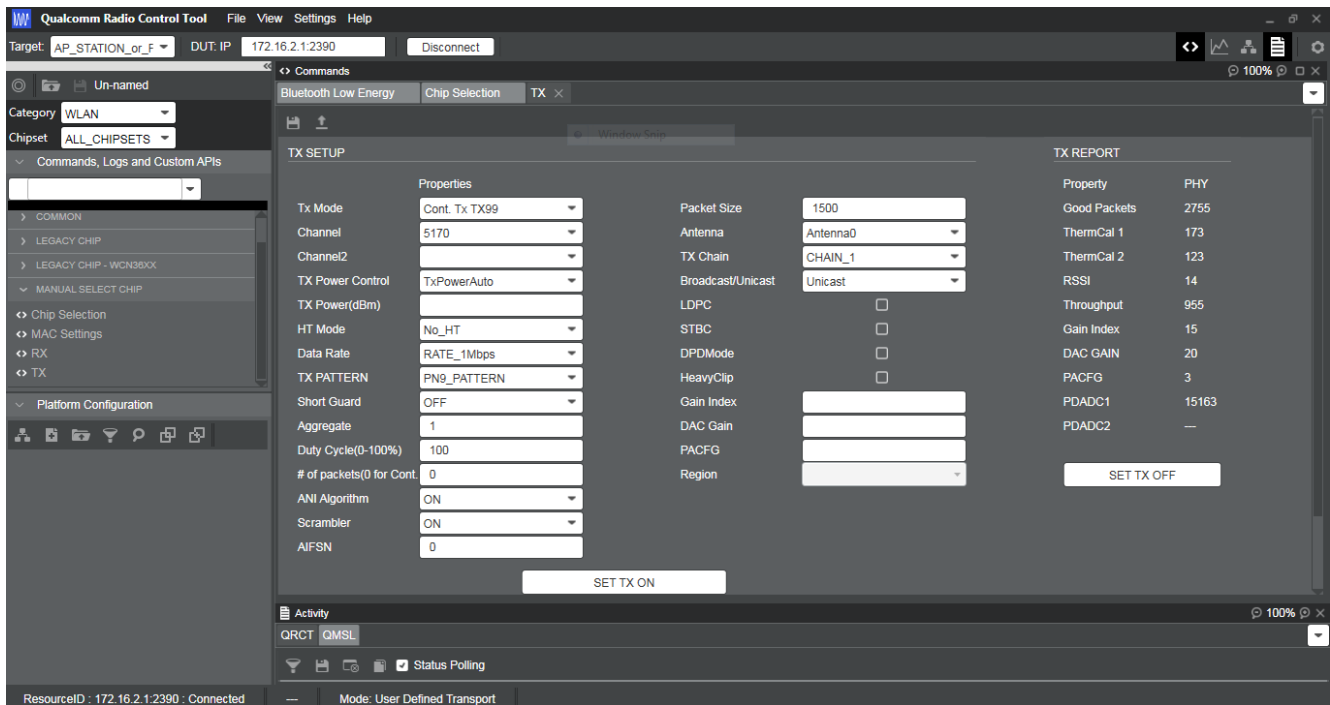

WIFI 5 GHz

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

The EUT has WIFI and Bluetooth in 2.4 GHz band, WIFI is chosen to be the representative worst-case due to higher output power.

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

In the laboratory, the following ambient conditions are respected for each test reported below:

Temperature	18 – 33 °C
Relative humidity	25 – 70 %
Air pressure	860 – 1060 mbar

The following instruments are used to monitor the environmental conditions:

Equipment	Manufacturer	Model no.	Asset no.	Cal date	Next cal.
Data logger con diagnosi in campo	Testo	175-H2	20012380/305	2022-12	2024-12
Data logger con diagnosi in campo	Testo	175-H2	38203337/703	2022-12	2024-12
Barometer	Castle	GPB 3300	072015	2022-04	2023-04

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002.

The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Disturbance	Antenna distance 1 m, 3 m, 10 m 0.009 ÷ 200 MHz	5.0 dB	(1)
	Antenna distance 1 m, 3 m, 10 m 200 ÷ 1000 MHz	5.2 dB	(1)
	Antenna distance 1 m, 3 m, 10 m 1 ÷ 6 GHz	5.2 dB	(1)
	Antenna distance 1 m, 3 m 6 ÷ 18 GHz	5.5 dB	(1)
	Antenna distance 1 m, 3 m 18 ÷ 40 GHz	7.2 dB	(1)
Radiated Disturbance with large loop antenna system (LLAS)	0.009 ÷ 30 MHz	3.3 dB	(1)
Conducted Disturbance	0.02 ÷ 150 kHz with AMN	3.8 dB	(1)
	150 kHz ÷ 30 MHz with AMN	3.4 dB	(1)
	150 kHz ÷ 30 MHz with AAN	4.6 dB	(1)
	9 kHz ÷ 30 MHz with voltage probe	2.9 dB	(1)
	150 kHz ÷ 30 MHz with current probe	2.9 dB	(1)
Frequency	10 Hz ÷ 1 kHz	0.2 %	(1)
	1 kHz ÷ 40 GHz	10 ⁻⁶	(1)
Electromagnetic fields (EMF)	Magnetic, Electric and Electromagnetic fields: 0 Hz ÷ 40 GHz	25 %	(1)
Electrical quantities (voltage, current, resistance)	AC/DC Voltage 10 mV ÷ 1000 V 0÷100 kHz AC/DC Current 0.1 mA ÷ 400 A 0÷1 kHz Resistance 100 mΩ ÷ 10 MΩ	2.5 %	(1)

NOTES:

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2$, which for a normal distribution corresponds to a coverage probability of approximately 95 %

(2) The instruments used for this immunity test is according to the tolerances requested by the applicable standard

(3) The reported expanded uncertainty of measurement is related to the stimulus quantity

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Description	Manufacturer	Model	Identifier	Cal Date	Due Date
EMI Receiver	Rohde & Schwarz	ESW44	101620	2022-08	2023-08
Antenna Trilog 25-2000 MHz	Schwarzbeck Mess-Elektronik	VULB9168	9168-242	2021-06	2024-06
Antenna 1 - 18 GHz	Schwarzbeck Mess-Elektronik	STLP9148	STLP 9148-152	2021-09	2024-09
Double Ridge Horn Antenna	RFSpin	DRH40	061106A40	2020-04	2023-04
Broadband Amplifier	Schwarzbeck Mess-Elektronik	BBV9718C	00121	2022-03	2023-03
Broadband Bench Top Amplifier	Sage	STB-1834034030-KFKF-L1	18490-01	2022-05	2023-05
3m Semi anechoic chamber	Comtest	SAC-3	1711-150	2022-09	2024-09
Semi-anechoic chamber	Nemko S.p.a.	10m semi-anechoic chamber	530	2021-09	2023-09

Section 8. Testing data

8.1 FCC 15.209 and RSS-GEN section 8.9 Radiated emission limits; general requirements

8.1.1 Definitions and limits

FCC:

(f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device.

ISED:

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 8.1-1: FCC §15.209 and RSS-Gen – Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.1-2: ISED restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	12.57675–12.57725	399.9–410	7.25–7.75
0.495–0.505	13.36–13.41	608–614	8.025–8.5
2.1735–2.1905	16.42–16.423	960–1427	9.0–9.2
3.020–3.026	16.69475–16.69525	1435–1626.5	9.3–9.5
4.125–4.128	16.80425–16.80475	1645.5–1646.5	10.6–12.7
4.17725–4.17775	25.5–25.67	1660–1710	13.25–13.4
4.20725–4.20775	37.5–38.25	1718.8–1722.2	14.47–14.5
5.677–5.683	73–74.6	2200–2300	15.35–16.2
6.215–6.218	74.8–75.2	2310–2390	17.7–21.4
6.26775–6.26825	108–138	2483.5–2500	22.01–23.12
6.31175–6.31225	149.9–150.05	2655–2900	23.6–24.0
8.291–8.294	156.52475–156.52525	3260–3267	31.2–31.8
8.362–8.366	156.7–156.9	3332–3339	36.43–36.5
8.37625–8.38675	162.0125–167.17	3345.8–3358	
8.41425–8.41475	167.72–173.2	3500–4400	
12.29–12.293	240–285	4500–5150	Above 38.6
12.51975–12.52025	322–335.4	5350–5460	

Note: Certain frequency bands listed in Table 8.1-2 and above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Table 8.1-3: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.1.2 Test summary

Verdict	Pass
Tested by	P. Barbieri

8.1.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to 40 GHz.

Different channel setting has been investigated as per provided by client's setup, only the worst-case is presented. Radiated measurements were performed at a distance of 3 m.

The limits apply to the spurious emissions of the 3G/4G radio module is -13 dBm (82.2 dBμV/m = -13 dBm + 95.23 dB)..

Receiver settings for radiated measurements within restricted bands 30 MHz to 1 GHz:

Resolution bandwidth:	120 kHz
Detector mode:	Quasi-Peak


Receiver settings for peak radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Detector mode:	Peak

Receiver settings for average radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Detector mode:	Average


8.1.4 Test data for LTE B14 at middle channel, WIFI at 2437 MHz and BT at low channel

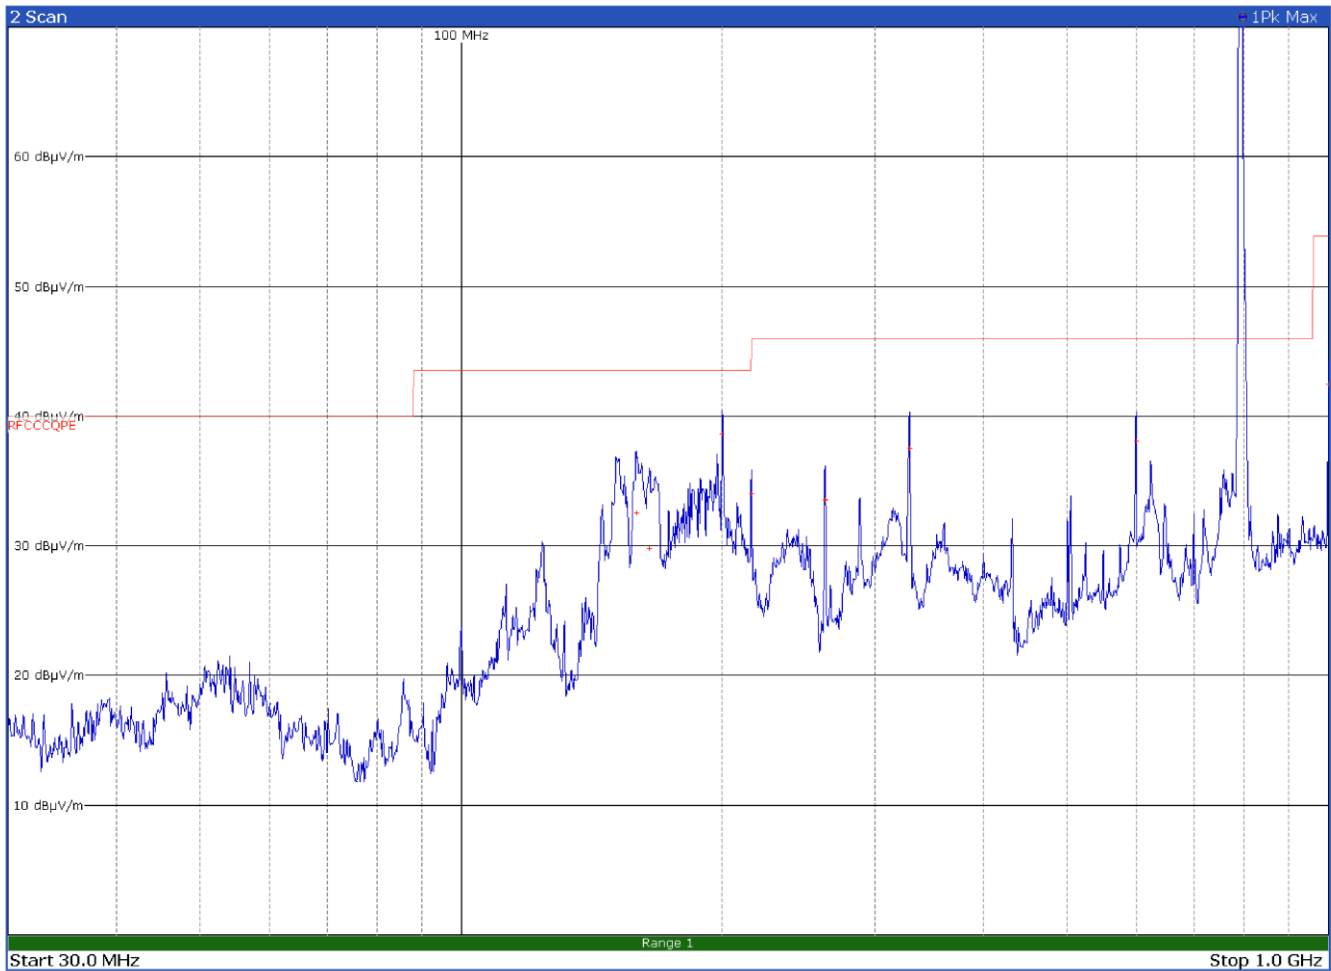

Antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
158.9700	32.6	43.5	-10.9	QP
164.9400	29.8	43.5	-13.7	QP
199.9800	38.6	43.5	-4.9	QP
216.0000	34.0	46.0	-12.0	QP
262.9800	33.6	46.0	-12.4	QP
328.6800	37.6	46.0	-8.4	QP
600.0000	38.1	46.0	-7.9	QP
999.9900	42.5	53.9	-11.4	QP


Limit exceeded by the carrier

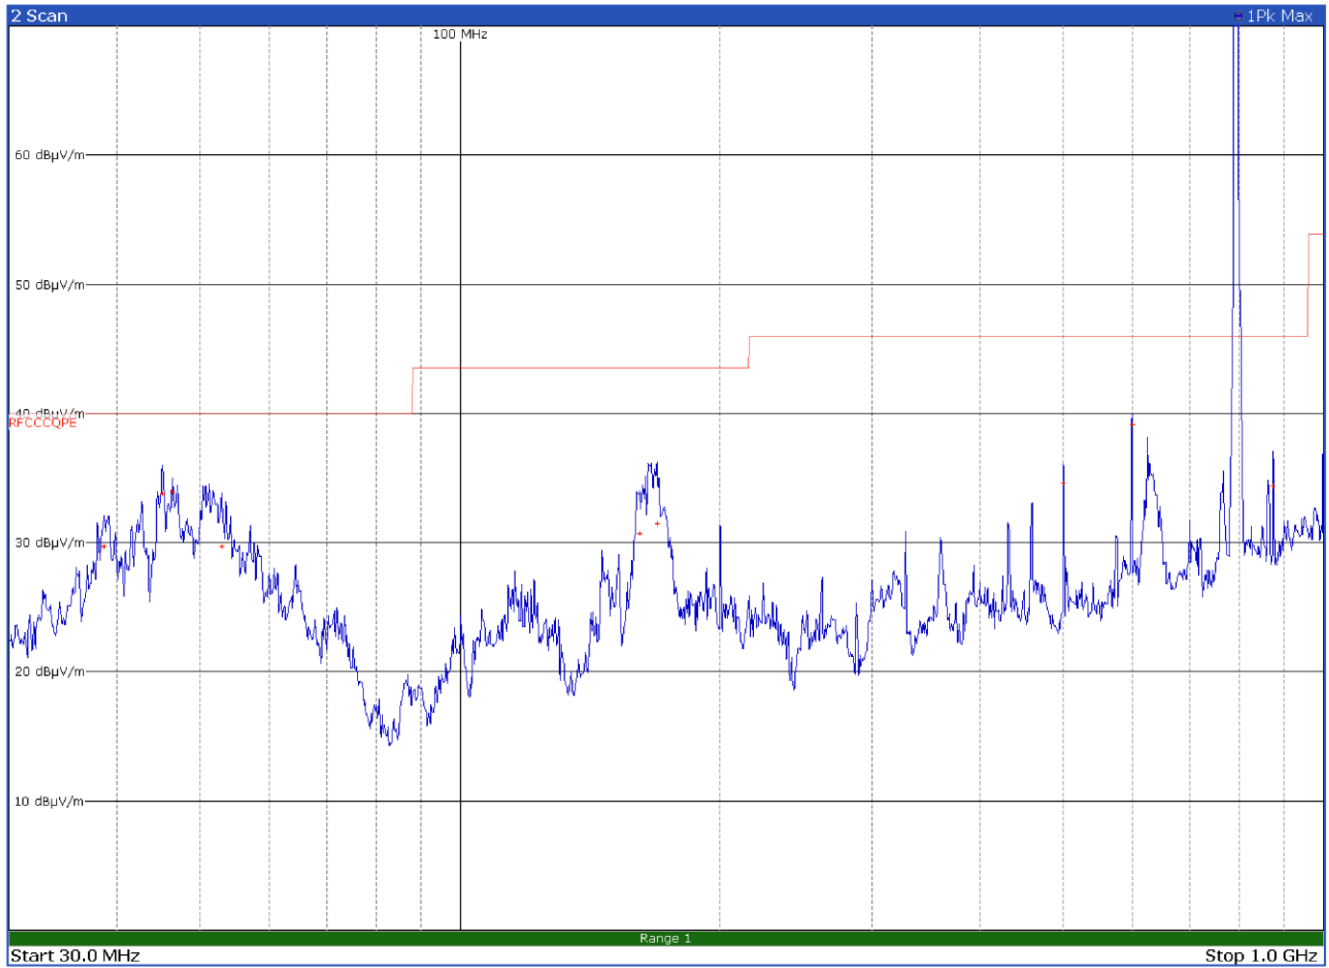

Antenna in vertical polarization


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
38.6400	29.8	40.0	-10.2	QP
45.1200	33.8	40.0	-6.2	QP
46.3800	33.9	40.0	-6.1	QP
52.8900	29.7	40.0	-10.3	QP
161.3700	30.8	43.5	-12.7	QP
168.9600	31.5	43.5	-12.0	QP
500.0100	34.6	46.0	-11.4	QP
600.0000	39.2	46.0	-6.8	QP
874.9800	34.4	46.0	-11.6	QP

Limit exceeded by the carrier

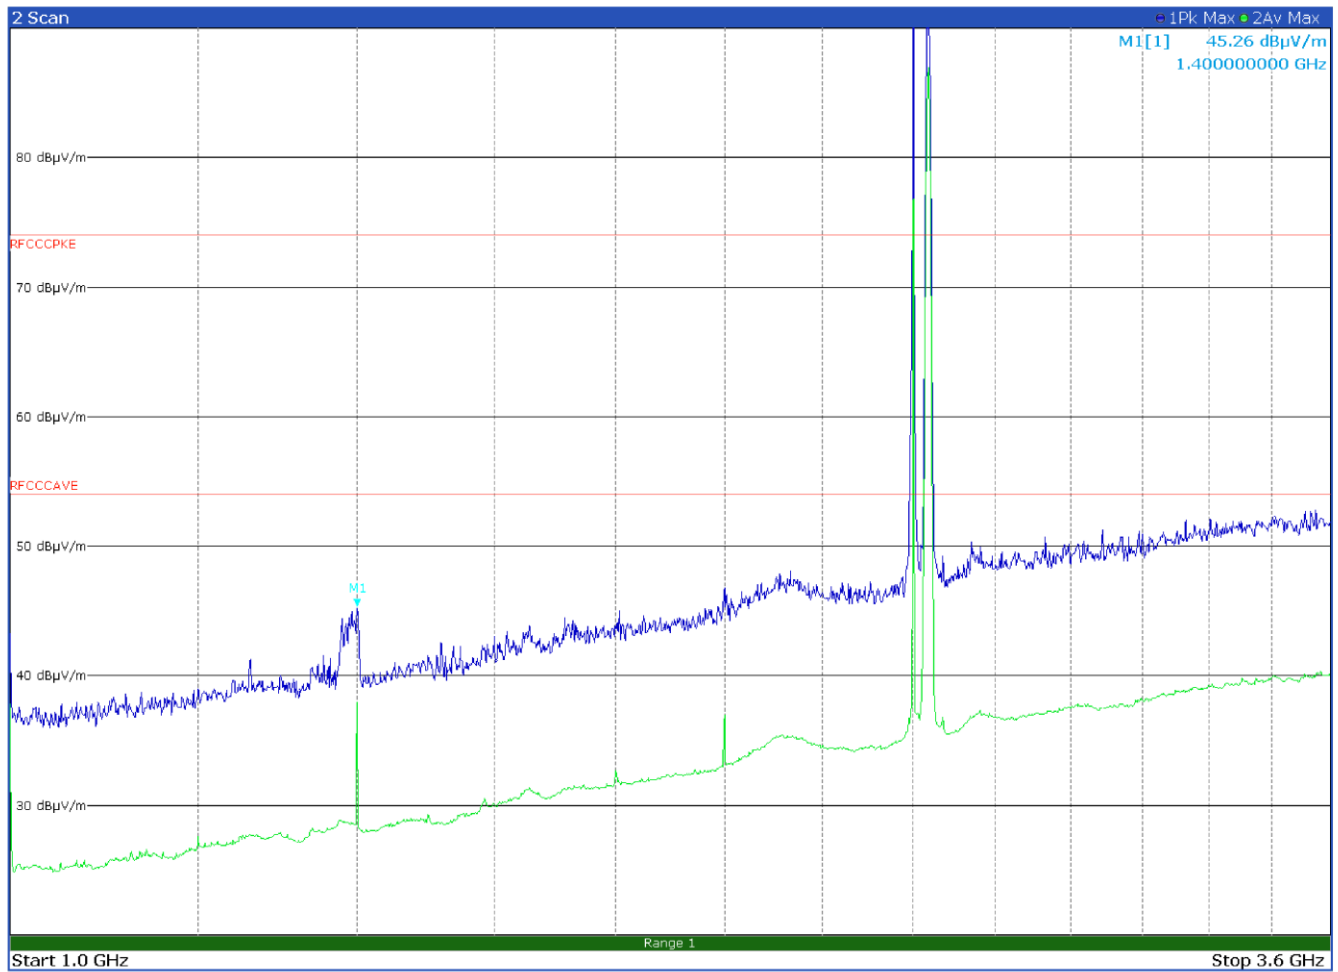


Antenna in horizontal polarization

Limit exceeded by carriers – No inter-modulation product founds

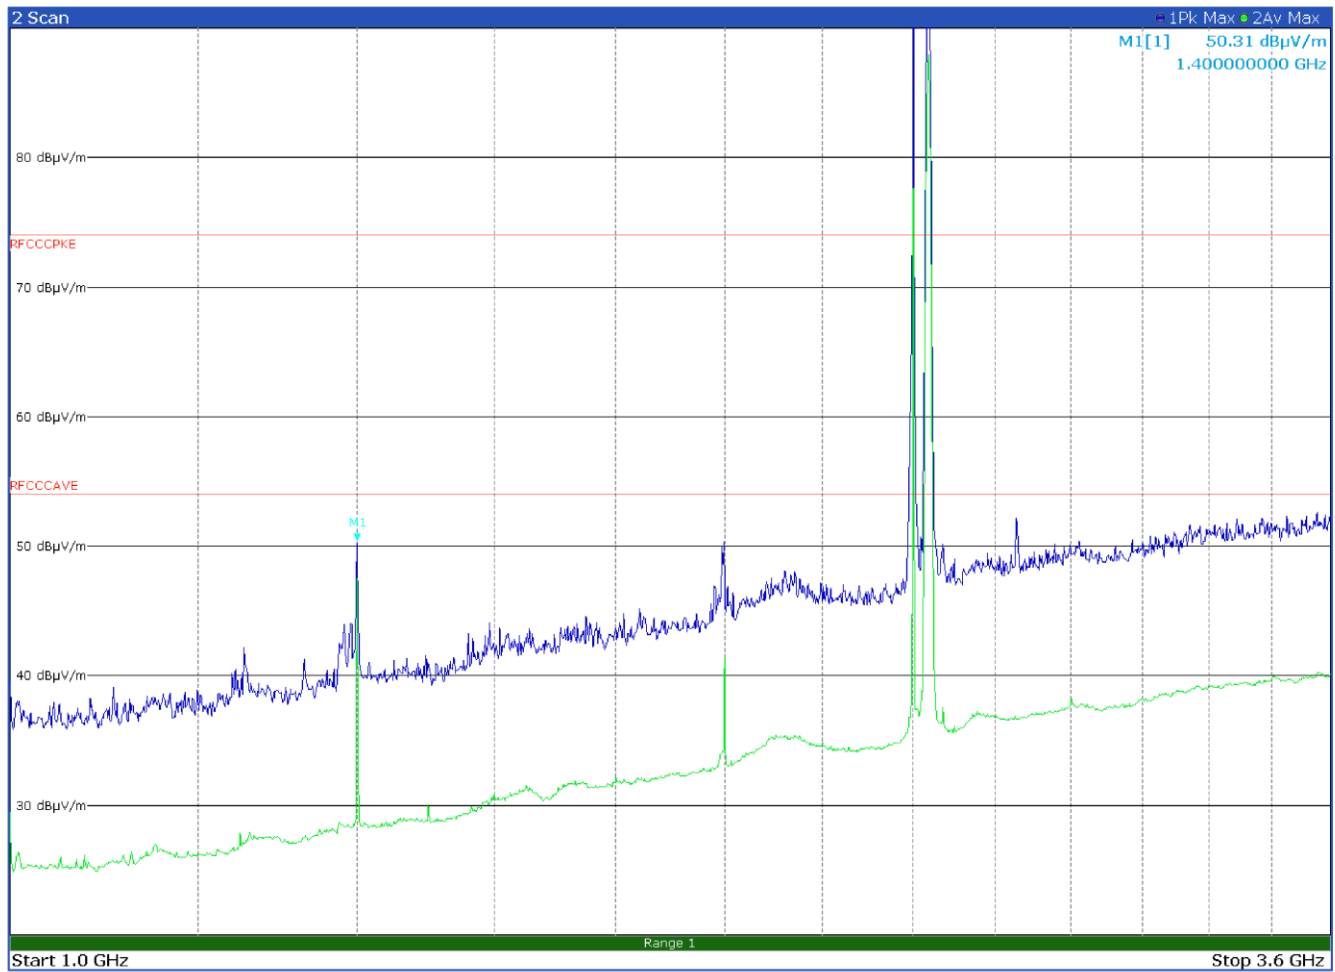


Antenna in vertical polarization


Limit exceeded by carriers – No inter-modulation product founds

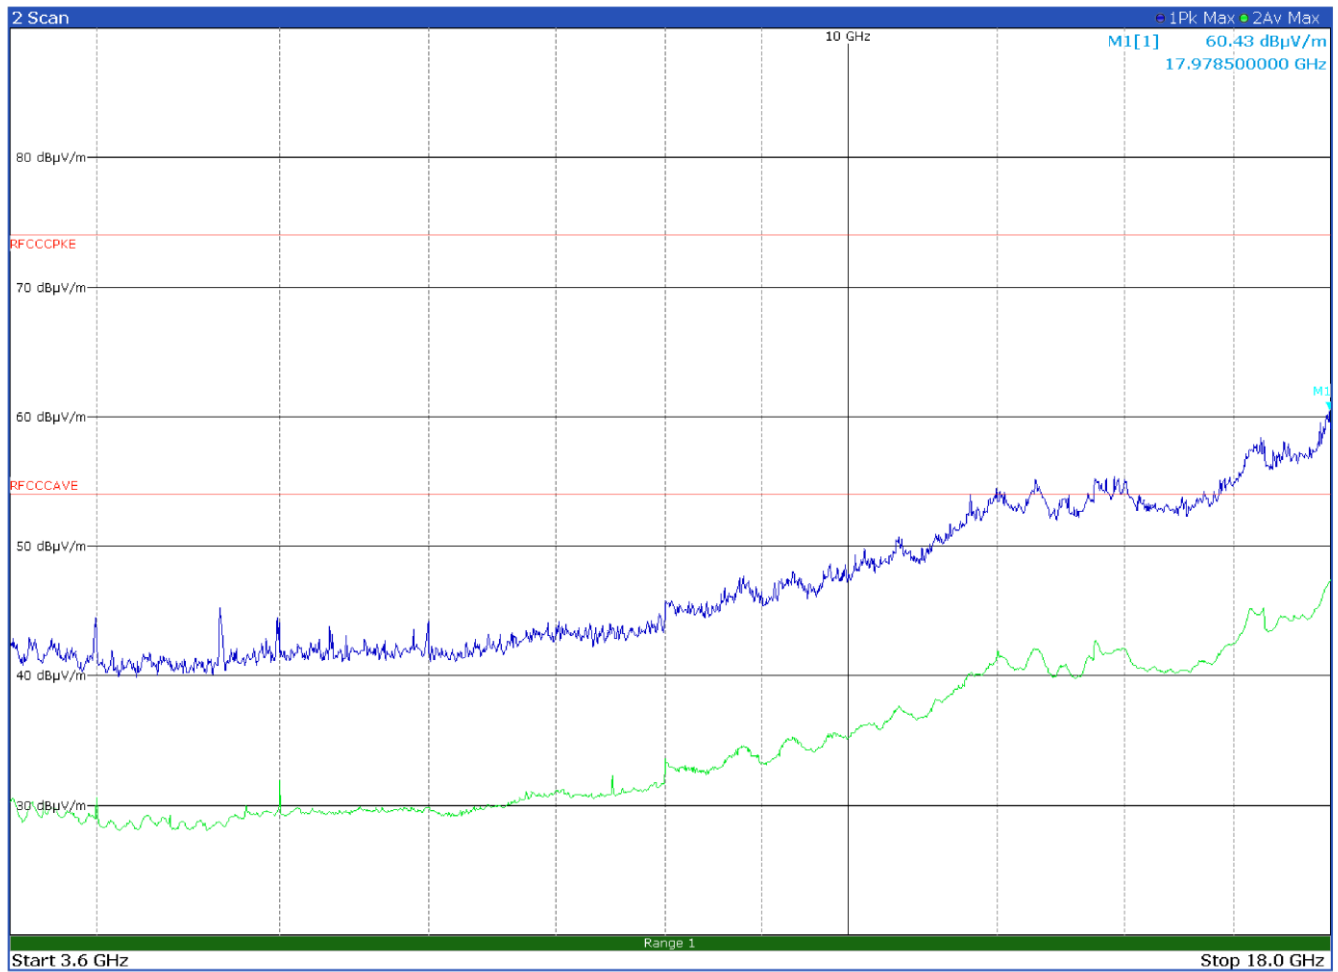


Antenna in horizontal polarization – No inter-modulation product founds

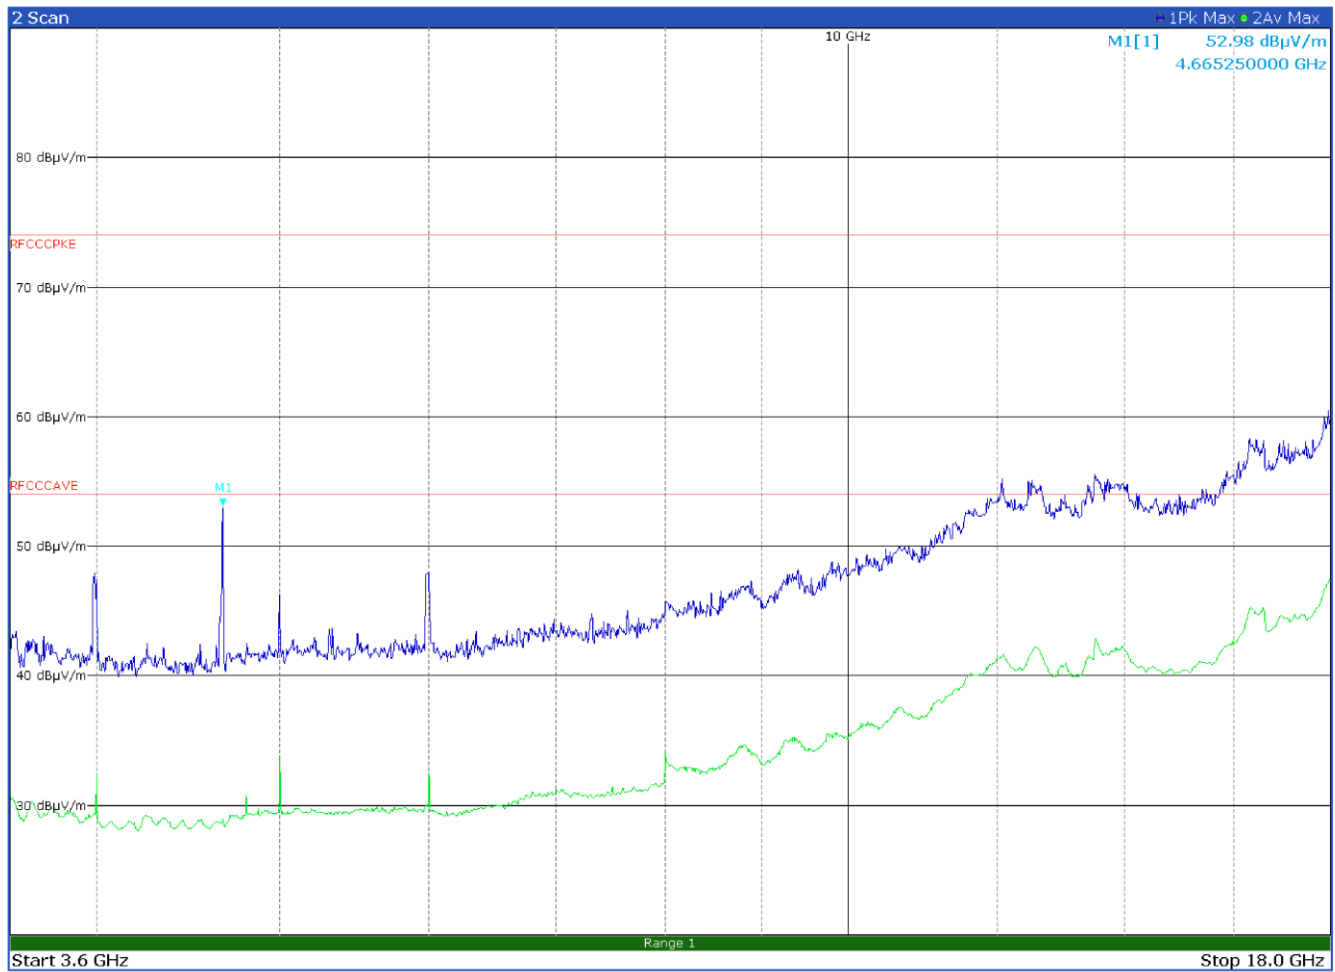

Antenna in vertical polarization – No inter-modulation product founds

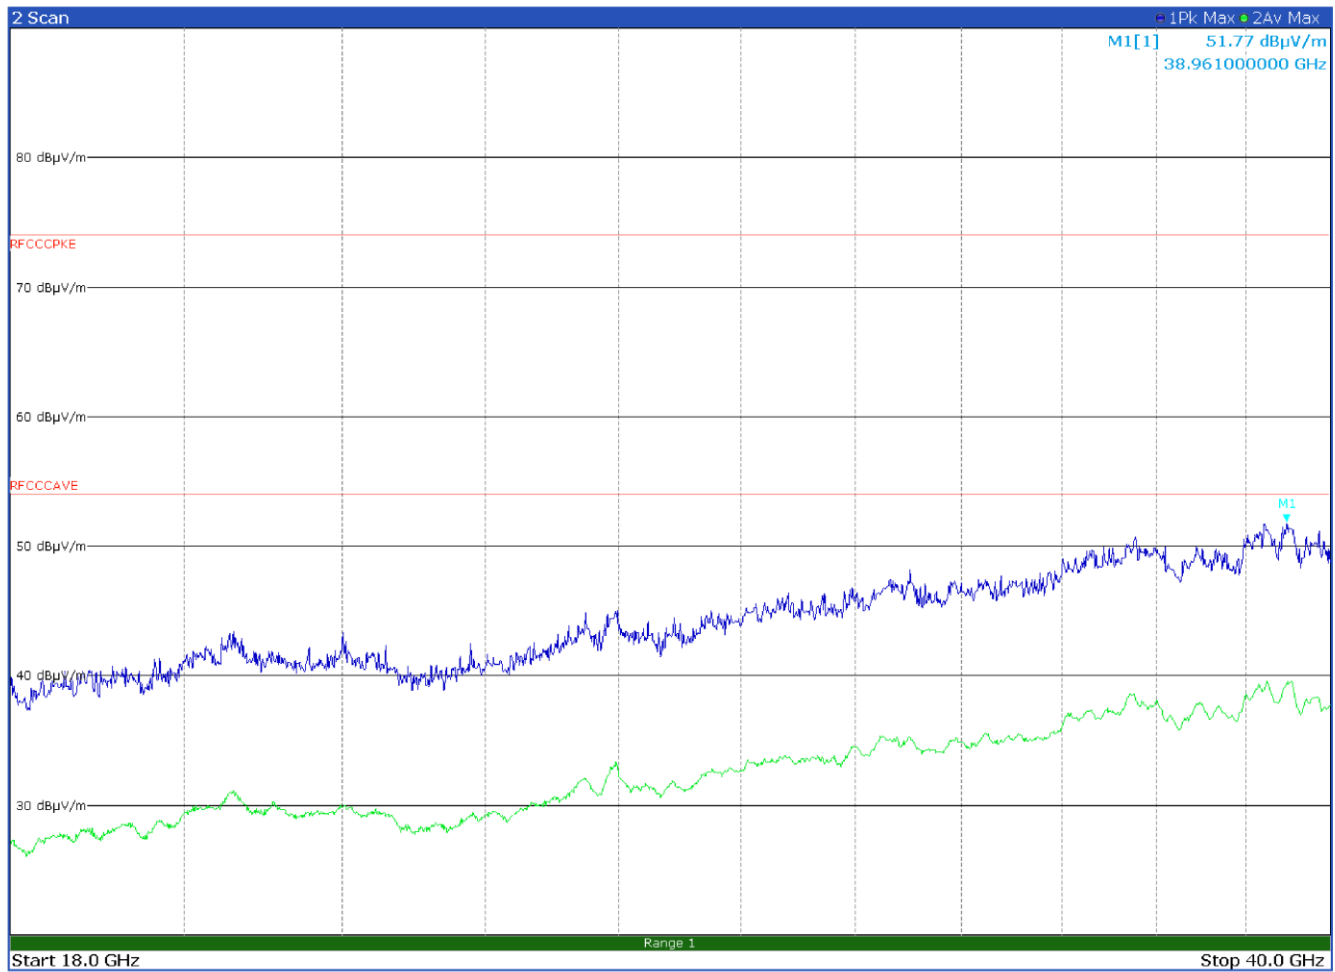


Antenna in horizontal polarization – No inter-modulation product founds

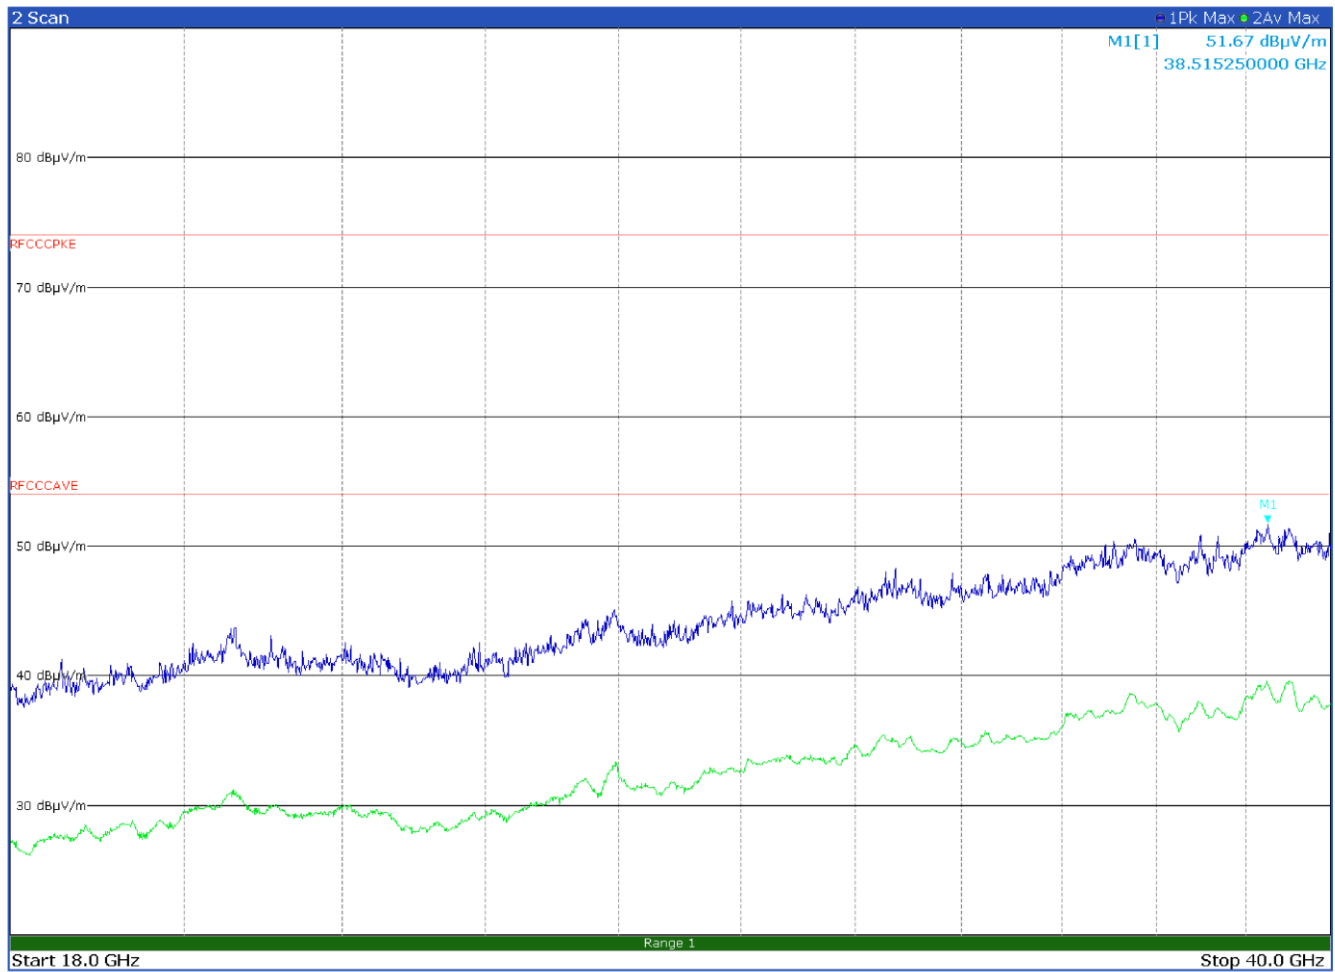


Antenna in vertical polarization – No inter-modulation product founds

8.1.5 8.1.4 Test data for LTE B25 at middle channel, WIFI at 2437 MHz and BT at low channel

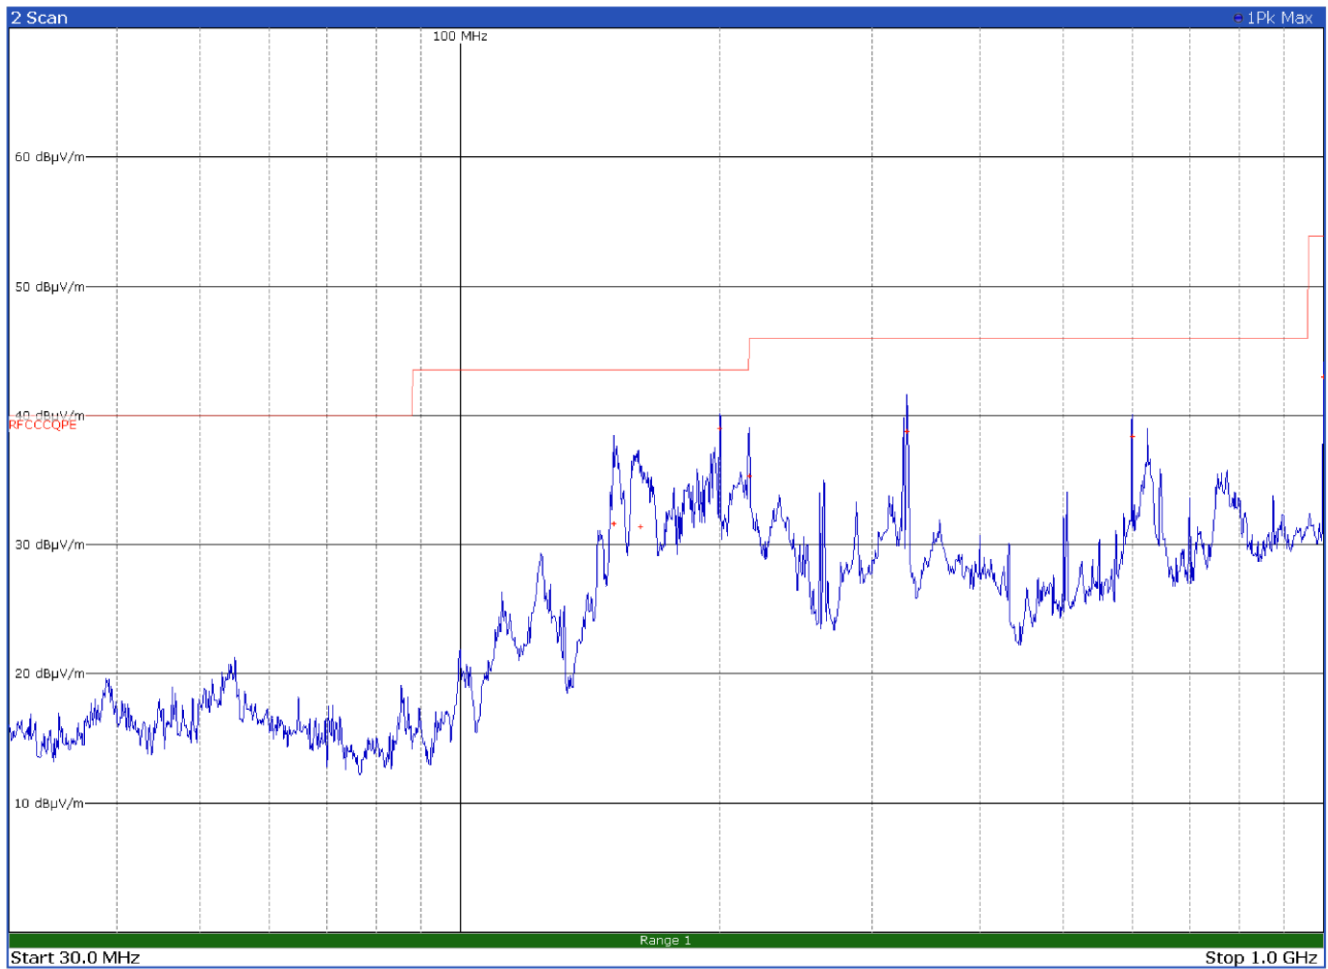


Antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
150.5700	31.7	43.5	-11.8	QP
161.9100	31.4	43.5	-12.1	QP
200.0100	39.0	43.5	-4.5	QP
216.3300	35.3	46.0	-10.7	QP
328.9800	38.8	46.0	-7.2	QP
600.0000	38.4	46.0	-7.6	QP
999.9900	43.0	53.9	-10.9	QP

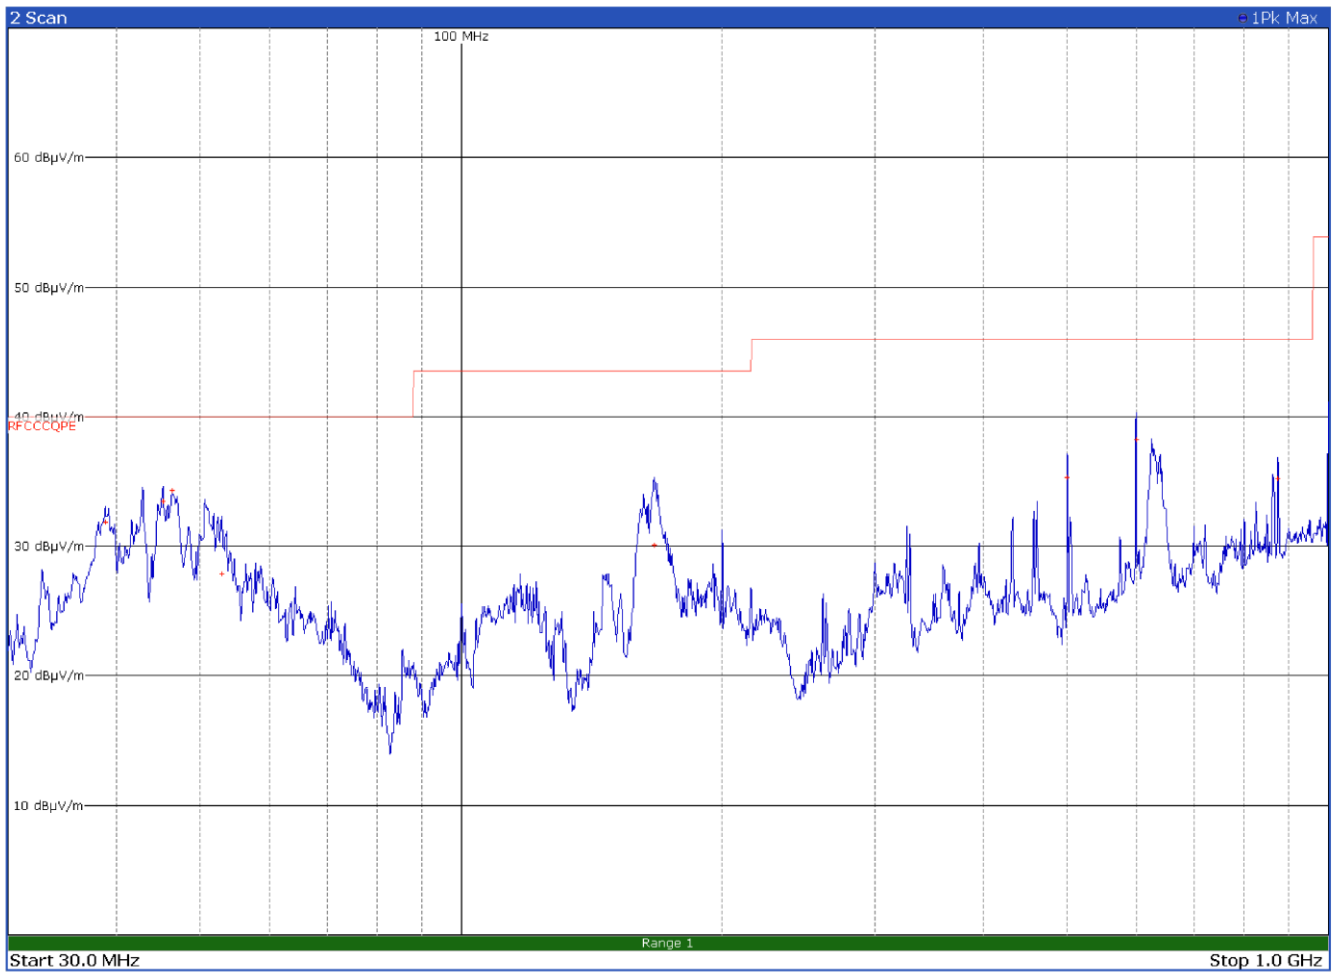


Antenna in vertical polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
38.8200	31.9	40.0	-8.1	QP
45.2400	33.5	40.0	-6.5	QP
46.3500	34.3	40.0	-5.7	QP
52.8900	27.9	40.0	-12.1	QP
166.7700	30.1	43.5	-13.4	QP
500.0100	35.4	46.0	-10.6	QP
600.0000	38.3	46.0	-7.7	QP
874.9800	35.3	46.0	-10.7	QP

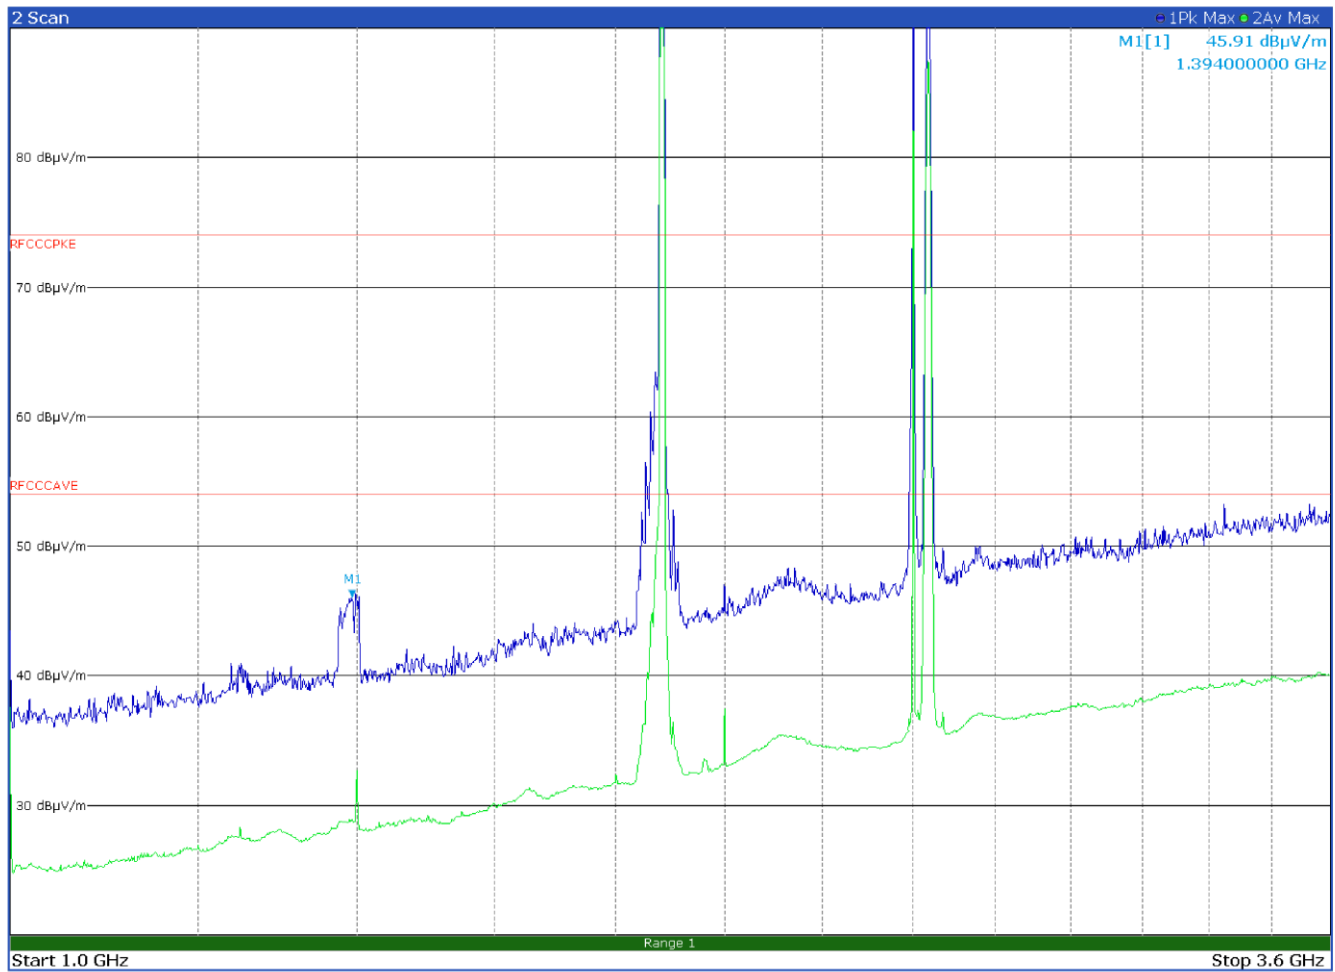


Antenna in horizontal polarization

Limit exceeded by carriers – No inter-modulation product founds

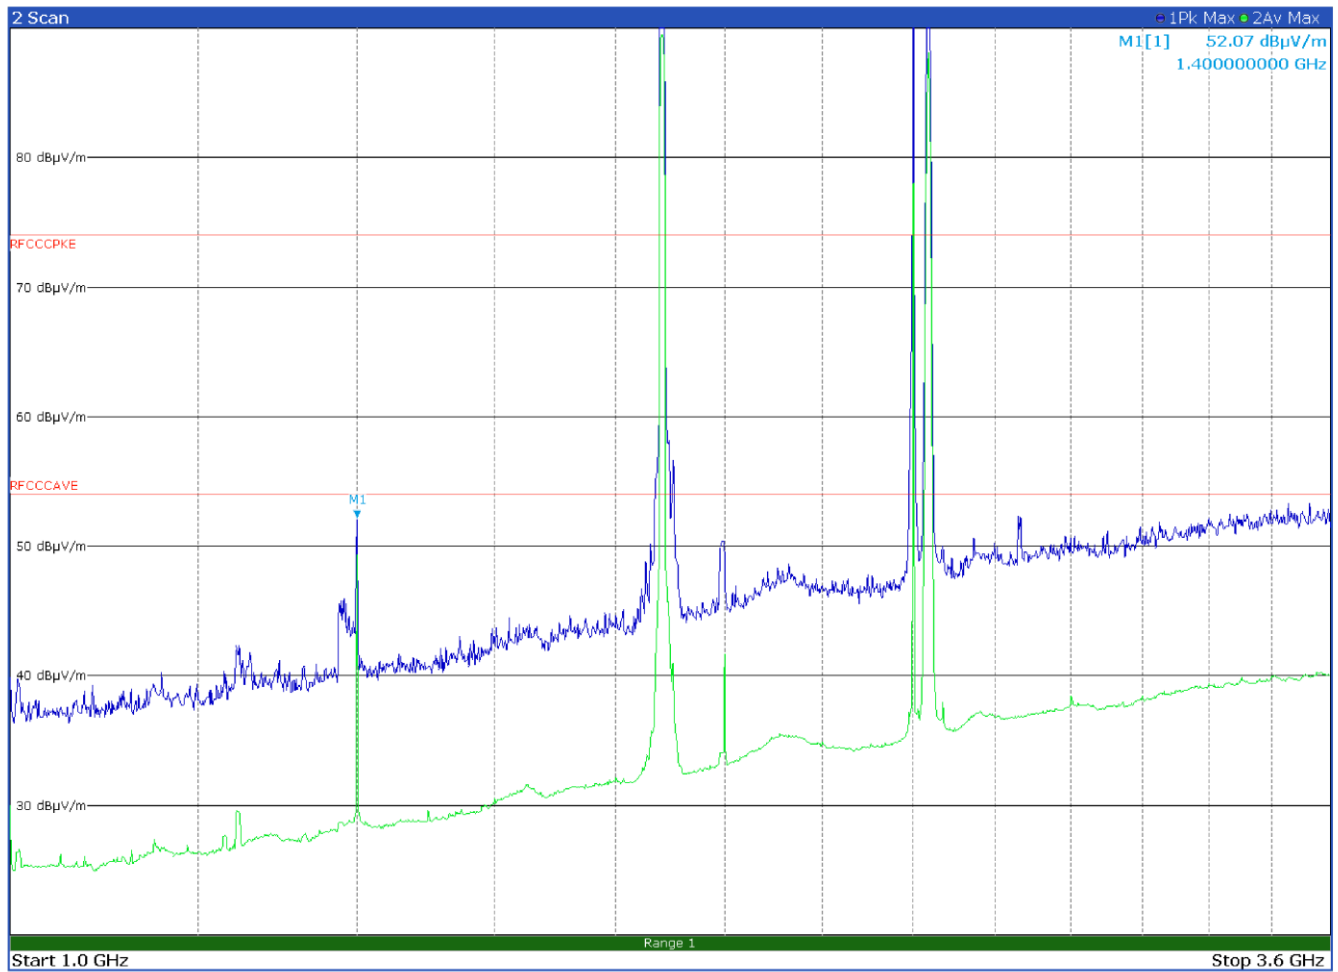


Antenna in horizontal polarization


Limit exceeded by carriers – No inter-modulation product founds

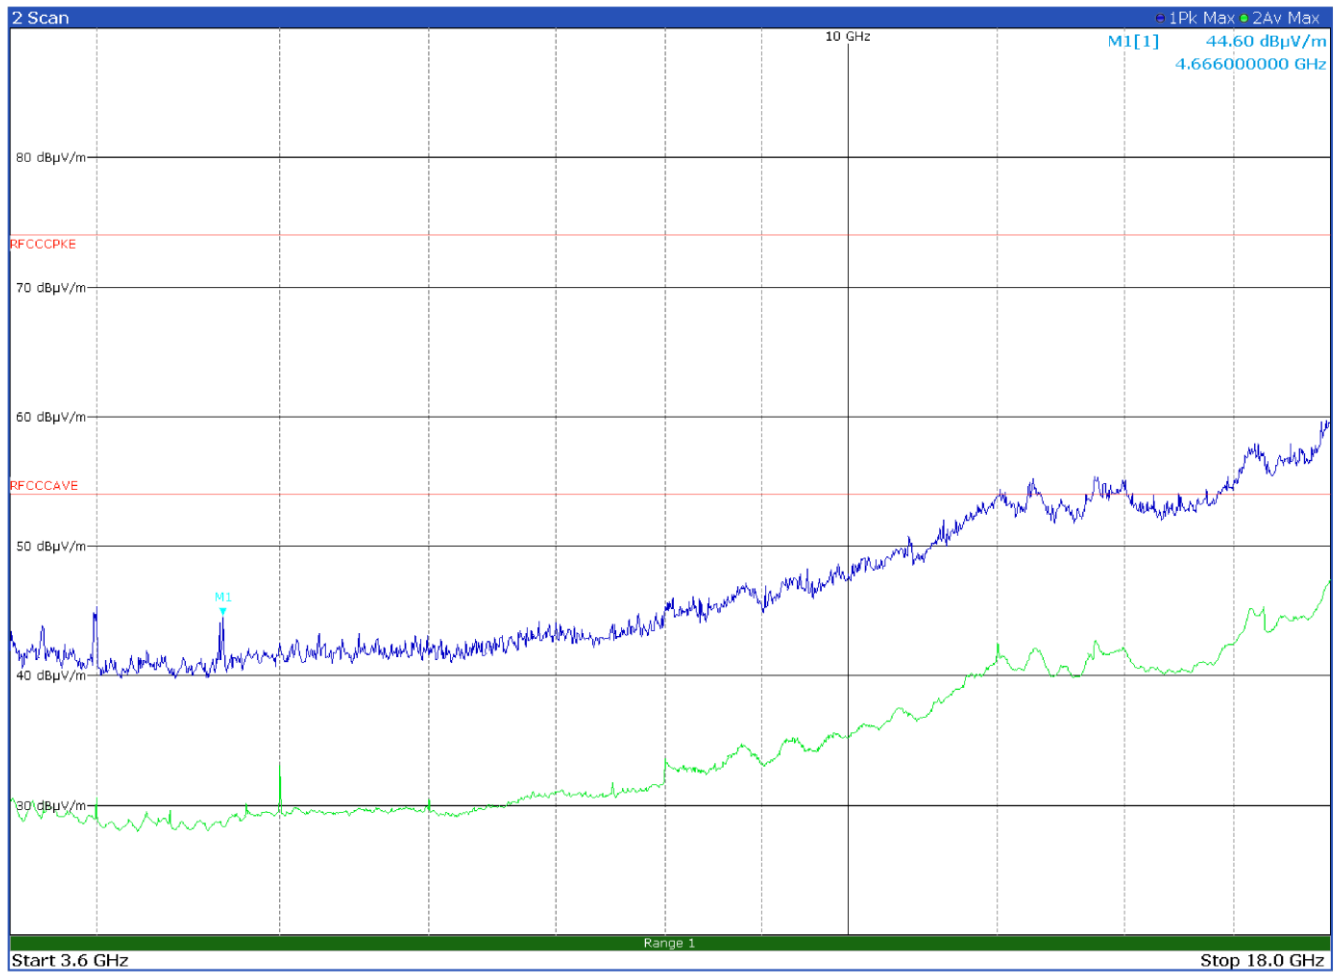


Antenna in horizontal polarization – No inter-modulation product founds

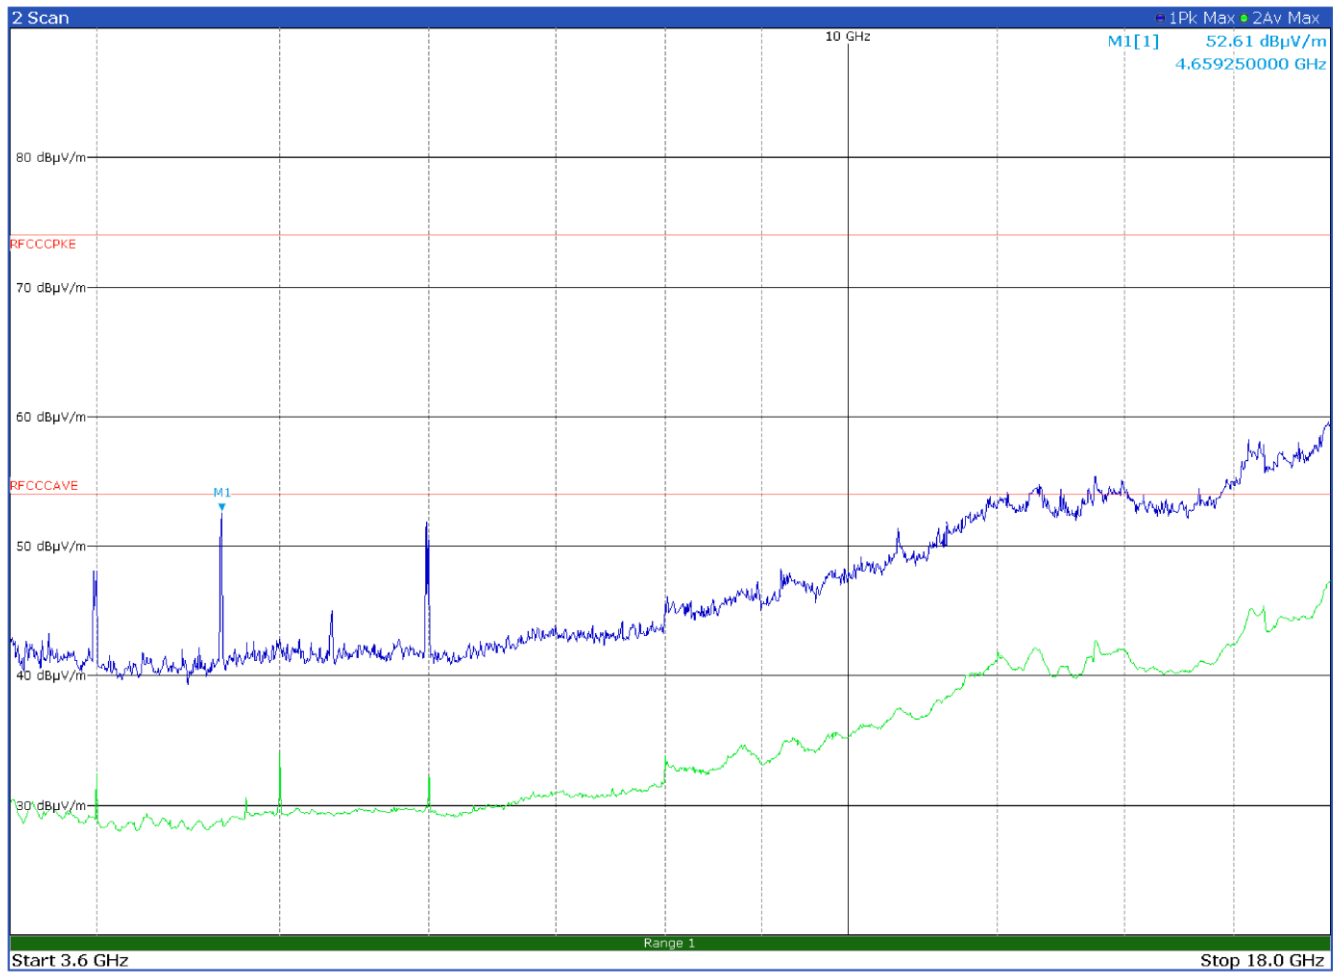

Antenna in vertical polarization – No inter-modulation product founds

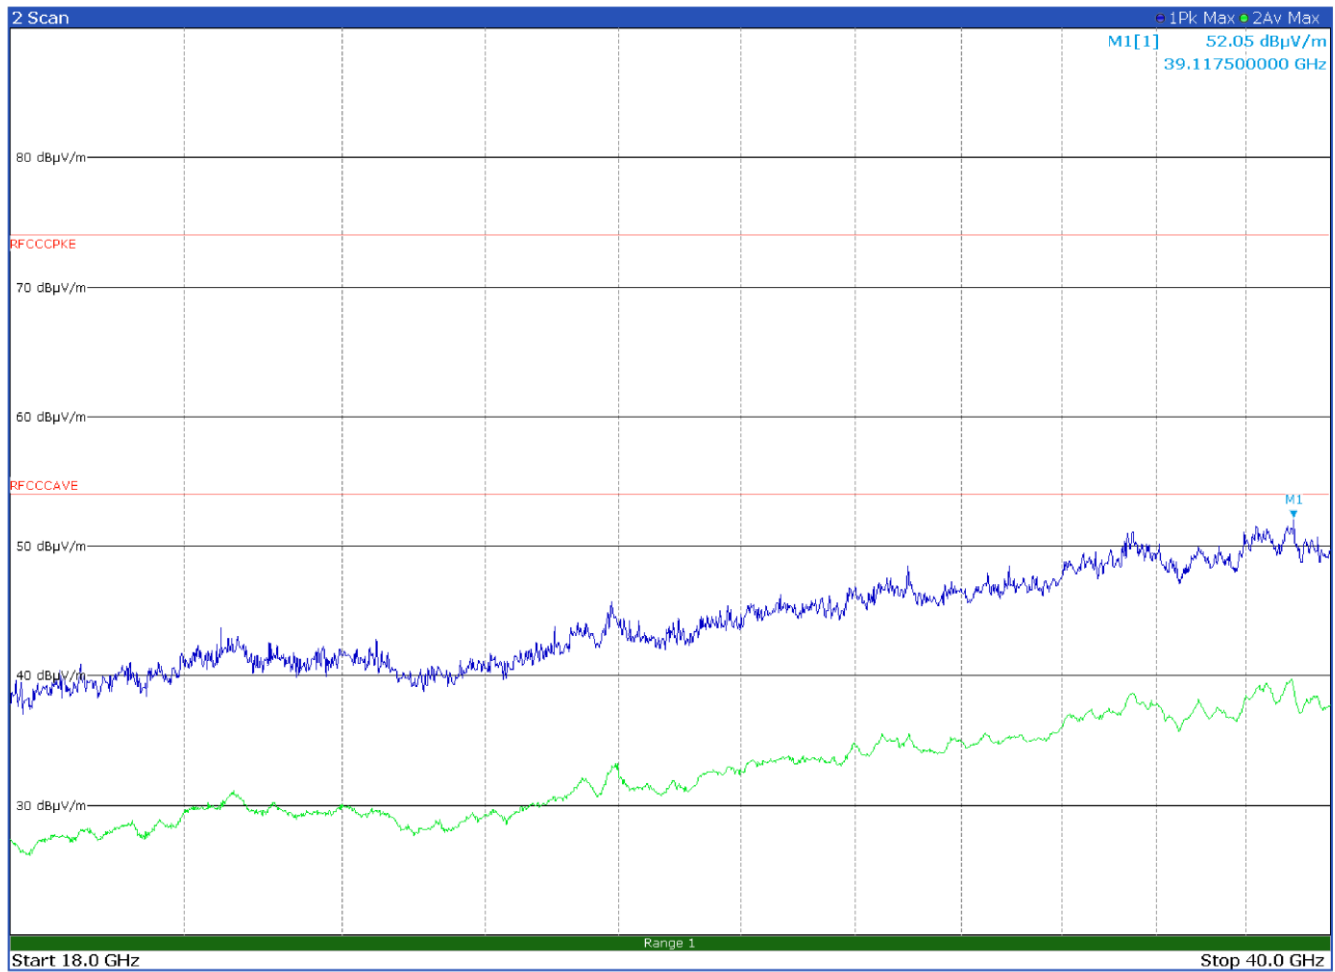


Antenna in horizontal polarization – No inter-modulation product founds

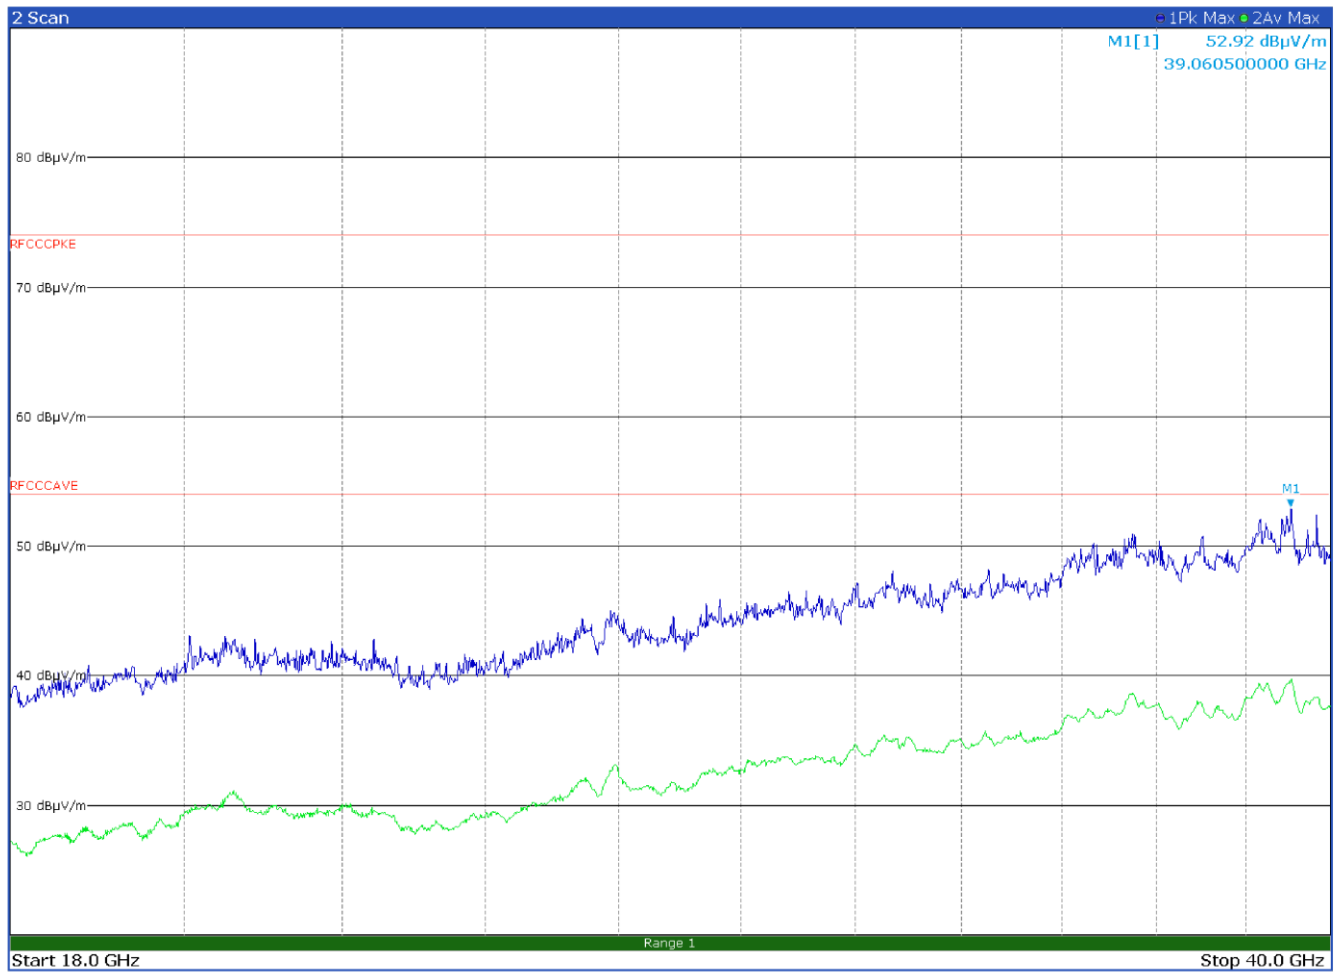


Antenna in vertical polarization – No inter-modulation product founds

8.1.6 Test data for LTE B7 at middle channel, WIFI at 2437 MHz and BT at high channel

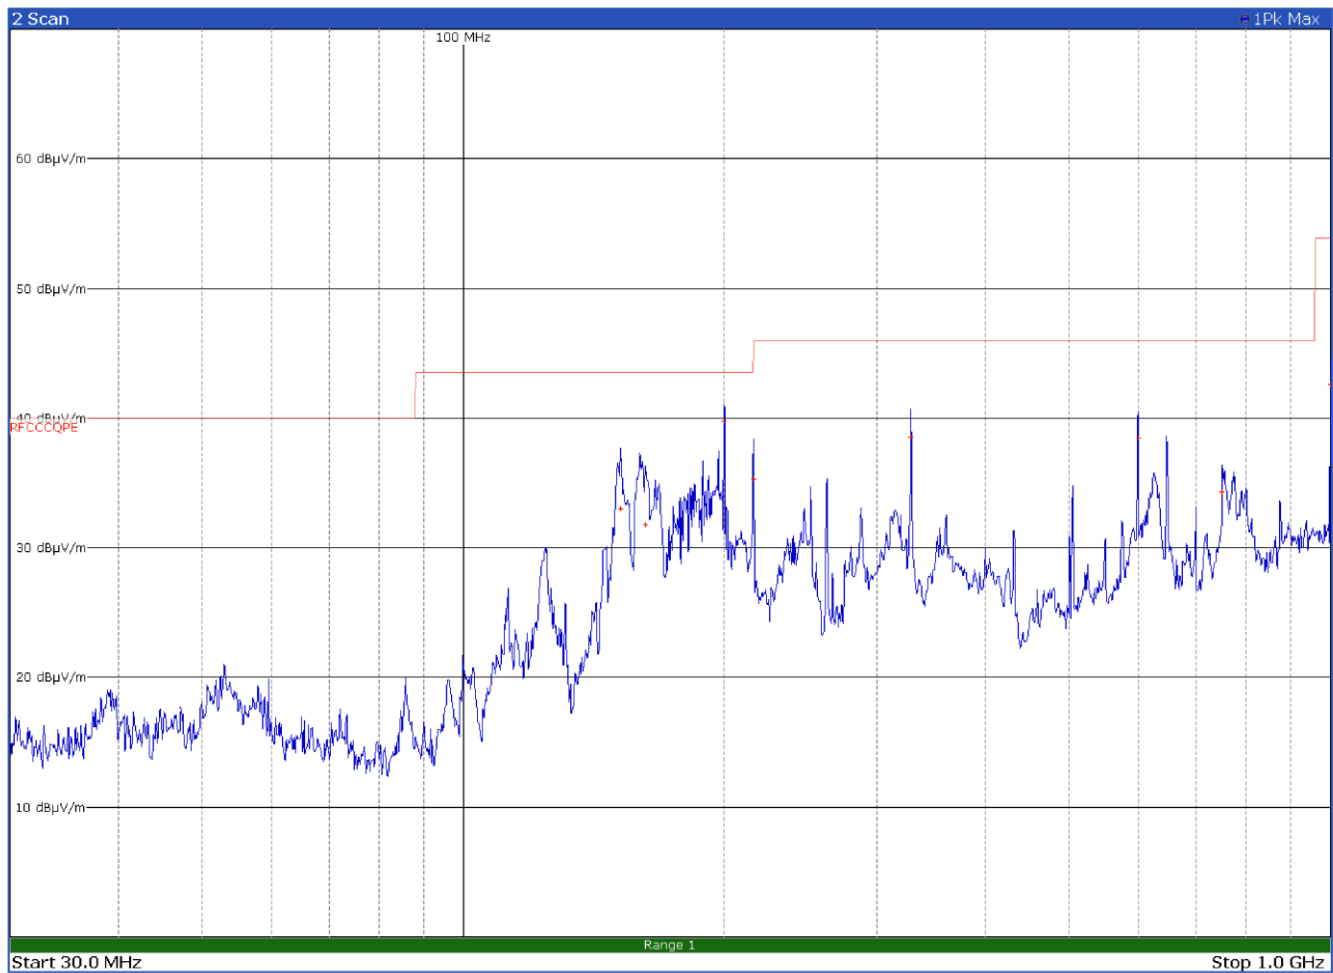


Antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
151.7400	33.0	43.5	-10.5	QP
162.1200	31.8	43.5	-11.7	QP
200.0100	39.8	43.5	-3.7	QP
216.3000	35.4	46.0	-10.6	QP
328.3800	38.6	46.0	-7.4	QP
600.0000	38.5	46.0	-7.5	QP
750.0000	34.4	46.0	-11.6	QP
999.9900	42.6	53.9	-11.3	QP

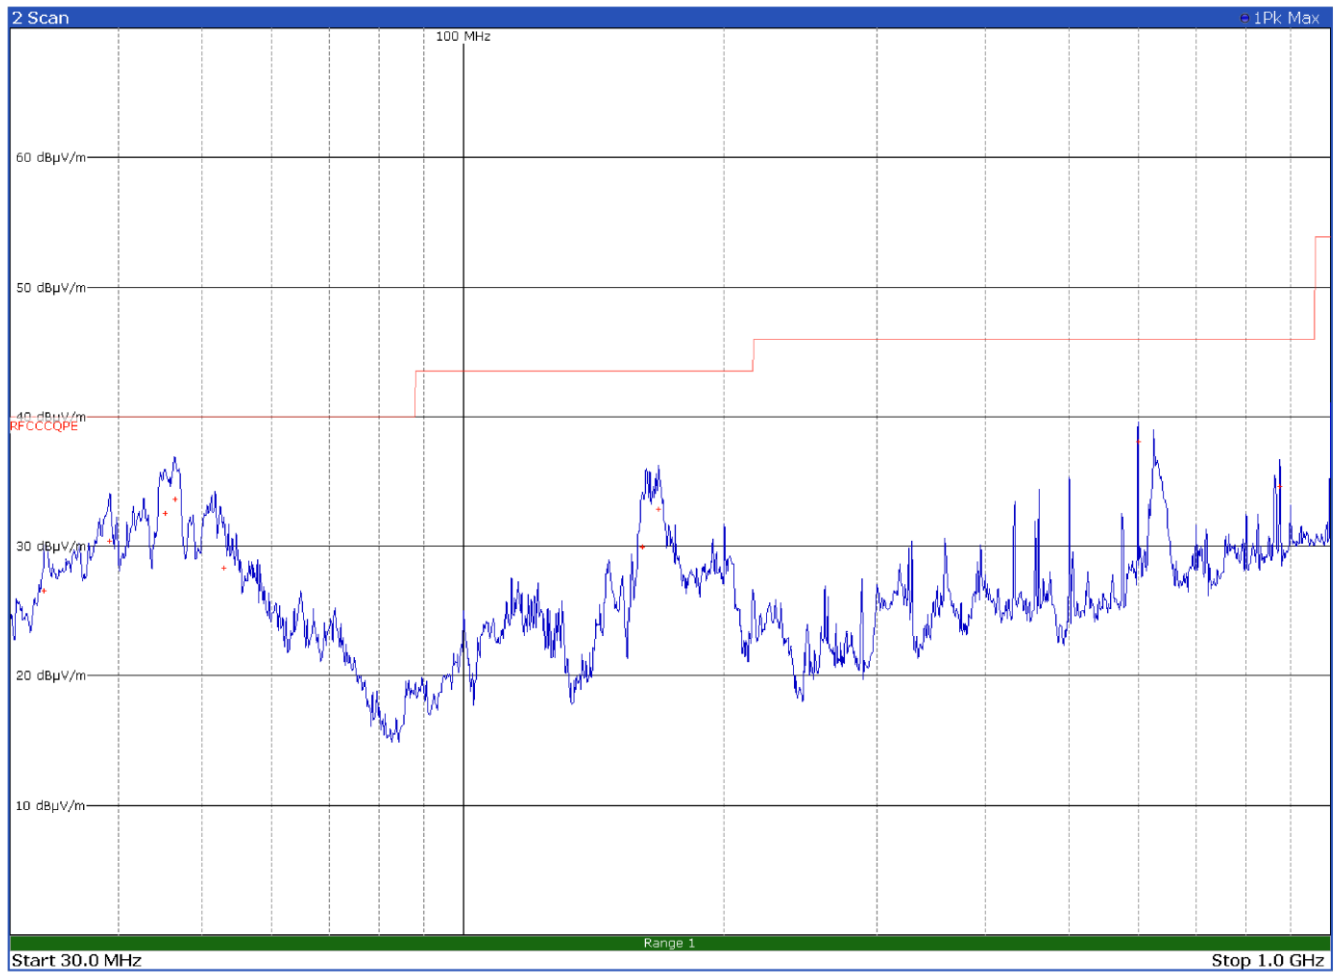


Antenna in vertical polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
32.8500	26.6	40.0	-13.4	QP
39.0900	30.5	40.0	-9.5	QP
45.3300	32.6	40.0	-7.4	QP
46.4700	33.6	40.0	-6.4	QP
52.9200	28.4	40.0	-11.6	QP
160.8900	30.0	43.5	-13.5	QP
167.9700	32.9	43.5	-10.6	QP
600.0000	38.1	46.0	-7.9	QP
874.9800	34.7	46.0	-11.3	QP

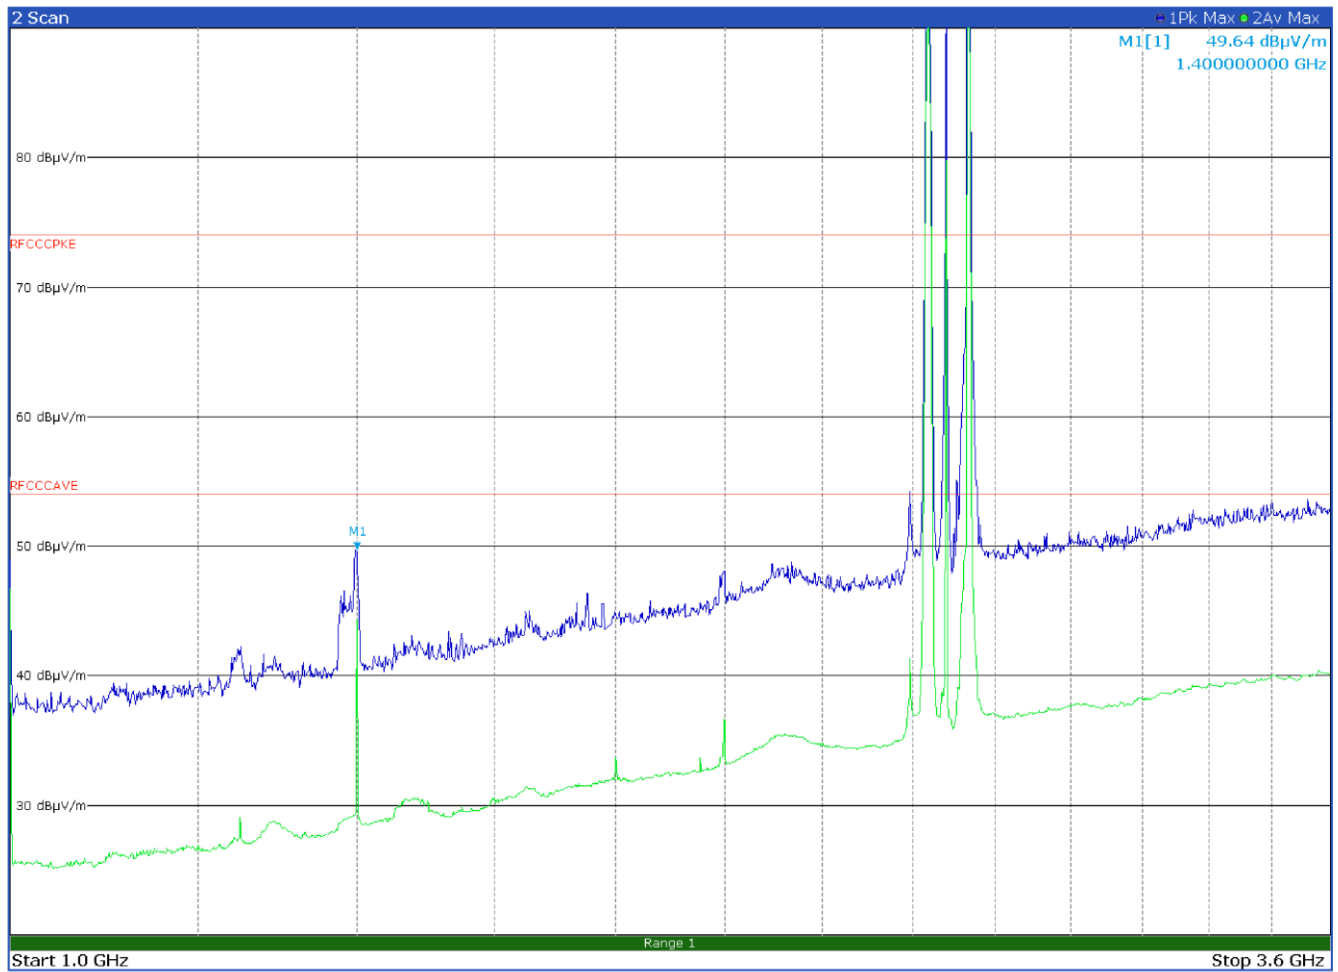


Antenna in horizontal polarization – No inter-modulation product founds

Limit exceeded by carriers

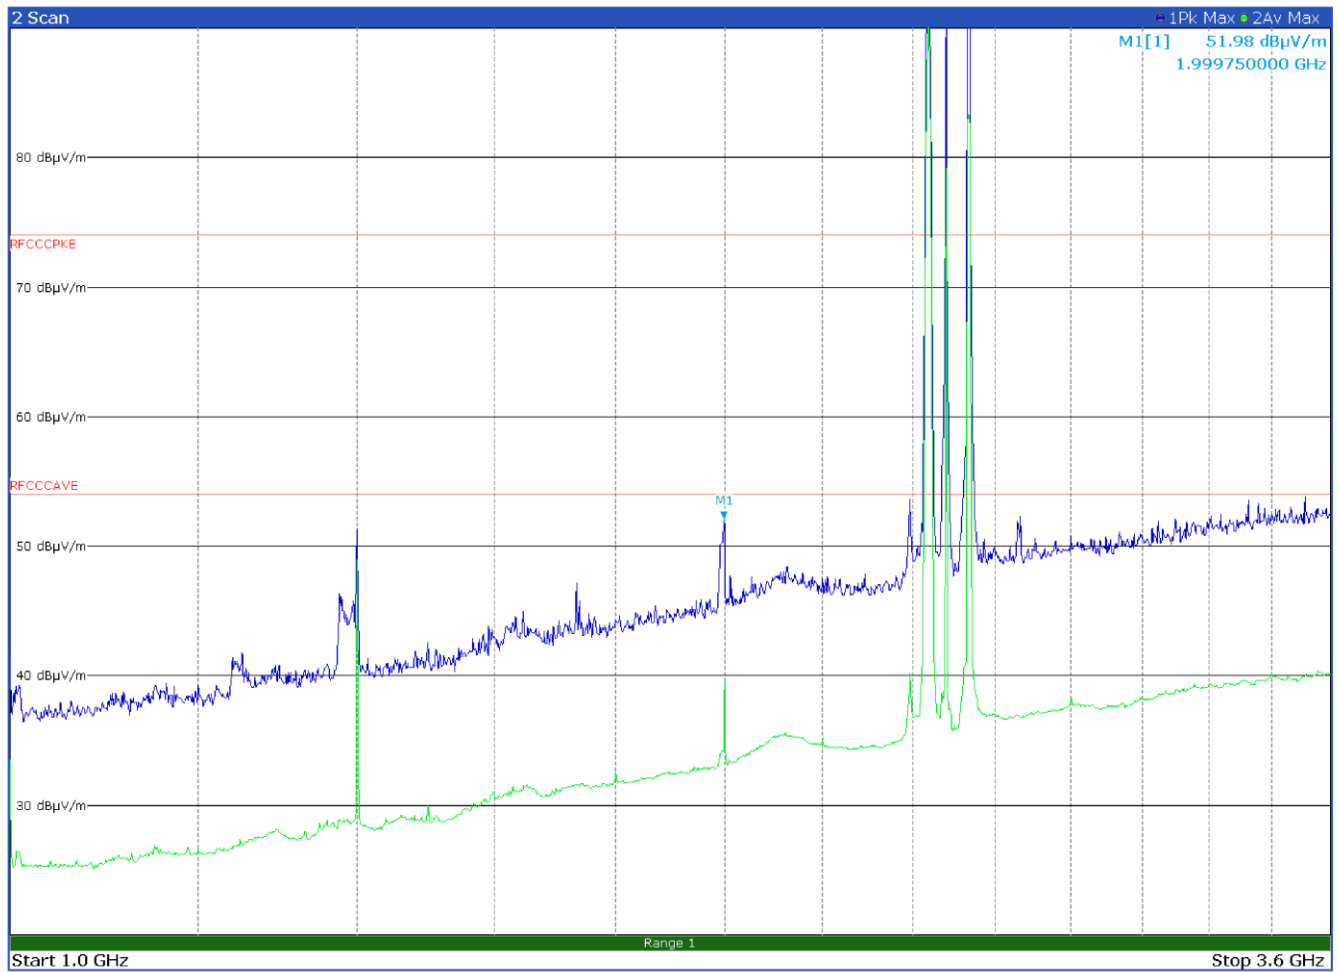


Antenna in vertical polarization – No inter-modulation product founds


Limit exceeded by carriers

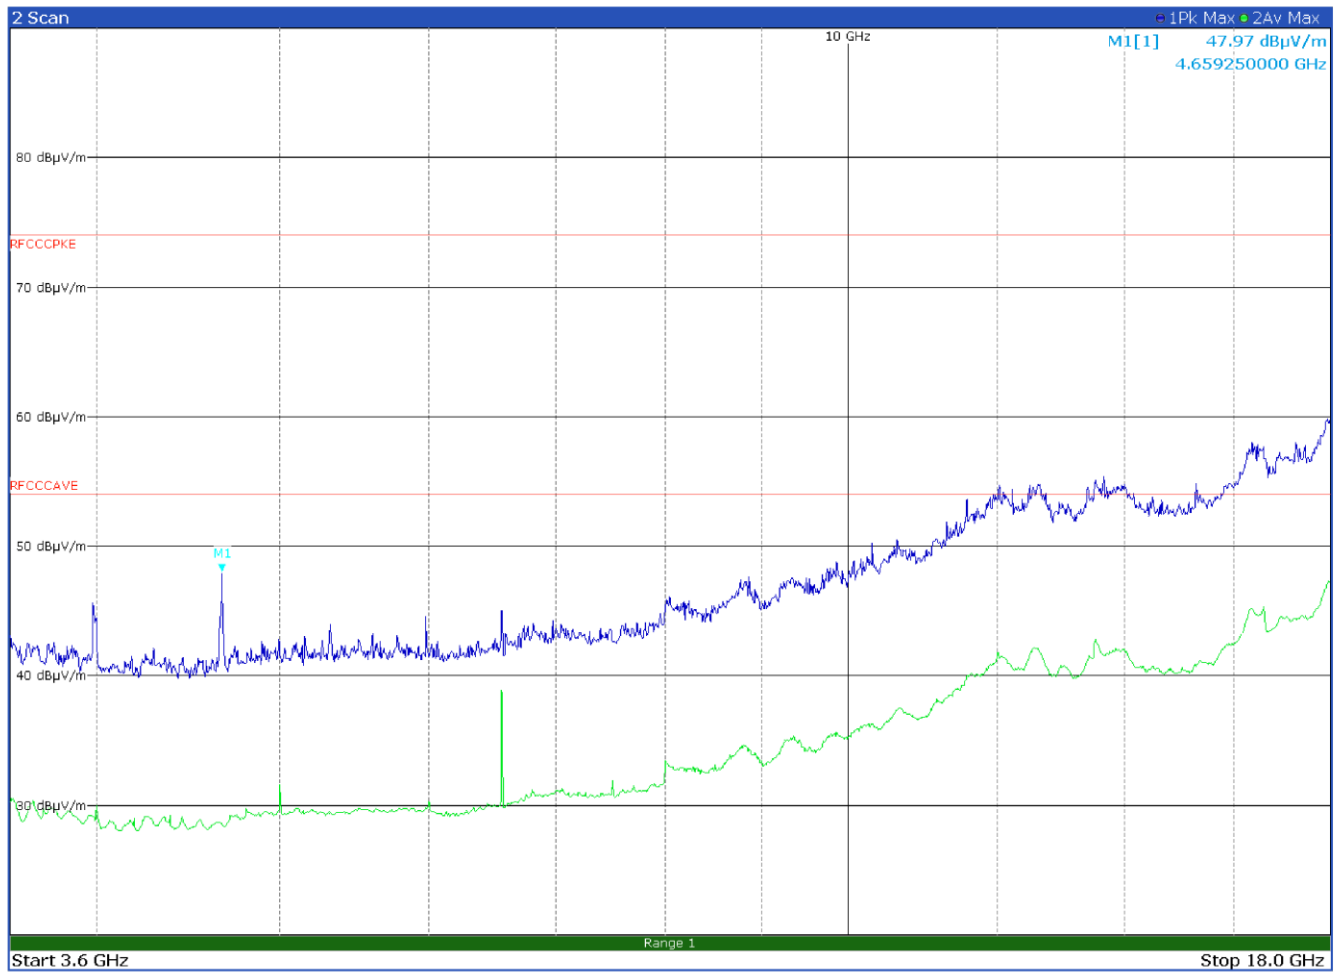


Antenna in horizontal polarization – No inter-modulation product founds

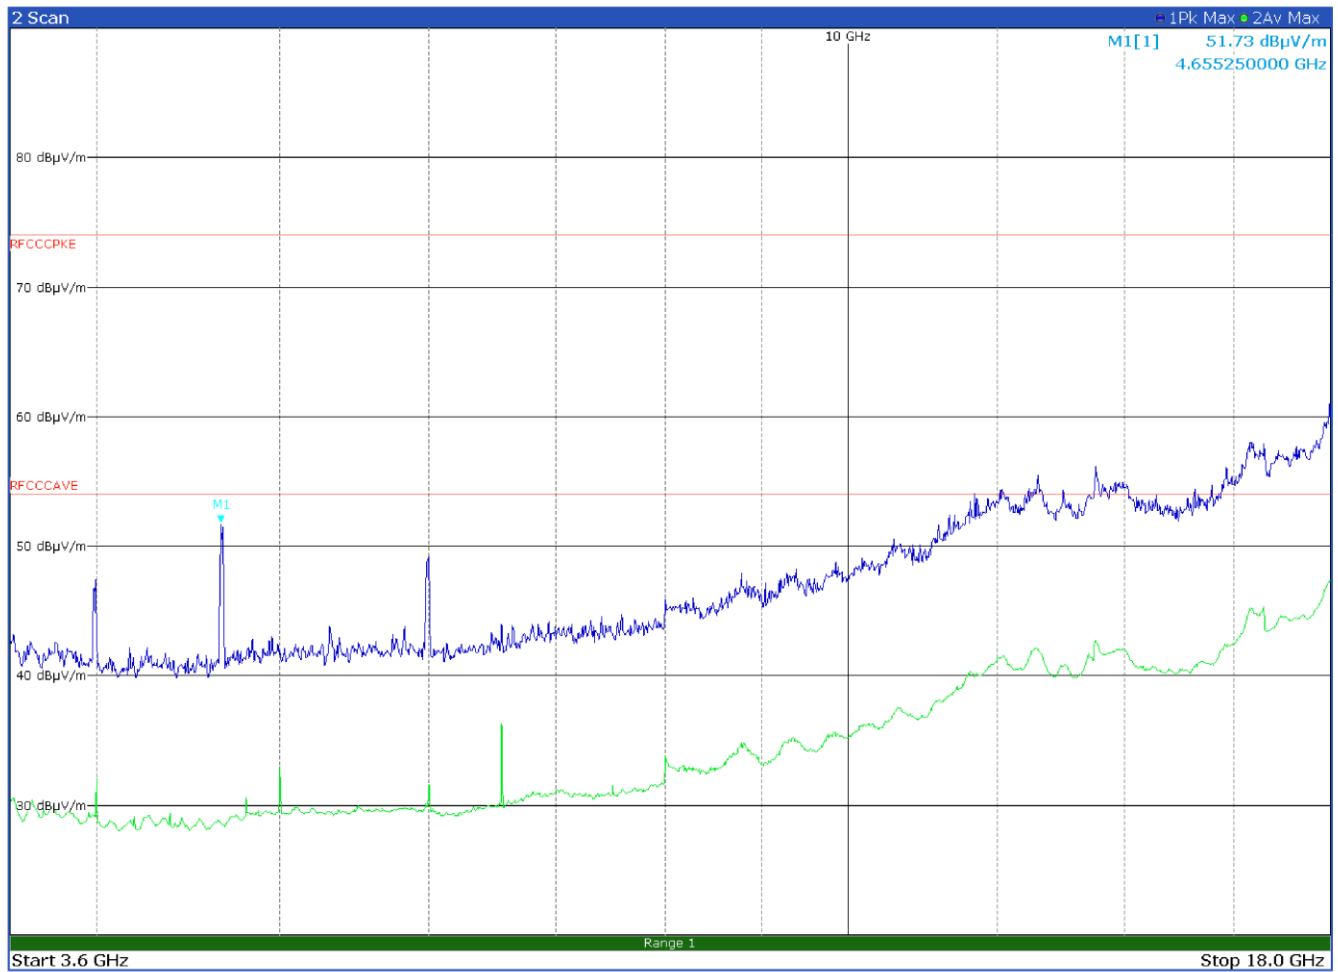

Antenna in vertical polarization – No inter-modulation product founds

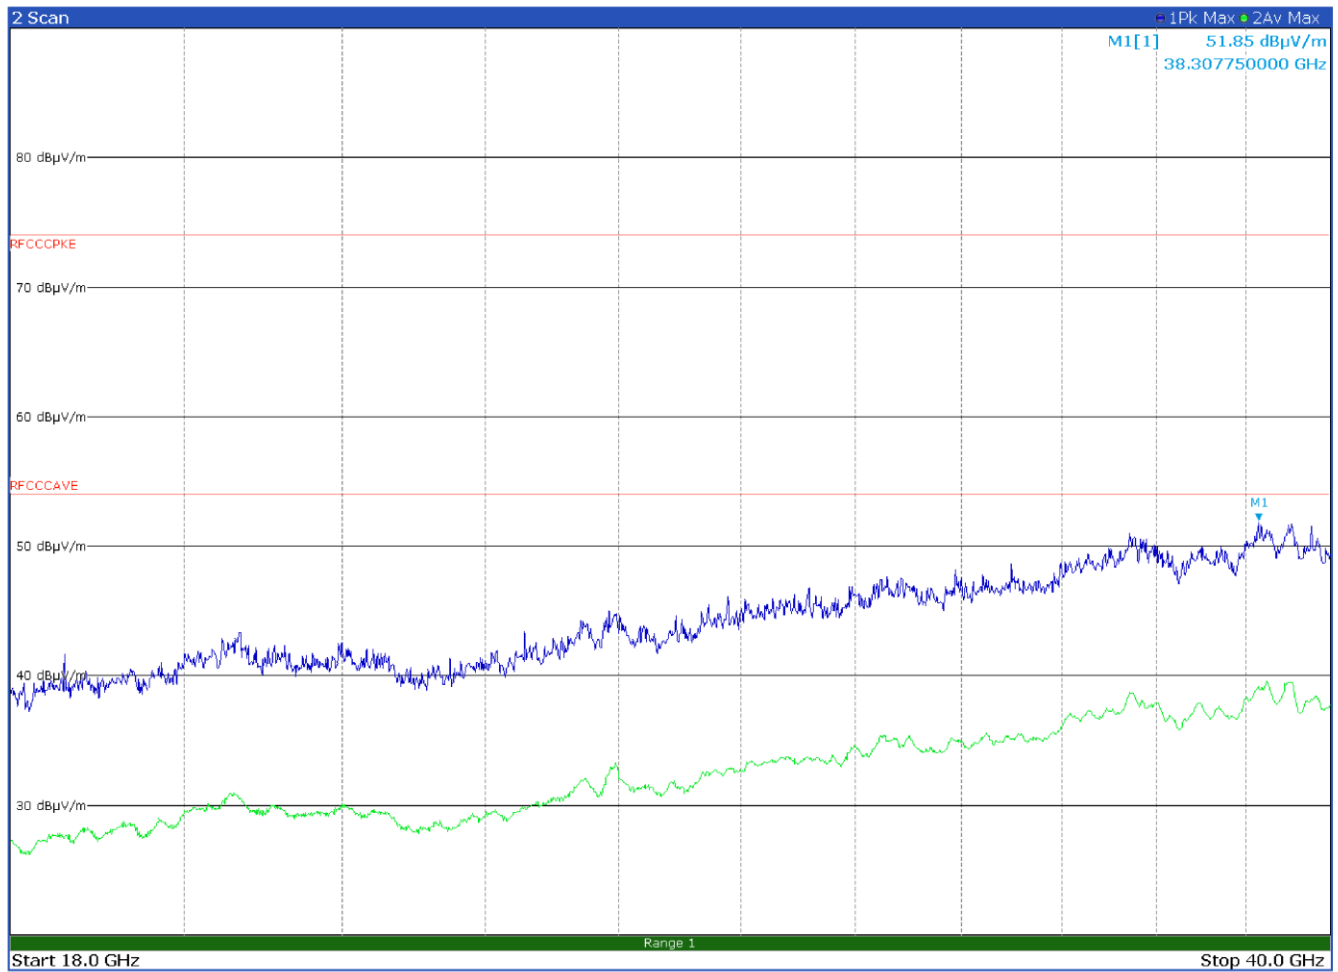


Antenna in horizontal polarization – No inter-modulation product founds

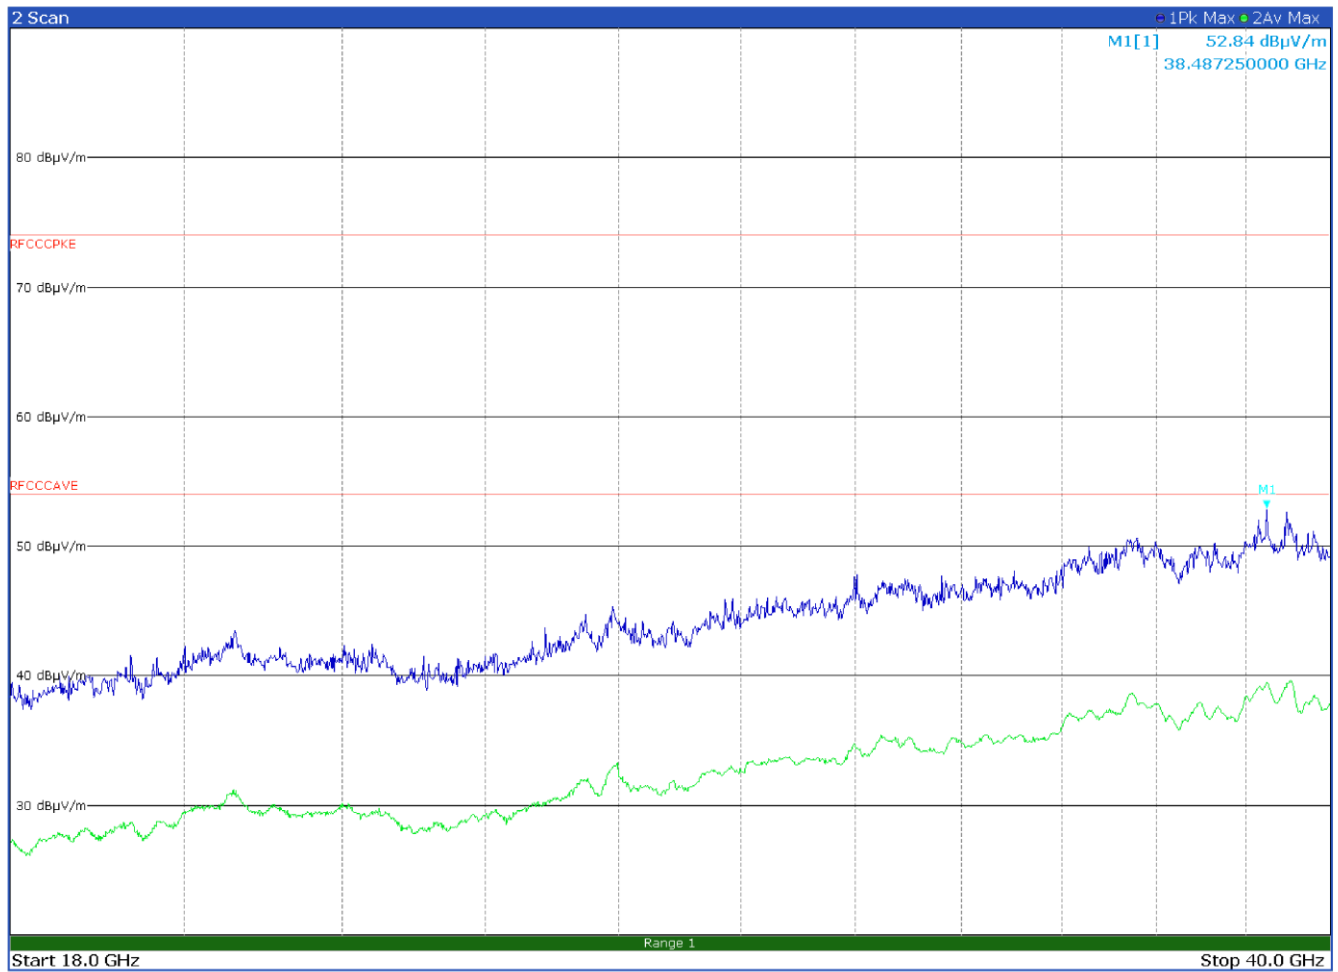

Antenna in vertical polarization – No inter-modulation product founds


8.1.7 Test data for LTE B14 at middle channel, WIFI at 5170 MHz and BT at low channel

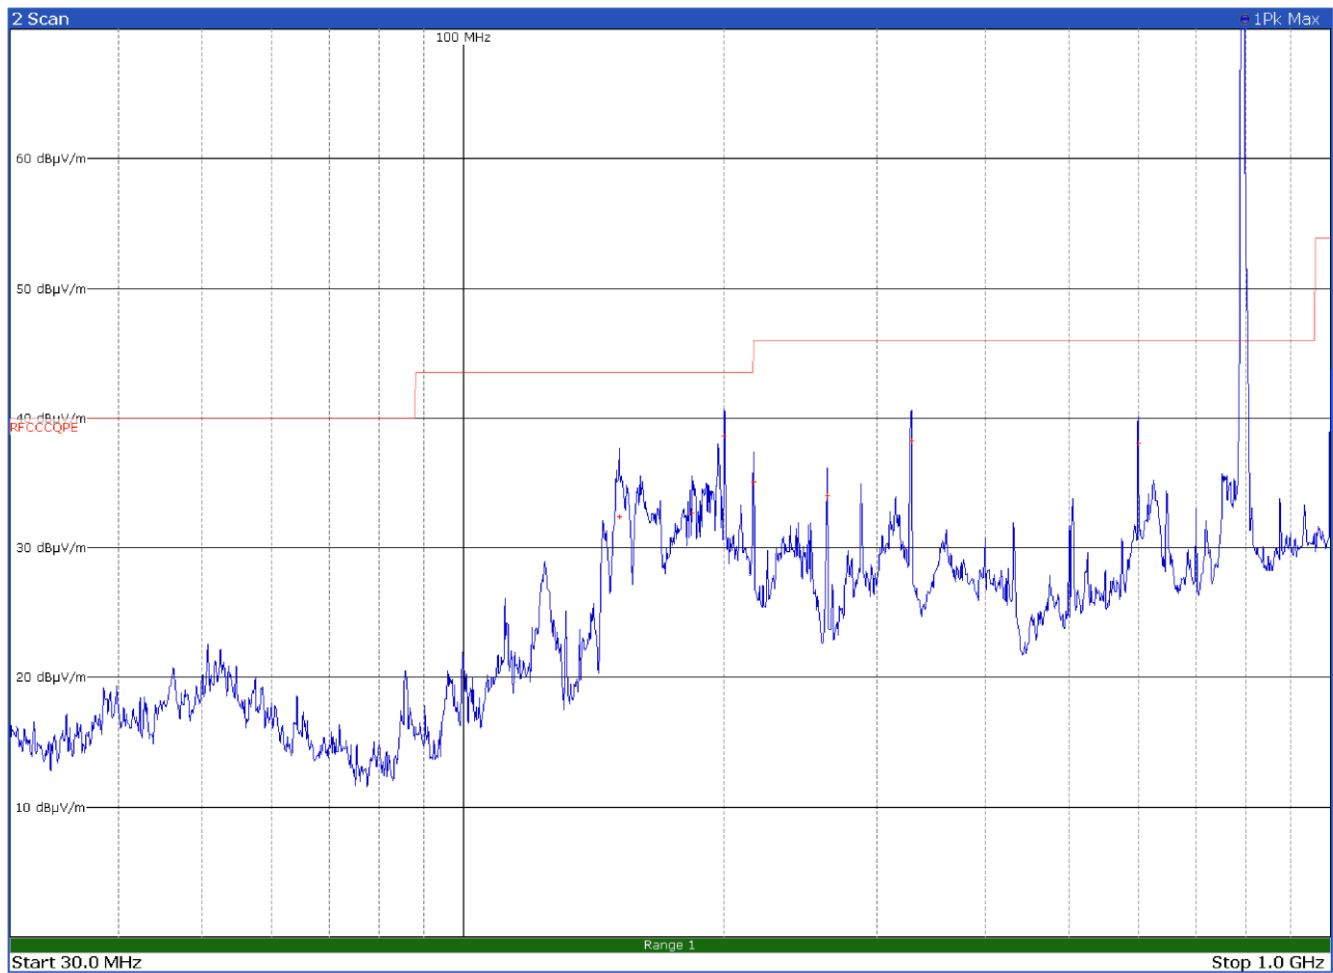

Antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
151.2600	32.4	43.5	-11.1	QP
183.6000	32.8	43.5	-10.7	QP
200.0100	38.7	43.5	-4.8	QP
216.3300	35.1	46.0	-10.9	QP
262.8600	34.0	46.0	-12.0	QP
328.5900	38.3	46.0	-7.7	QP
600.0000	38.1	46.0	-7.9	QP


Limit exceeded by carriers

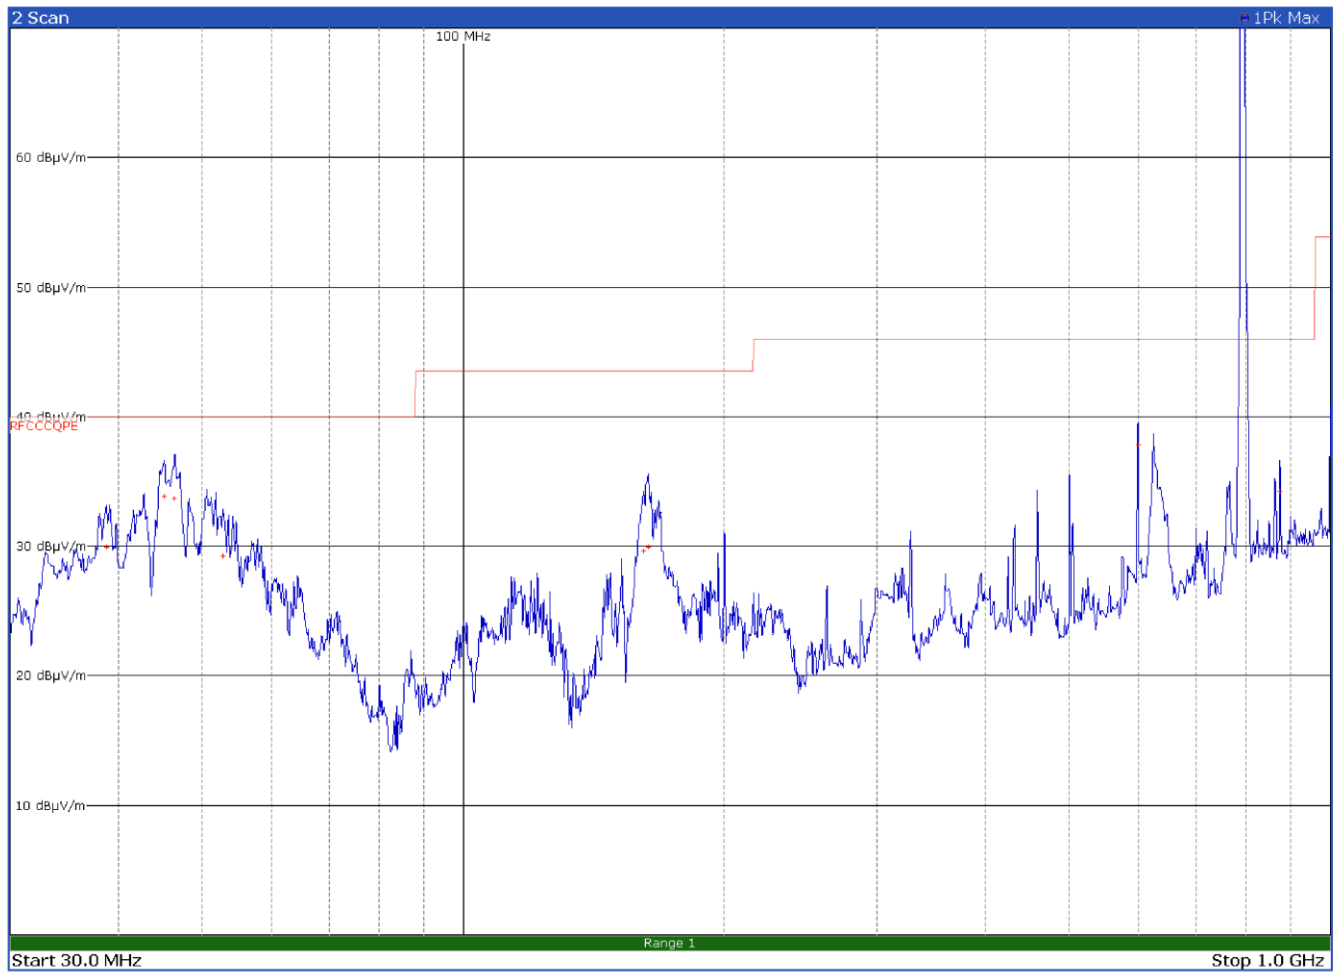

Antenna in vertical polarization


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
38.7300	30.0	40.0	-10.0	QP
45.2100	33.9	40.0	-6.1	QP
46.4400	33.8	40.0	-6.2	QP
52.8000	29.3	40.0	-10.7	QP
161.3700	29.6	43.5	-13.9	QP
163.3200	30.0	43.5	-13.5	QP
599.9700	37.9	46.0	-8.1	QP
874.9800	34.3	46.0	-11.7	QP

Limit exceeded by carriers

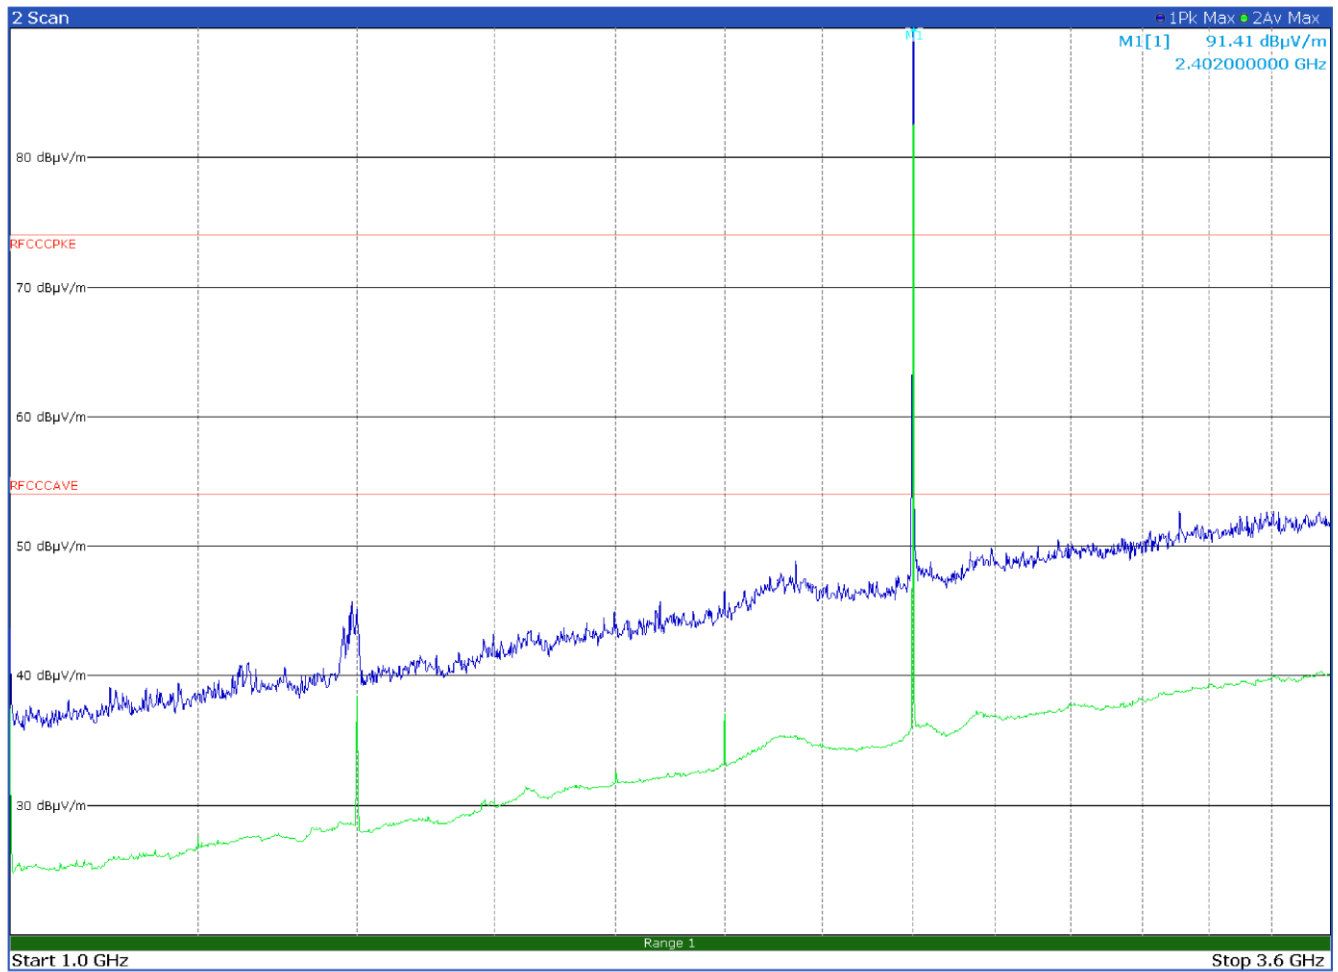

Antenna in horizontal polarization – No inter-modulation product founds

Limit exceeded by carrier

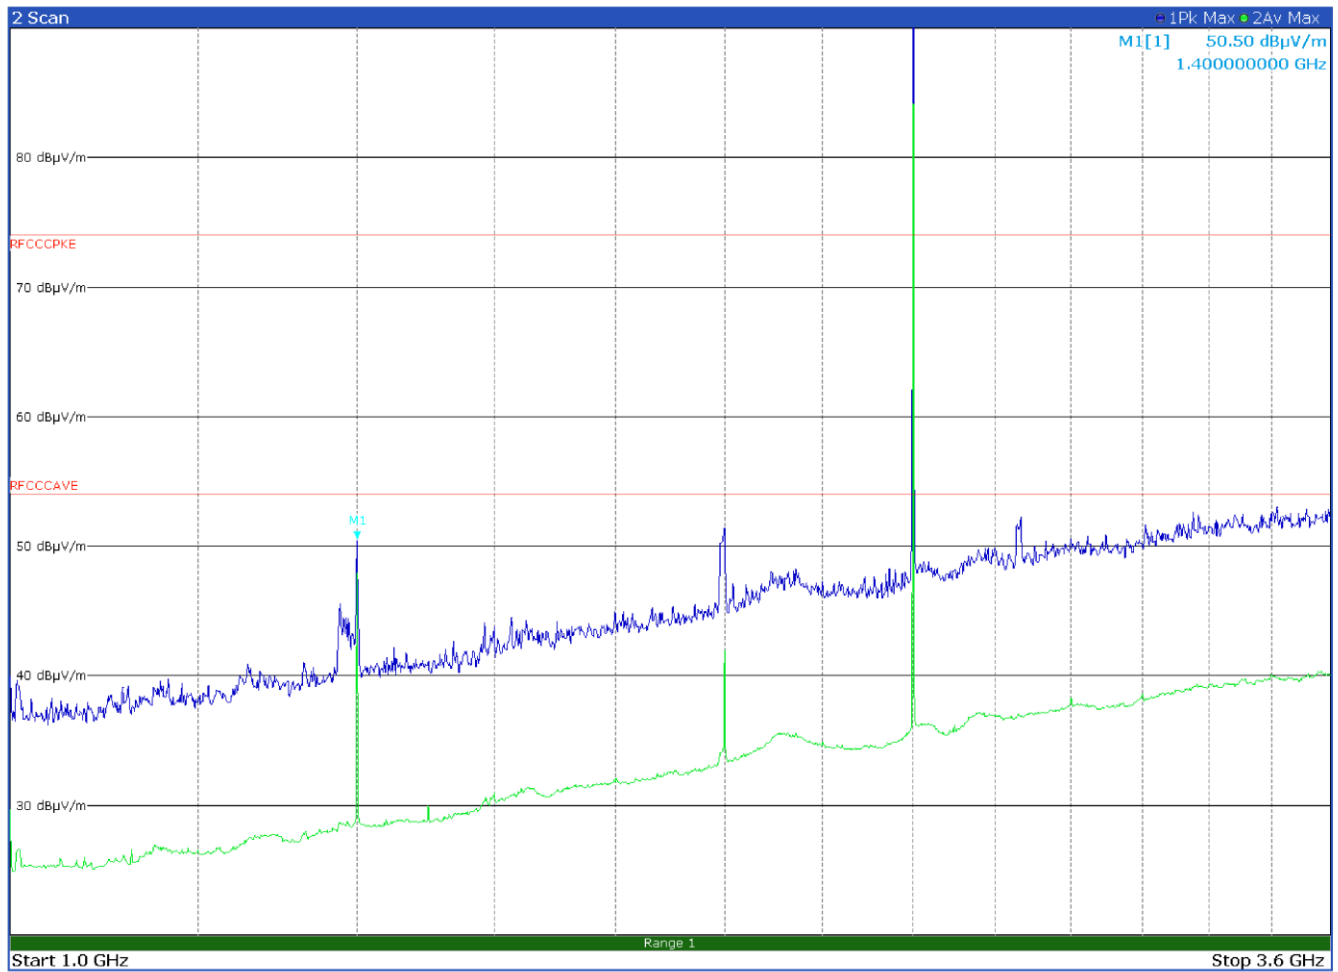

Antenna in vertical polarization – No inter-modulation product founds

Limit exceeded by carrier