



ONE WORLD • OUR APPROVAL

Wireless test report – 395016-10TRFWL

Applicant:

Eurotech SpA

Product name:

MRG1014

Model:

REGATE-10-14-35

Model variant:

--

FCC ID:

UKMMRG1014

IC Registration number:

21442-MRG1014

Specifications:

- ◆ **FCC 47 CFR Part 15 Subpart C, §15.209**
Radiated emission limits; general requirements.
- ◆ **RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9**
Transmitter Emission Limits

Date of issue: June 23, 2020

Tested by
(name, function and signature) **P. Barbieri**

(project handler) Signature:

Reviewed by
(name, function and signature) **D. Guarnone**

(verifier) Signature:

This test report may not be partially reproduced, except with the prior written permission of Nemko SpA

The test report merely corresponds to the tested sample.

The phase of sampling / collection of equipment under test is carried out by the customer.



Test location(s)

Company name	Nemko Spa
Address	Via del Carroccio, 4
City	Biassono
Province	MB
Postal code	20853
Country	Italy
Telephone	+39 039 220 12 01
Facsimile	+39 039 220 12 21
Website	www.nemko.com
Site number	FCC: 682159; IC: 9109A (10 m semi anechoic chamber)

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Spa ISO/IEC 17025 accreditation.

Copyright notification

Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Test methods.....	4
1.4 Statement of compliance	4
1.5 Exclusions	4
1.6 Test report revision history	4
Section 2. Summary of test results.....	5
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
2.2 ISED RSS-GEN, Issue 5, test results	5
Section 3. Equipment under test (EUT) details	6
3.1 Sample information.....	6
3.2 EUT information	6
3.3 Technical information	6
3.4 EUT setup diagram	7
3.5 Product description and theory of operation	7
3.6 EUT sub assemblies	7
3.7 EUT exercise details.....	8
Section 4. Engineering considerations.....	9
4.1 Modifications incorporated in the EUT.....	9
4.2 Technical judgment.....	9
4.3 Deviations from laboratory tests procedures.....	9
Section 5. Test conditions.....	10
5.1 Atmospheric conditions	10
5.2 Power supply range.....	10
Section 6. Measurement uncertainty	11
6.1 Uncertainty of measurement	11
Section 7. Test equipment	13
7.1 Test equipment list.....	13
Section 8. Testing data	14
8.1 FCC 15.209 and RSS-GEN section 8.9 Radiated emission limits; general requirements.....	14
Section 9. Block diagrams of test set-ups	76
9.1 Radiated emissions set-up for frequencies below 1 GHz.....	76
9.2 Radiated emissions set-up for frequencies above 1 GHz.....	76
Section 10. Photos.....	77
10.1 Photos of the test set-up	77
10.2 Photos of the EUT.....	78



Section 1. Report summary

1.1 Applicant and manufacturer

Company name	Eurotech SpA
Address	Via Fratelli Solari 3/a – 33020 Amaro (UD) – Italy

1.2 Test specifications

FCC 47 CFR Part 15 Subpart C, §15.209 RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9	Radiated emission limits; general requirements. Transmitter Emission Limits for Licence-Exempt Radio Apparatus
---	---

1.3 Test methods

ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
-------------------	--

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.5 below. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.5 Exclusions

As per quote, the purpose of this report is verification of transmitters colocation. Only inter-modulation products within restricted bands were assessed, other requirements were excluded from the scope of this report.

1.6 Test report revision history

Revision #	Date of issue	Details of changes made to test report
395016-10TRFWL	June 23, 2020	Original report issued

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.209	Radiated emission limits; general requirements.	Pass

2.2 ISED RSS-GEN, Issue 5, test results

Part	Test description	Verdict
8.9	Transmitter Emission Limits for Licence-Exempt Radio Apparatus	Pass

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	April 23, 2020
Nemko sample ID number	395016-1/1

3.2 EUT information

Product name	MRG1014
Model	REGATE 10-14-35
Model variant	--
Serial number	395016-1/1 (Number assigned by Nemko Spa)

3.3 Technical information

RSS number and Issue number	RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9												
Frequency band	WIFI/ BT/BLE:2400–2483.5 MHz band WIFI:5150–5850 MHz bands LTE North America Bands												
Transmitter spurious, dB μ V/m @3 m	48.5 at 4.874 GHz												
Type of modulation	GFSK, 802.11a/n, OFDM												
Emission classification (F1D, G1D, D1D)	F1D, W7D												
EUT power requirements	24 V _{DC} , via 120 V _{AC} adapter or battery												
Antenna information	<p>The EUT uses a unique antenna coupling. The following antennas are provided with the EUT.</p> <table> <thead> <tr> <th>Product Type</th> <th>Manufacturer</th> <th>Model</th> </tr> </thead> <tbody> <tr> <td>Wi-Fi/BT antenna</td> <td>Linx Technologies</td> <td>ANT-DB1-RAF-RPS</td> </tr> <tr> <td>GNSS antenna</td> <td>2J-ANTENNA</td> <td>2J4301MPGF</td> </tr> <tr> <td>Cellular antenna</td> <td>2J-ANTENNA</td> <td>2JW0124</td> </tr> </tbody> </table>	Product Type	Manufacturer	Model	Wi-Fi/BT antenna	Linx Technologies	ANT-DB1-RAF-RPS	GNSS antenna	2J-ANTENNA	2J4301MPGF	Cellular antenna	2J-ANTENNA	2JW0124
Product Type	Manufacturer	Model											
Wi-Fi/BT antenna	Linx Technologies	ANT-DB1-RAF-RPS											
GNSS antenna	2J-ANTENNA	2J4301MPGF											
Cellular antenna	2J-ANTENNA	2JW0124											

3.4 EUT setup diagram

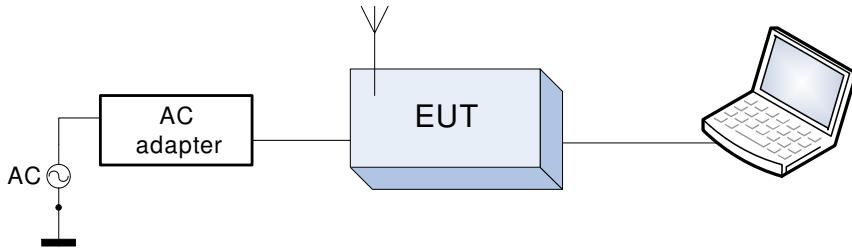


Figure 3.4-1: Setup diagram

3.5 Product description and theory of operation

The ReliaGATE 10-14 is a Multi-service IoT Gateway that has been designed to deliver LTE and 2G/3G connectivity to industrial and lightly rugged applications. Based on the NXP i.MX 8M Mini Cortex-A53 quad core processor, with up to 4GB of RAM, up to 64GB of eMMC and a user-accessible microSD slot, the ReliaGATE 10-14 is a low power gateway suitable for demanding use cases: it supports a 9 to 30V power supply with transient protection, Display Port video output, two protected and isolated RS-232/422/RS-485 serial ports, two noise and surge protected USB ports, six optoisolated digital and two isolated analog interfaces. The ReliaGATE 10-14 features a wide range of connectivity capabilities: it integrates a carrier certified LTE Cat 1 cellular modem with dual SIM support, Wi-Fi, Bluetooth 4.2/BLE, and two Gigabit Ethernet ports; an optional internal GNSS provides precise geolocation capabilities. Expansion options allow adding extra features with side modules, such as the LoRa LPWAN Gateway unit, or the DAQ unit that provides analog input and more DI/O ports. The EUT is equipped with two Telit radio module model WE866C3-P for WIFI/BT and model LE910C1-NF for 3G/LTE and GNSS.

3.6 EUT sub assemblies

Table 3.6-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number
ReliaGATE 10-14	Eurotech	REGATE-10-14-35	395016-1/1
AC adapter	Sunny	SYS1541-2424	None


3.7 EUT exercise details

EUT was set to continuously transmit mode during tests, by test software provided by client.

The EUT runs a Linux operating system which allows for the testing to be performed using engineering test tools and scripts. Communication with the EUT is via a serial console or Ethernet connection which provides a Linux command line interface for execution of the test tools/scripts. These tools/scripts configure the radio modules to enable continuous transmission with the ability to adjust modulation, frequency and output power as required.

Linux operating system version: 4.19.35-imx_4.19.35_1.0.0+ge4452f4

For WIFI, the following software installed on the PC has been used to force the EUT in TX mode (Qualcomm Radio Control Tool version 4.0.00125):

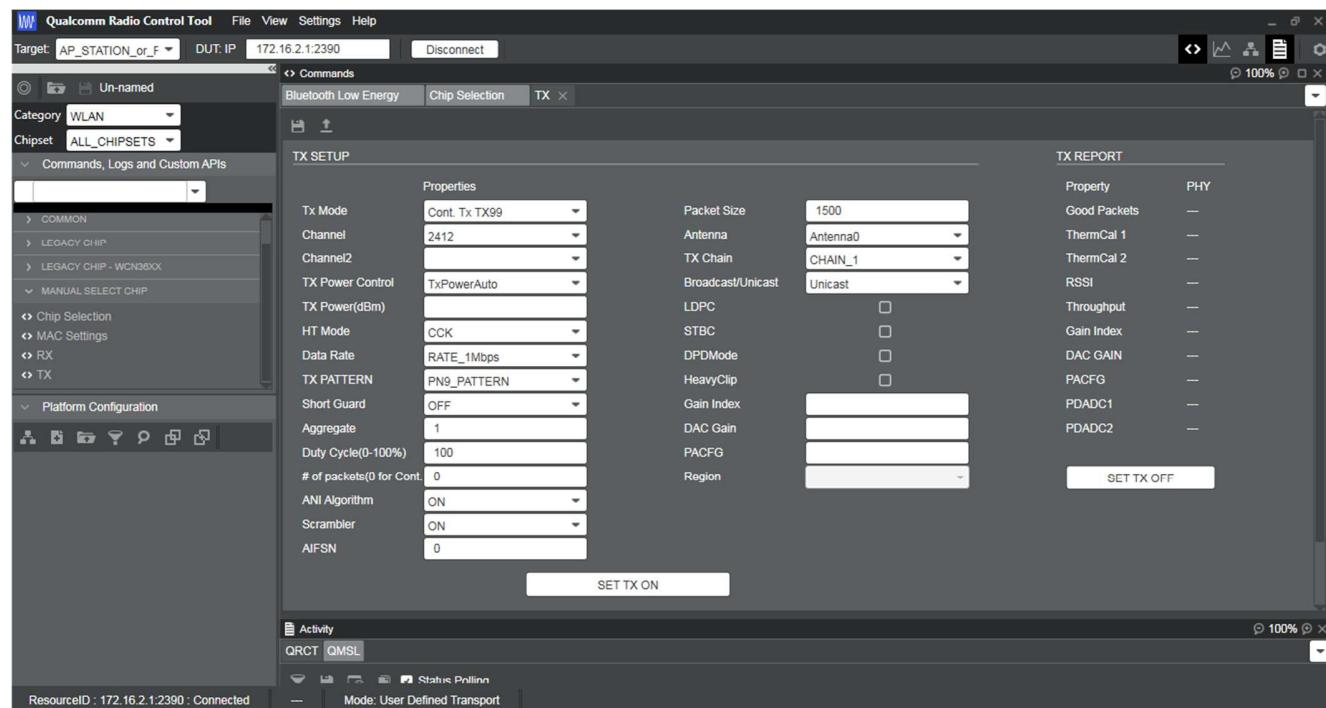

For the 3G/4G radio module the following script with AT commands has been used to put the EUT in TX mode:

```

TELIT 2G/3G/4G Transmission Test Mode

NOTE: ENSURE ANTENNAS ARE CONNECTED TO THE UNIT UNDER TEST BEFORE PROCEEDING

Select Mode:
 1) GSM
 2) WCDMA
 3) LTE
 4) TD-SCDMA
 Q) QUIT
Enter mode: 

```

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

The EUT has WIFI and Bluetooth in 2.4 GHz band, WIFI is chosen to be the representative worst-case. The radio module TELIT-LE910C1NF use the standard 3G and 4G. 3G standard is chosen to be the representative worst-case.

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

In the laboratory, the following ambient conditions are respected for each test reported below:

Temperature	18 – 33 °C
Relative humidity	25 – 70 %
Air pressure	860 – 1060 mbar

The following instruments are used to monitor the environmental conditions:

Equipment	Manufacturer	Model no.	Asset no.	Cal date	Next cal.
Thermo-hygrometer data loggers	Testo	175-H2	20012380/305	2019-01	2021-01
Thermo-hygrometer data loggers	Testo	175-H2	38203337/703	2019-01	2021-01
Barometer	Castle	GPB 3300	072015	2019-12	2020-12

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002.

The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

EUT	Type	Test	Range	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
			0.009 MHz ÷ 30 MHz	1.1 dB	(1)
		Carrier power	30 MHz ÷ 18 GHz	1.5 dB	(1)
		RF Output Power	18 MHz ÷ 40 GHz	3.0 dB	(1)
			40 MHz ÷ 140 GHz	5.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.4 dB	(1)
			0.009 MHz ÷ 18 GHz	3.0 dB	(1)
		Conducted spurious emissions	18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter – Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
	Radiated	Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
			0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
		Radiated spurious emissions	26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
	Effective radiated power transmitter		10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)

EUT	Type	Test	Range	Measurement Uncertainty	Notes
Receiver	Radiated	Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
	Sensitivity measurement		1 MHz ÷ 18 GHz	6.0 dB	(1)
	Conducted	Conducted spurious emissions	0.009 MHz ÷ 18 GHz	3.0 dB	(1)
			18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)

NOTES:

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2$, which for a normal distribution corresponds to a coverage probability of approximately 95 %

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI receiver (20 Hz ÷ 8 GHz)	Rohde & Schwarz	ESU8	100202	2020-01	2021-01
EMI receiver (20 Hz ÷ 8 GHz)	Rohde & Schwarz	ESW44	101620	2019-08	2020-08
Trilog Antenna (30 MHz ÷ 7 GHz)	Schwarzbeck	VULB 9162	9162-025	2018-07	2021-07
Bilog antenna (1 ÷ 18 GHz)	Schwarzbeck	STLP 9148	9148-123	2018-07	2021-07
Preamplifier (1 ÷ 18 GHz)	Schwarzbeck	BBV 9718	9718-137	2019-09	2020-09
Horn antenna (18 ÷ 40 GHz)	A.H. System	SAS-574	558	2020-01	2023-01
Preamplifier (18 ÷ 40 GHz)	Miteq	JS44-18004000-35-8P-R	1.627	2019-09	2020-09
Controller	Maturo	FCU3.0	10041	NCR	NCR
Tilt antenna mast	Maturo	TAM4.0-E	10042	NCR	NCR
Turntable	Maturo	TT4.0-5T	2.527	NCR	NCR
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	2019-09	2021-09
Shielded room	Siemens	10m control room	1947	NCR	NCR
LISN three phase (9 kHz ÷ 30 MHz)	Rohde & Schwarz	ESH2-Z5	872 460/041	2019-09	2020-09
Shielded room	Siemens	Conducted emission test room	1862	NCR	NCR

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

8.1.1 Definitions and limits

FCC:

(f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device.

ISED:

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 8.1-1: FCC §15.209 and RSS-Gen – Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	μV/m	dB μ V/m	
0.009–0.490	2400/F	67.6 – 20 × log ₁₀ (F)	300
0.490–1.705	24000/F	87.6 – 20 × log ₁₀ (F)	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.1-2: ISED restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	12.57675–12.57725	399.9–410	7.25–7.75
0.495–0.505	13.36–13.41	608–614	8.025–8.5
2.1735–2.1905	16.42–16.423	960–1427	9.0–9.2
3.020–3.026	16.69475–16.69525	1435–1626.5	9.3–9.5
4.125–4.128	16.80425–16.80475	1645.5–1646.5	10.6–12.7
4.17725–4.17775	25.5–25.67	1660–1710	13.25–13.4
4.20725–4.20775	37.5–38.25	1718.8–1722.2	14.47–14.5
5.677–5.683	73–74.6	2200–2300	15.35–16.2
6.215–6.218	74.8–75.2	2310–2390	17.7–21.4
6.26775–6.26825	108–138	2483.5–2500	22.01–23.12
6.31175–6.31225	149.9–150.05	2655–2900	23.6–24.0
8.291–8.294	156.52475–156.52525	3260–3267	31.2–31.8
8.362–8.366	156.7–156.9	3332–3339	36.43–36.5
8.37625–8.38675	162.0125–167.17	3345.8–3358	
8.41425–8.41475	167.72–173.2	3500–4400	Above 38.6
12.29–12.293	240–285	4500–5150	
12.51975–12.52025	322–335.4	5350–5460	

Note: Certain frequency bands listed in Table 8.1-2 and above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Section 8 Testing data
Test name FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
Specification FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1



Table 8.1-3: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.1.2 Test summary

Test start date	April 9, 2020
Test engineer	P. Barbieri

8.1.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to 40 GHz.
 EUT's LTE and WIFI transmitters were set to transmit continuously, different channel setting has been investigated as per provided by client's setup, only the worst-case is presented.
 Radiated measurements were performed at a distance of 3 m for frequency rand below 18 GHz, and 1 m for frequency range above 18 GHz. No inter-modulation products emissions were detected above 18 GHz within 6 dB below the limit.

Spectrum analyzer settings for frequencies below 30 MHz:

Detector mode	Quasi-Peak
Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold
Measurement time	100 ms

Spectrum analyser settings for radiated measurements within restricted bands 30 MHz to 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for average radiated measurements within restricted bands above 1 GHz:


Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Detector mode:	Peak
Trace mode:	Max Hold

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

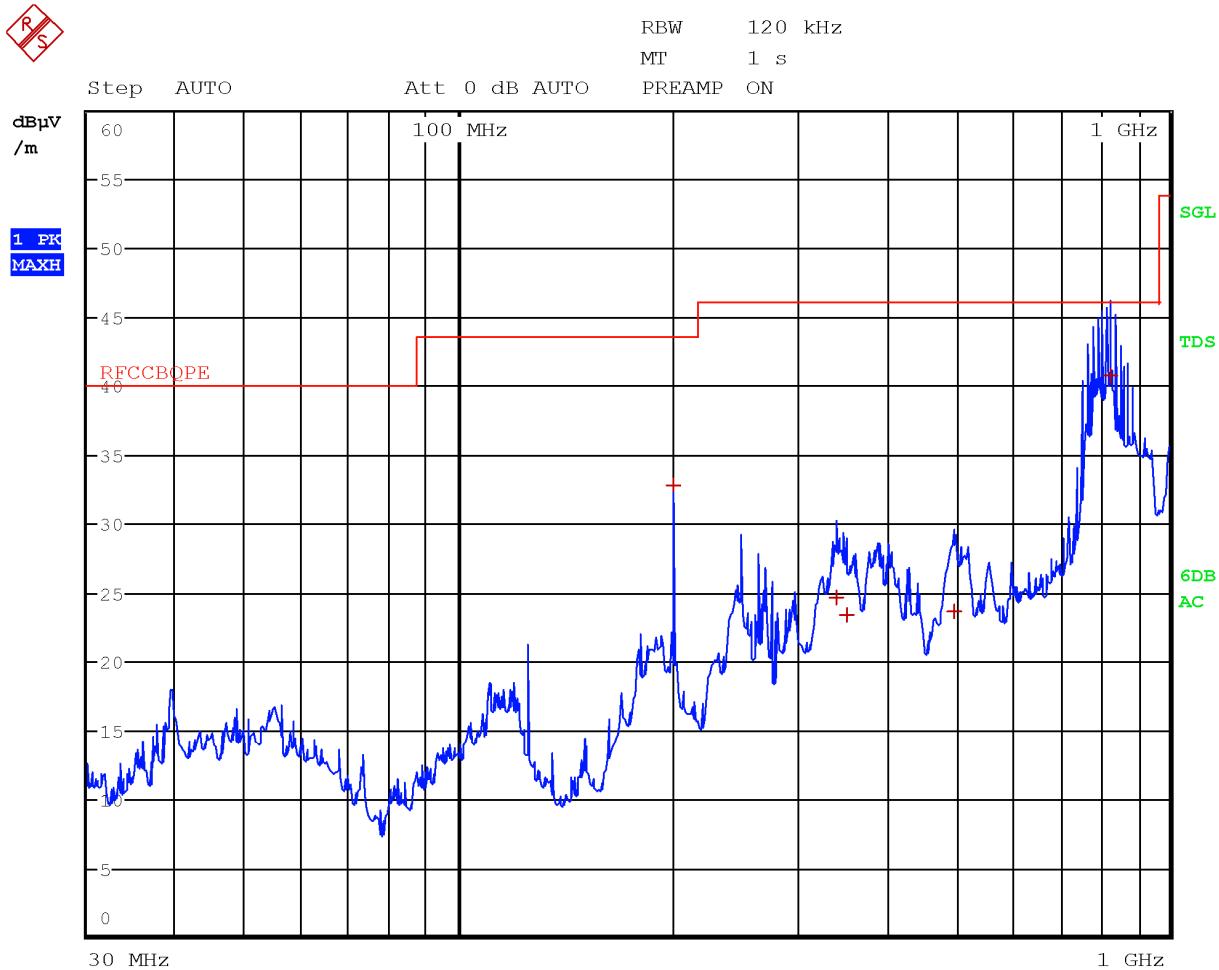**8.1.4 Test data****Figure 8.1-1: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in horizontal polarization**

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
200.0000	32.9	43.5	-10.6	QP
339.9200	24.8	46.0	-21.2	QP
352.0400	23.5	46.0	-22.5	QP
497.9200	23.7	46.0	-22.3	QP
828.2000	40.8	46.0	-5.2	QP

Section 8
Test name
Specification

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

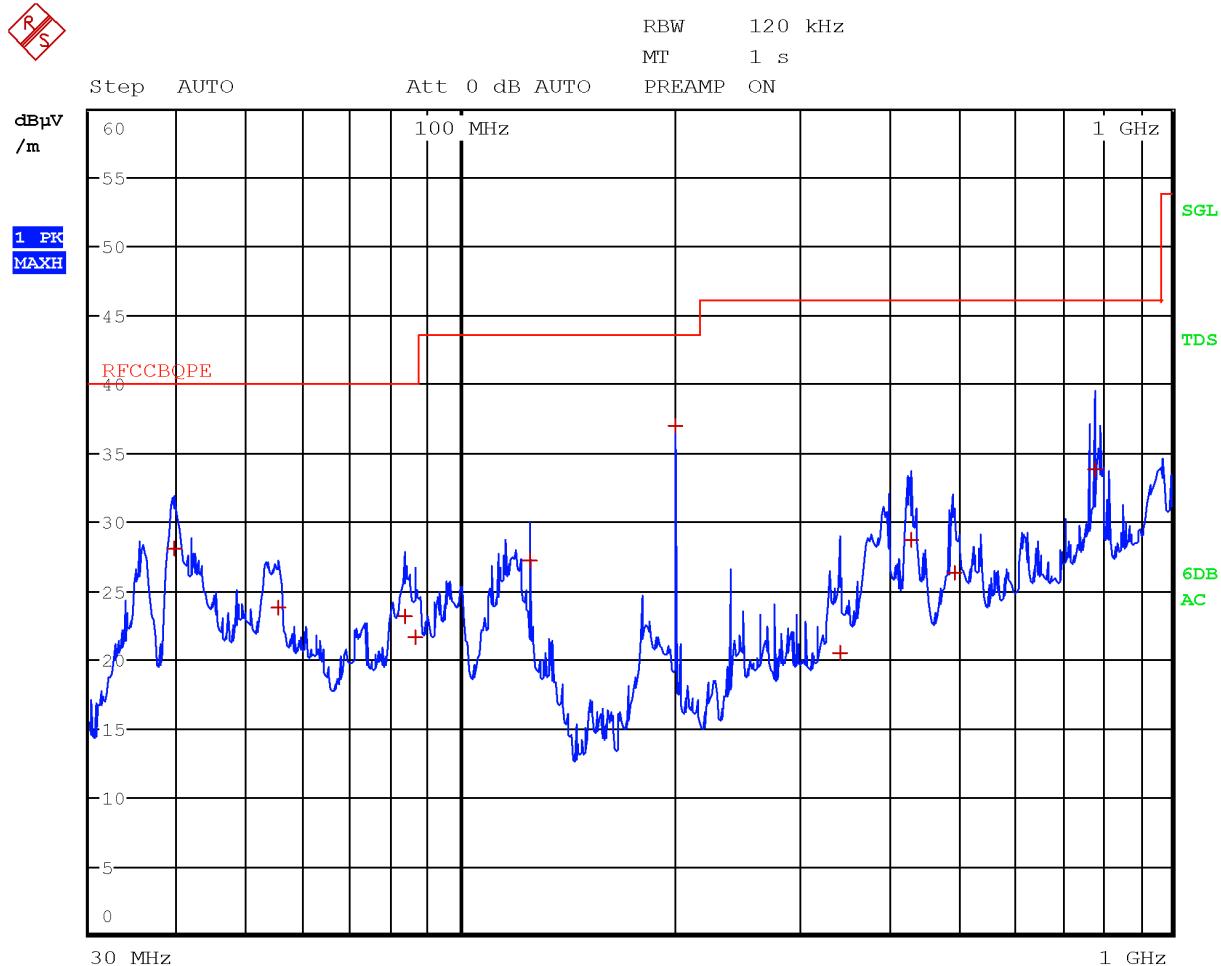


Figure 8.1-2: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
39.3600	28.0	40.0	-12.0	QP
55.1600	23.9	40.0	-16.1	QP
83.3200	23.2	40.0	-16.8	QP
86.0800	21.6	40.0	-18.4	QP
125.0000	27.3	43.5	-16.2	QP
200.0000	37.1	43.5	-6.4	QP
341.5200	20.6	46.0	-25.4	QP
429.8000	28.7	46.0	-17.3	QP
496.6800	26.4	46.0	-19.6	QP
780.0800	33.9	46.0	-12.1	QP

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

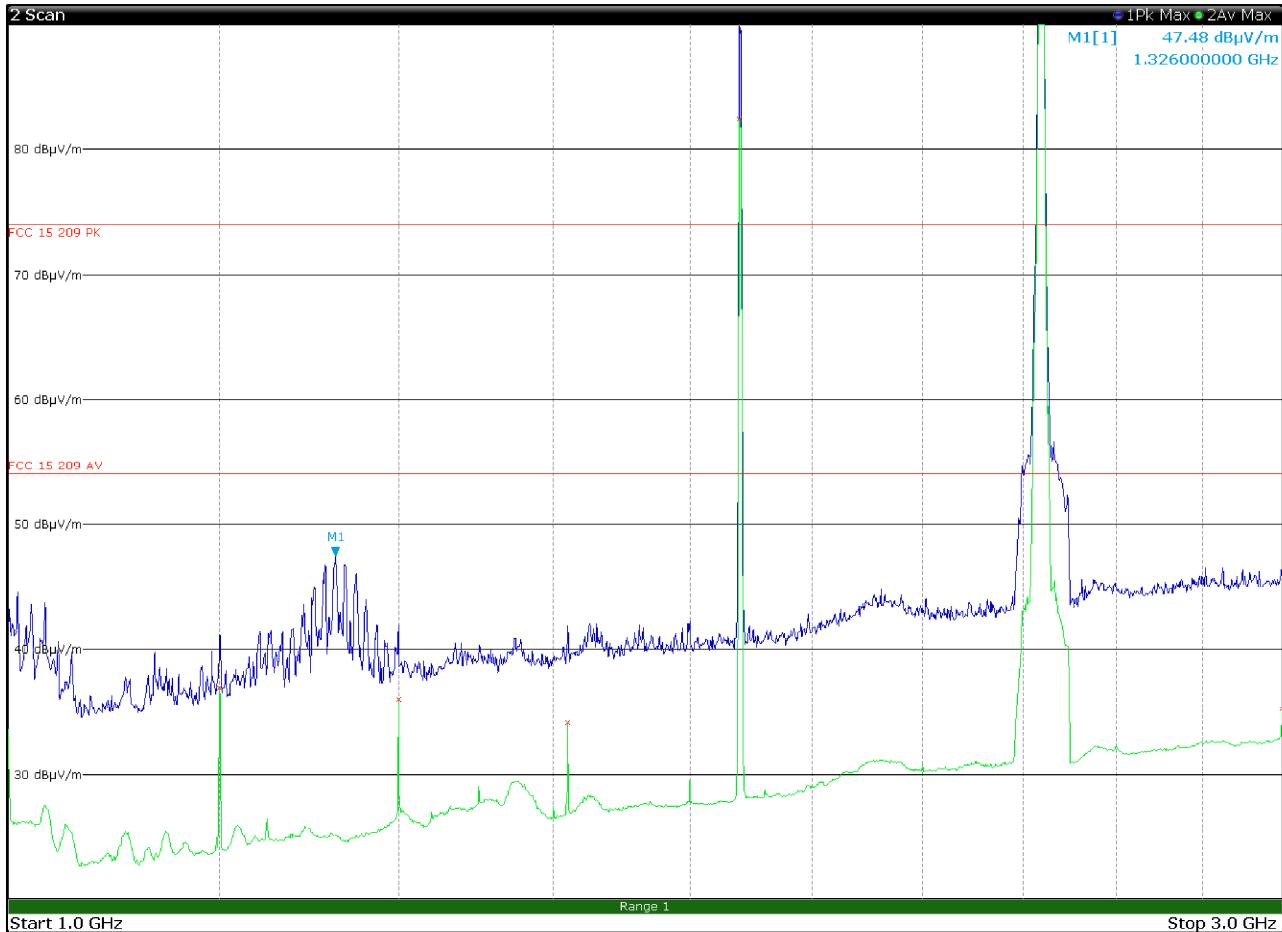


Figure 8.1-3: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1200.0000	37.0	54.0	-17.0	Av
1400.0000	36.1	54.0	-17.9	Av
1620.0000	34.2	54.0	-19.8	Av
3000.0000	35.3	54.0	-18.7	Av

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

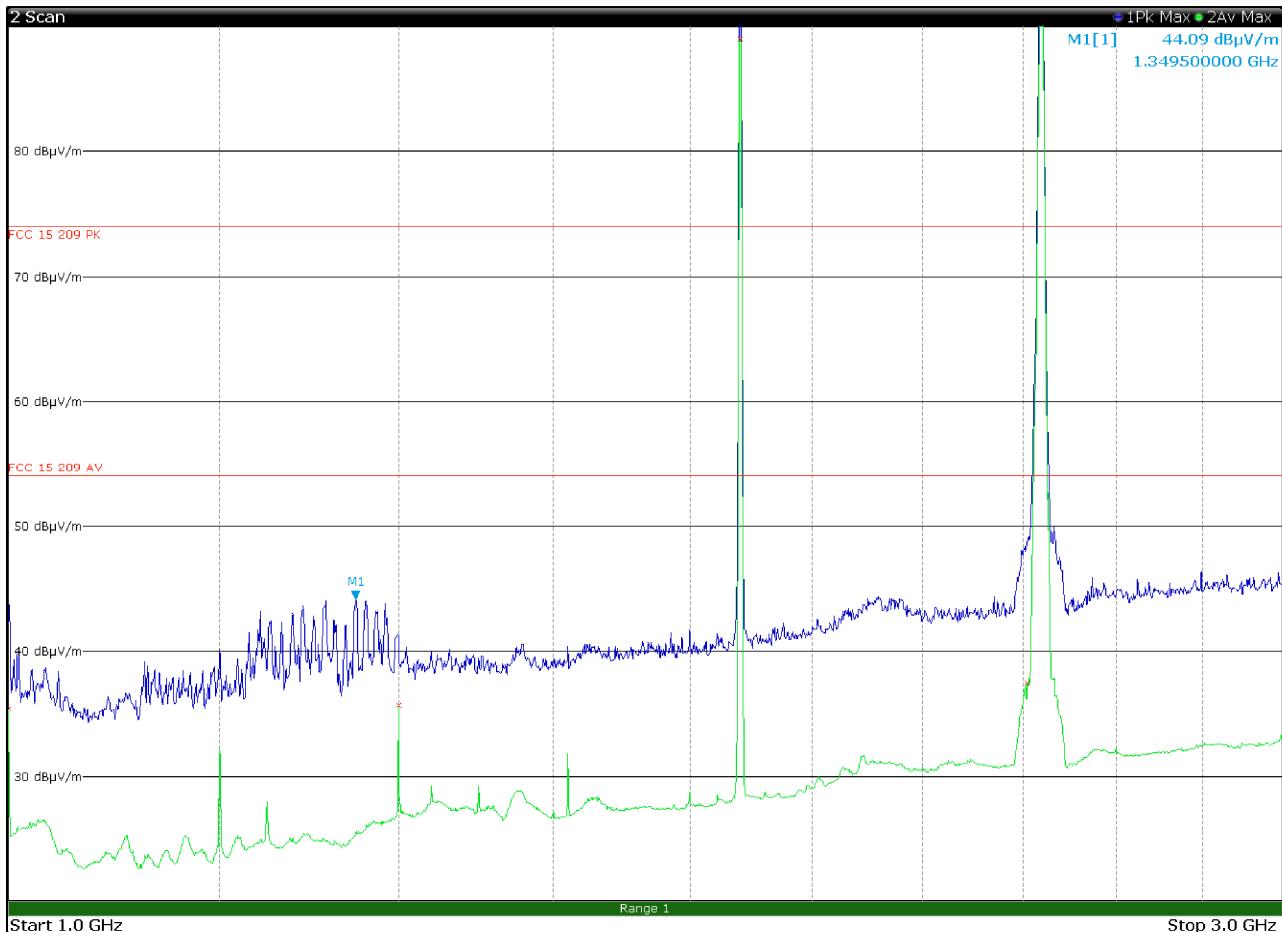


Figure 8.1-4: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1000.0000	35.4	54.0	-18.6	Av
1400.0000	35.8	54.0	-18.2	Av
2407.7500	37.6	54.0	-16.4	Av

Section 8**Testing data****Test name**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

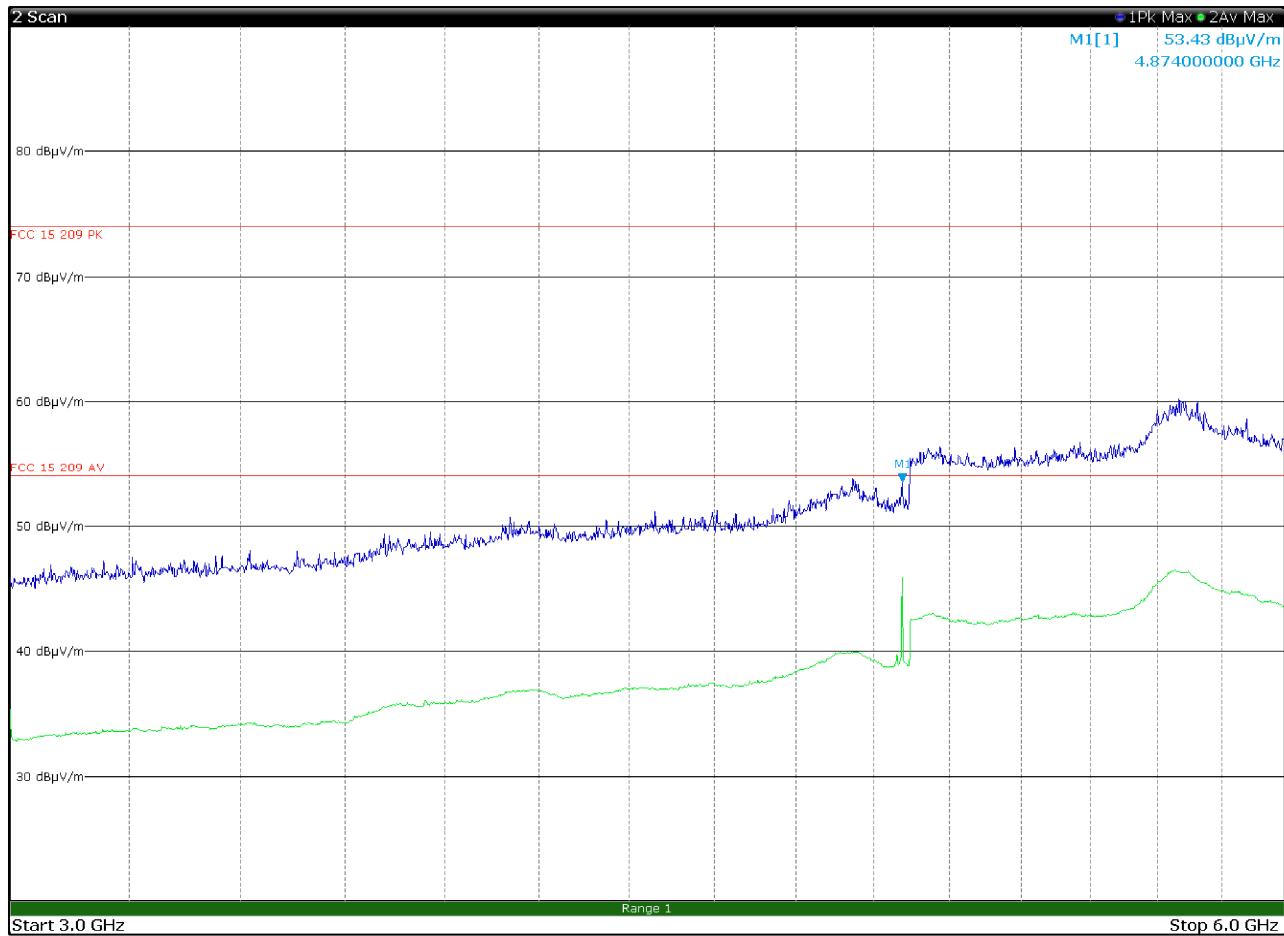


Figure 8.1-5: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Frequency (GHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
4.8740	53.5	74.0	-20.5	Pk
4.8740	48.3	54.0	-5.7	Av

Section 8**Test name**

Testing data
 FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
 FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

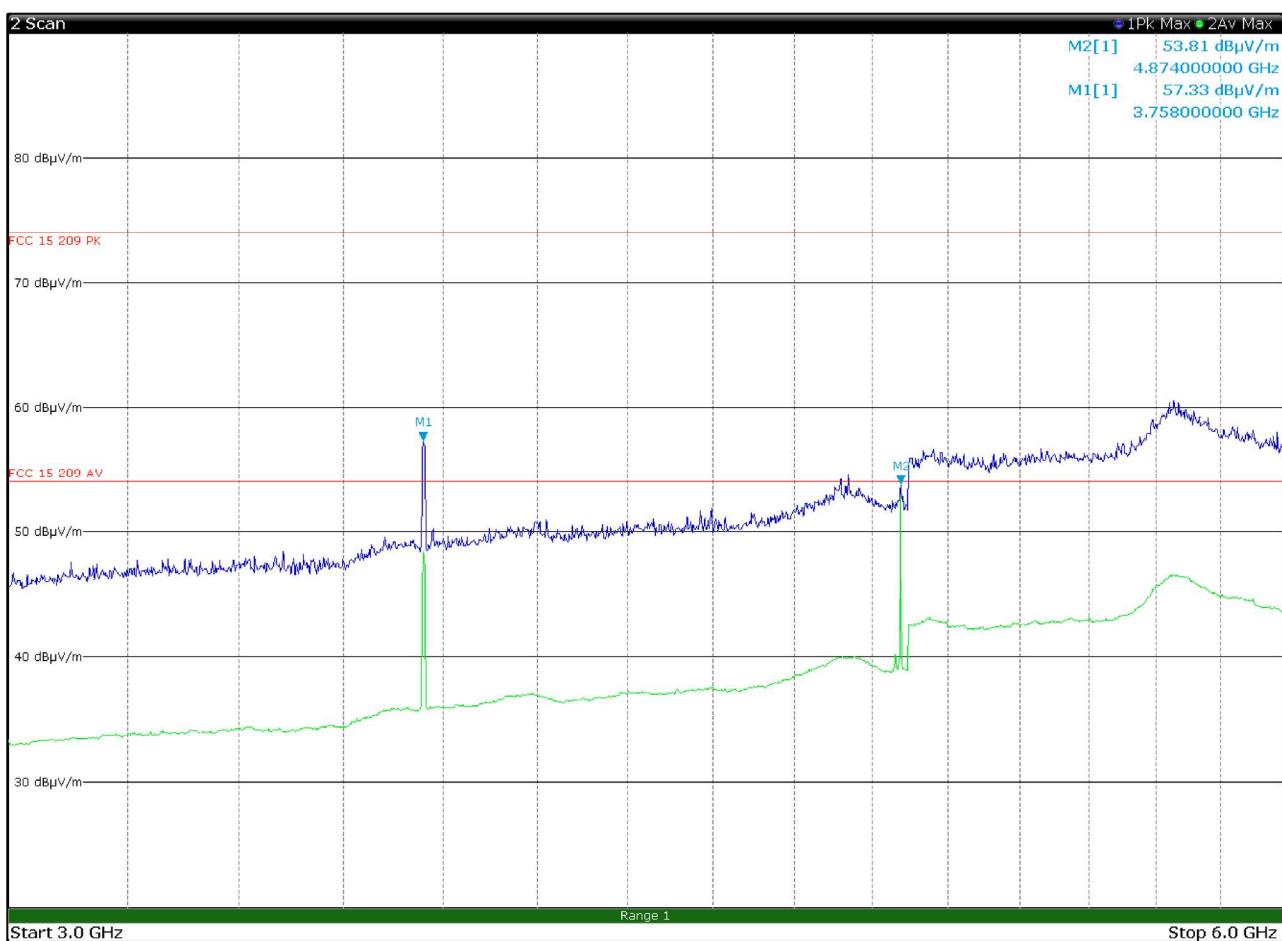


Figure 8.1-6: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Frequency (GHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
3.7580	57.4	82.2	-24.8	Pk
4.8740	53.8	74.0	-20.2	Pk
4.8740	48.5	54.0	-5.5	Av

The limit for WCDMA is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

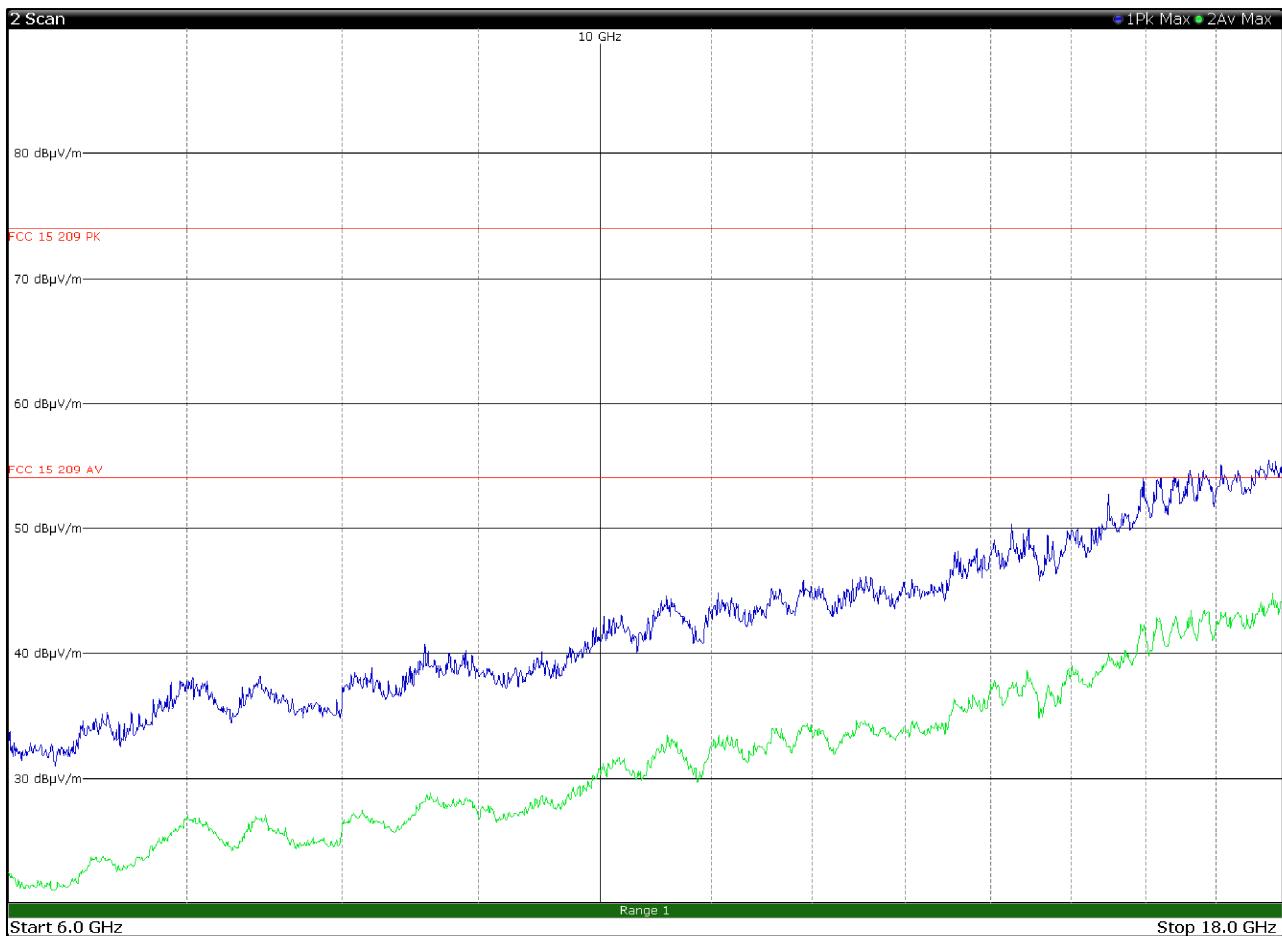


Figure 8.1-7: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

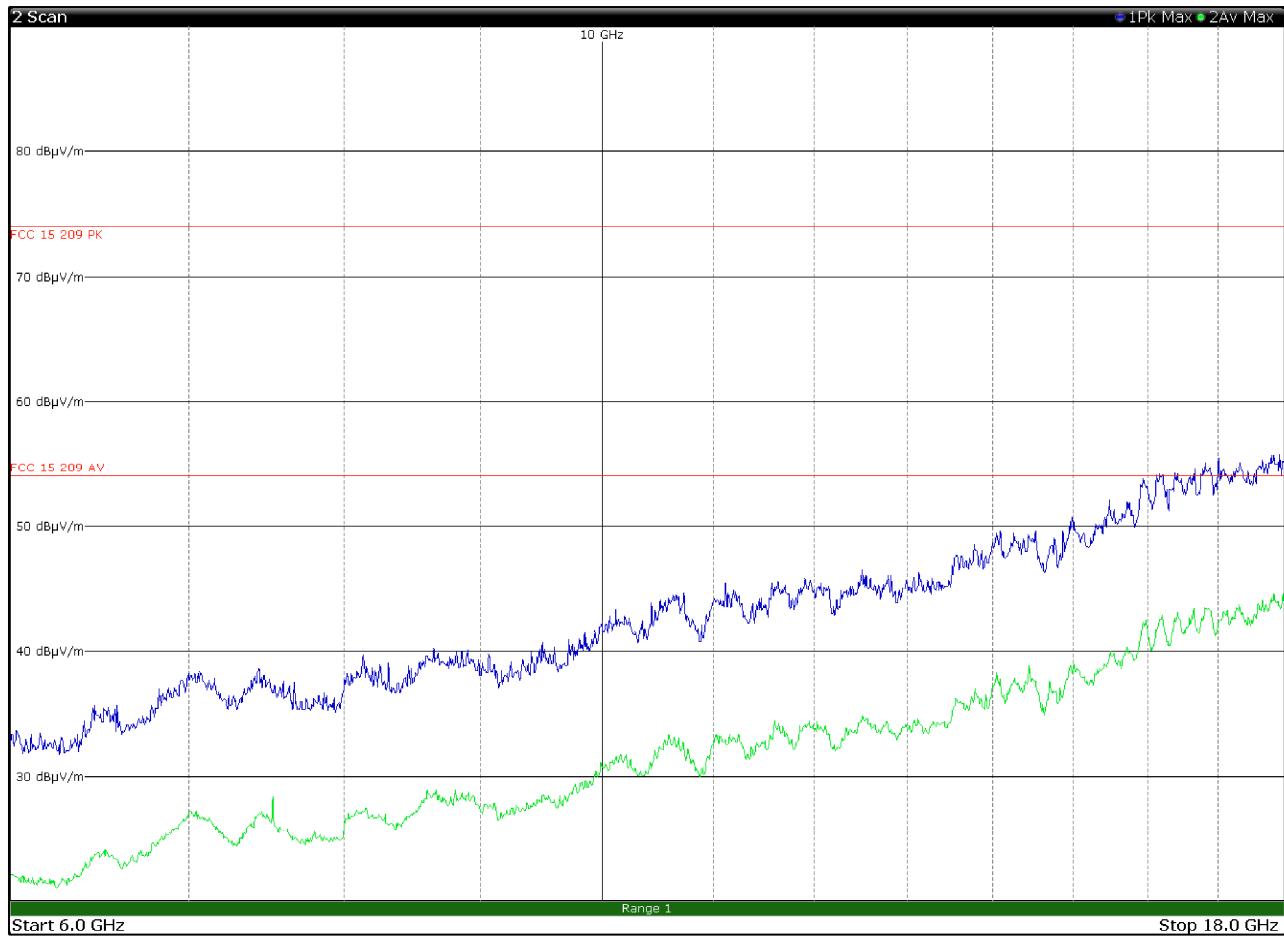


Figure 8.1-8: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

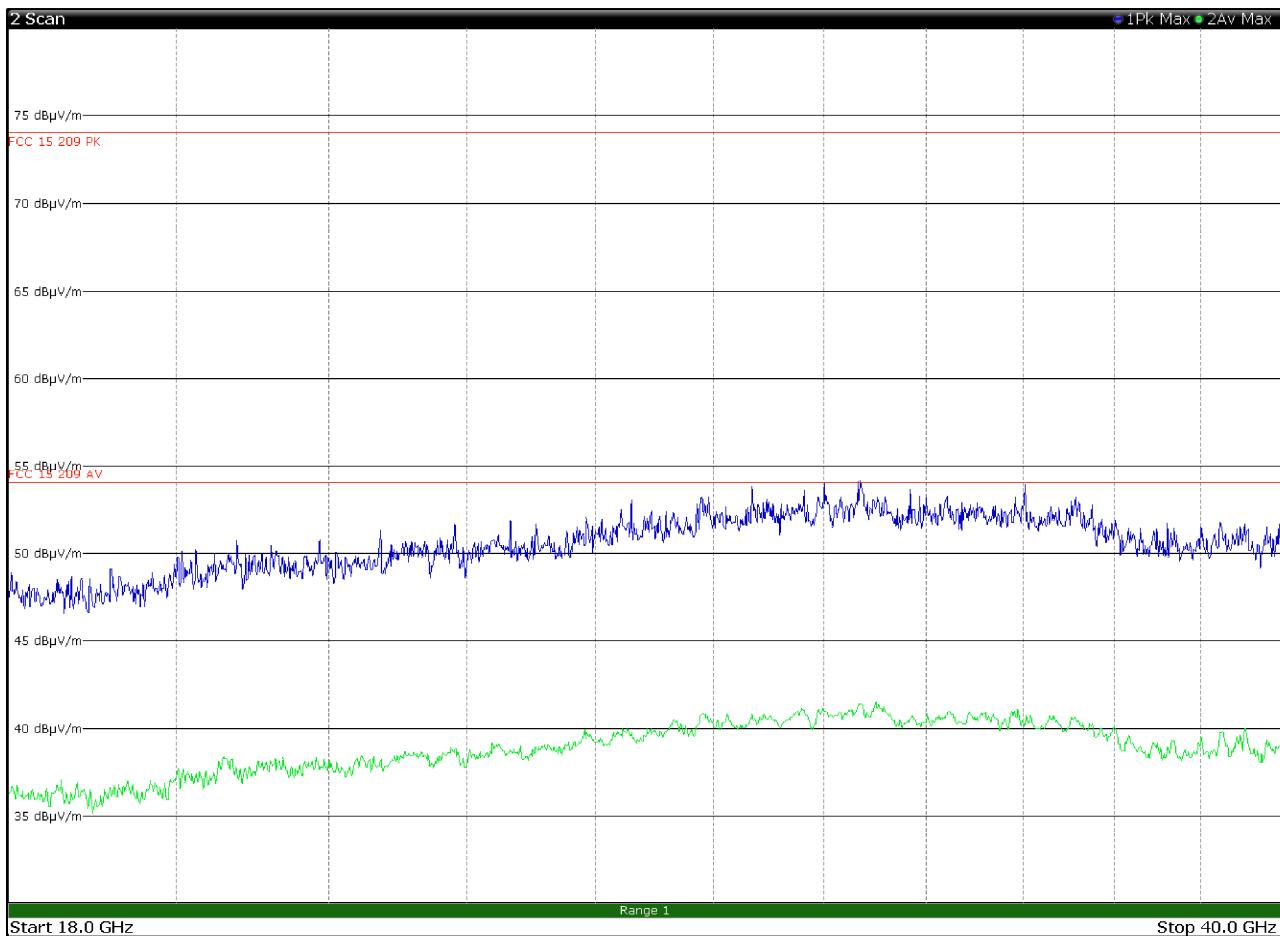


Figure 8.1-9: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission
limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

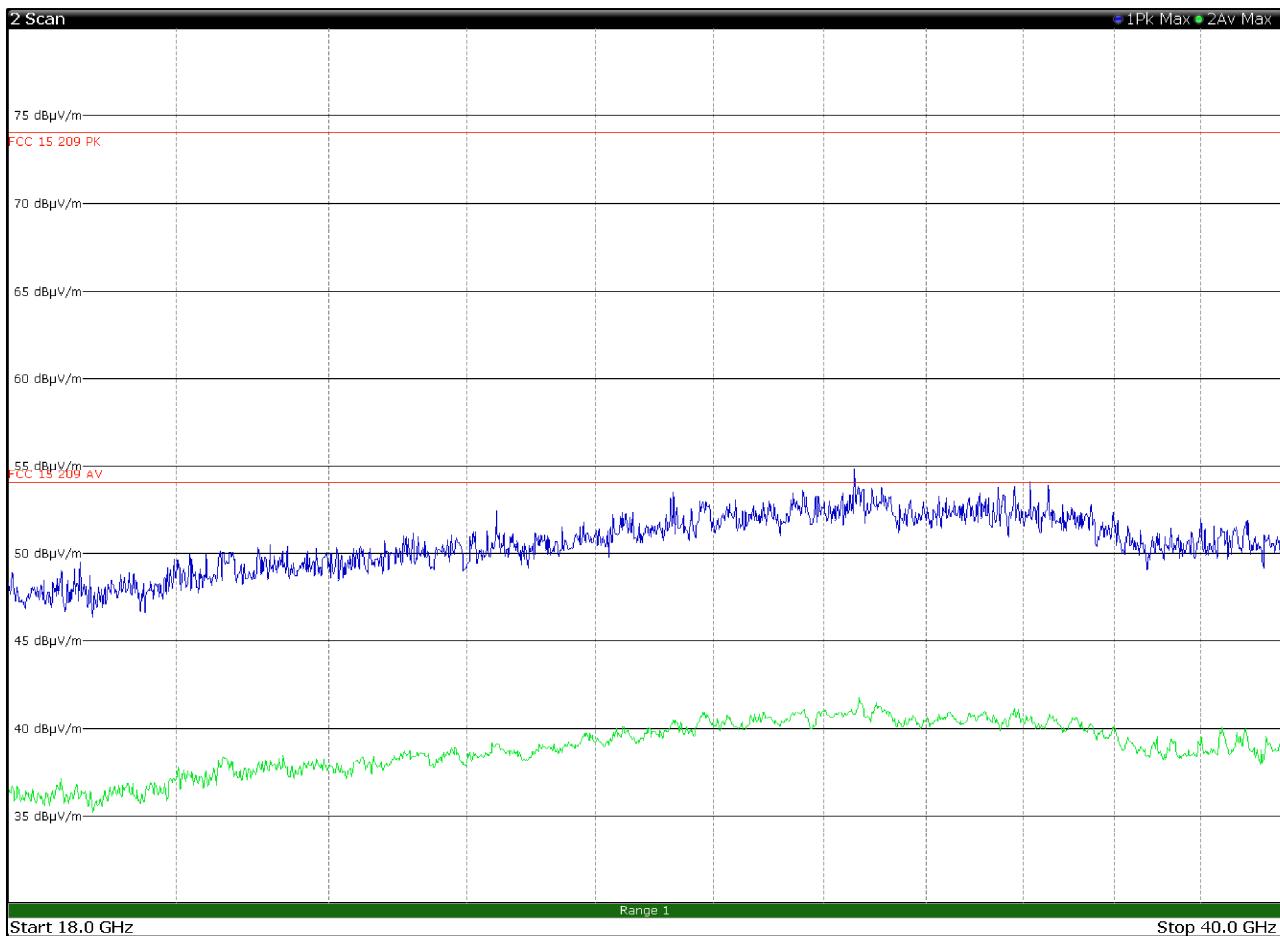


Figure 8.1-10: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

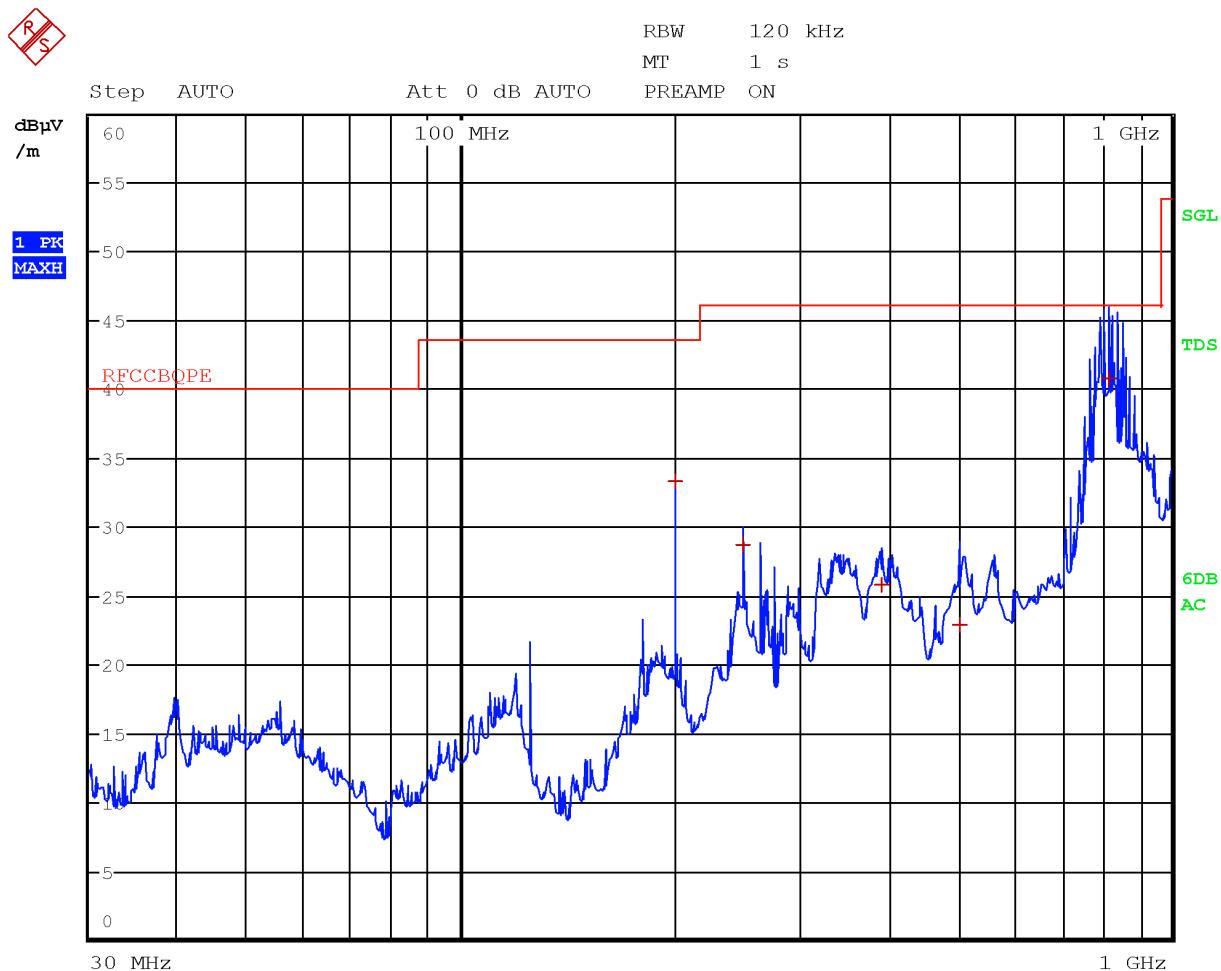


Figure 8.1-11: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
200.0000	33.3	43.5	-10.2	QP
250.0000	28.7	46.0	-17.3	QP
390.5600	25.8	46.0	-20.2	QP
504.3200	23.0	46.0	-23.0	QP
816.2000	40.8	46.0	-5.2	QP

Section 8
Test name
Specification

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

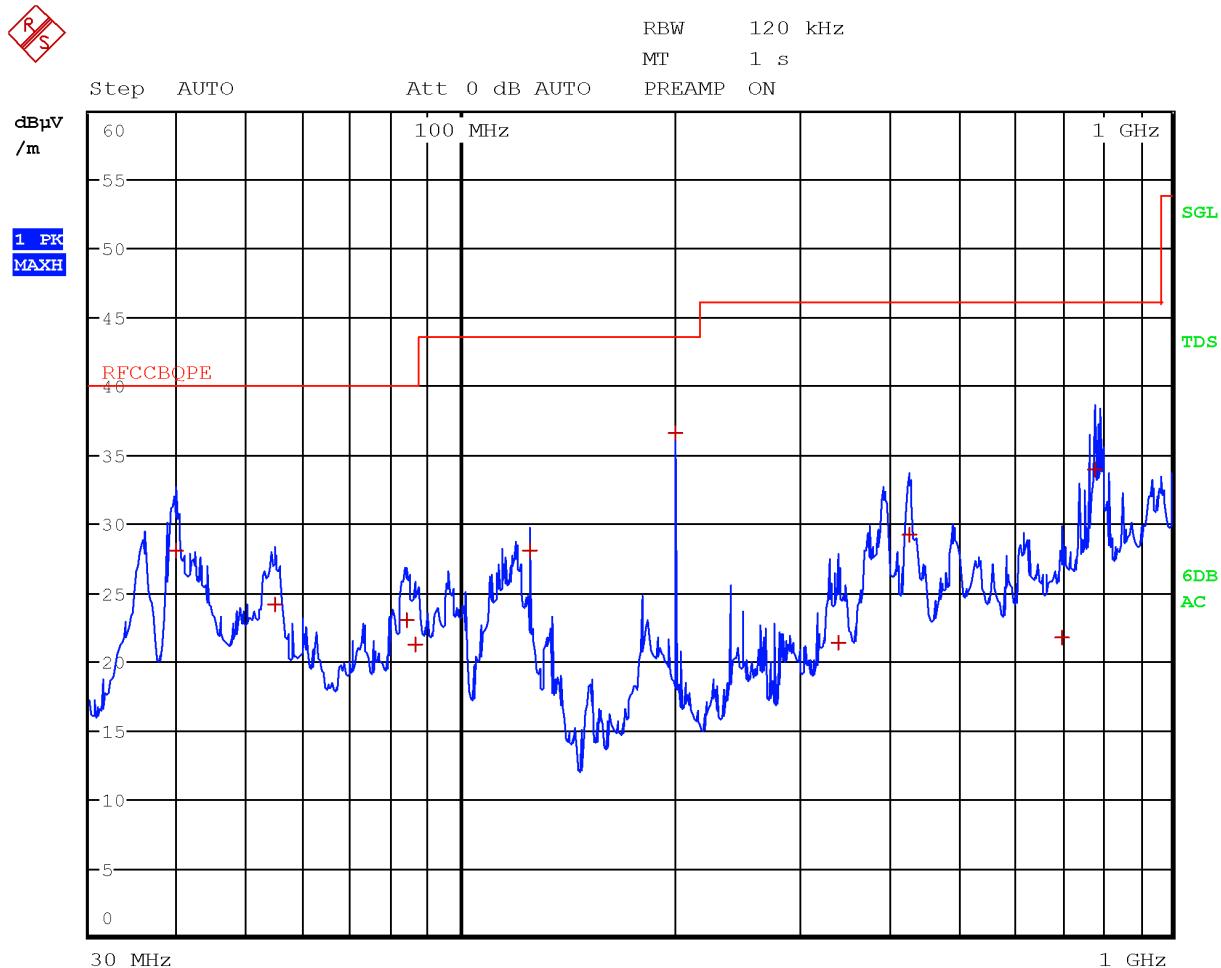


Figure 8.1-12: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
39.8000	28.1	40.0	-11.9	QP
54.8400	24.2	40.0	-15.8	QP
84.0800	23.0	40.0	-17.0	QP
86.2800	21.3	40.0	-18.7	QP
125.0000	28.1	43.5	-15.4	QP
200.0000	36.6	43.5	-6.9	QP
339.0800	21.4	46.0	-24.6	QP
428.9600	29.3	46.0	-16.7	QP
703.0400	21.8	46.0	-24.2	QP
780.1200	34.0	46.0	-12.0	QP

Section 8**Testing data****Test name**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

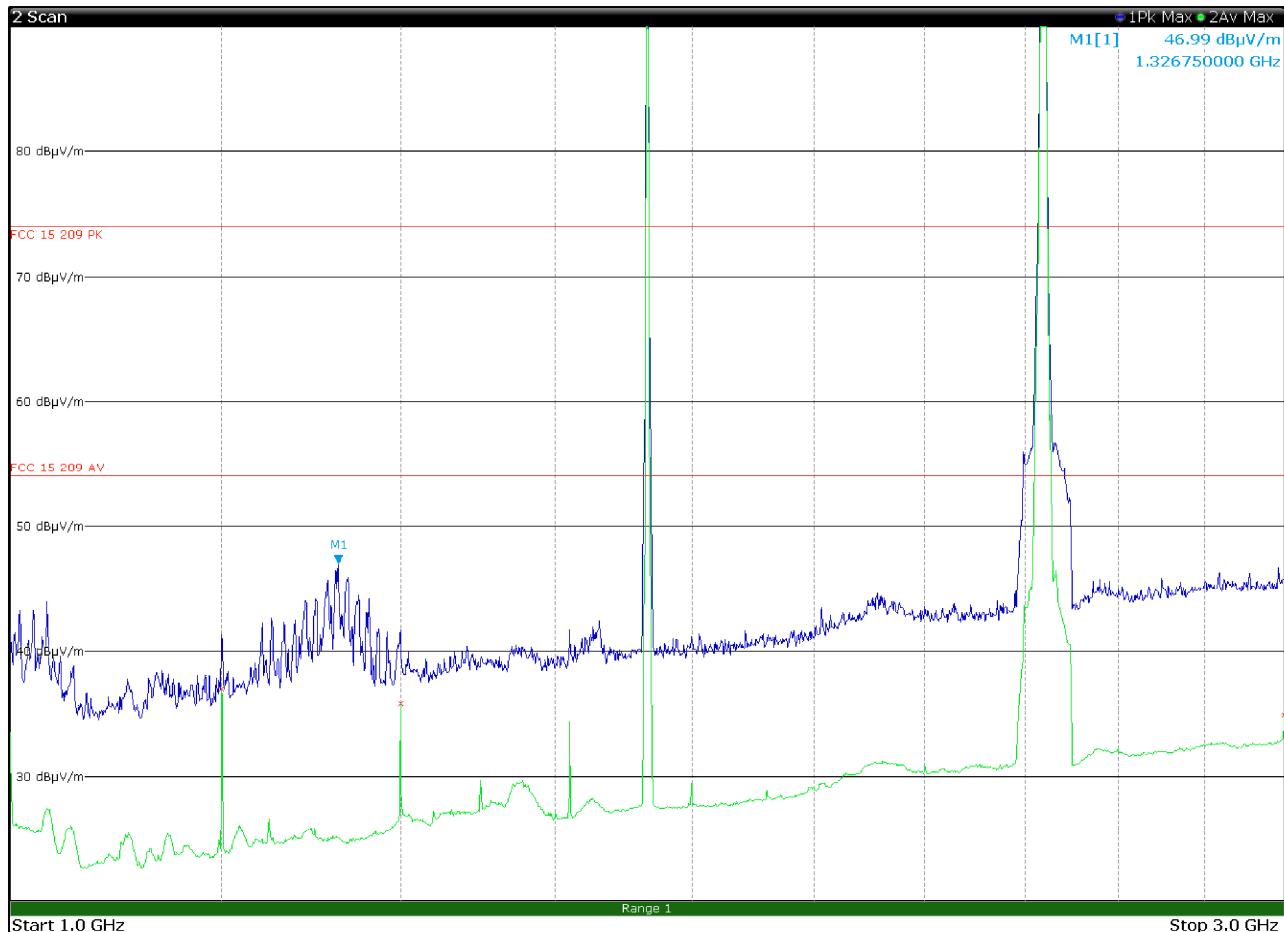


Figure 8.1-13: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1200.0000	37.1	54.0	-16.9	Av
1400.0000	35.9	54.0	-18.1	Av
3000.0000	34.9	54.0	-19.1	Av

Section 8**Test name**

Testing data
 FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
 FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

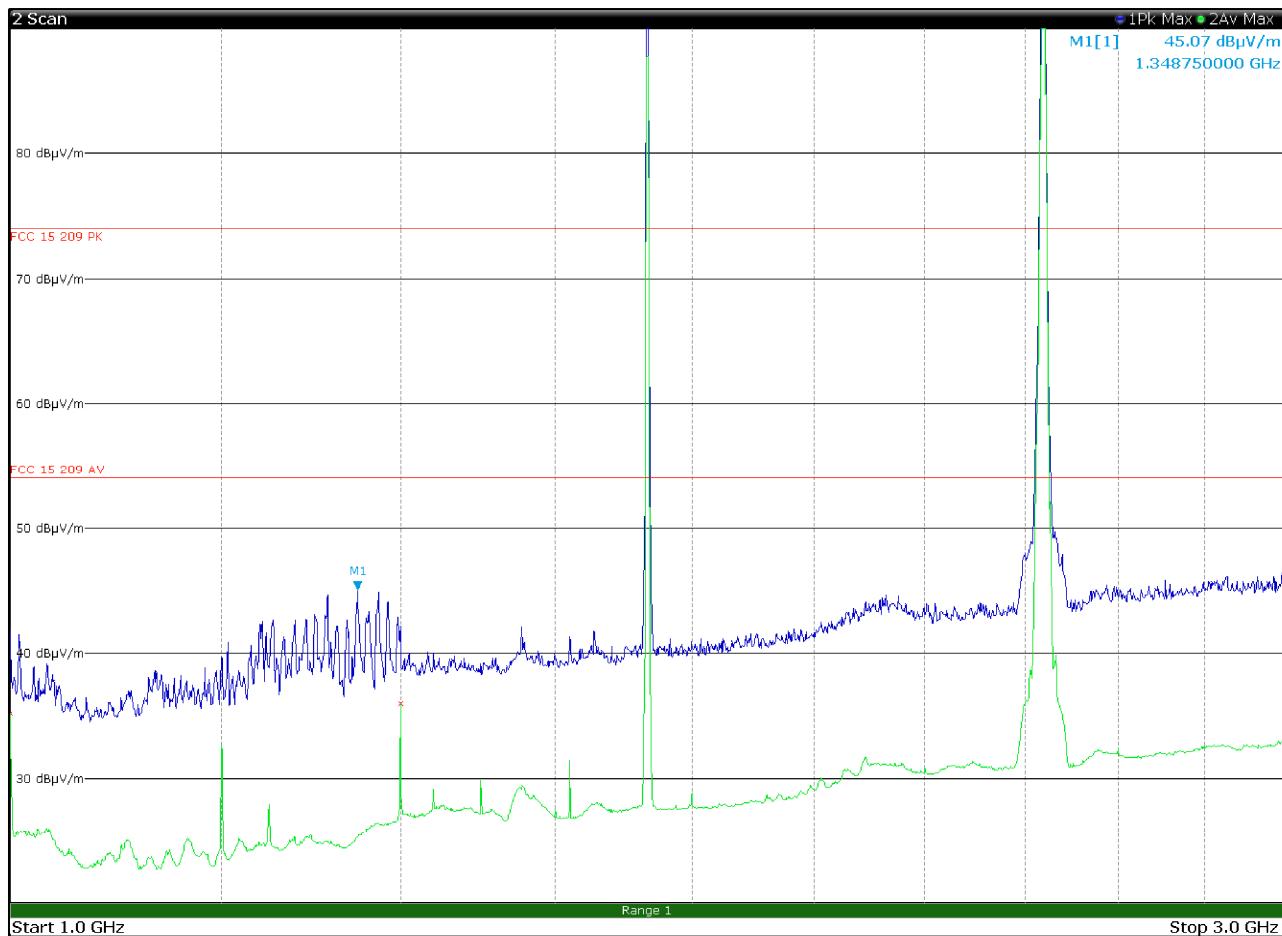


Figure 8.1-14: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1000.0000	35.2	54.0	-18.8	Av
1400.0000	36.1	54.0	-17.9	Av

Section 8**Testing data****Test name**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

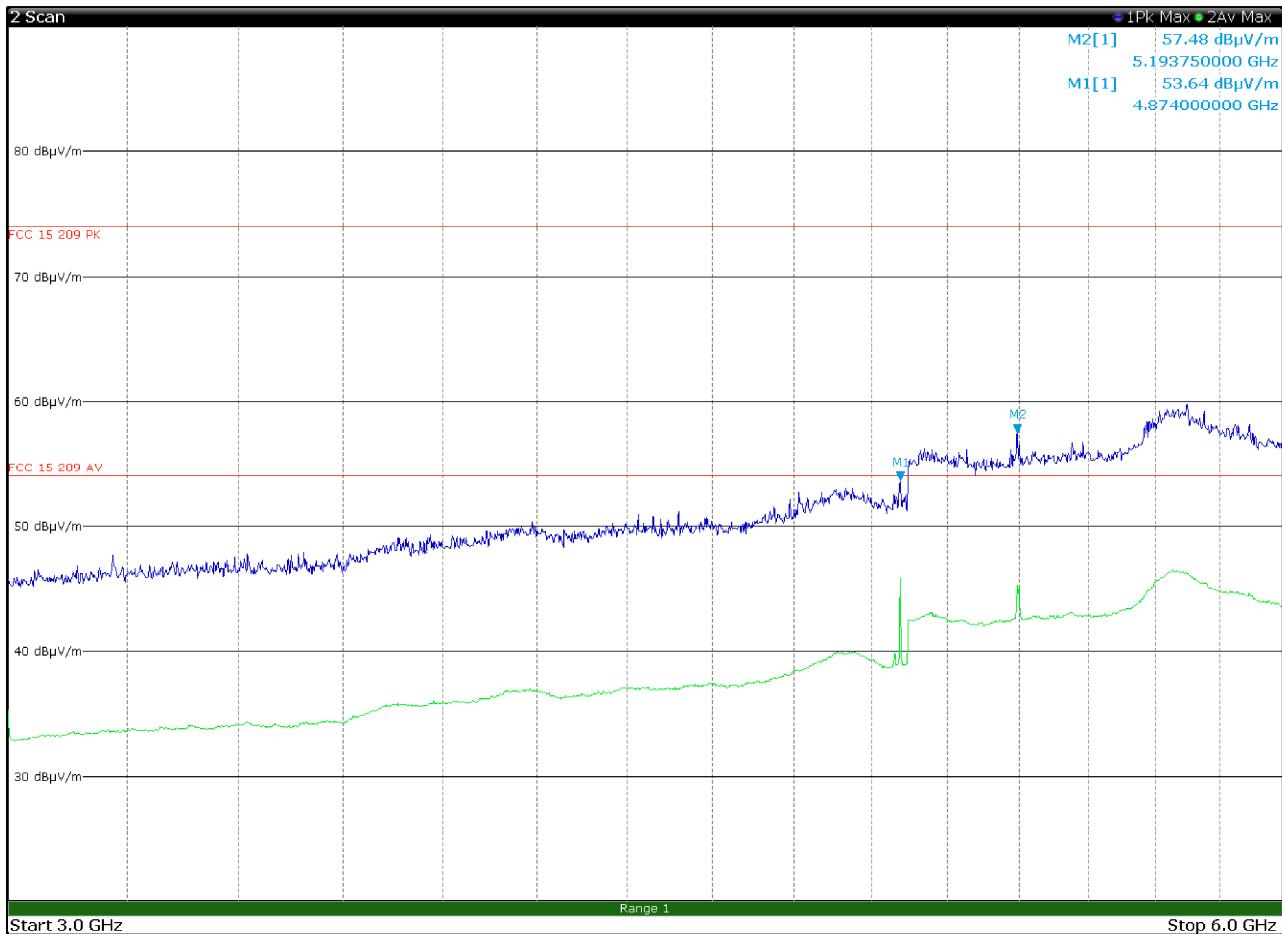


Figure 8.1-15: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Frequency (GHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
4.8740	53.7	74.0	-20.3	Pk
4.8740	48.4	54.0	-5.6	Av
5.1937	57.5	82.2	-24.7	Av

The limit for WCDMA is -13 dBm. Limit (dB μ V/m) = limit (dBm) + 95.23 = 82.2 dB μ V/m

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

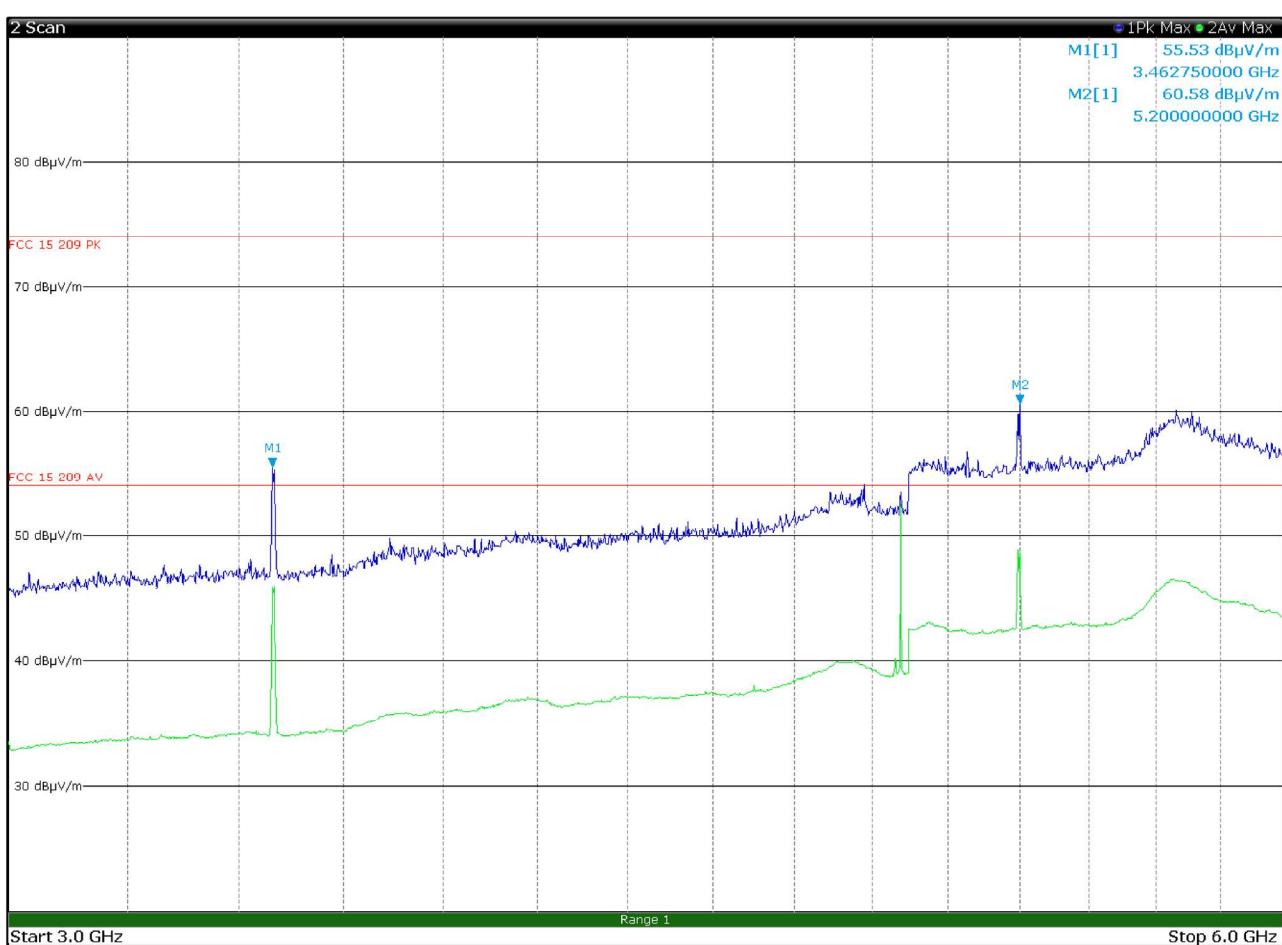


Figure 8.1-16: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Frequency (GHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
3.4627	55.6	82.2	-26.6	Pk
4.8740	53.8	74.0	-20.2	Pk
4.8740	48.5	54.0	-5.5	Av
5.1937	60.6	82.2	-21.6	Av

The limit for WCDMA is -13 dBm. Limit (dB μ V/m) = limit (dBm) + 95.23 = 82.2 dB μ V/m

Section 8**Test name**

Testing data

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

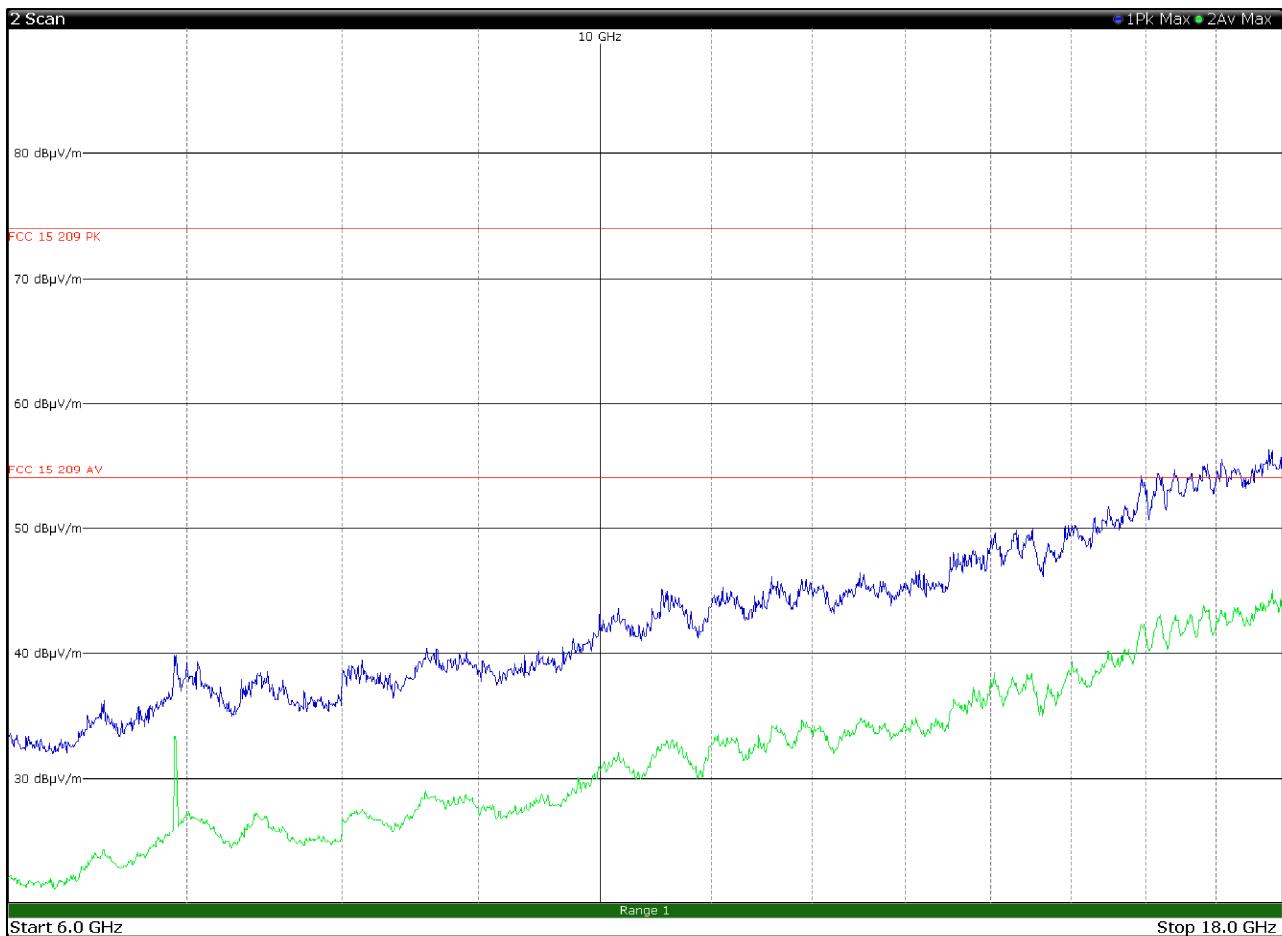


Figure 8.1-17: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

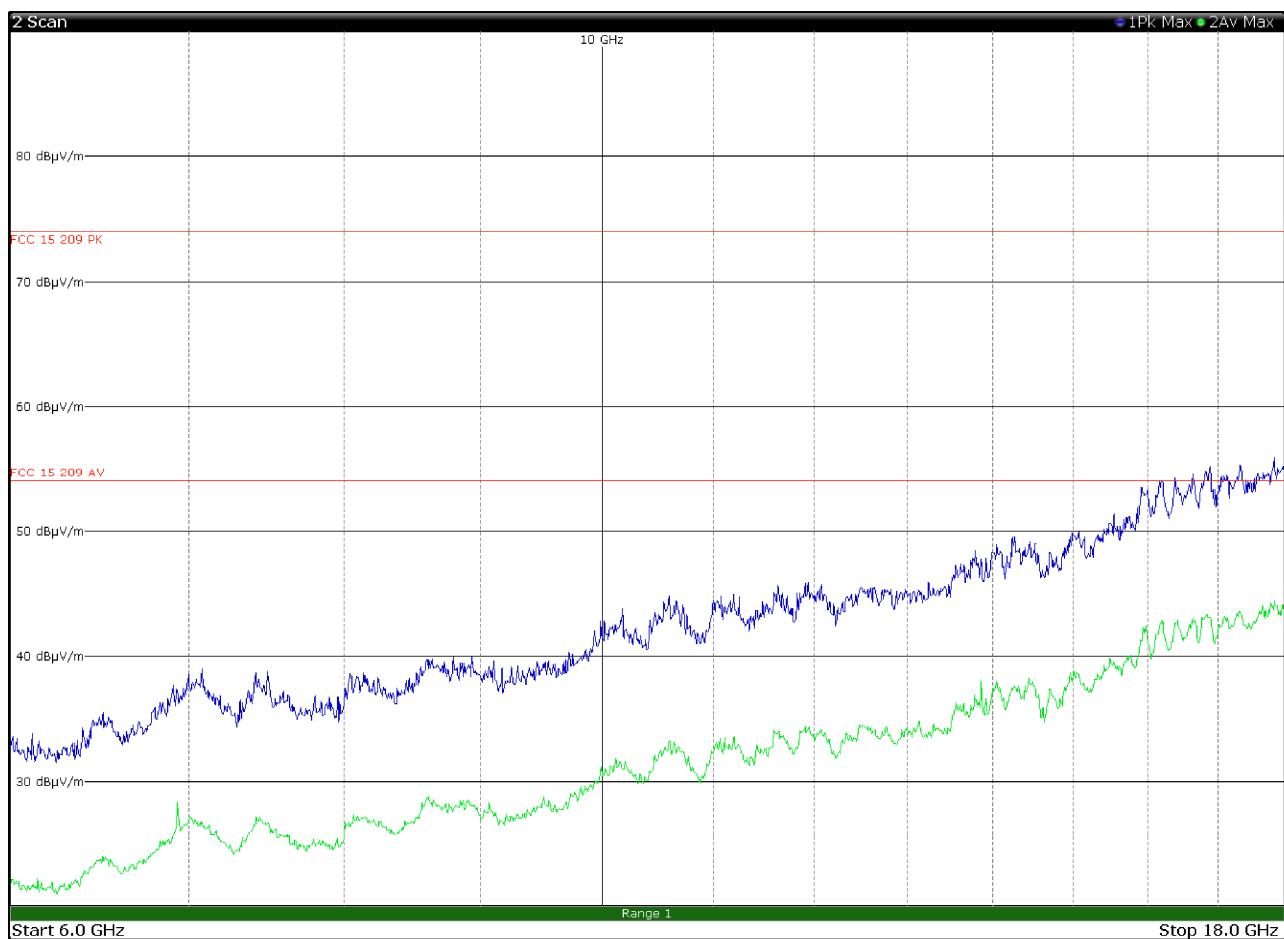


Figure 8.1-18: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Section 8**Testing data****Test name**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

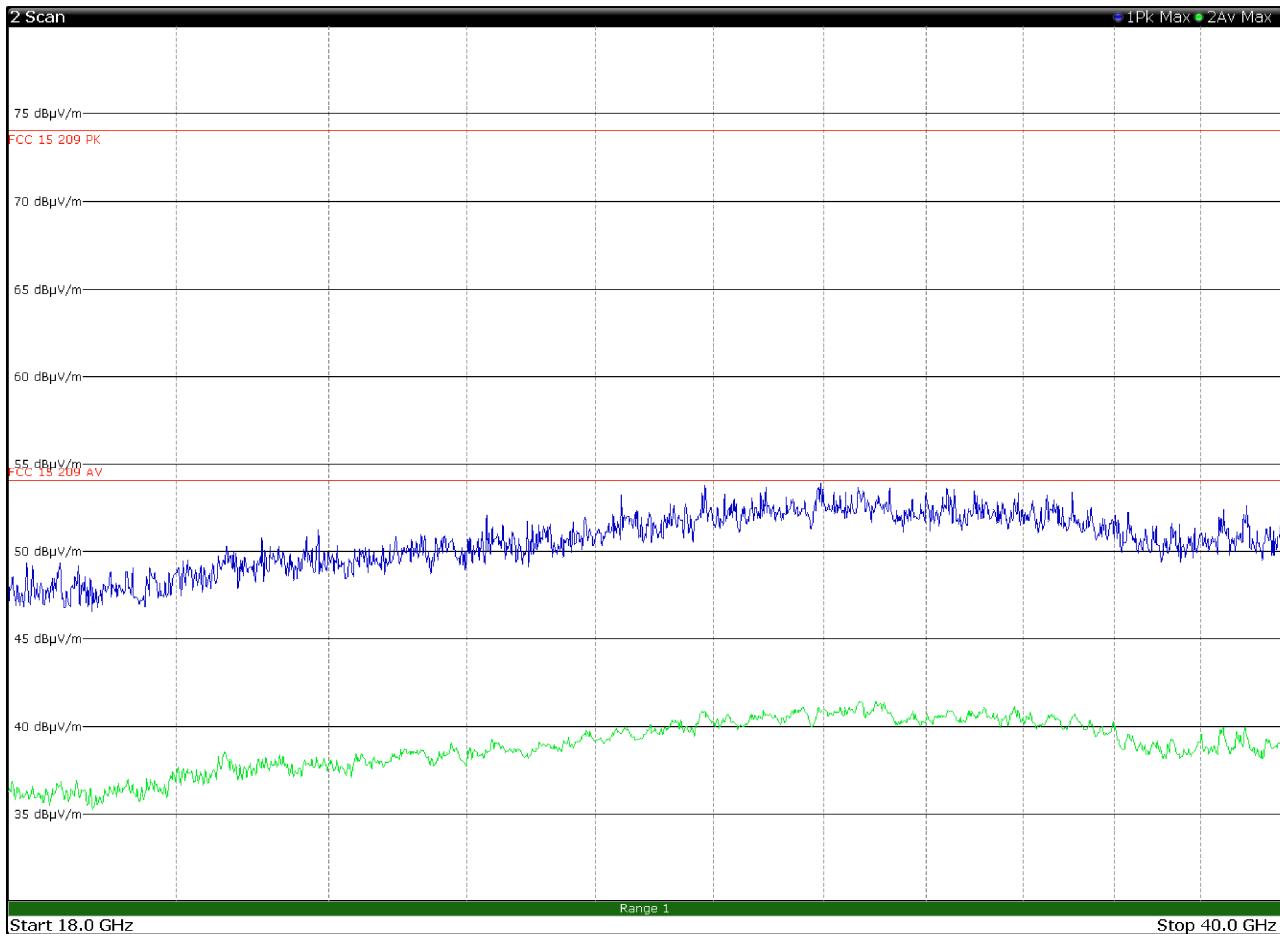


Figure 8.1-19: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

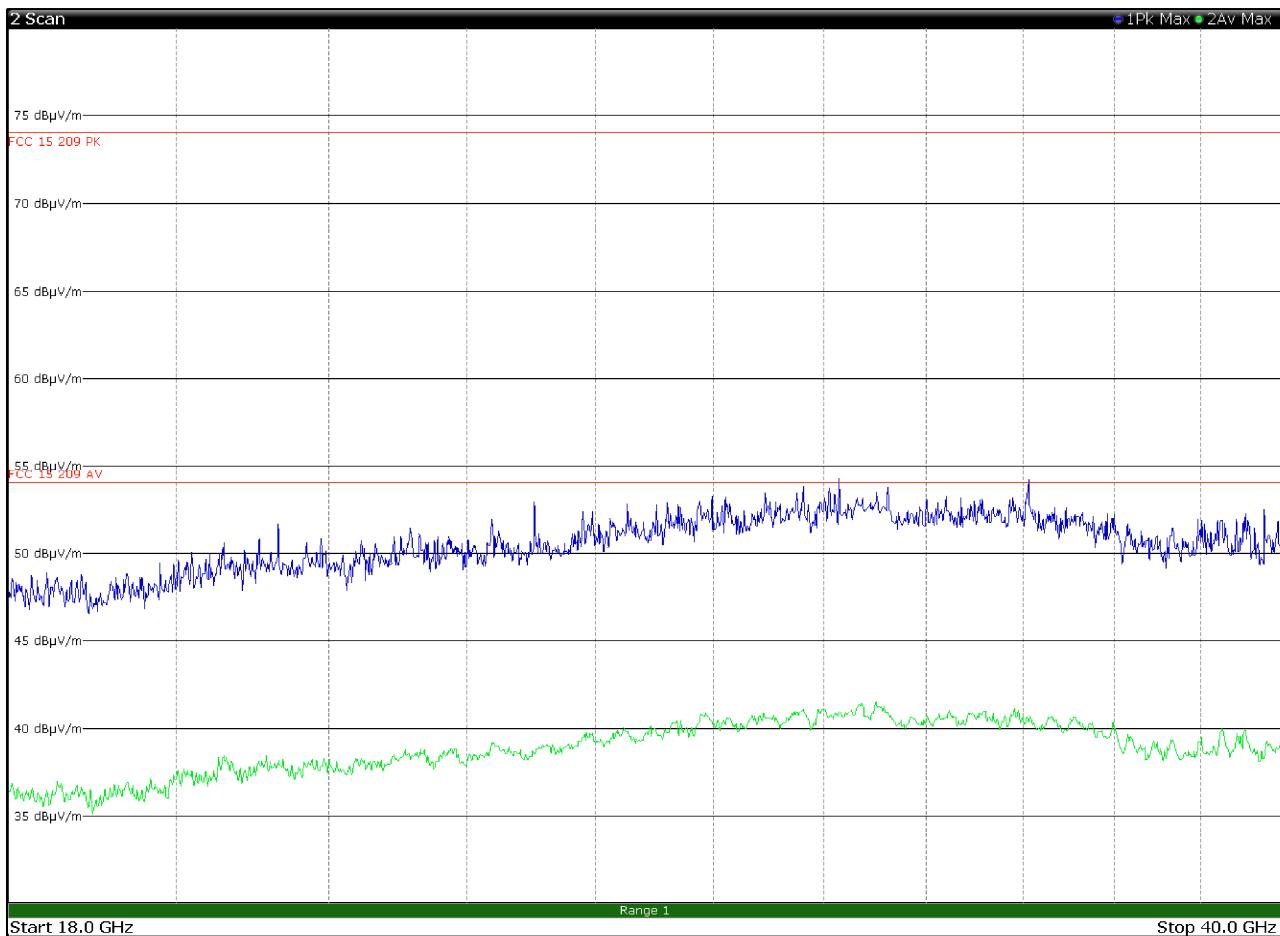


Figure 8.1-20: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

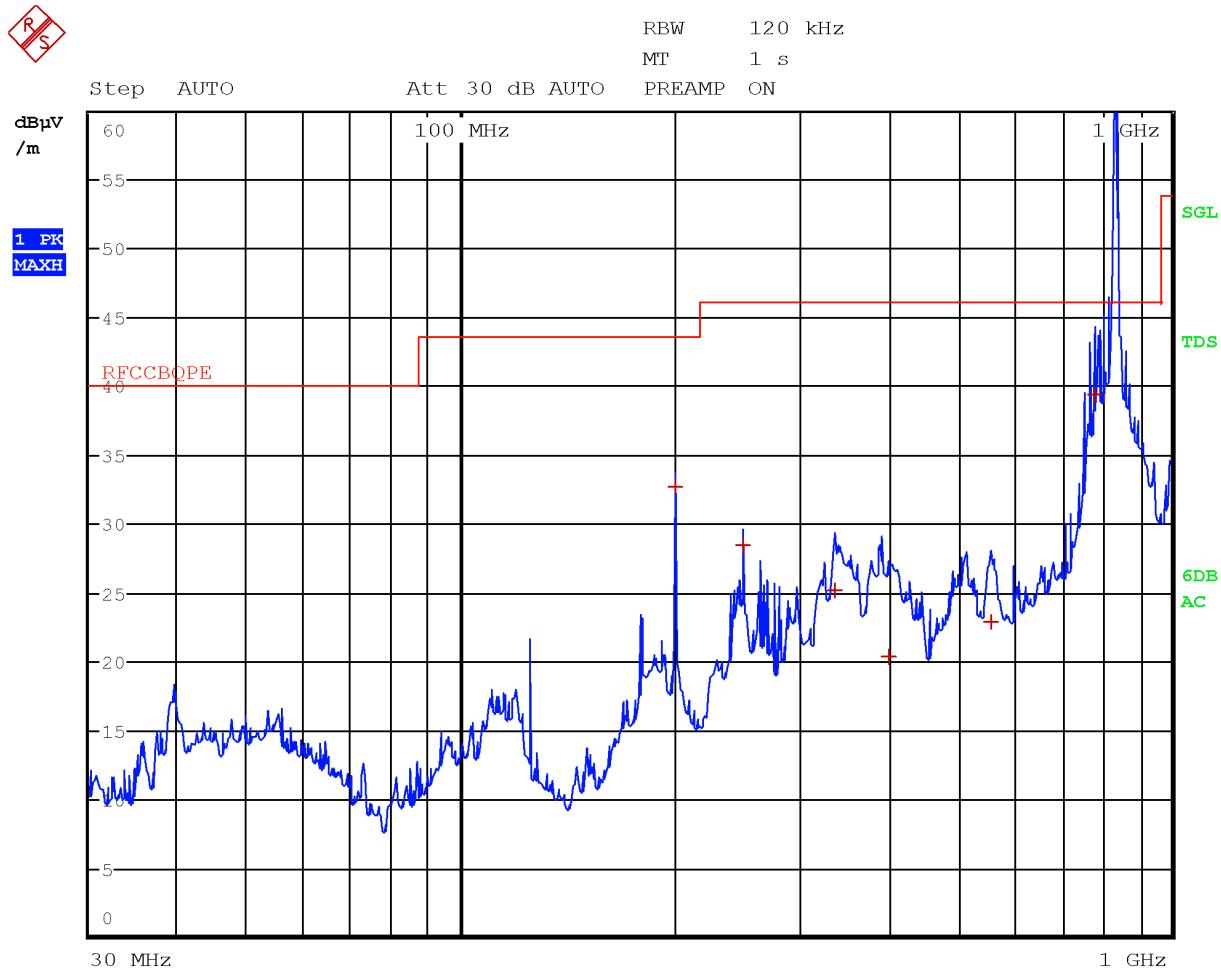


Figure 8.1-21: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
200.0000	32.8	43.5	-10.7	QP
250.0000	28.5	46.0	-17.5	QP
336.4400	25.2	46.0	-20.8	QP
401.0800	20.3	46.0	-25.7	QP
558.7200	22.9	46.0	-23.1	QP
780.0400	39.4	46.0	-6.6	QP

Section 8
Test name
Specification

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

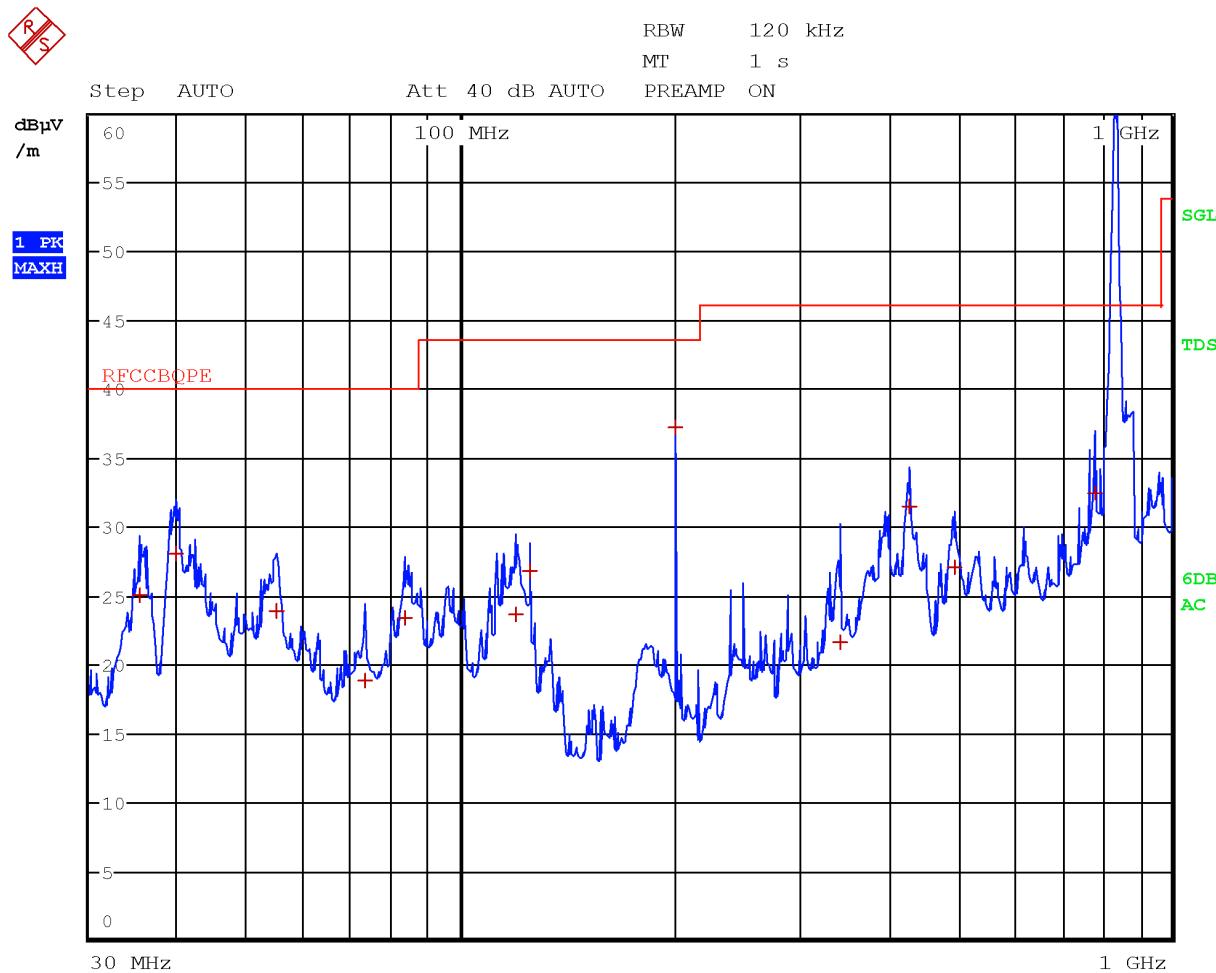


Figure 8.1-22: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
35.3200	25.1	40.0	-14.9	QP
39.8000	28.1	40.0	-11.9	QP
55.0400	24.0	40.0	-16.0	QP
73.2000	18.9	40.0	-21.1	QP
83.3200	23.5	40.0	-16.5	QP
119.3600	23.7	43.5	-19.8	QP
125.0000	26.9	43.5	-16.6	QP
200.0000	37.3	43.5	-6.2	QP
342.2400	21.6	46.0	-24.4	QP
428.0000	31.6	46.0	-14.4	QP
496.6400	27.1	46.0	-18.9	QP
780.1200	32.4	46.0	-13.6	QP

Section 8**Testing data****Test name**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

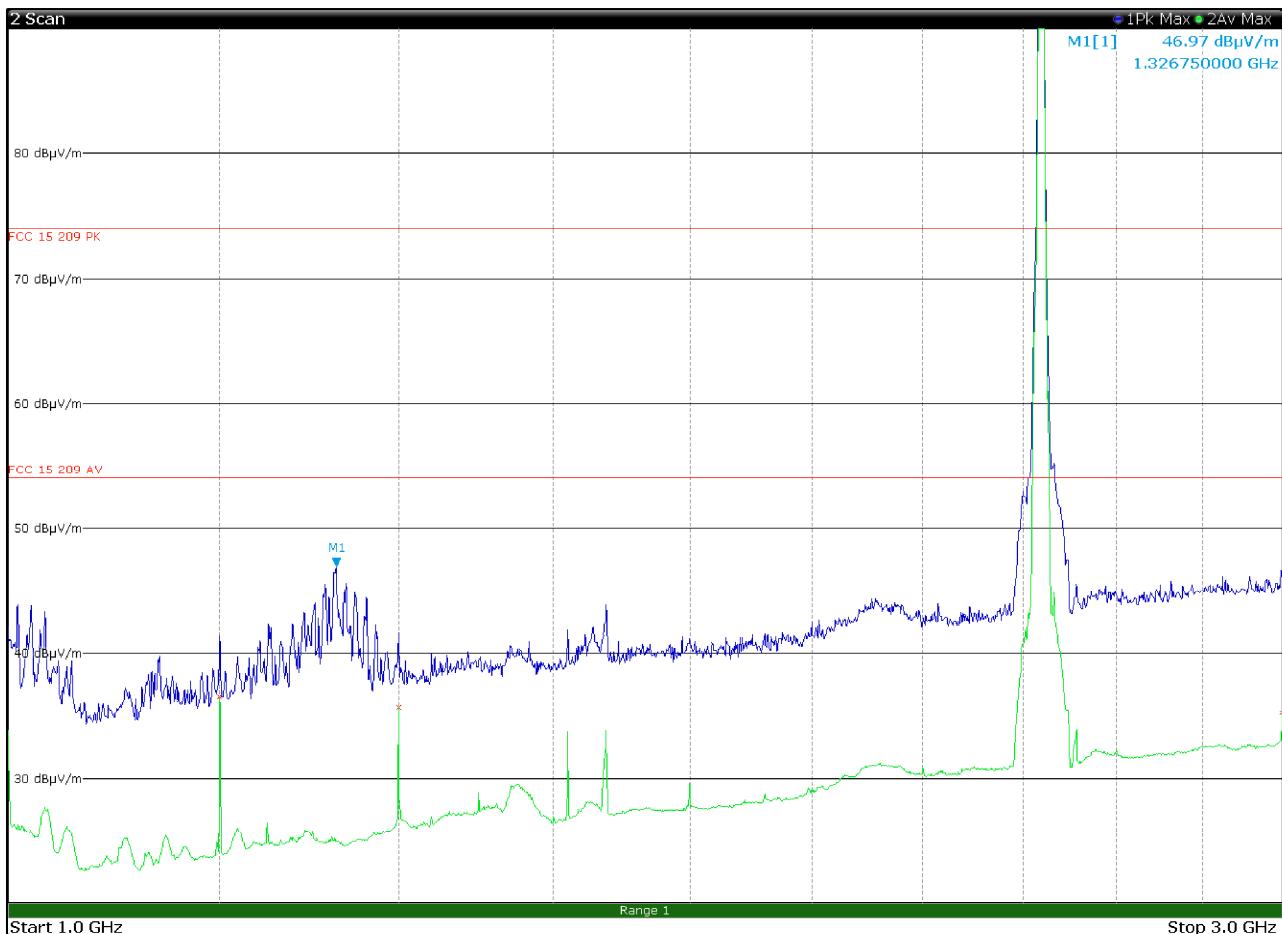


Figure 8.1-23: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1200.0000	36.6	54.0	-17.4	Av
1400.0000	35.8	54.0	-18.2	Av
3000.0000	35.4	54.0	-18.6	Av

Section 8**Testing data****Test name**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

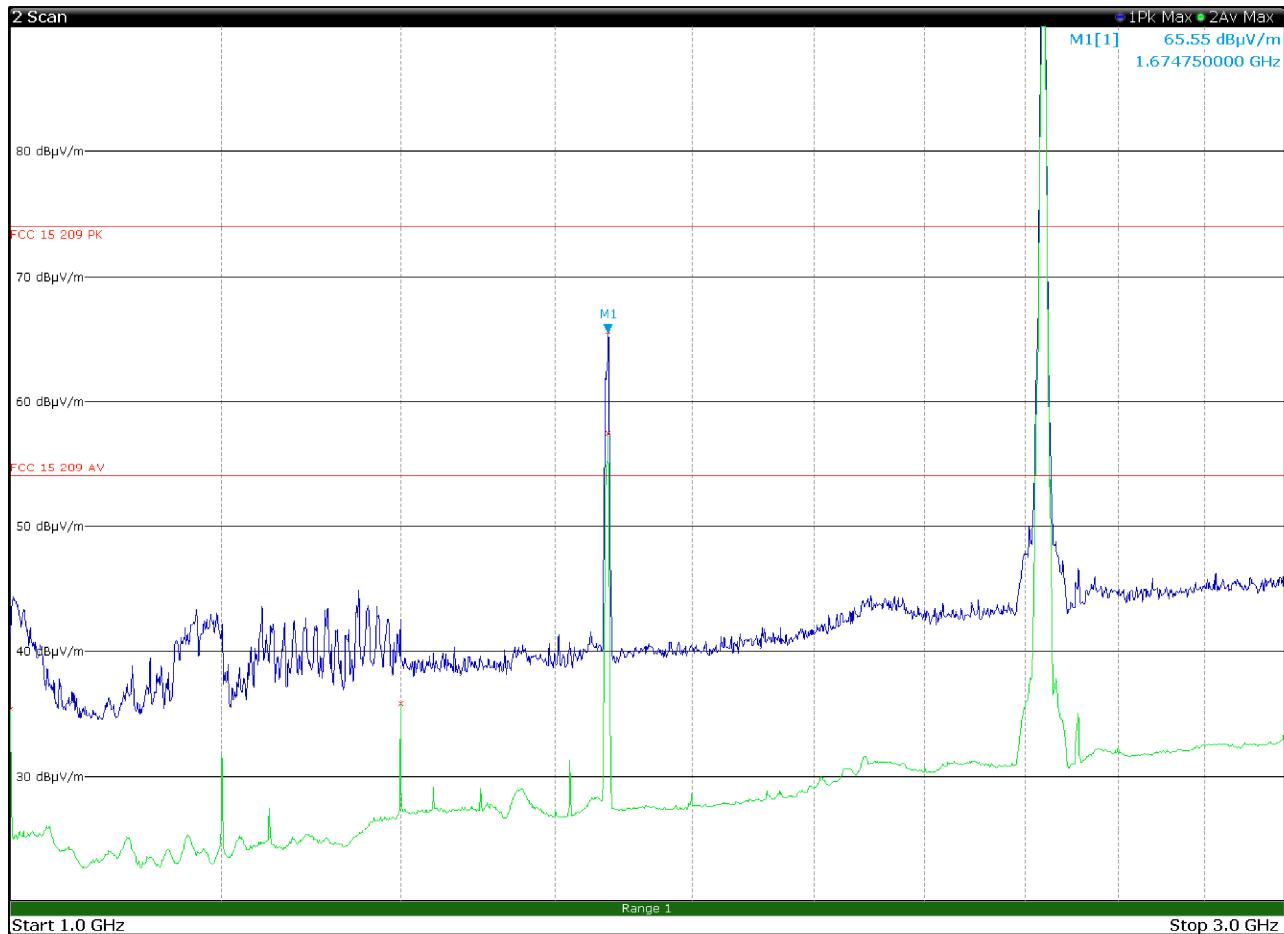


Figure 8.1-24: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1000.0000	35.5	54.0	-18.5	Av
1400.0000	35.9	54.0	-18.1	Av
1674.7500	65.6	82.2	-16.6	Pk

The limit for LTE is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m

Section 8**Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Test name
Specification



FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

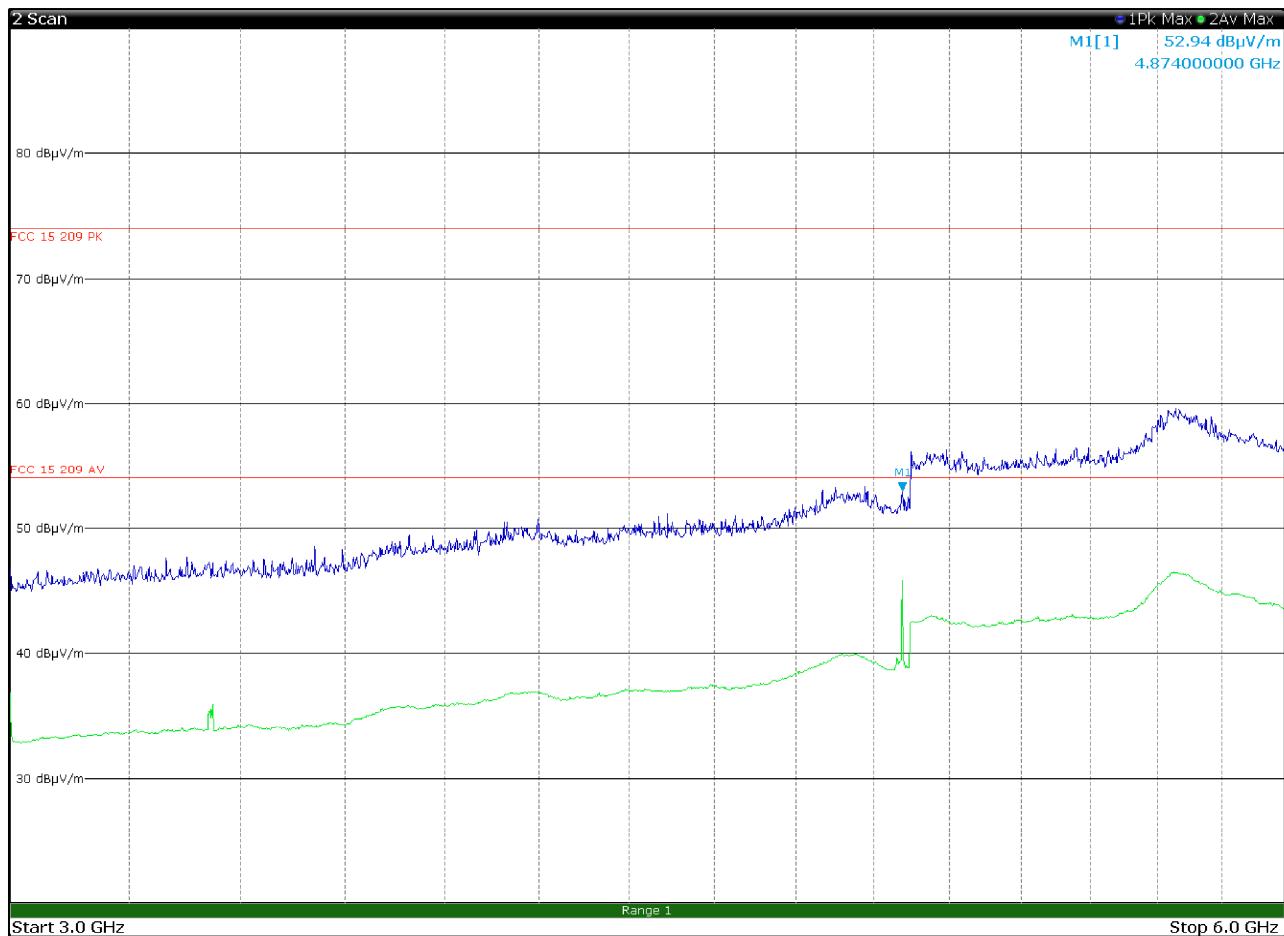


Figure 8.1-25: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Frequency (GHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
4.8740	53.0	74.0	-21.0	Pk
4.8740	47.9	54.0	-6.1	Av

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

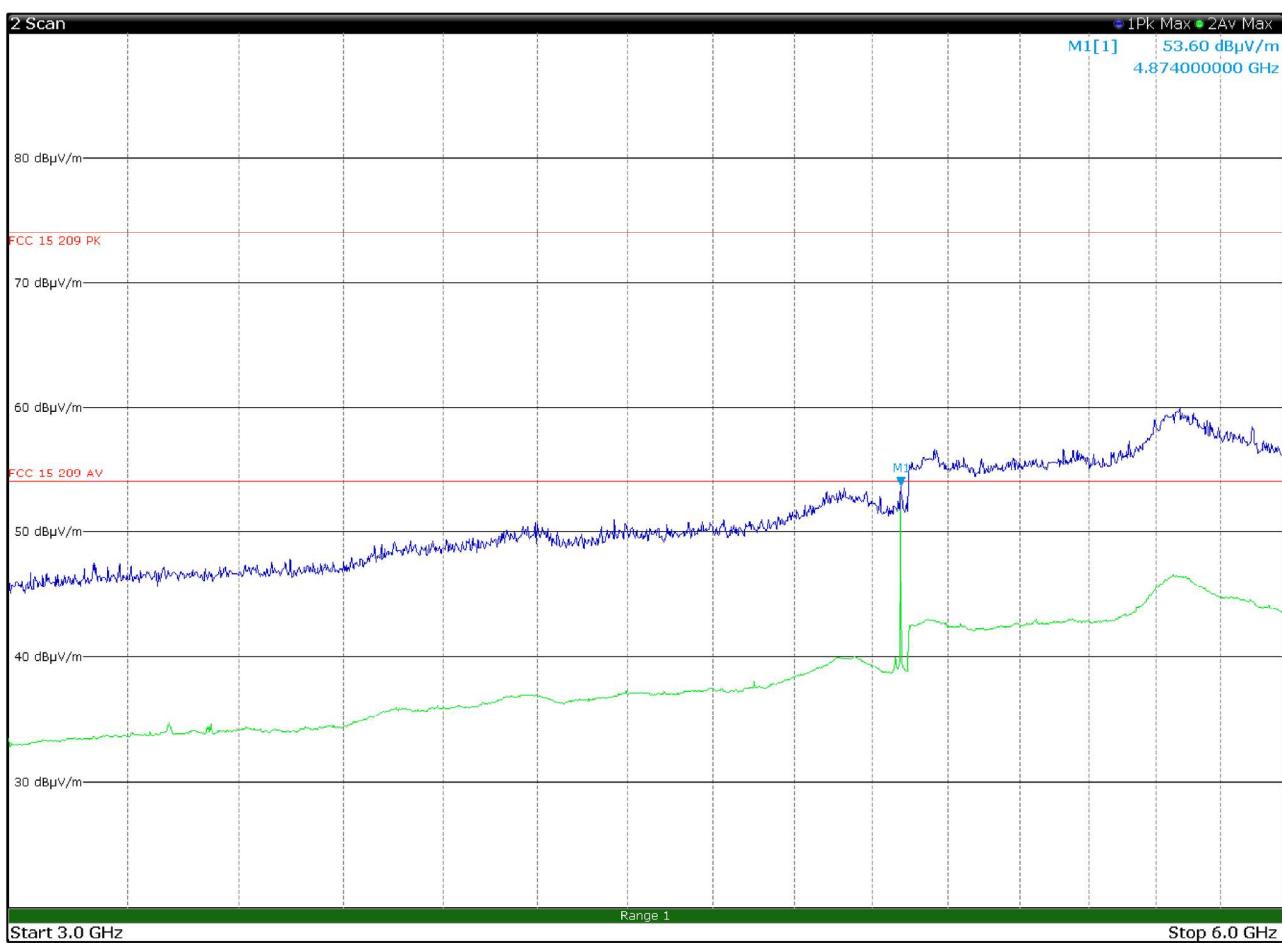


Figure 8.1-26: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Frequency (GHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
4.8740	53.6	74.0	-20.4	Pk
4.8740	48.5	54.0	-5.5	Av

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

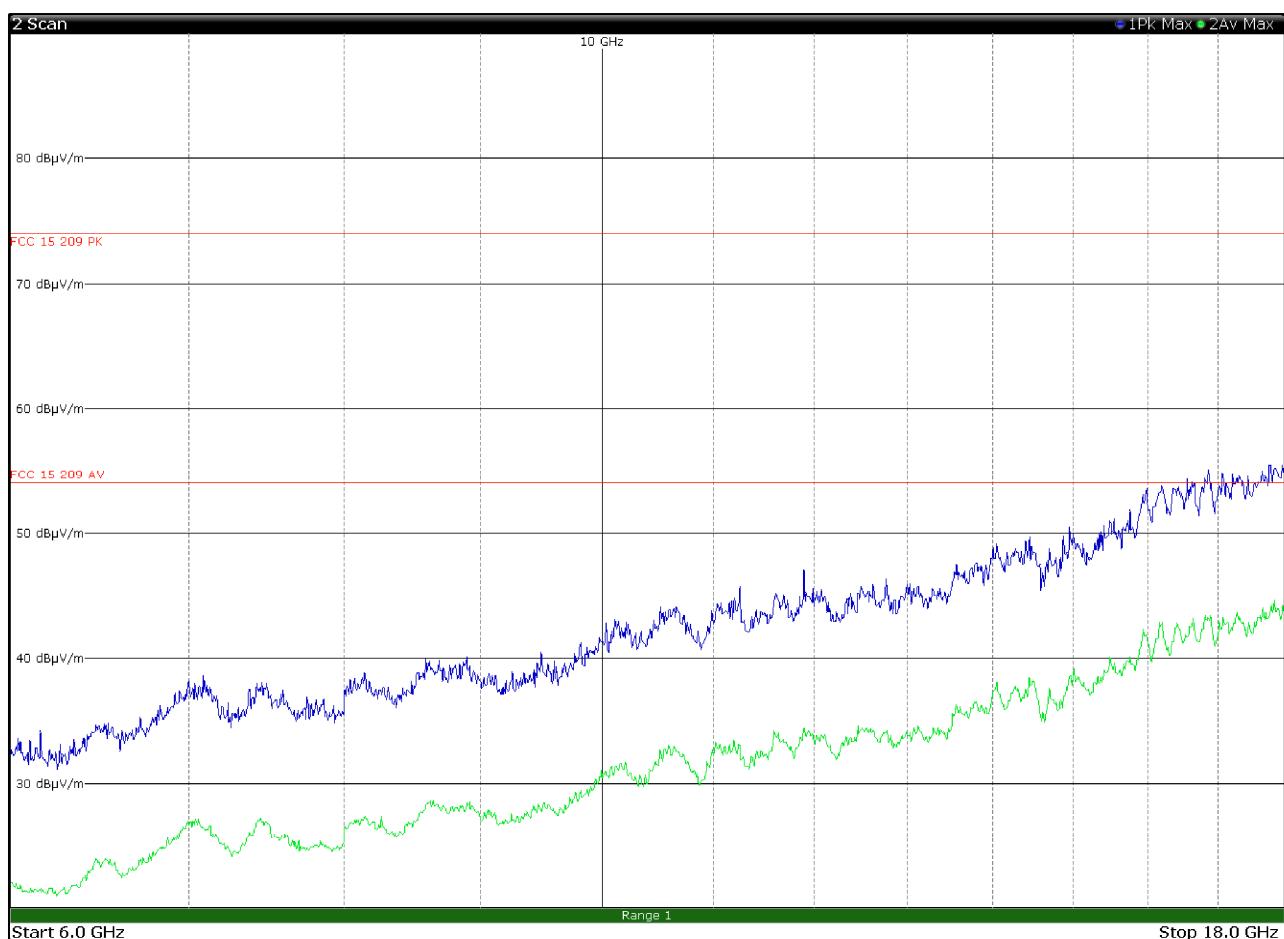


Figure 8.1-27: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Section 8**Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Test name
Specification

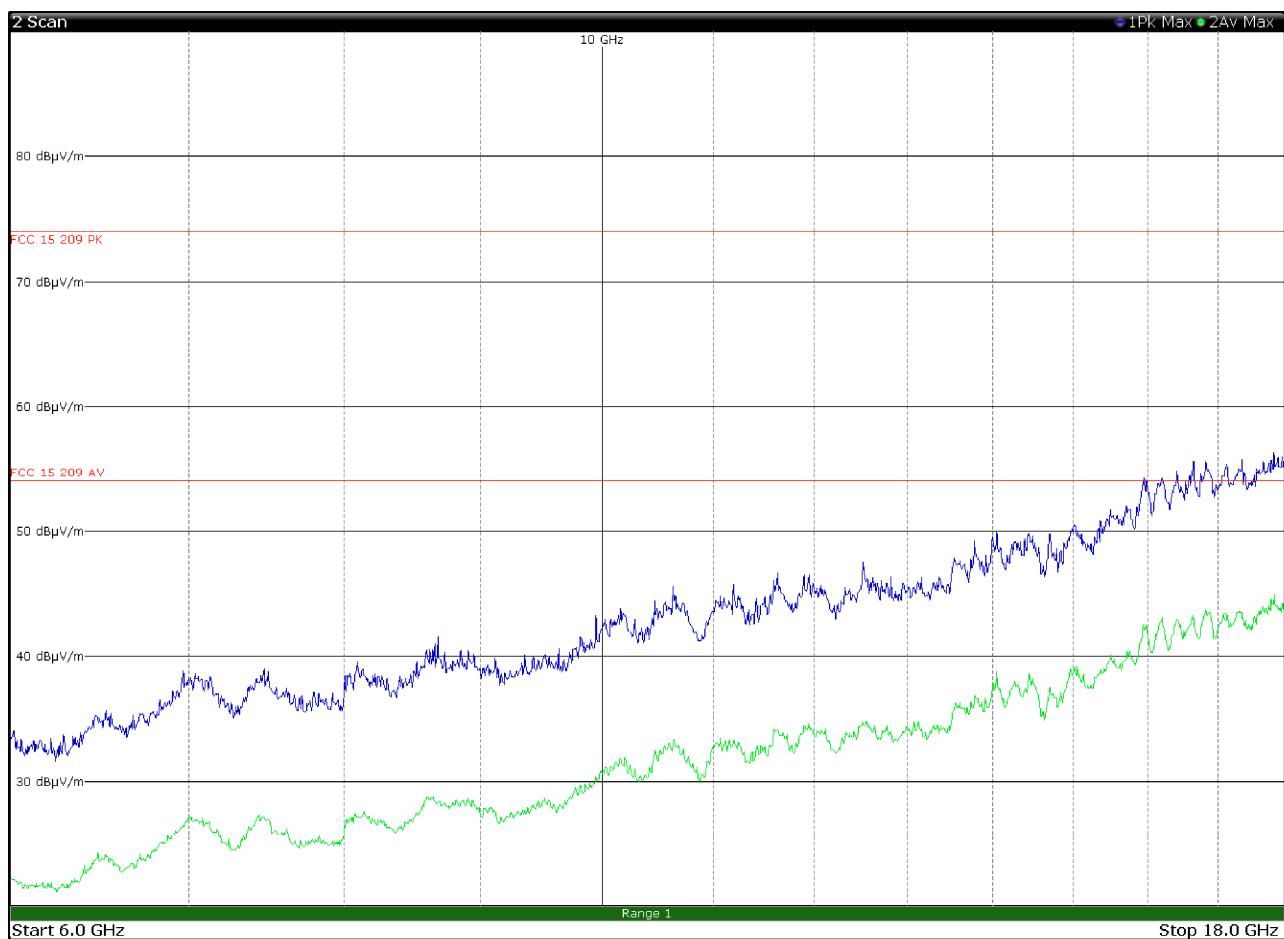


Figure 8.1-28: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission
limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

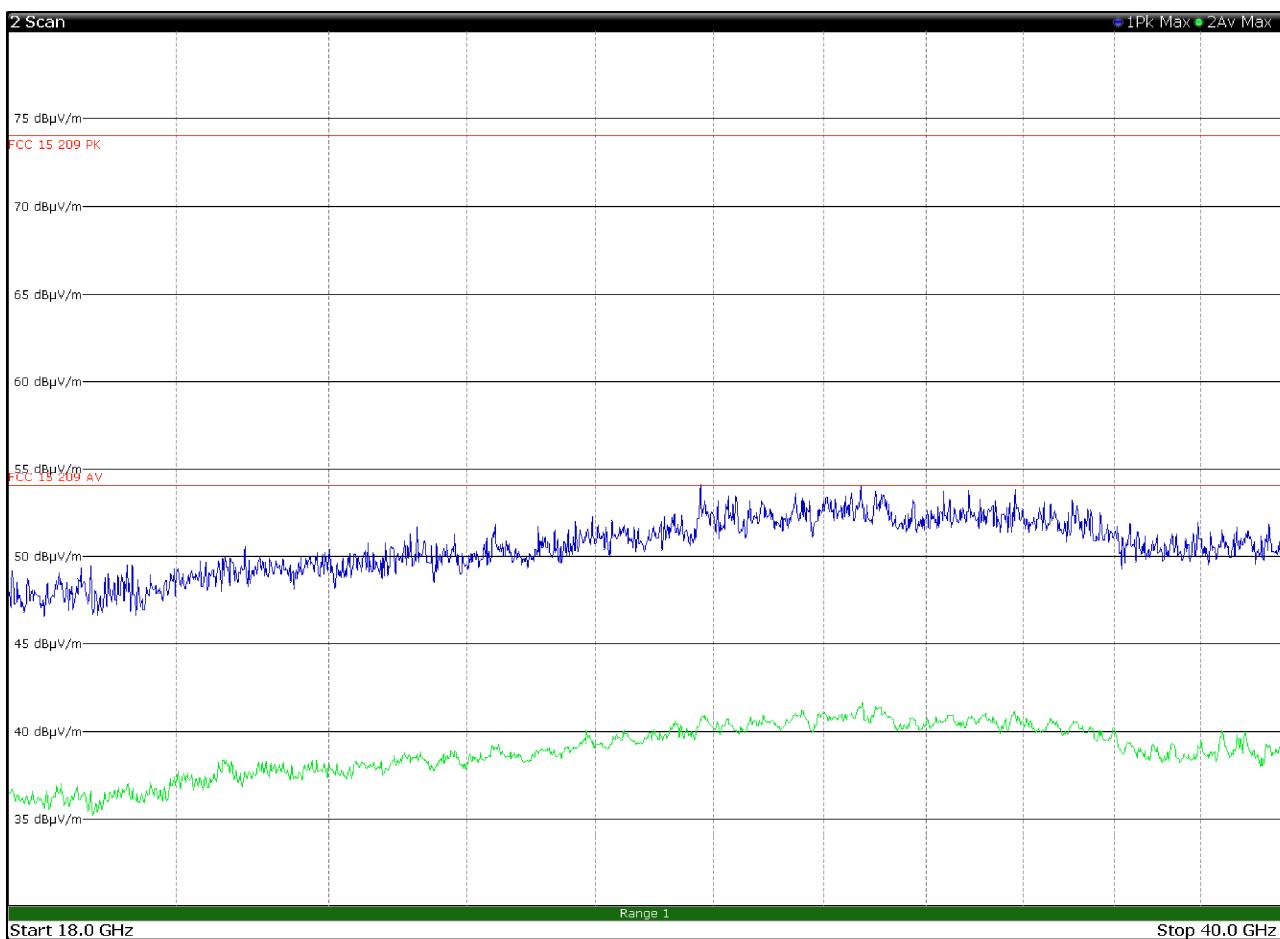


Figure 8.1-29: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in horizontal polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission
limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

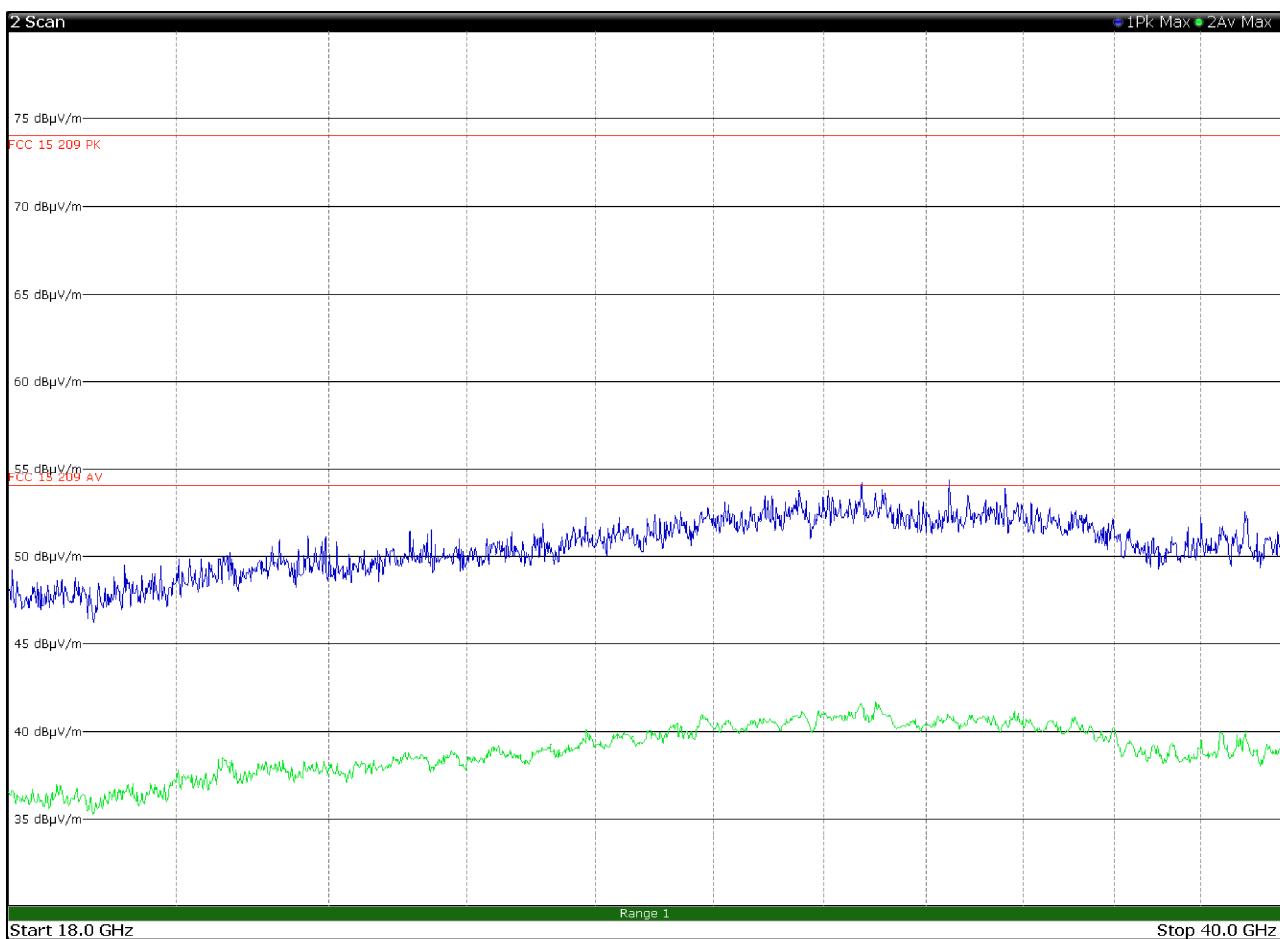


Figure 8.1-30: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 2437 MHz – antenna in vertical polarization

Section 8
Test name
Specification

Testing data
 FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
 FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

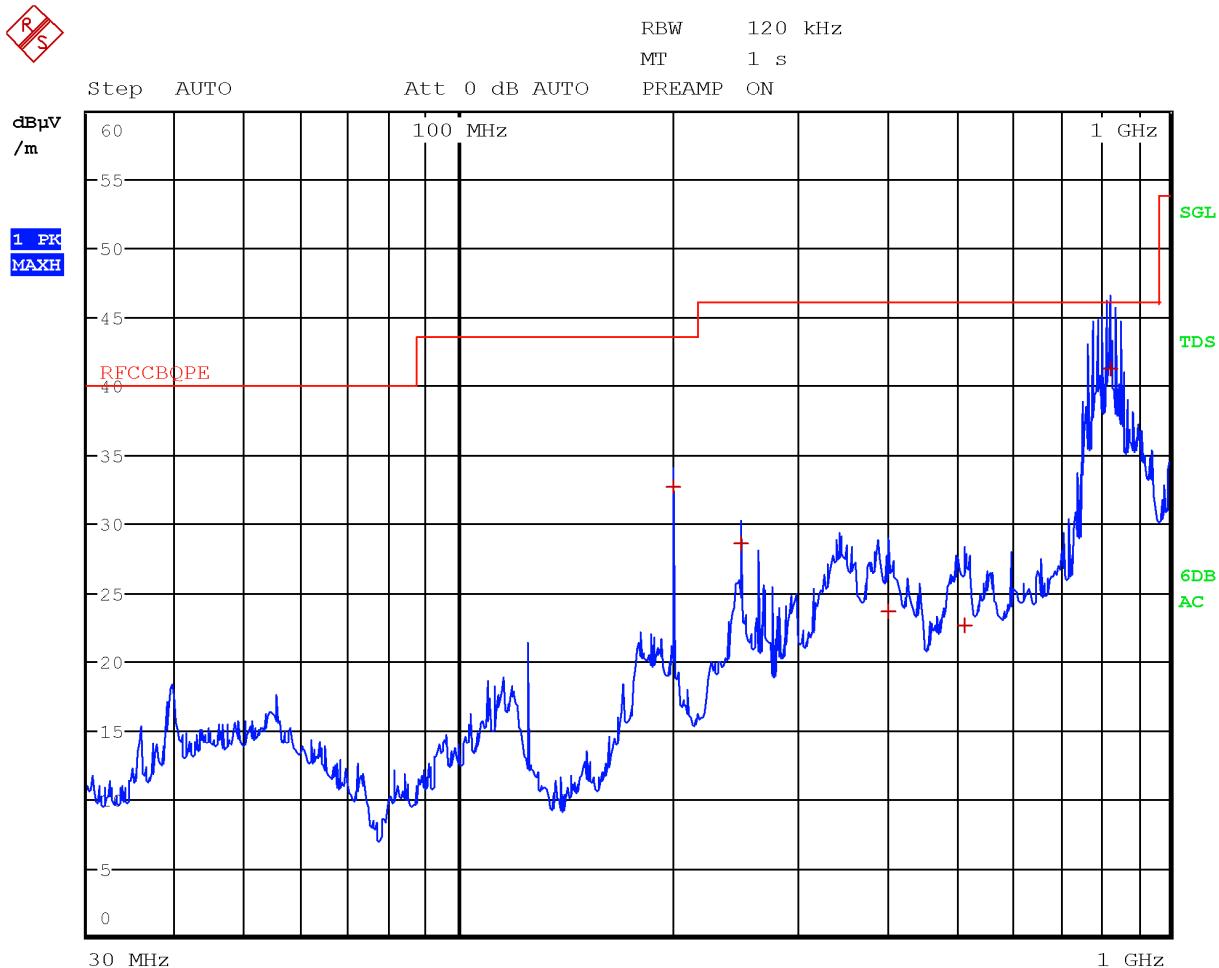


Figure 8.1-31: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
200.0000	32.8	43.5	-10.7	QP
250.0000	28.6	46.0	-17.4	QP
401.3200	23.7	46.0	-22.3	QP
515.8800	22.7	46.0	-23.3	QP
828.1600	41.3	46.0	-4.7	QP

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

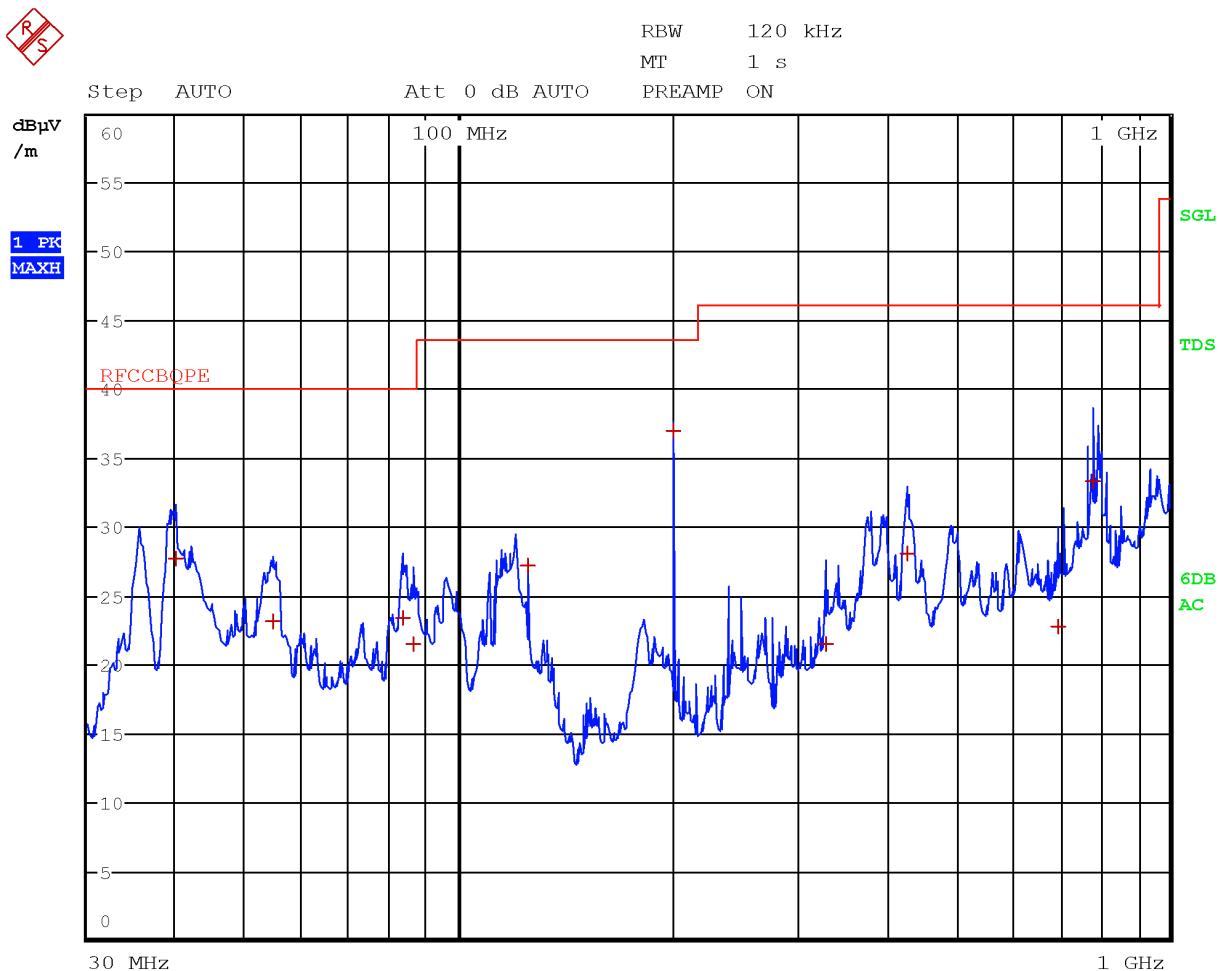


Figure 8.1-32: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
39.8800	27.8	40.0	-12.2	QP
54.6000	23.1	40.0	-16.9	QP
83.4400	23.4	40.0	-16.6	QP
86.0800	21.5	40.0	-18.5	QP
125.0000	27.2	43.5	-16.3	QP
200.0000	37.1	43.5	-6.4	QP
329.0400	21.5	46.0	-24.5	QP
428.3200	28.1	46.0	-17.9	QP
696.0000	22.8	46.0	-23.2	QP
780.1600	33.4	46.0	-12.6	QP

Section 8**Testing data****Test name**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

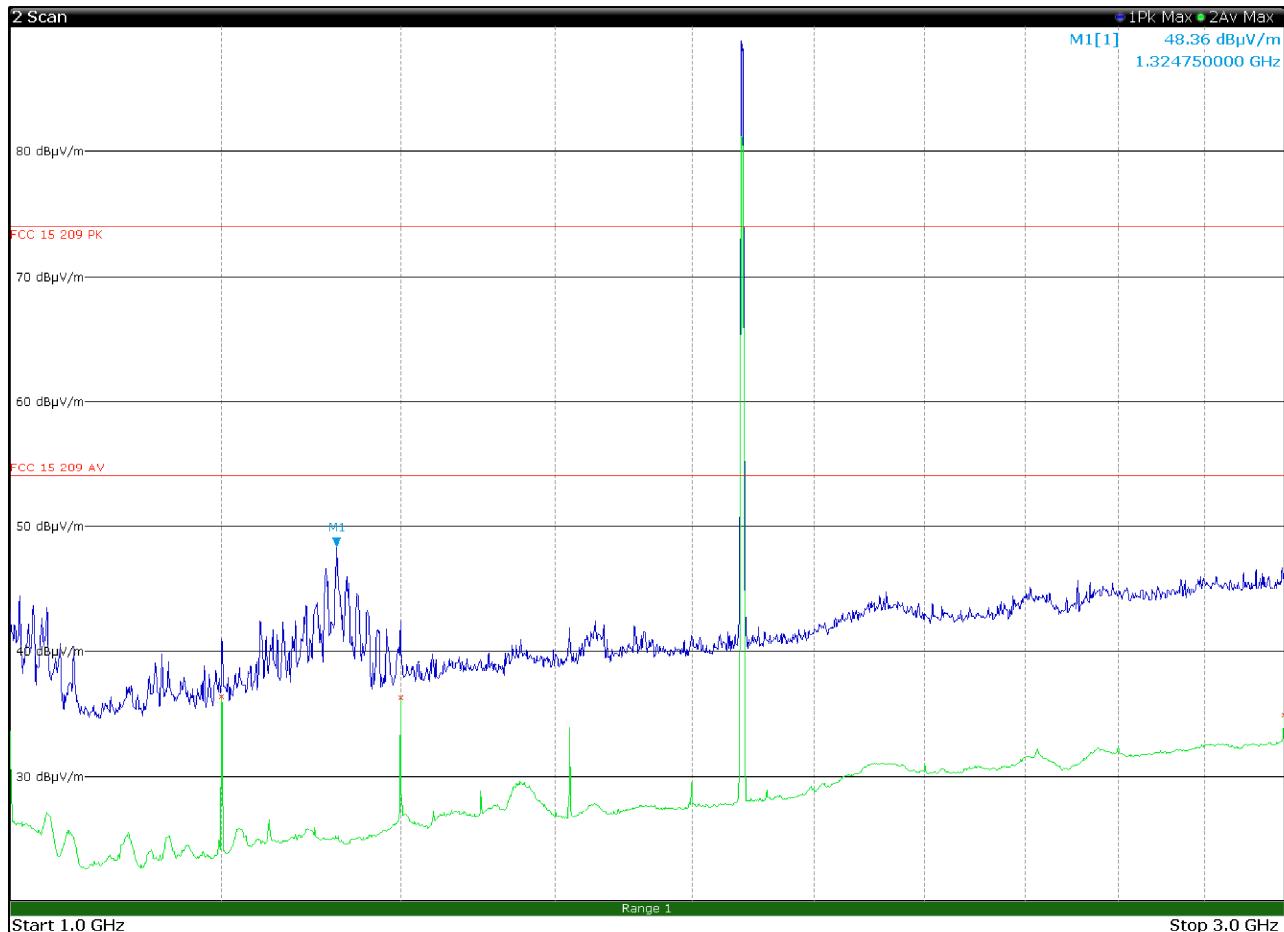


Figure 8.1-33: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1200.0000	36.4	54.0	-17.6	Av
1400.0000	36.4	54.0	-17.6	Av
3000.0000	34.9	54.0	-19.1	Av

Section 8**Testing data****Test name**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

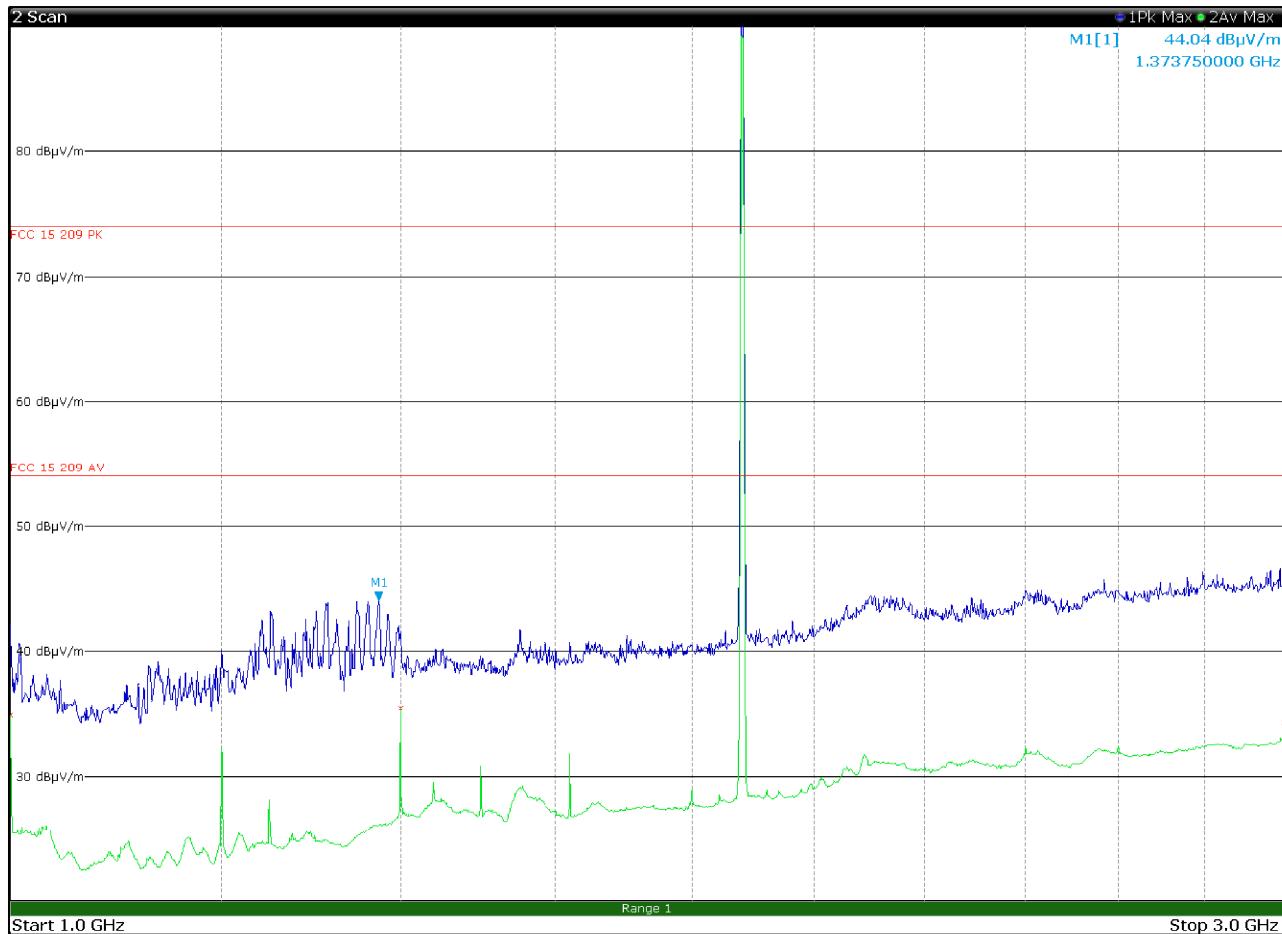


Figure 8.1-34: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1000.0000	35.0	54.0	-19.0	Av
1400.0000	35.5	54.0	-18.5	Av
3000.0000	34.3	54.0	-19.7	Av

Section 8**Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Test name
Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

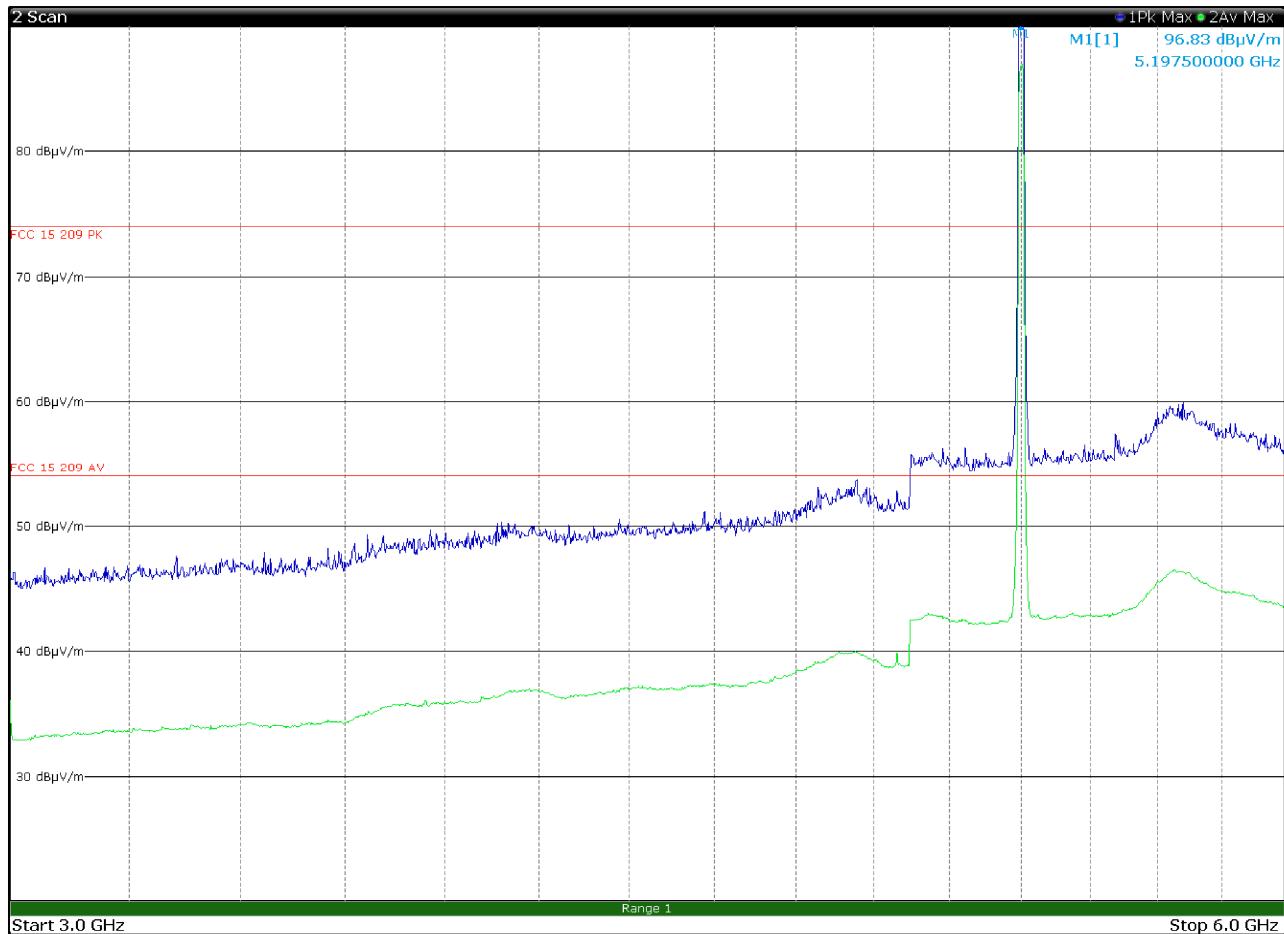


Figure 8.1-35: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Section 8**Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Test name
Specification



FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

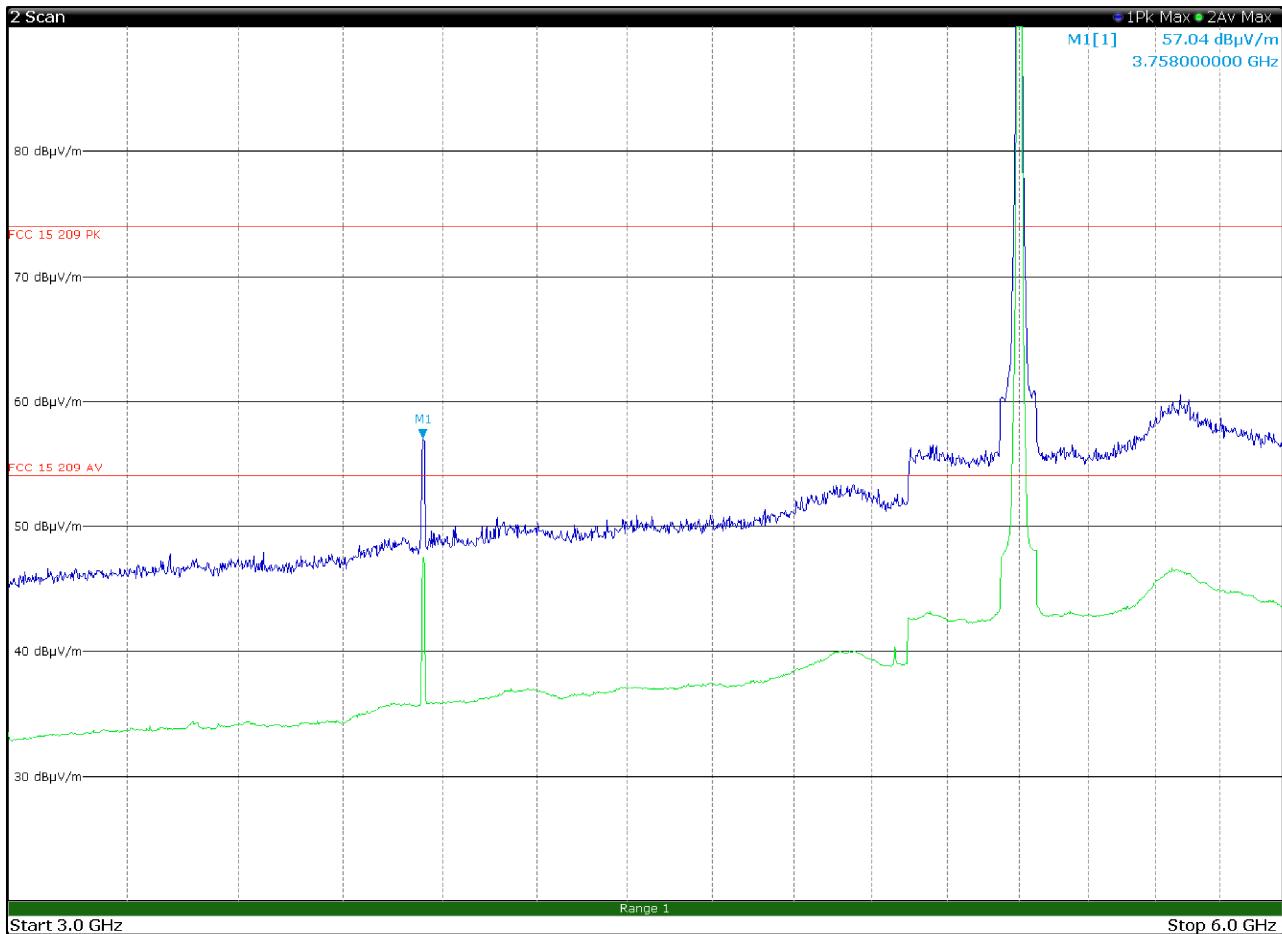


Figure 8.1-36: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (GHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
3.7580	57.1	82.2	-25.1	Pk

The limit for WCDMA is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

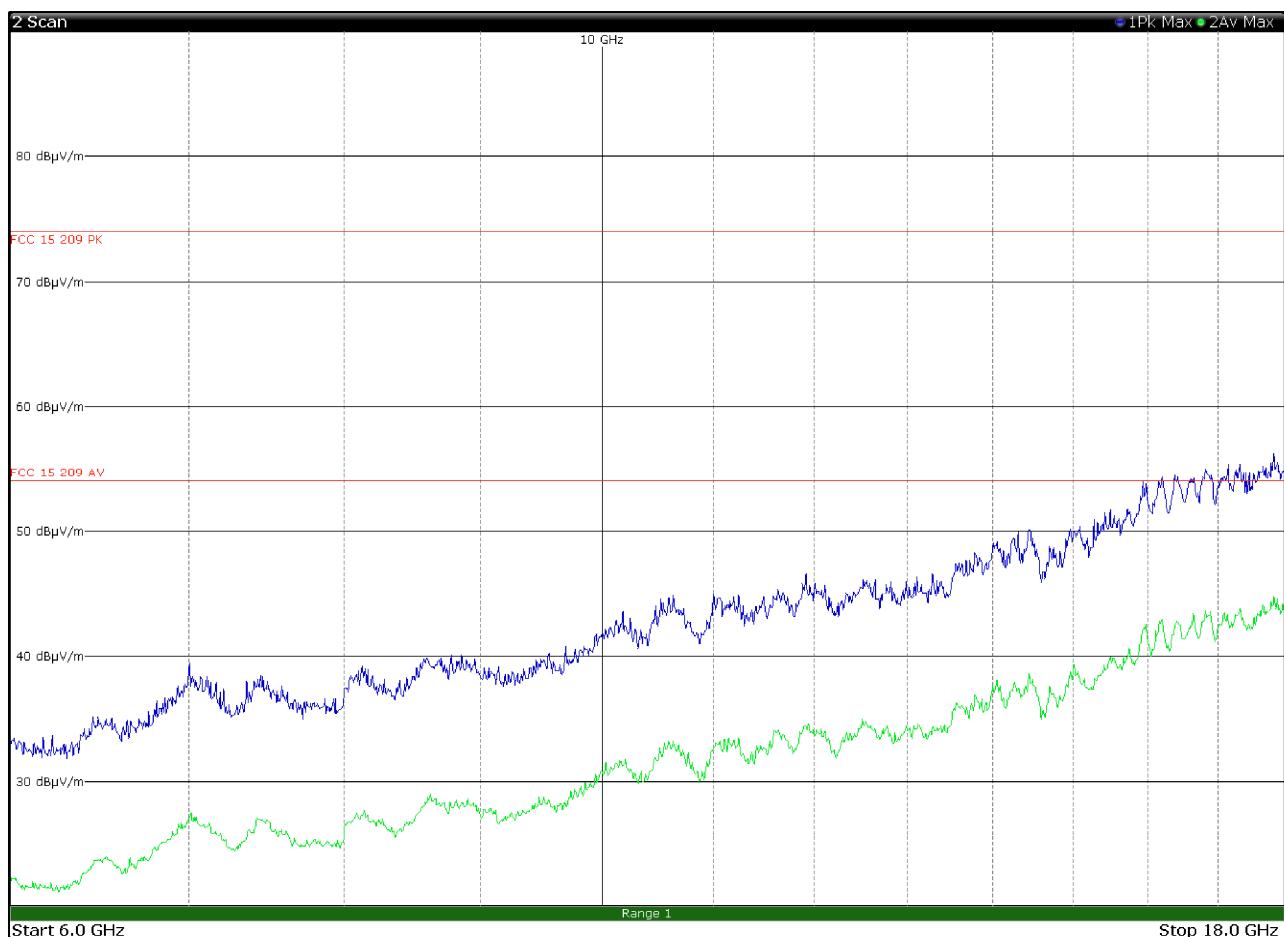


Figure 8.1-37: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission

Specification

limits; general requirements

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

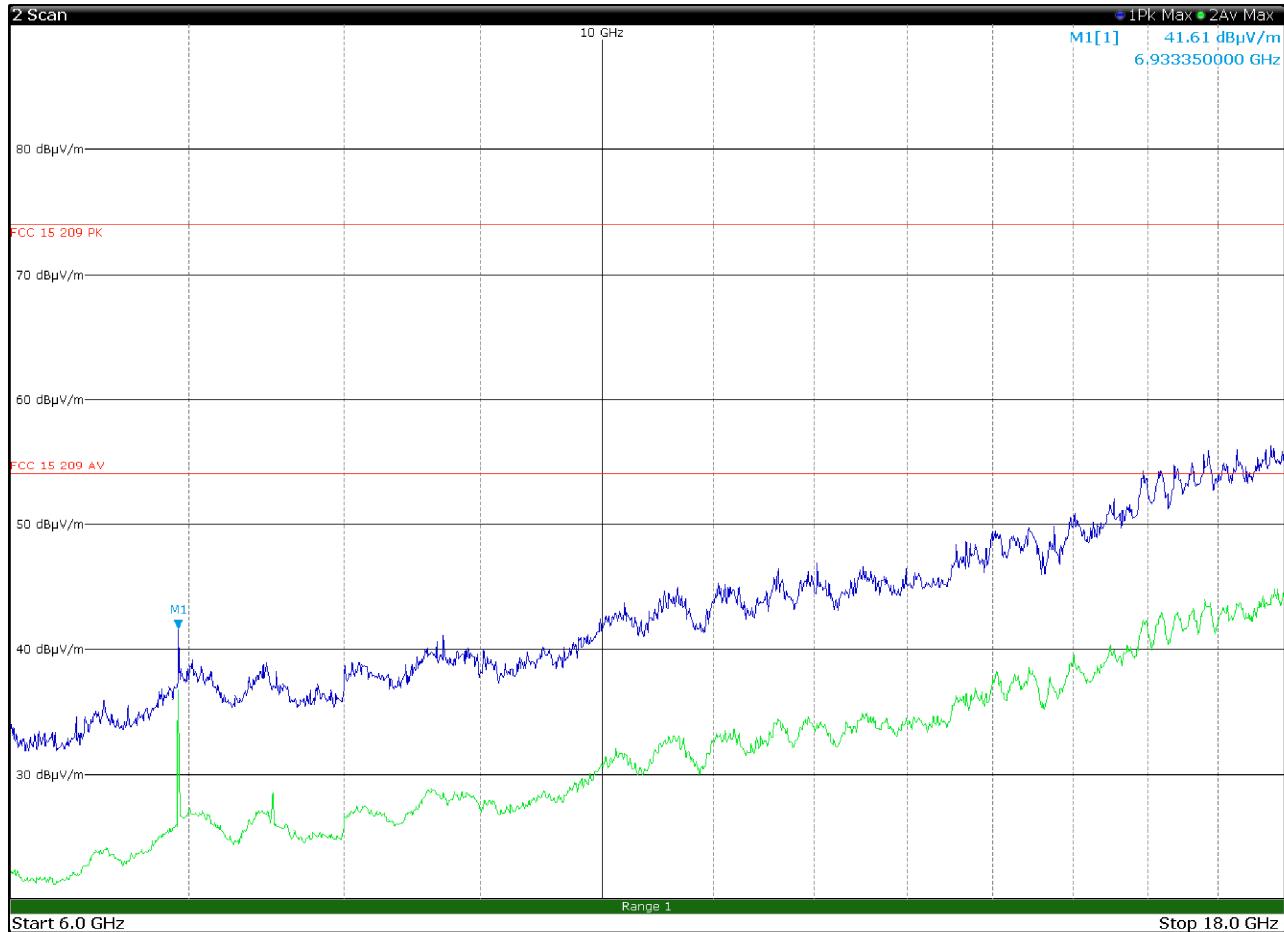


Figure 8.1-38: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission
limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

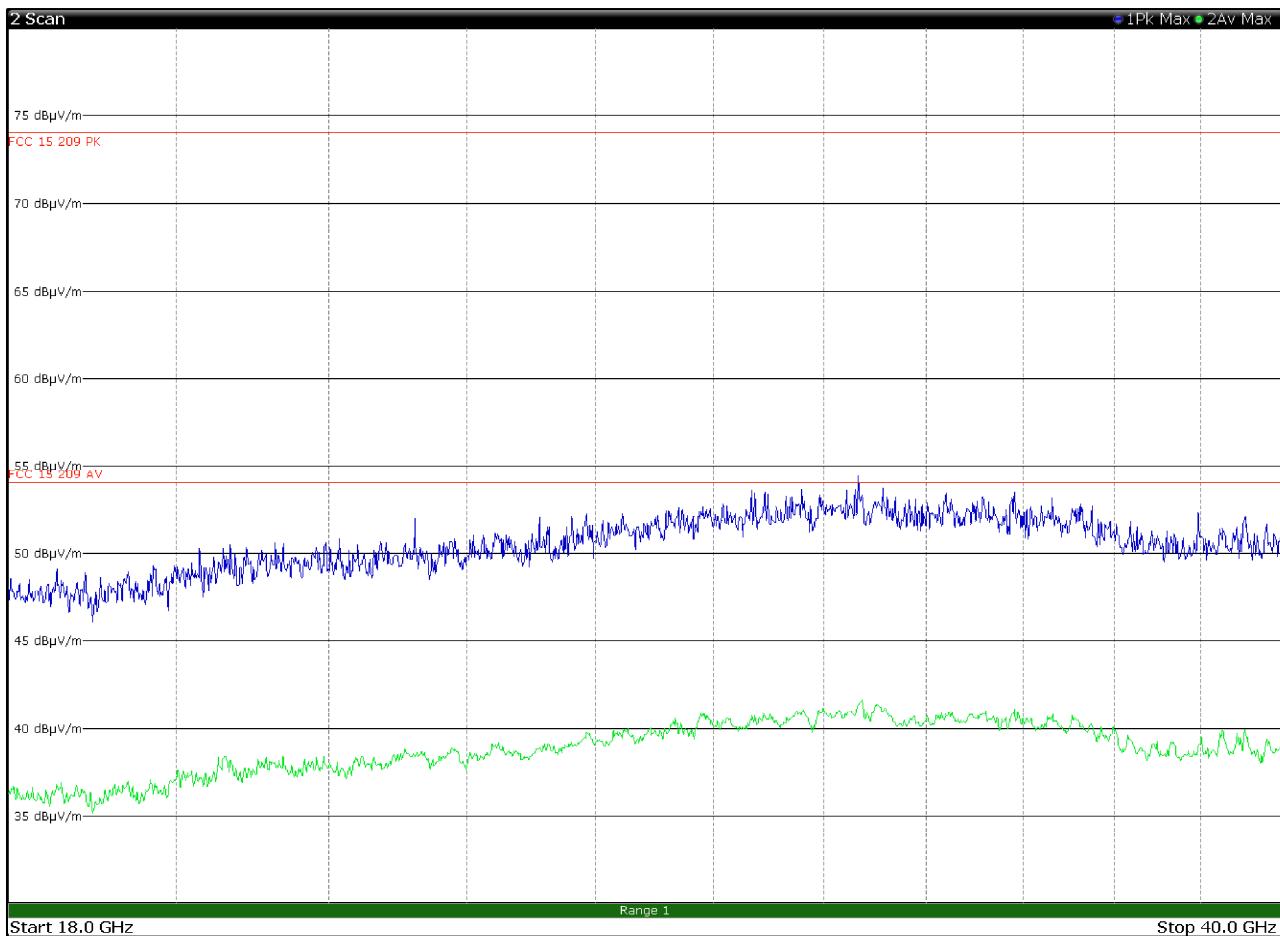


Figure 8.1-39: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission
limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

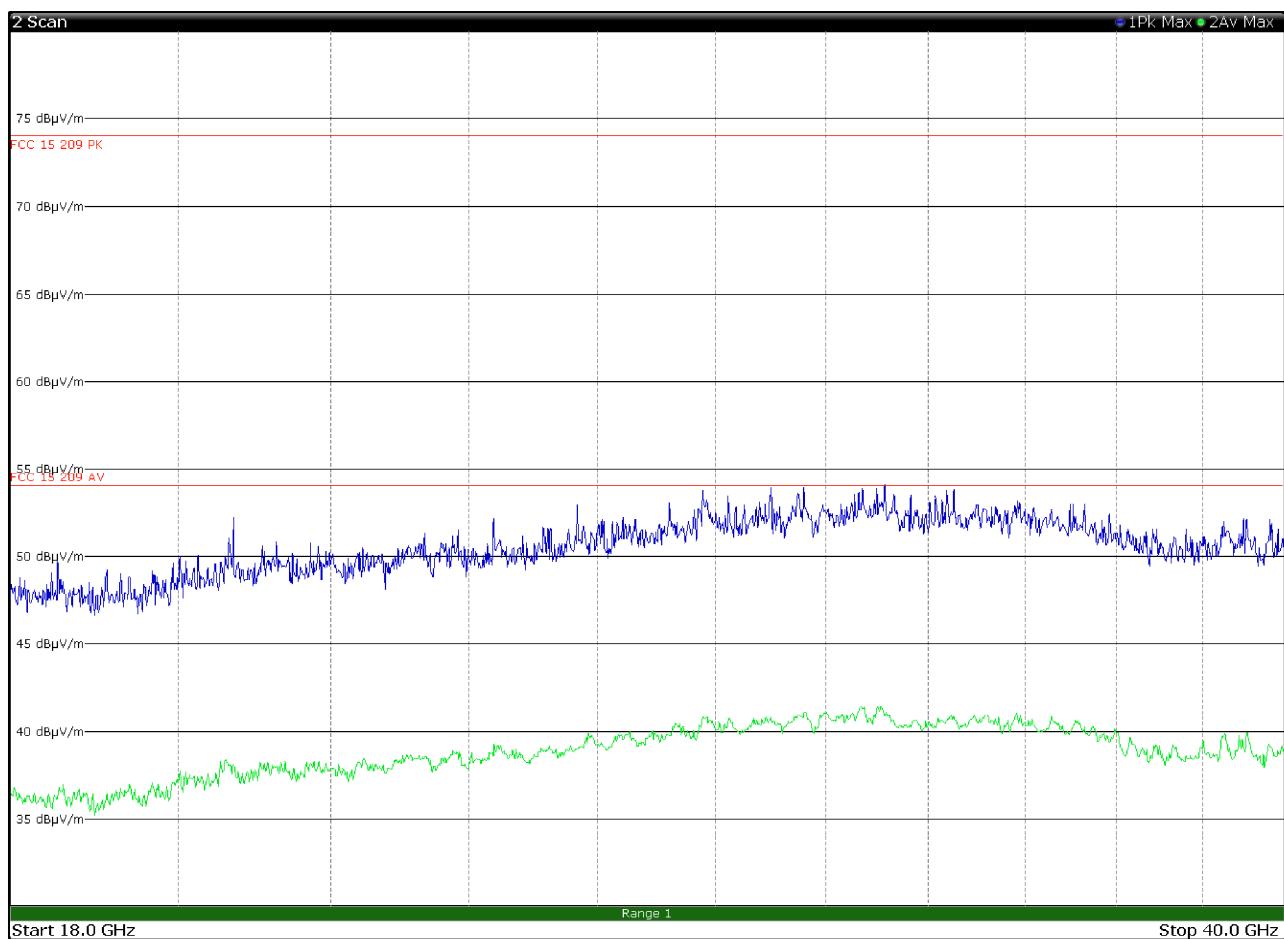


Figure 8.1-40: Radiated spurious emissions with WCDMA at 1880 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

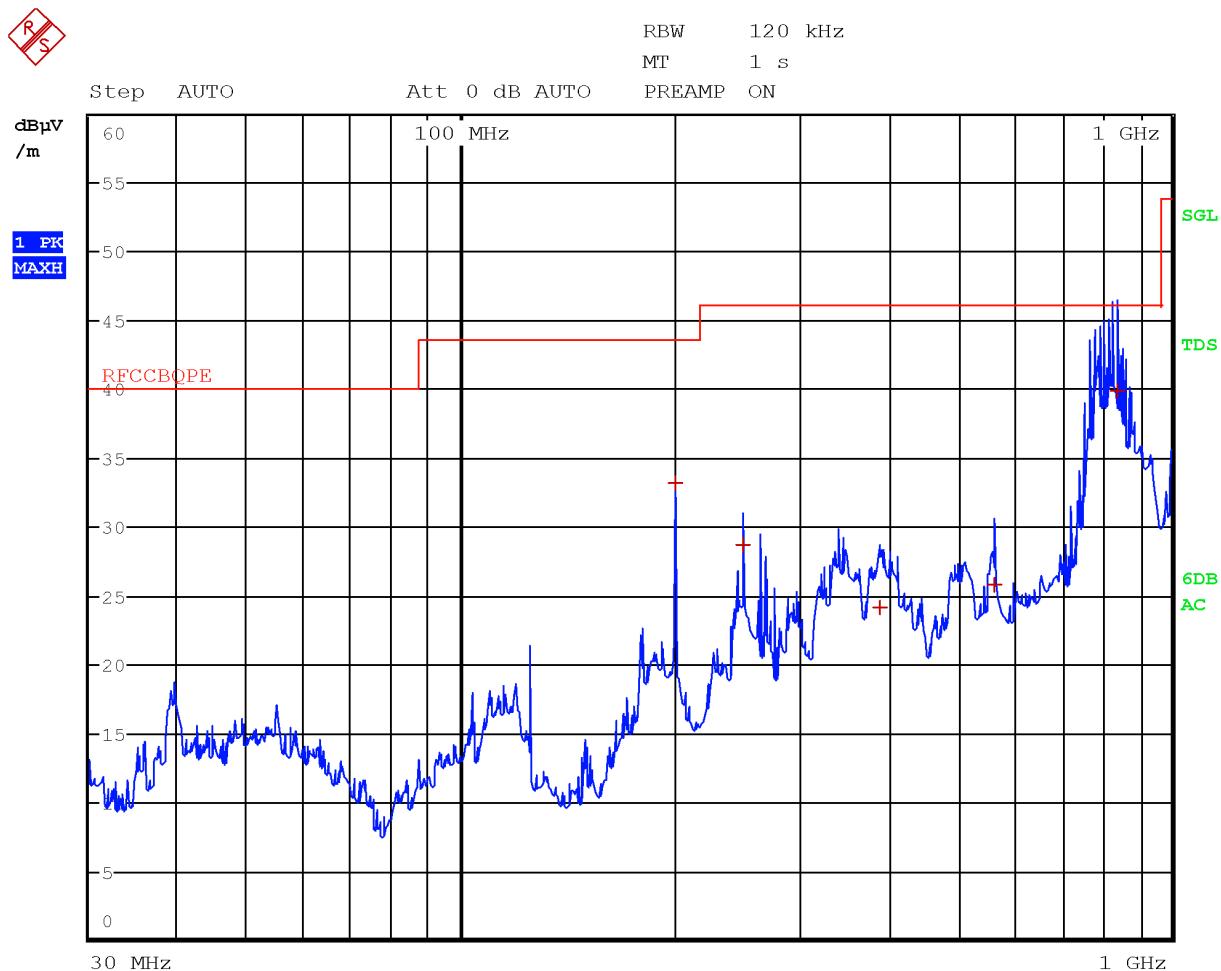


Figure 8.1-41: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
200.0000	33.3	43.5	-10.2	QP
250.0000	28.7	46.0	-17.3	QP
388.6000	24.2	46.0	-21.8	QP
562.3600	25.8	46.0	-20.2	QP
840.0400	39.9	46.0	-6.1	QP

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

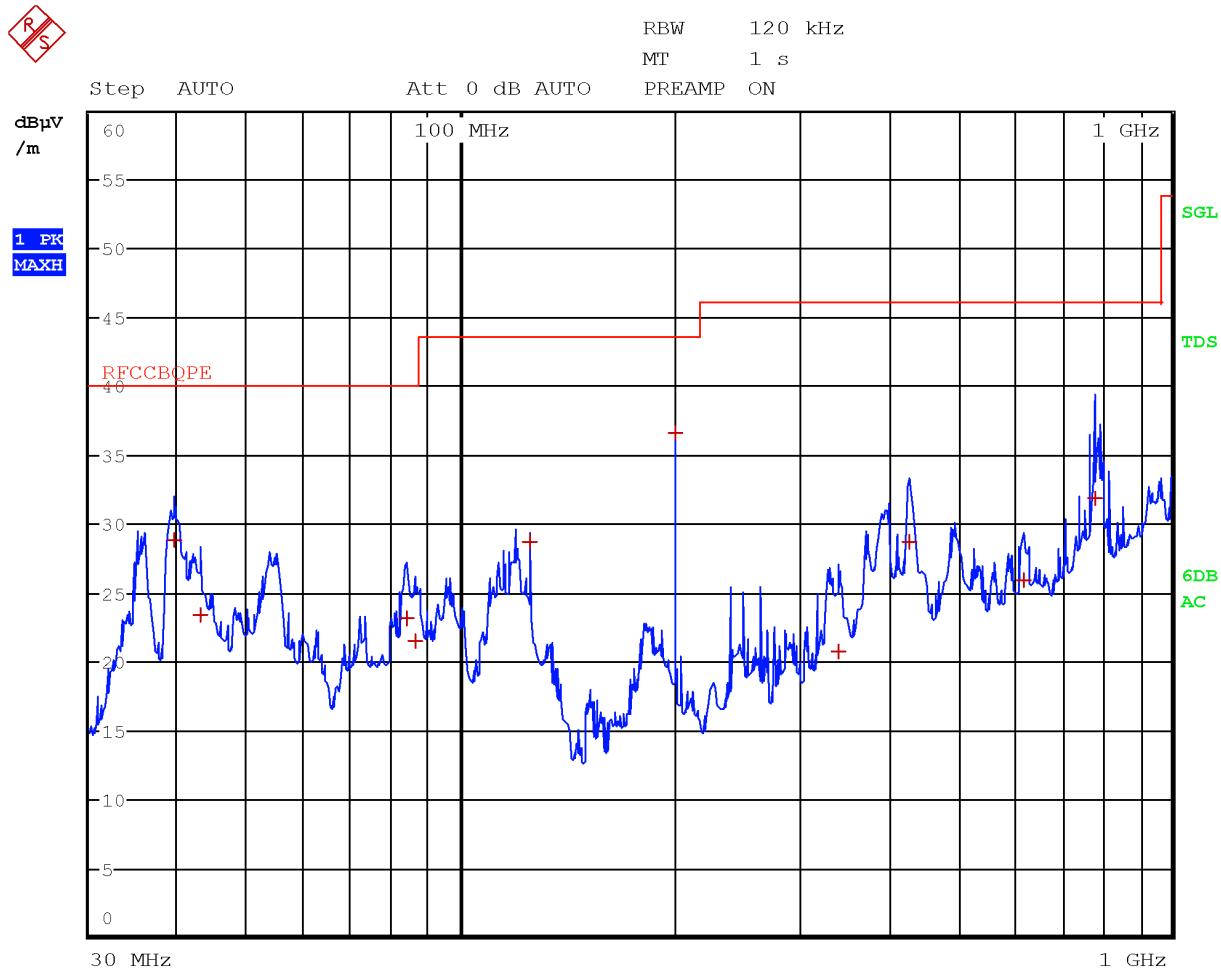


Figure 8.1-42: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
39.5600	28.8	40.0	-11.2	QP
42.8400	23.4	40.0	-16.6	QP
83.9600	23.2	40.0	-16.8	QP
86.3600	21.5	40.0	-18.5	QP
125.0000	28.8	43.5	-14.7	QP
200.0000	36.7	43.5	-6.8	QP
339.8000	20.8	46.0	-25.2	QP
428.9600	28.8	46.0	-17.2	QP
621.7600	25.9	46.0	-20.1	QP
780.2400	31.8	46.0	-14.2	QP

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

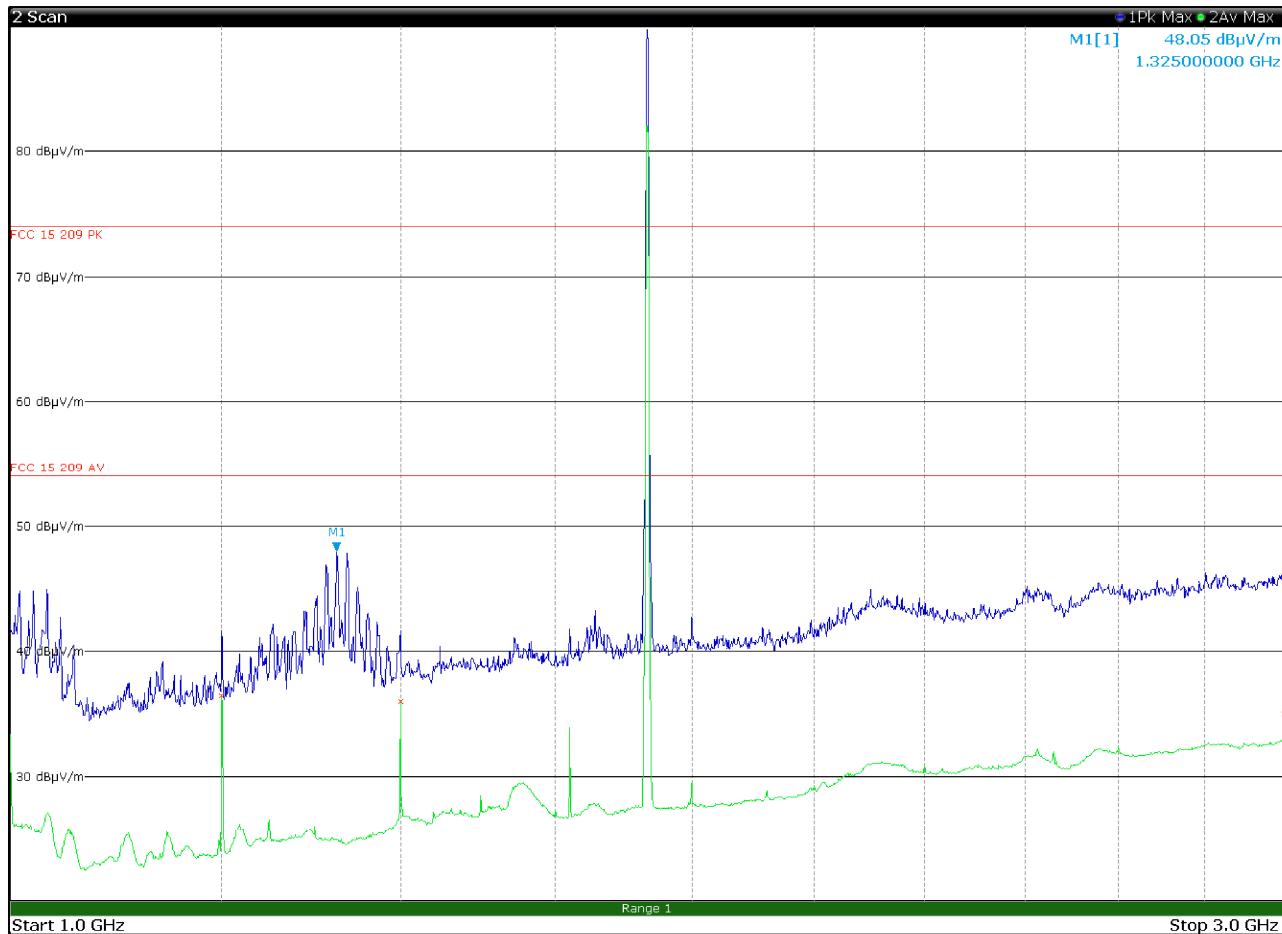


Figure 8.1-43: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1200.0000	36.6	54.0	-17.4	Av
1400.0000	36.1	54.0	-17.9	Av
3000.0000	35.0	54.0	-19.0	Av

Section 8**Test name**

Testing data
 FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
 FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

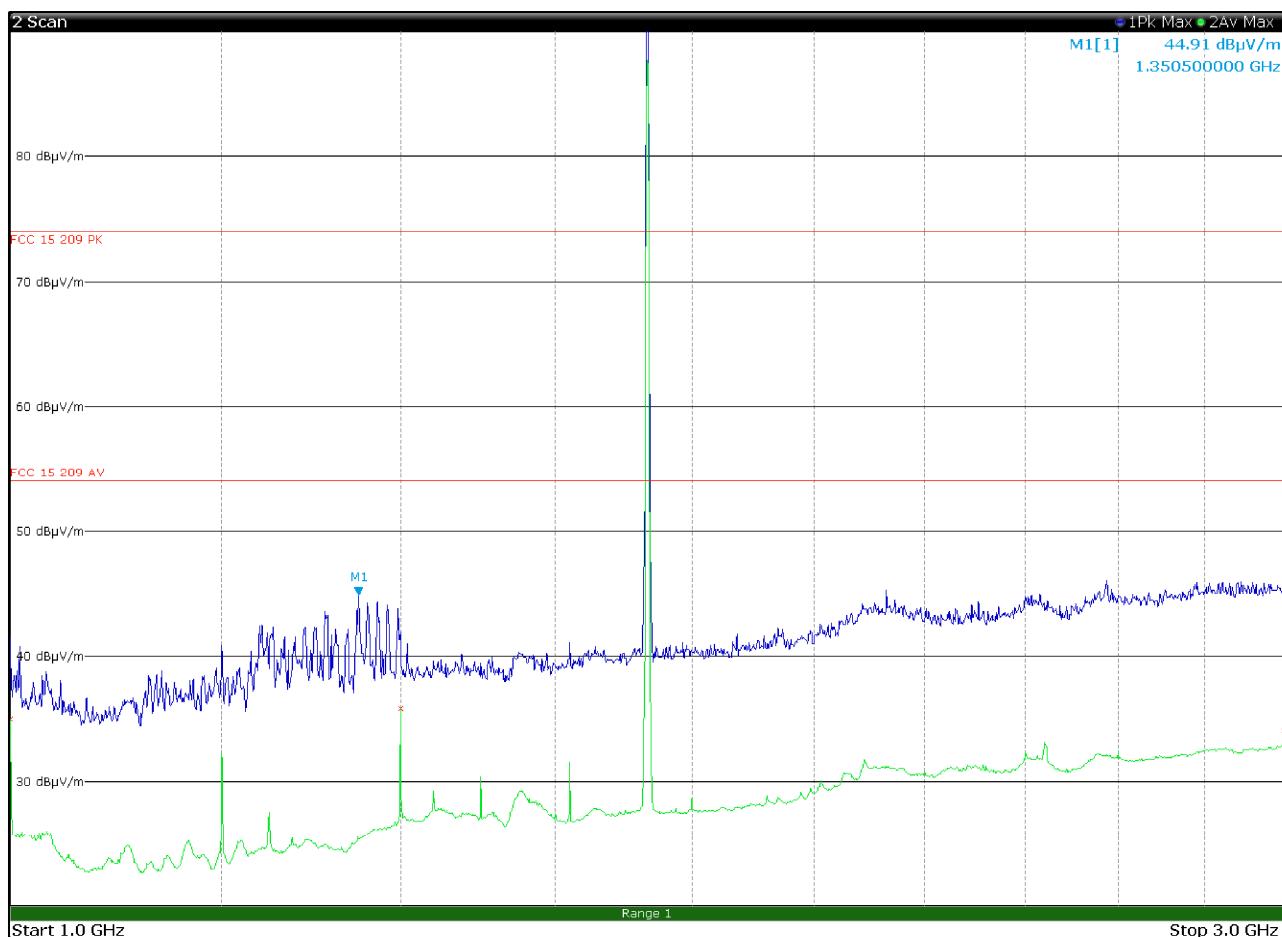


Figure 8.1-44: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1000.0000	35.0	54.0	-19.0	Av
1400.0000	35.9	54.0	-18.1	Av
3000.0000	34.1	54.0	-19.9	Av

Section 8**Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Test name
Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

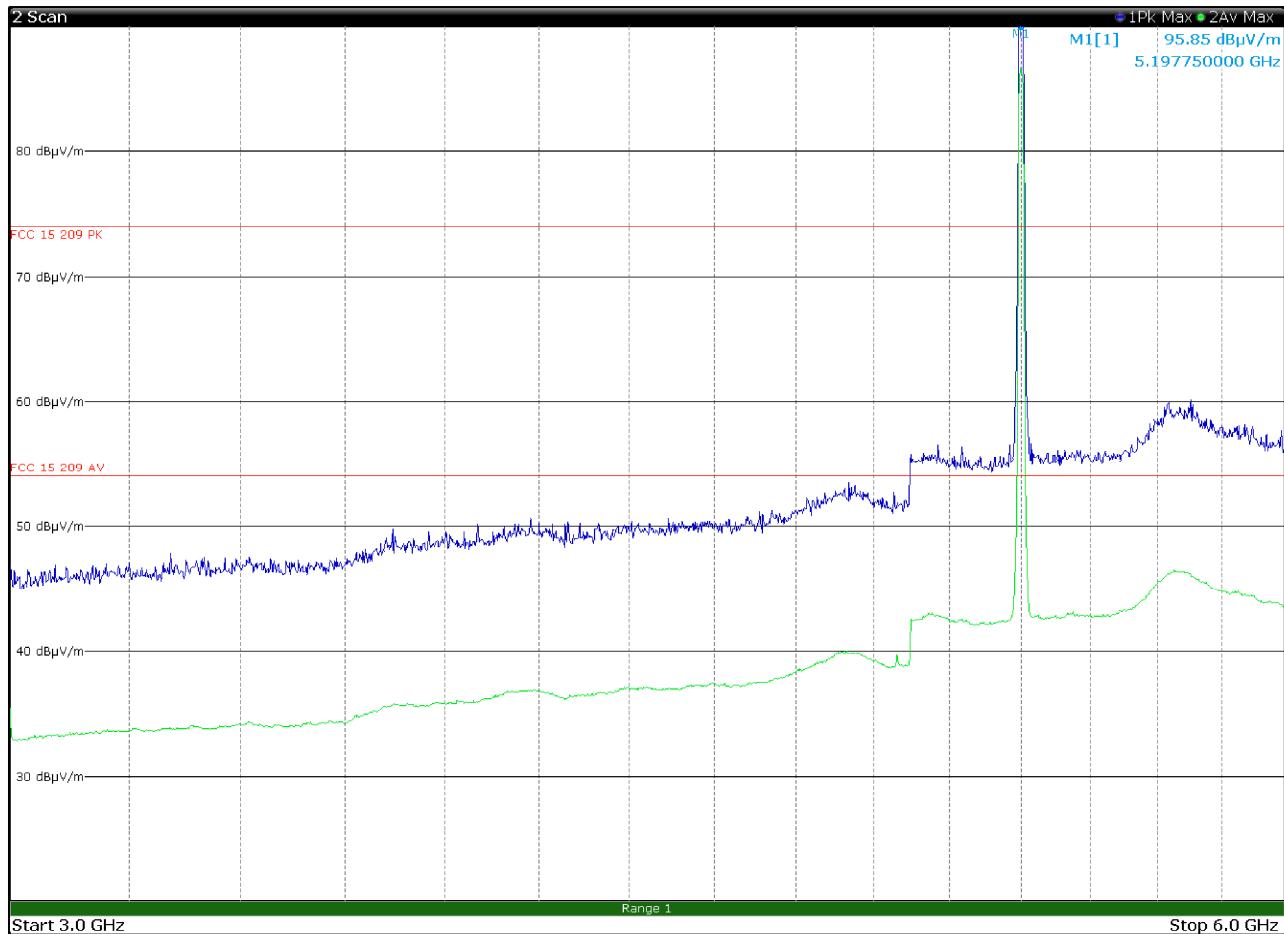


Figure 8.1-45: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Section 8**Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Test name
Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

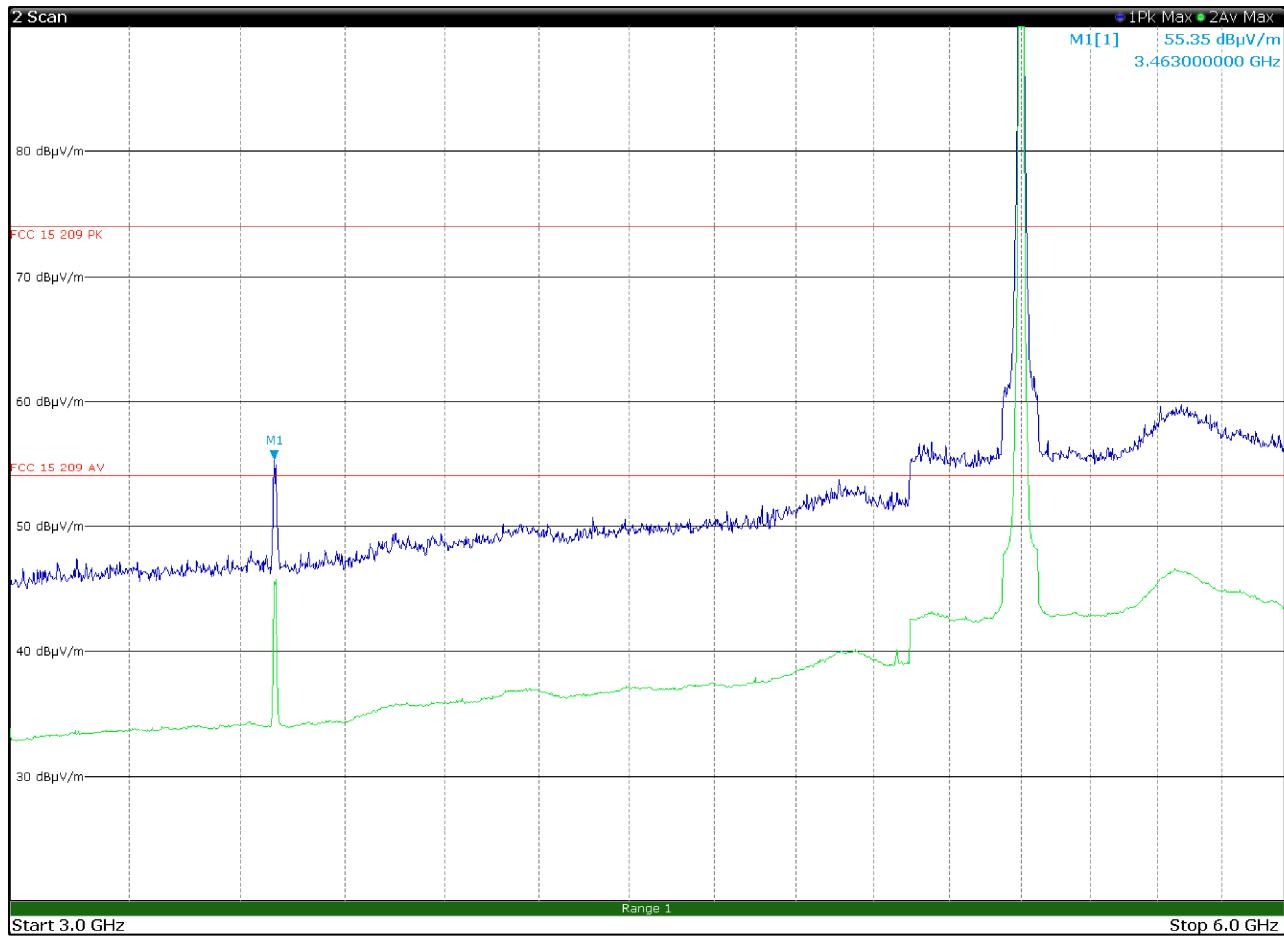


Figure 8.1-46: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (GHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
3.4630	55.4	82.2	-26.8	Pk

The limit for WCDMA is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

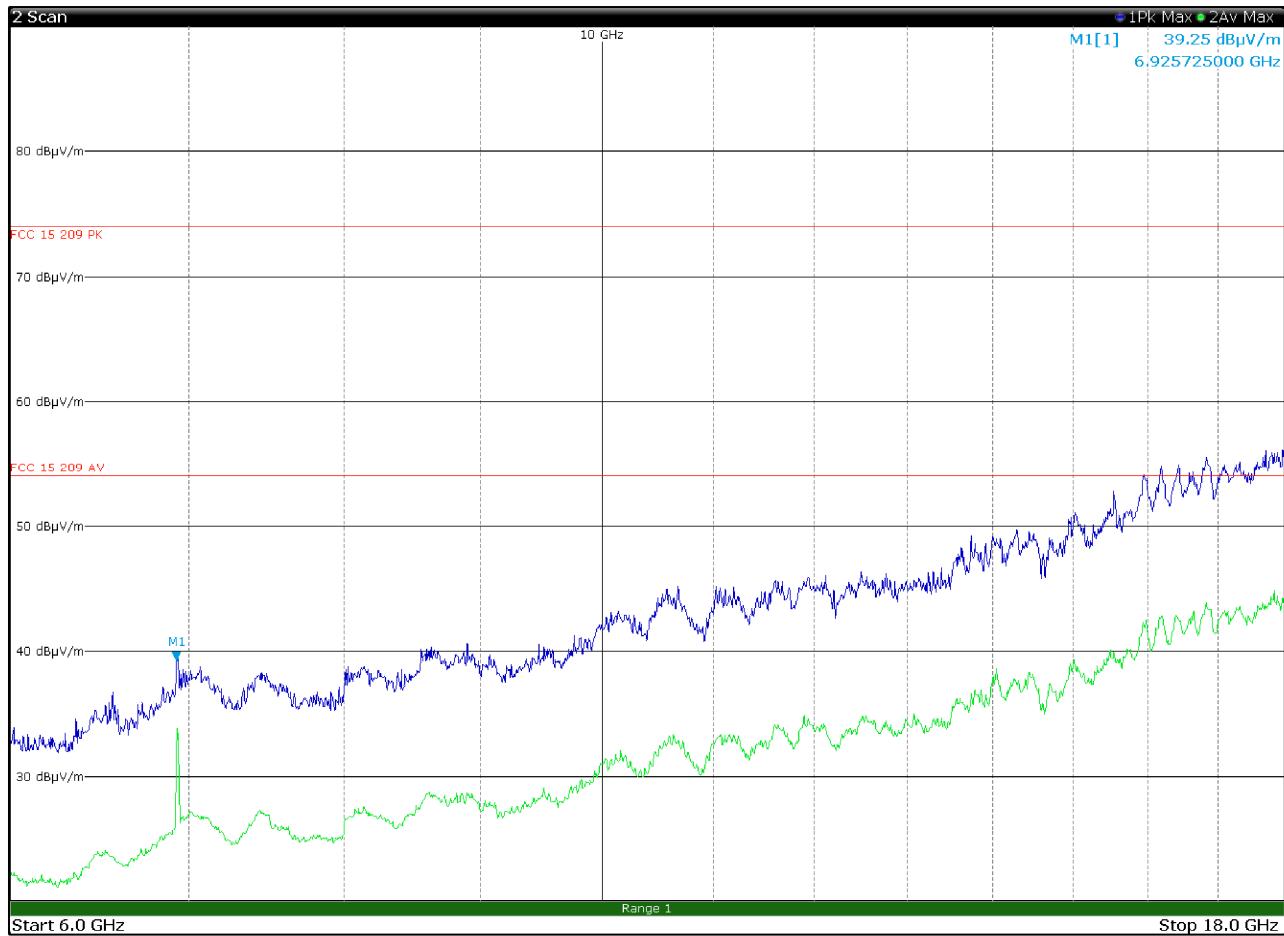


Figure 8.1-47: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

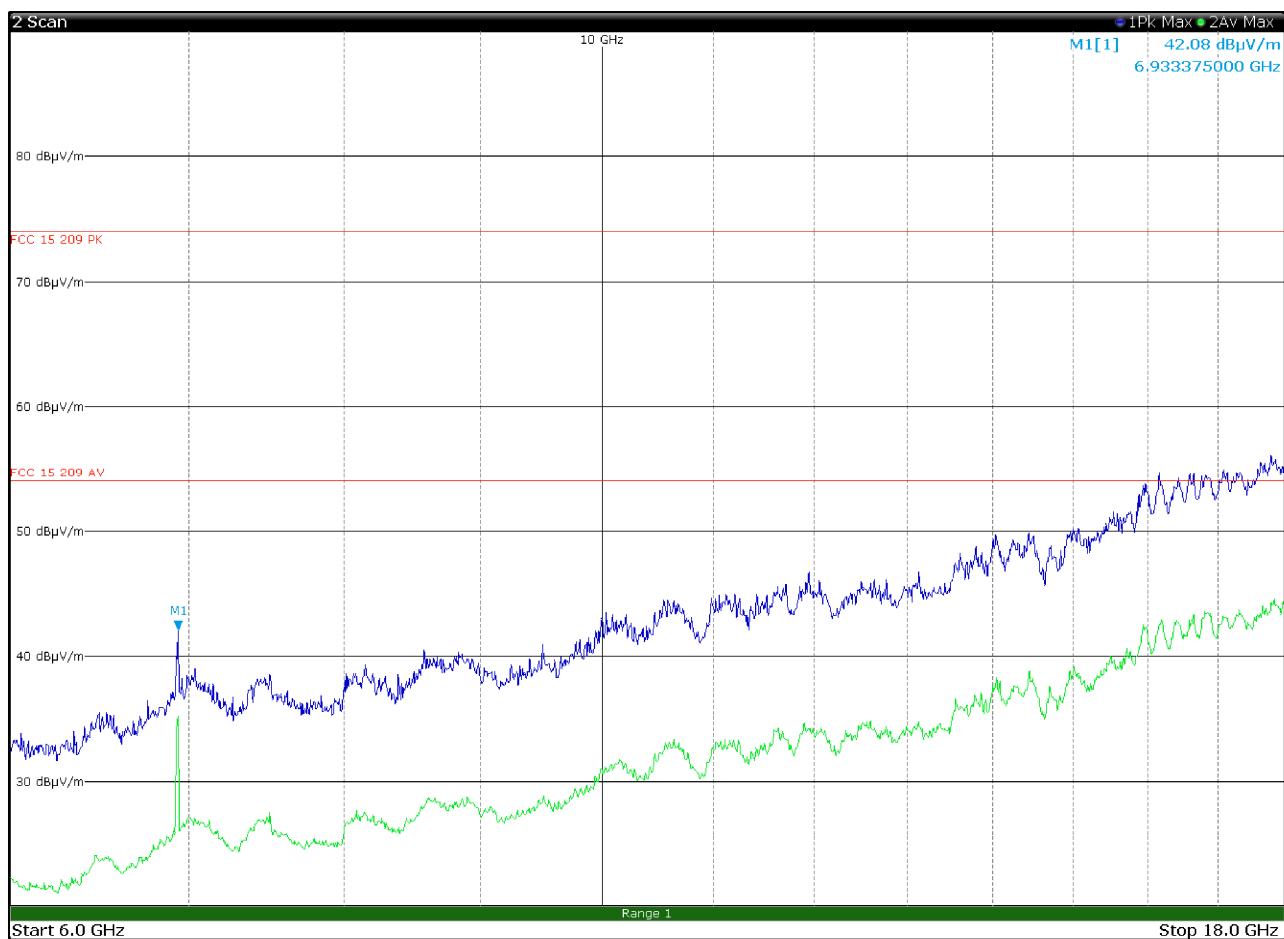


Figure 8.1-48: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

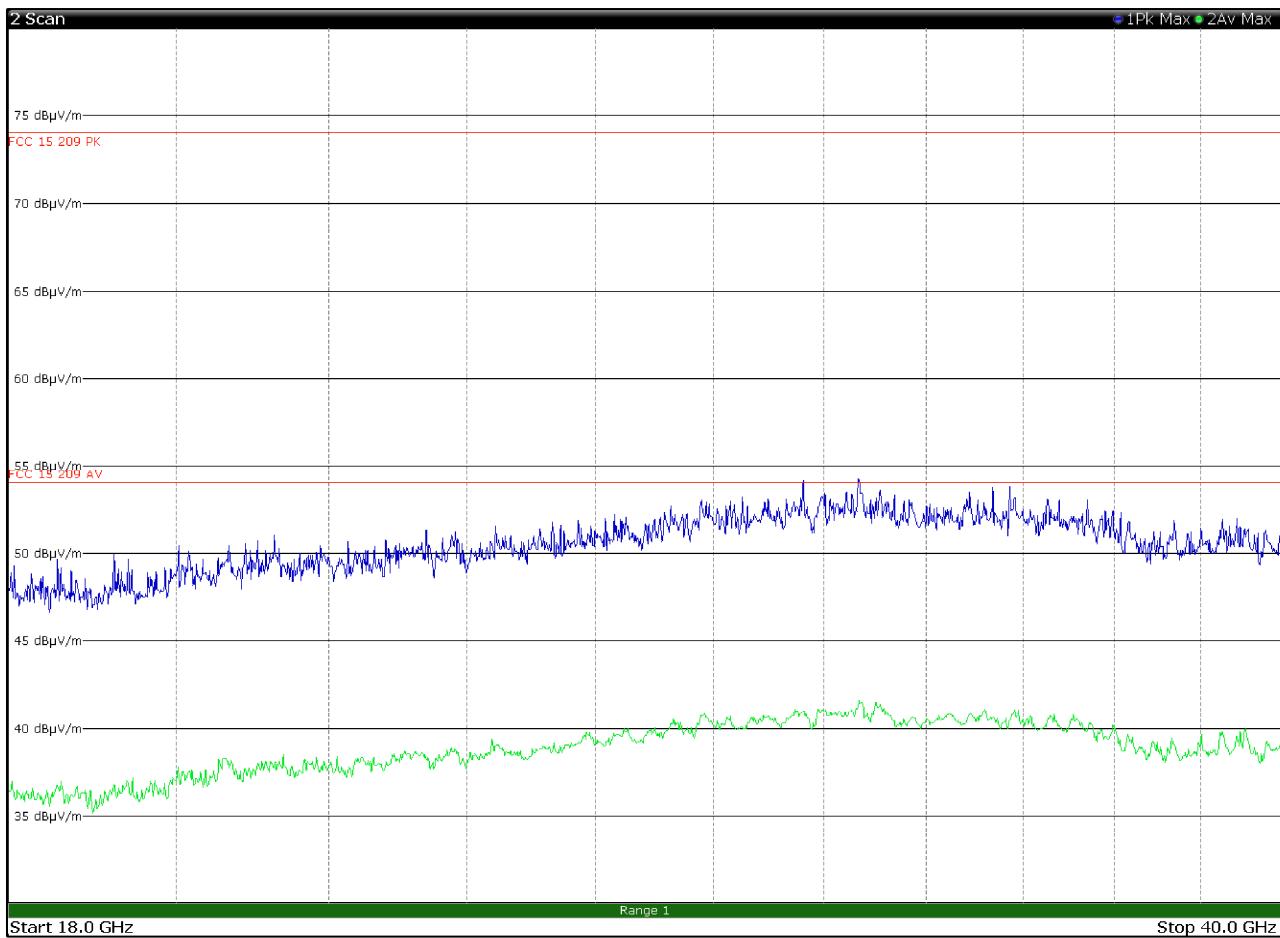


Figure 8.1-49: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

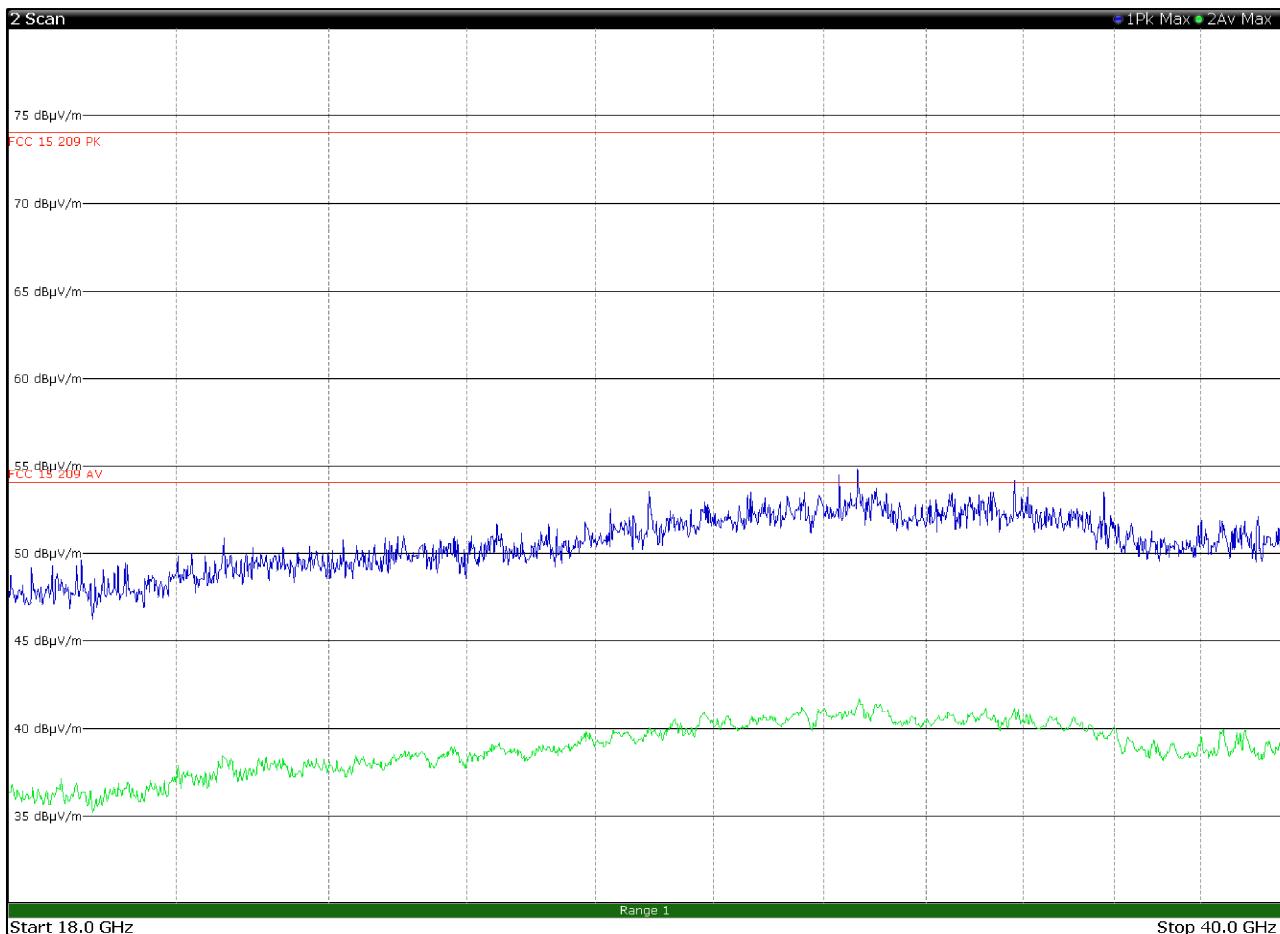


Figure 8.1-50: Radiated spurious emissions with WCDMA at 1732.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Section 8
Test name
Specification

Testing data
 FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
 FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

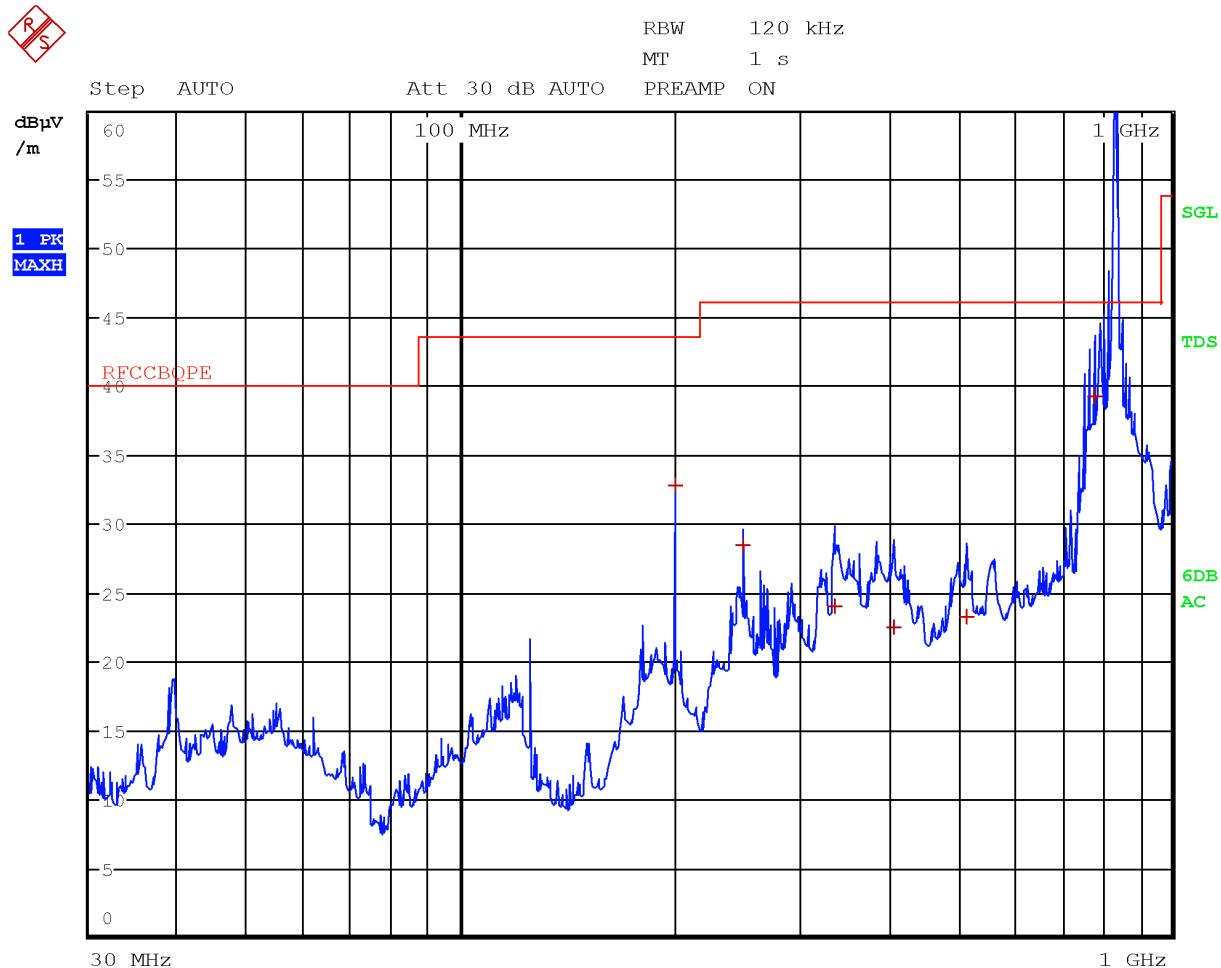


Figure 8.1-51: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
200.0000	32.9	43.5	-10.6	QP
250.0000	28.5	46.0	-17.5	QP
335.7600	24.0	46.0	-22.0	QP
406.1600	22.5	46.0	-23.5	QP
514.5600	23.3	46.0	-22.7	QP
780.0400	39.3	46.0	-6.7	QP

Section 8
Test name
Specification

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

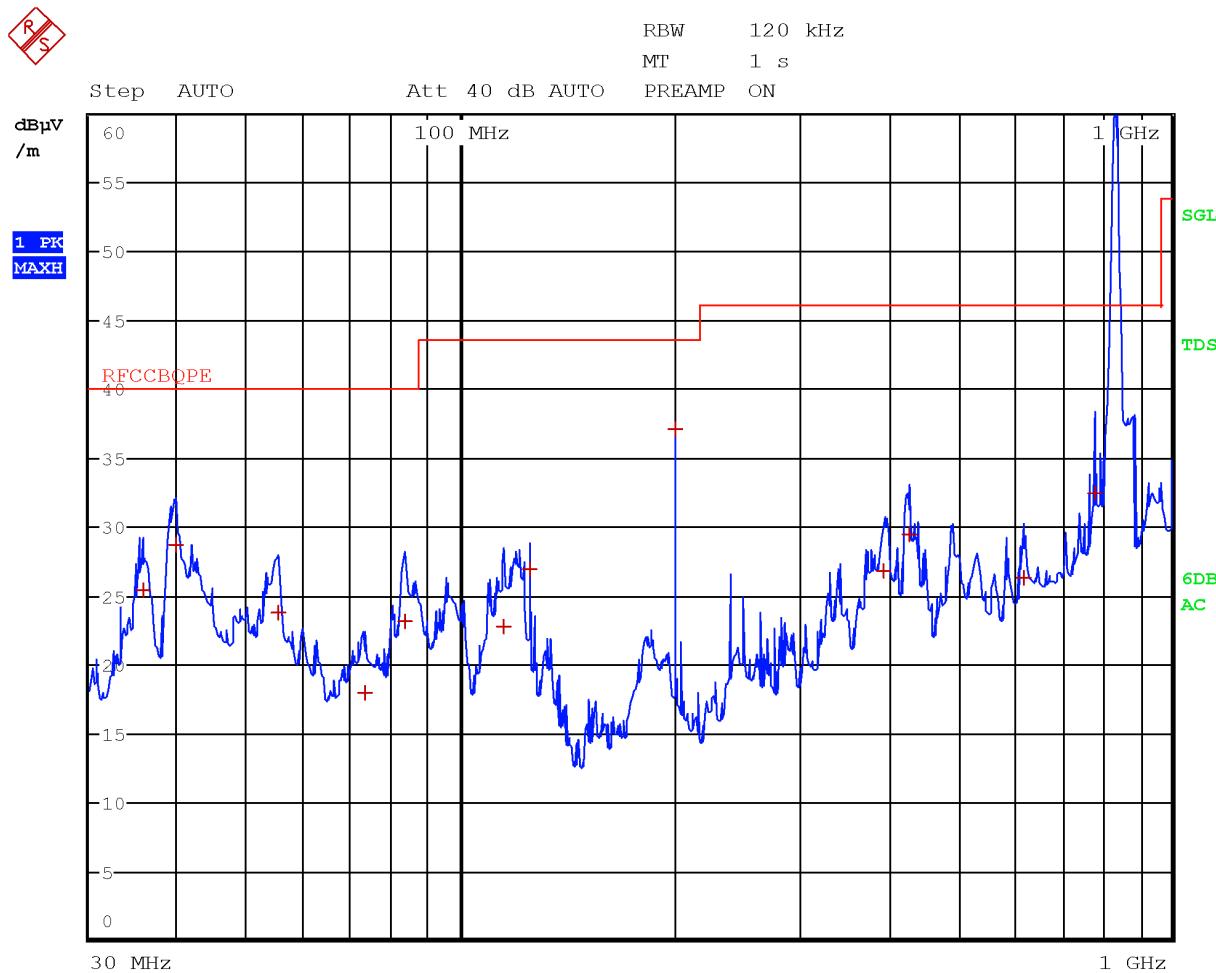


Figure 8.1-52: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. no intermodulation emissions were detected

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
35.6000	25.4	40.0	-14.6	QP
39.6800	28.7	40.0	-11.3	QP
55.1600	23.8	40.0	-16.2	QP
73.4400	18.0	40.0	-22.0	QP
83.2400	23.2	40.0	-16.8	QP
114.7600	22.8	43.5	-20.7	QP
125.0000	27.0	43.5	-16.5	QP
200.0000	37.2	43.5	-6.3	QP
392.3200	26.8	46.0	-19.2	QP
427.0800	29.4	46.0	-16.6	QP
618.5200	26.4	46.0	-19.6	QP
780.0800	32.6	46.0	-13.4	QP

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

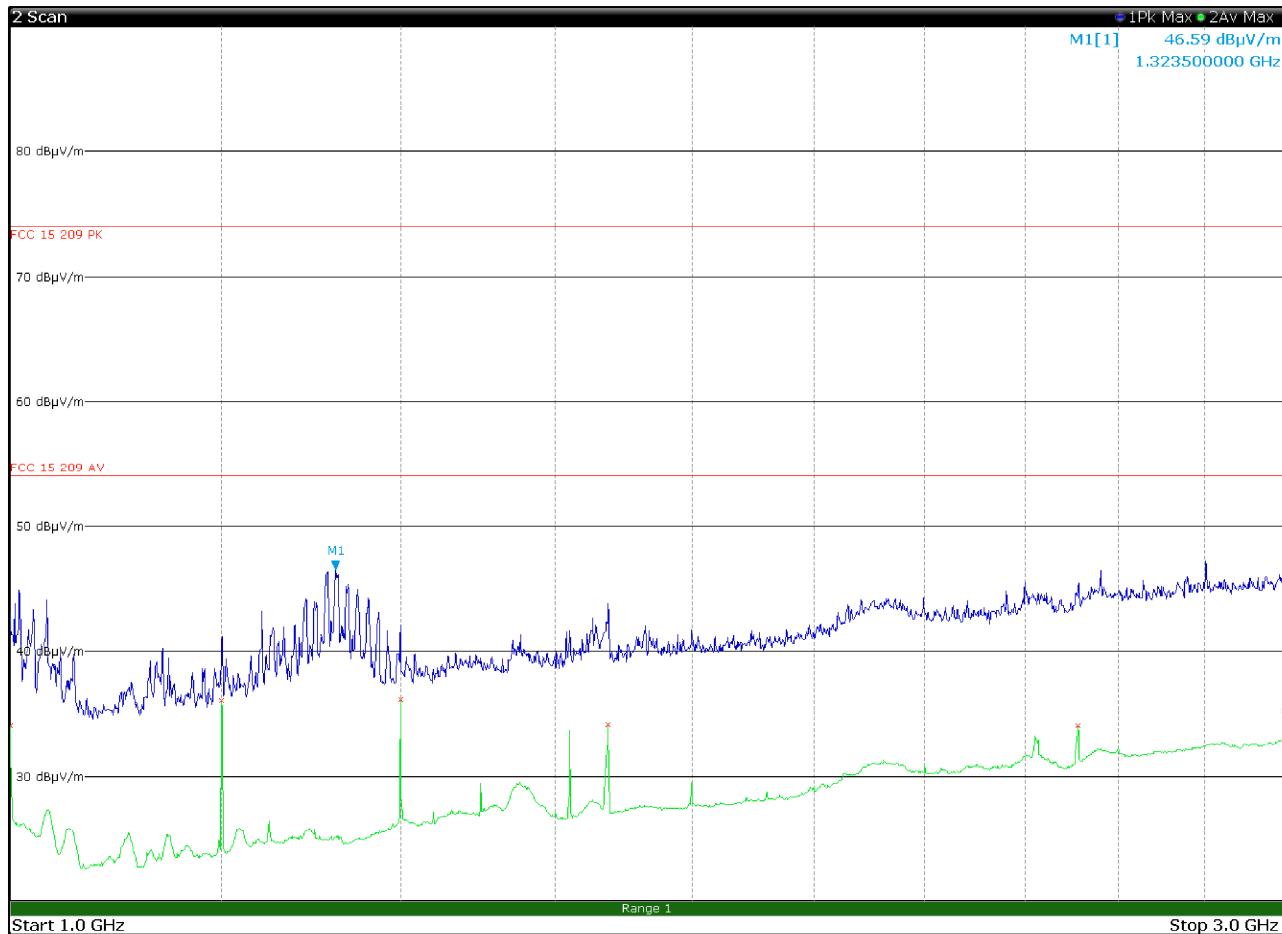


Figure 8.1-53: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1000.0000	34.1	54.0	-19.9	Av
1200.0000	36.2	54.0	-17.8	Av
1400.0000	36.2	54.0	-17.8	Av
1674.2500	34.2	54.0	-19.8	Av
2512.0000	34.1	54.0	-19.9	Av
3000.0000	35.3	54.0	-18.7	Av

Section 8**Test name****Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

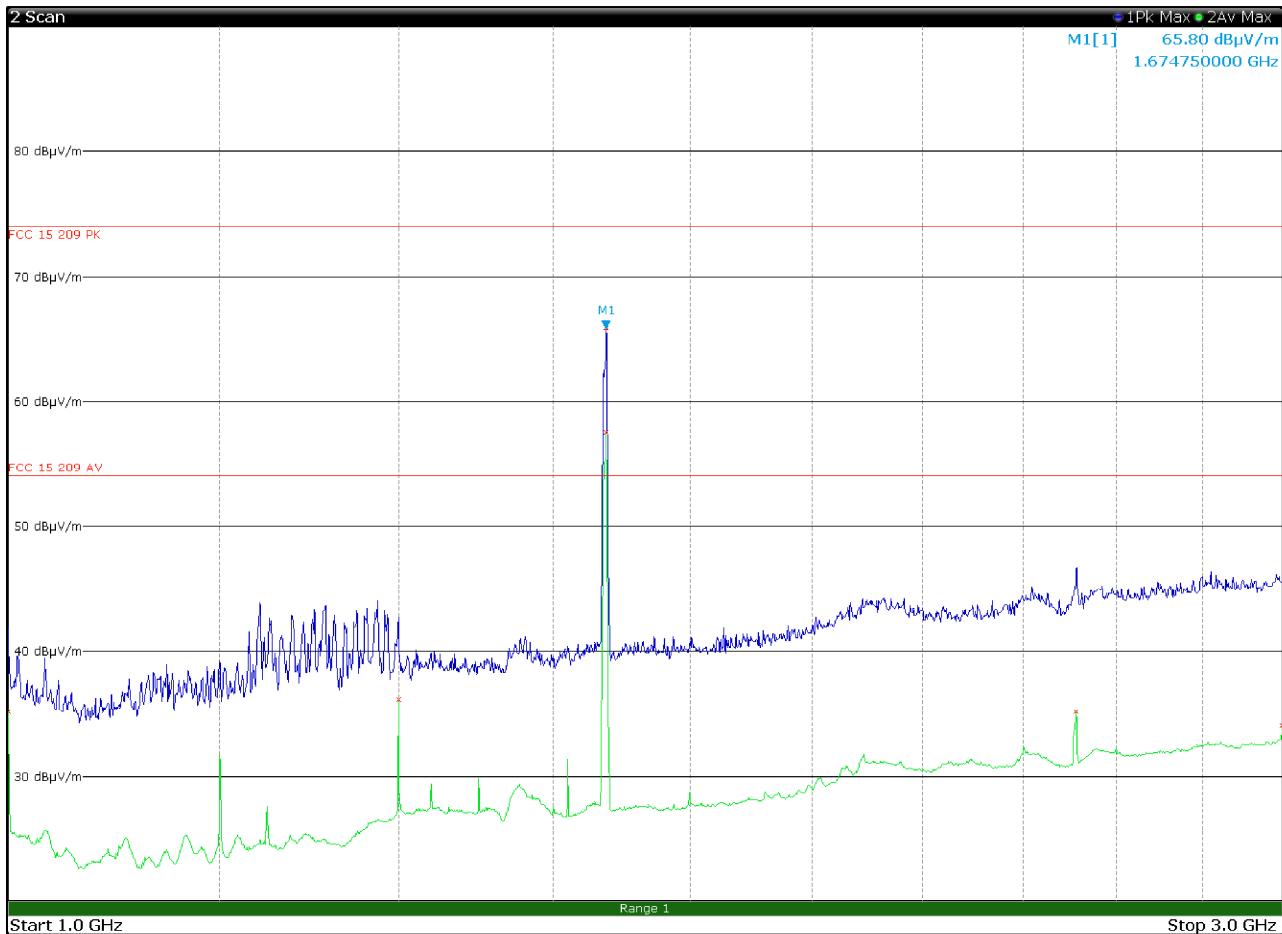


Figure 8.1-54: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1000.0000	35.3	54.0	-18.7	Av
1400.0000	36.2	54.0	-17.8	Av
1674.7500	65.8	82.2	-16.4	Pk
2512.0000	35.2	54.0	-18.8	Av
3000.0000	34.1	54.0	-19.9	Av

The limit for LTE is -13 dBm. Limit (dB μ V/m) = limit (dBm) + 95.23 = 82.2 dB μ V/m

Section 8**Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission

Test name

limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

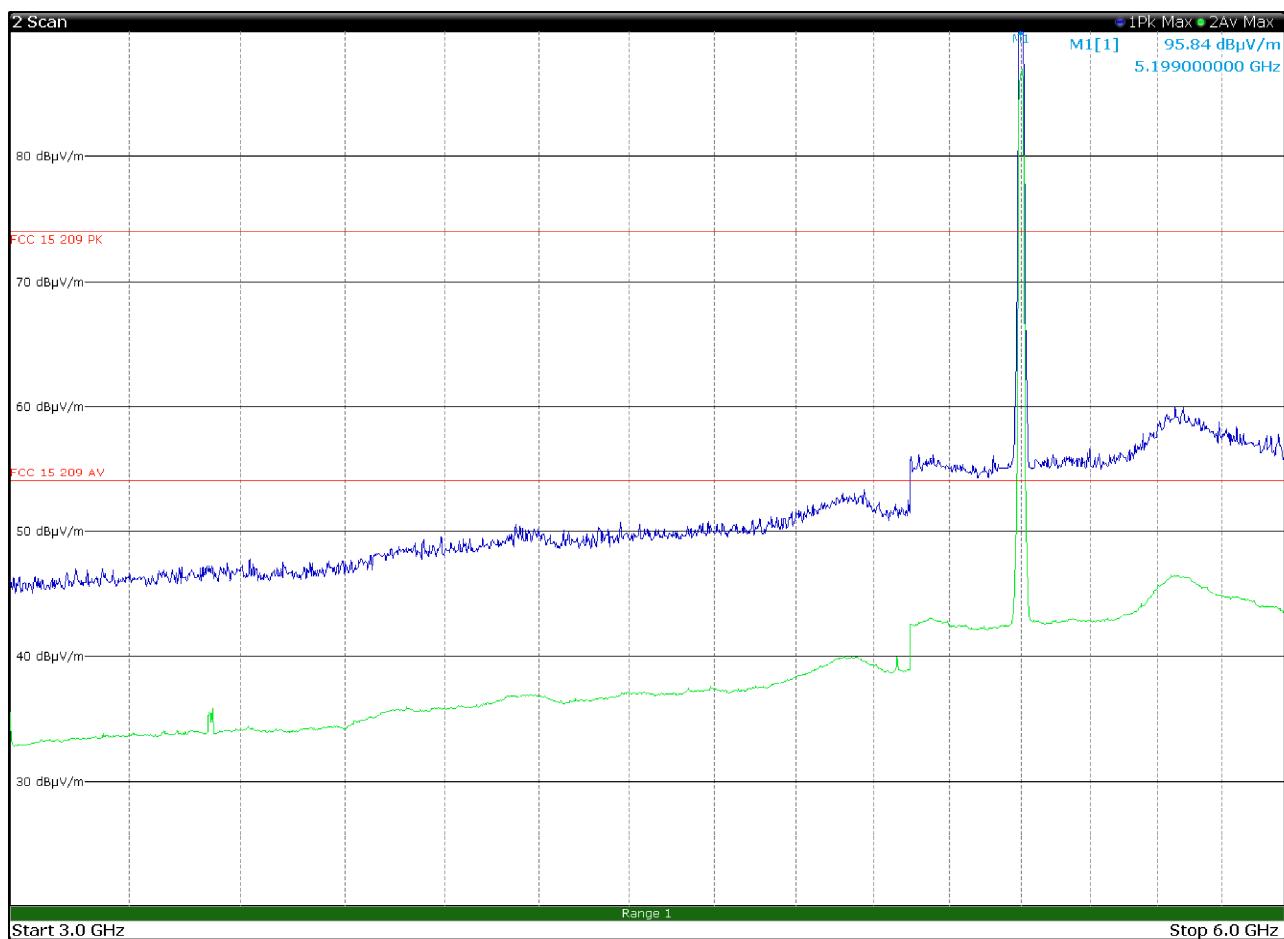


Figure 8.1-55: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Section 8**Testing data**

FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

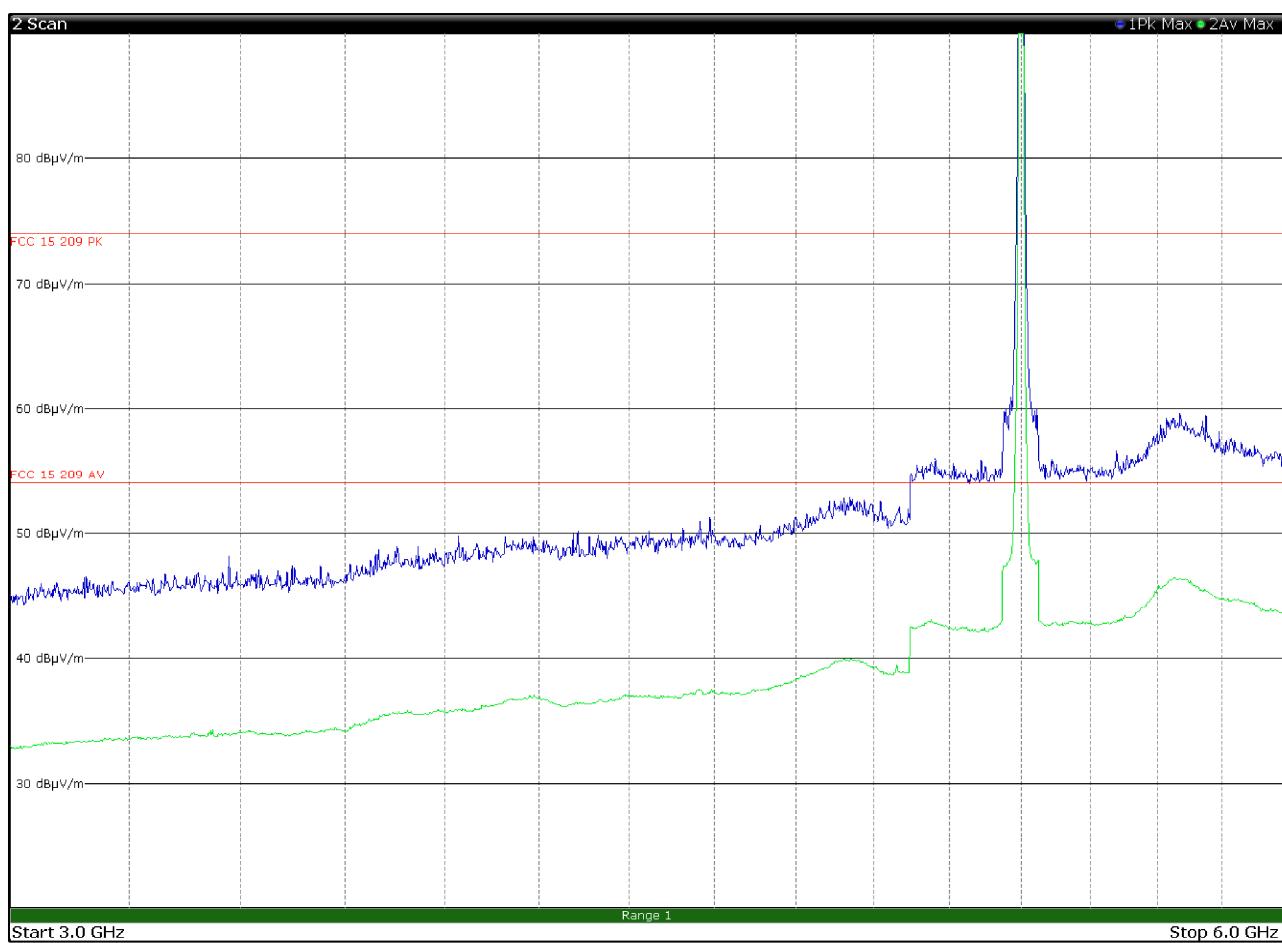
Test name
Specification

Figure 8.1-56: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements

Specification

FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

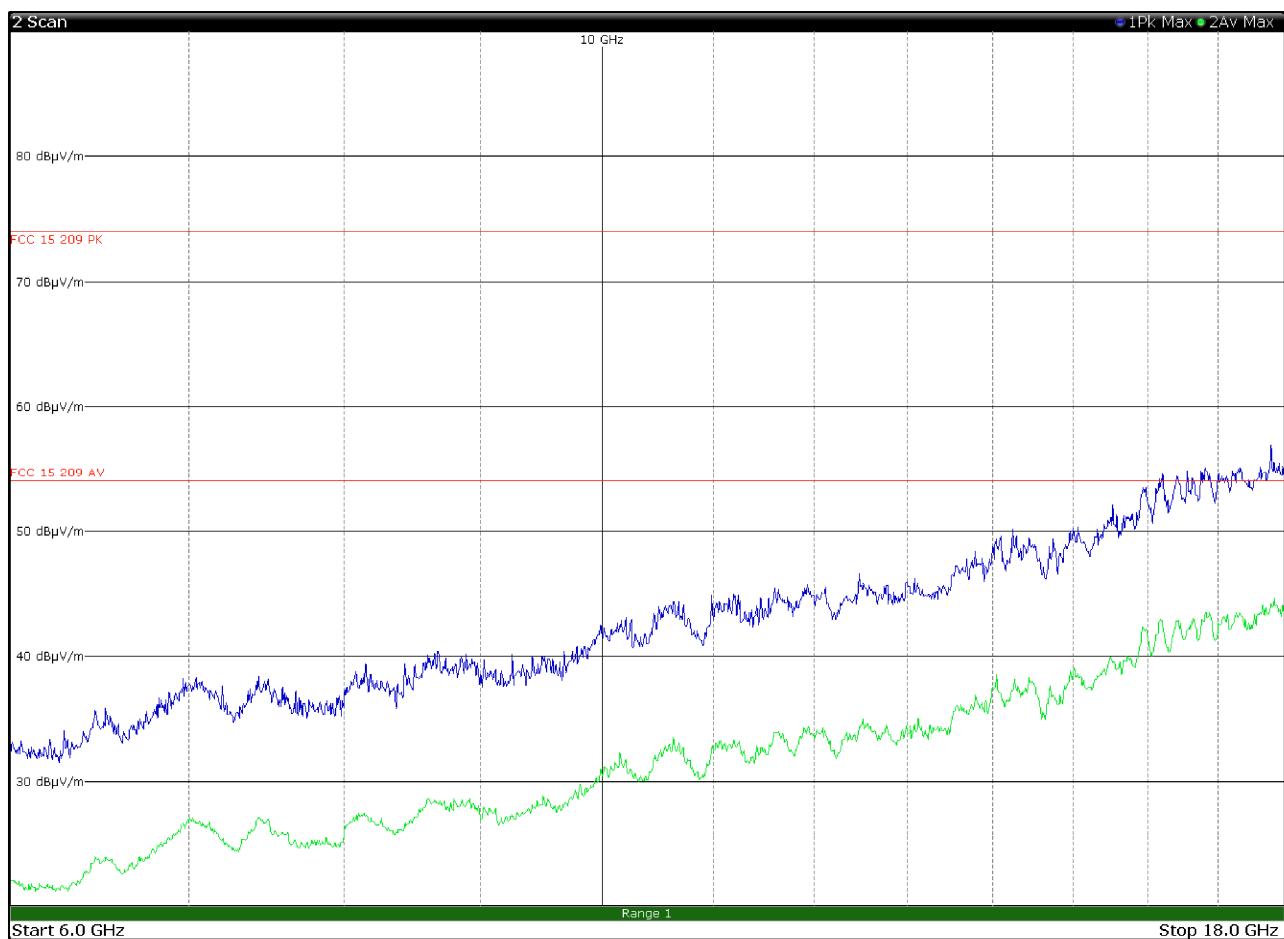


Figure 8.1-57: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

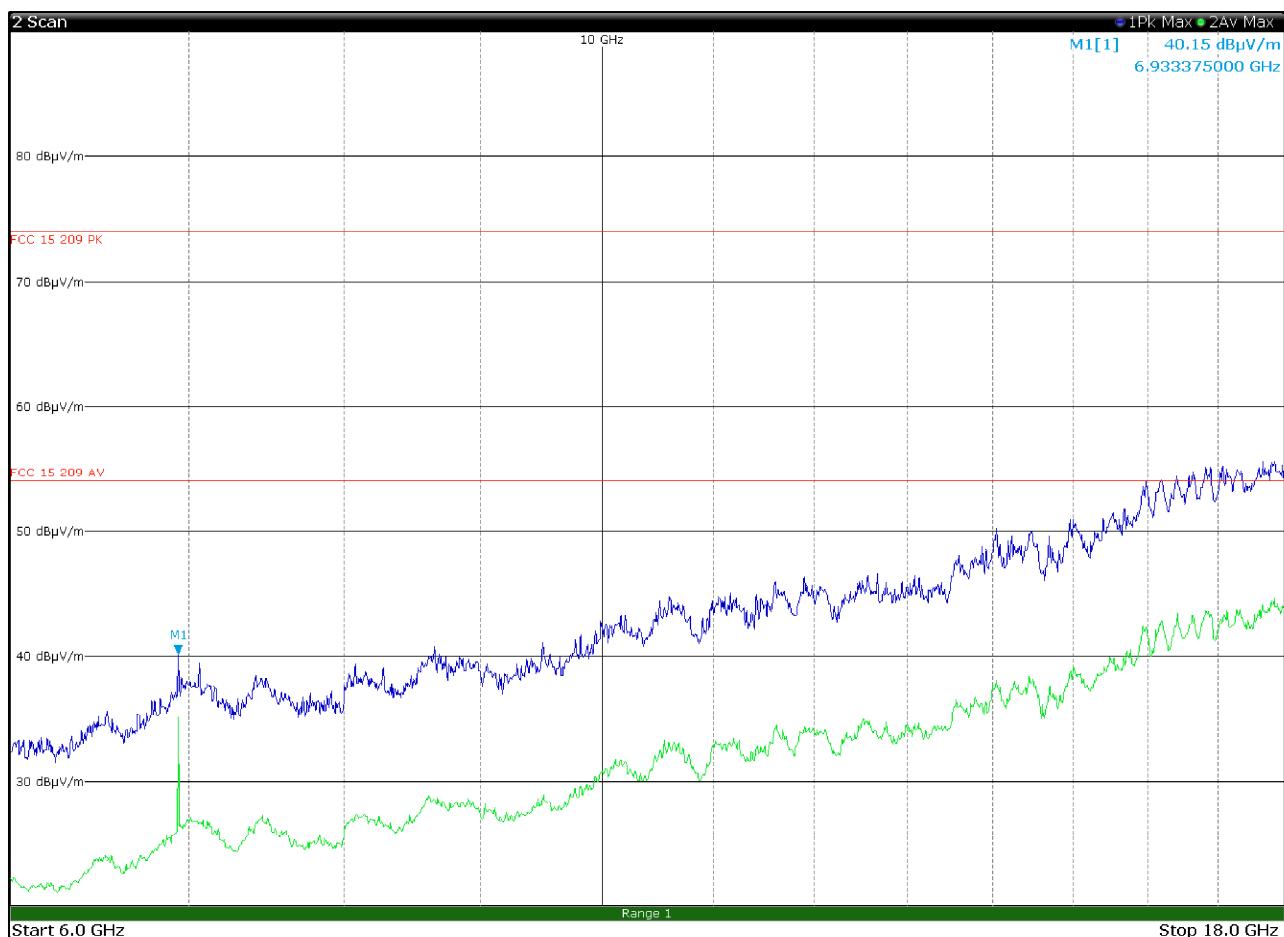


Figure 8.1-58: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission
limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1

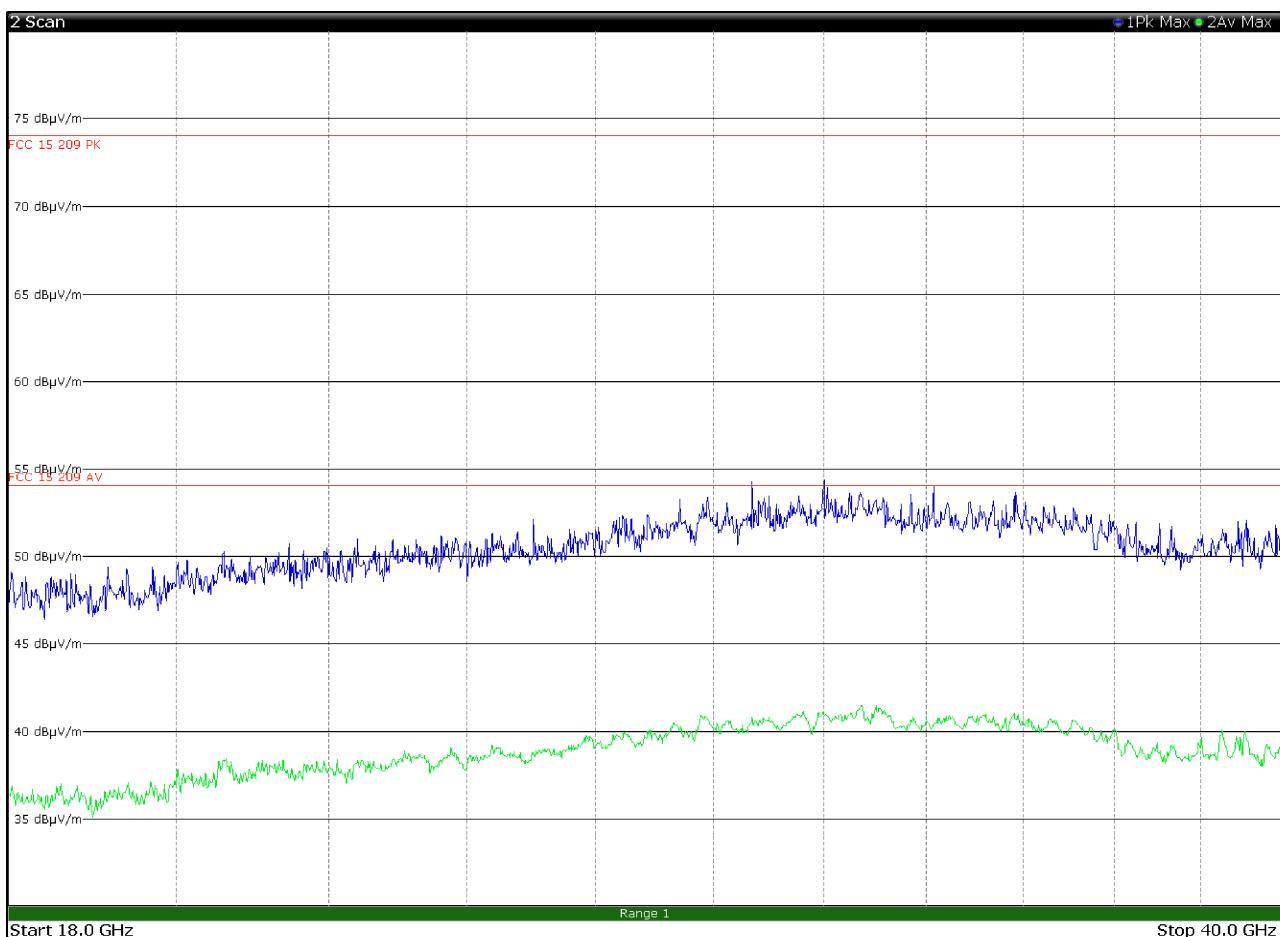


Figure 8.1-59: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in horizontal polarization

Section 8**Test name**

Testing data
FCC 15.209 and RSS-Gen, Issue 5, March 2019, Amendment 1, section 8.9 Radiated emission
limits; general requirements
FCC Part 15 Subpart C and RSS-Gen, Issue 5, March 2019, Amendment 1


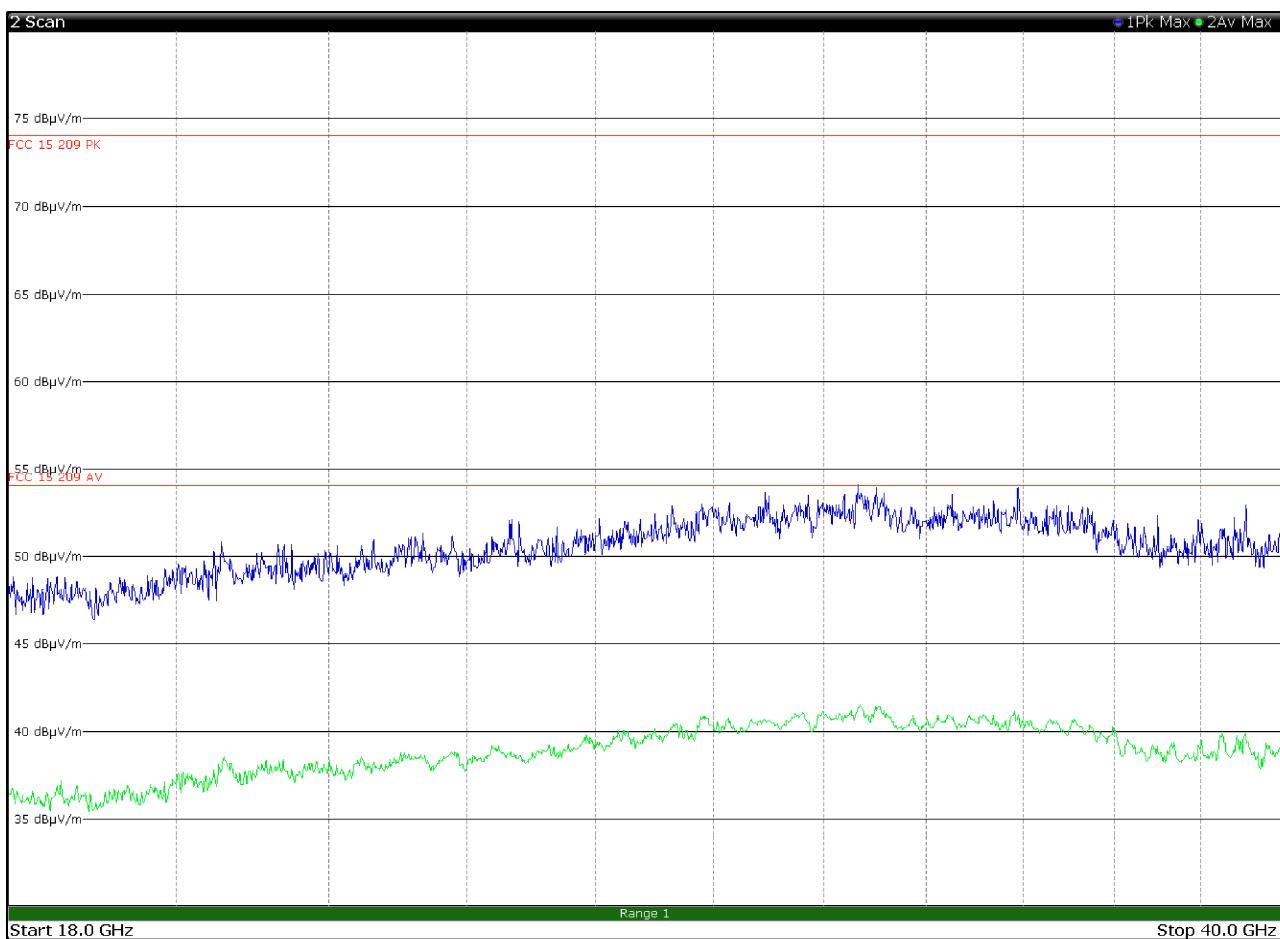



Figure 8.1-60: Radiated spurious emissions with WCDMA at 832.6 MHz and WiFi at 5200 MHz – antenna in vertical polarization

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up for frequencies below 1 GHz

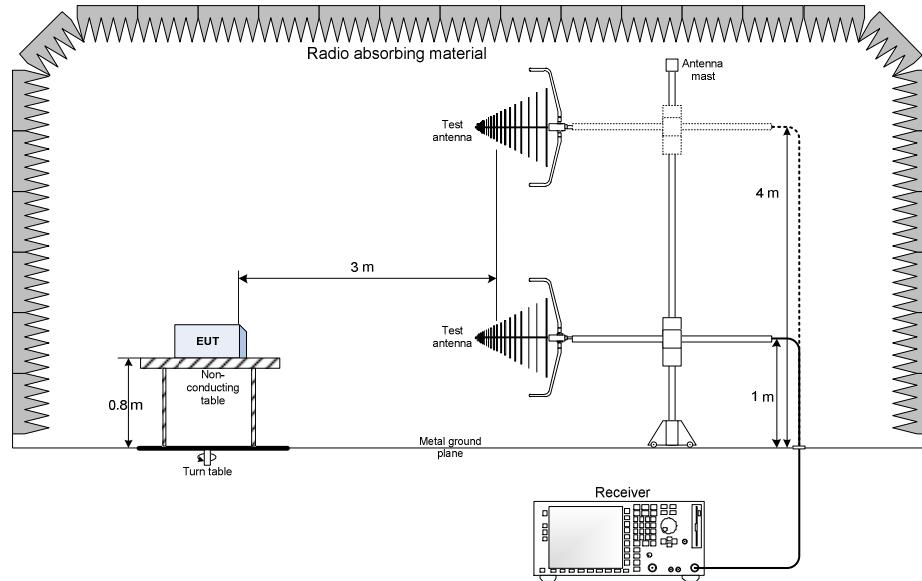


9.2 Radiated emissions set-up for frequencies above 1 GHz

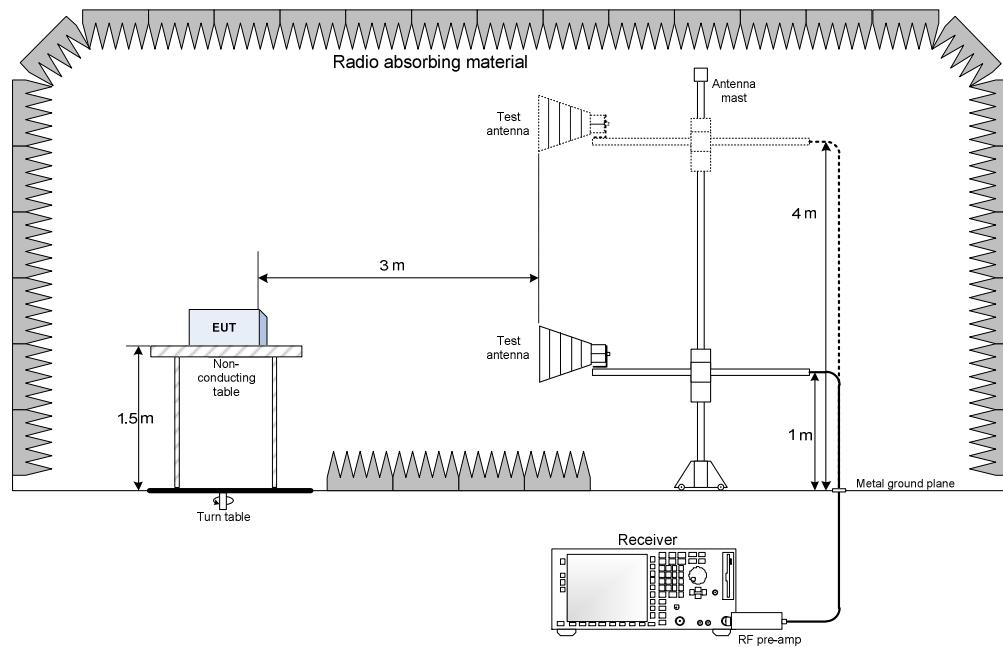

Section 10. Photos

10.1 Photos of the test set-up


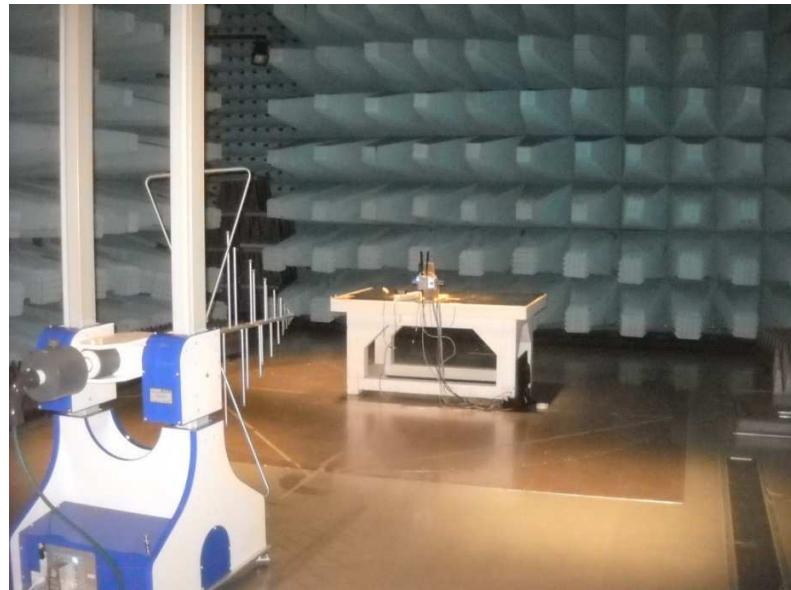


Radiated emission below 1 GHz



Radiated emission above 1 GHz

10.2 Photos of the EUT

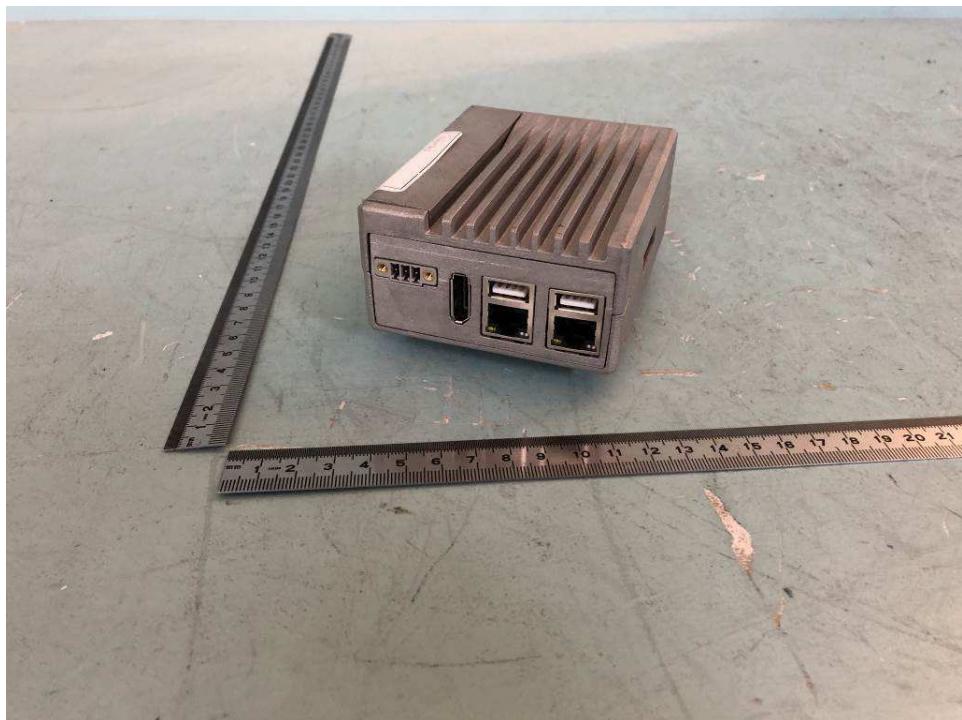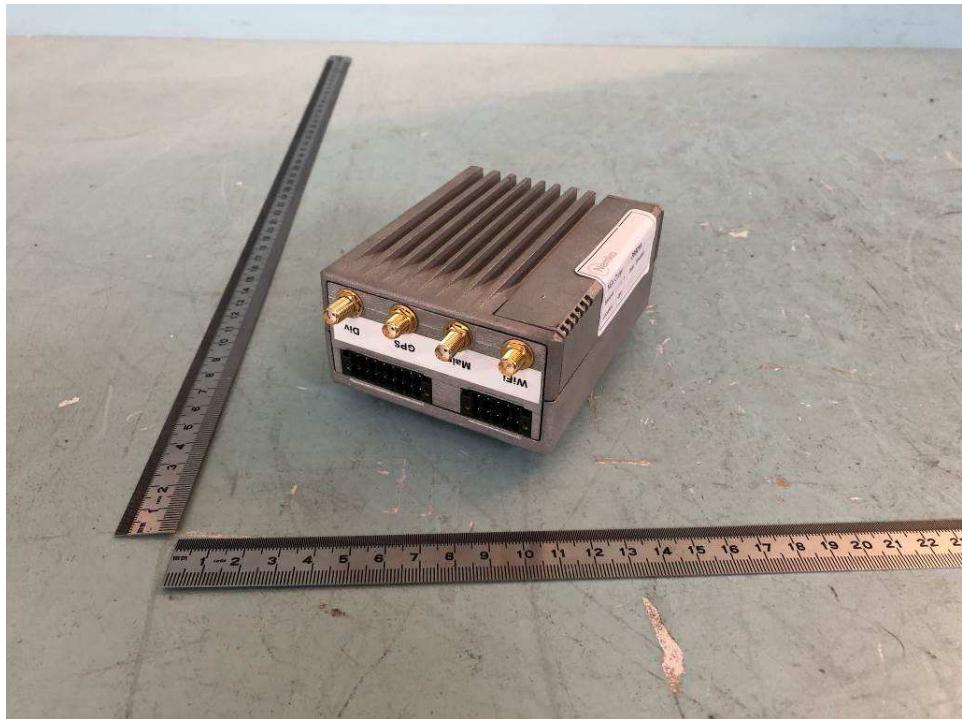

(End of report)