

## TEST REPORT

Report Number: 3100969ATL-003b

October 17, 2006

**Product Designation: EW 40 - Power Unit (FCCID: UL5-EW40US)**

Standard: FCC Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.  
RSS-210 Issue 6 September 2005: Annex 2.9

Tested by:  
Intertek Testing Services NA Inc.  
1950 Evergreen Blvd., Suite 100  
Duluth, GA 30096

Client:  
Exhausto, Inc.  
1200 Northmeadow Pkwy. Suite 180  
Roswell, GA 30076  
Contact: Steen Hagensen  
Phone: 770.587.3238  
Fax: 770.587.4731

Tests performed by:



Richard Bianco  
EMC Engineer

Report reviewed by:



David J. Schramm  
EMC Department Manager

All services undertaken are subject to the following general policy: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST, or any agency of the US Government.

## 1.0 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 3.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested complies with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

## 2.0 Test Summary

Section	Test Full Name	Test Date	Result
4.0	System setup including cable interconnection details, support equipment and simplified block diagram. (System Setup)		
5.0	Overview of EUT (Low Power Transmitters) (FCC 15C - EUT Overview)		
6.0	Conducted emissions on AC power lines (Conducted Emissions)	07/13/2006	PASS
NA	Duty Cycle Determination (FCC 15A - 15.35(c)) was waived due to The Carrier Frequency Peak Power is below the limit of 15.249		
7.0	Radiated emissions (E-field) (Radiated Emissions)	08/02/2006	PASS
NA	15.249(b): Requirements for fixed, point-to-point operation (FCC 15C - 15.249(b)) was waived due to EUT is not for fixed, point-to-point operation.	08/02/2006	

### 3.0 Description of Equipment Under Test

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Wireless Control System Power Unit	Exhausto	EW 40	Engineering Sample

EUT receive date:	July 12, 2006
EUT receive condition:	Production

Description of EUT provided by Client:

The EW40 is a wireless control that can be used to operate and control an Exhausto chimney fan or power venting system. It is designed for use with fireplaces and stoves. The use is not restricted to any type of fuel.


The unit allows the user to stop and start and control the speed of a chimney fan from a wireless Control Unit. It can be installed with or without a temperature sensor. For gas-fired appliances, a safety system in the form of a PDS (Proven Draft Switch) must be installed.

Description of EUT exercising:

The Control Unit, Repeater, and Power Unit were each tested individually.

**4.0 System setup including cable interconnection details, support equipment and simplified block diagram. (System Setup)****Method:**

Record the details of EUTcabling, document the support equipment, and show the interconnections in a block diagram.

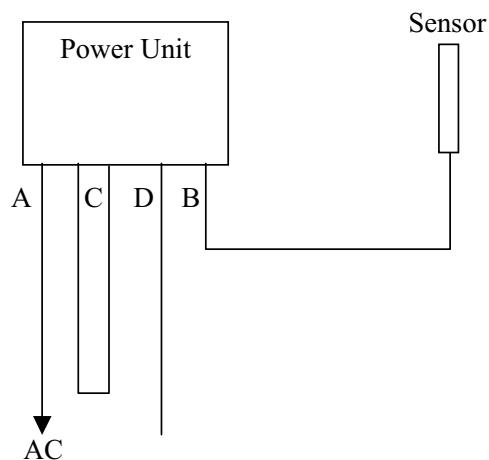**Drawing:**

System Block Diagram

**4.0 System setup including cable interconnection details, support equipment and simplified block diagram. (System Setup)****Data:**

EUT Cabling						
ID	Description	Length	Shielding	Ferrites	Connection	
					From	To
<b>Power Unit</b>						
A	AC Power	1.5m	None	None	EUT	AC Mains
B	Sensor	2m	None	None	EUT	Temperature Sensor
C	Alarm Wire	1m	None	None	EUT Alarm Pin 1	EUT Alarm Pin 2
D	Fan Power	2m	None	None	EUT	Unterminated

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
None Required			

## 5.0 Overview of EUT (Low Power Transmitters) (FCC 15C - EUT Overview)

**Method:**

Complete the overview spreadsheet.

Related Submittal(s) Grants: This report is for use with an application for certification of a low power transmitter. One transmitter is included in the application.

**Data:**

Applicant	Exhausto Incorporated 1200 Northmeadow Parkway Ste. 180 Roswell GA, 30076, USA
Trade Name & Model No.	EW 40 Wireless Control System
FCC Identifier	UL5-EW40US
Use of product	Chimney Fan and Power Vent Wireless Controller
Transmitter activation	<input checked="" type="checkbox"/> Automatically activated <input type="checkbox"/> Periodic transmissions
Frequency Range (MHz)	908MHz
Antenna Type (15.203)	Internal, integral
Manufacturer name & address	Exhausto Incorporated 1200 Northmeadow Parkway Ste. 180 Roswell GA, 30022, USA

Related Submittals and Grants:	This report is for use with an application for certification of a low power transmitter. One transmitter is included in the application.
Additions, deviations and exclusions from standards	None

## 6.0 Conducted emissions on AC power lines (Conducted Emissions)

### Method:

Equipment setup for conducted disturbance tests shall follow the guidelines of ANSI C63.4:2003, RSS-210, and RSS-GEN.

Measurements in the frequency range of 150kHz to 30 MHz shall be performed with a quasi-peak or average detector instrument that meets the requirements of Section One of CISPR 16. An AMN shall be used to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN defined in CISPR 16 shall be used.

In the frequency range of 150 kHz to 30 MHz, a resolution/video bandwidth of 9kHz/30kHz or greater shall be used.

The EUT shall be located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

If a flexible mains cord is provided by the manufacturer that is in excess of 1m, the excess cable shall be folded back and forth as far as possible to form a bundle not exceeding 0.4m in length.

The EUT shall be arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance shall be measured between each current carrying conductor and the reference ground. Each measured values shall be reported.

If EUT is intended for tabletop use, the EUT shall be placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is to be placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table shall be constructed of non-conductive materials. Its dimensions are at least 1m by 1.5m, but may be extended for larger EUT.

If EUT is floor standing, the floor standing EUT shall be placed on a horizontal metal ground plane and isolated from the ground plane by up to 12 mm of insulating material. The metal ground plane shall extend at least 0.5m beyond the boundaries of the EUT and had minimum dimensions of 2m by 2m.

### TEST SITE

The test site for radiated emissions is located at 1950 Evergreen Blvd, Suite 100, Duluth, Georgia 30096.

### MEASUREMENT UNCERTAINTY

Compliance of the product is based on the measured value. However, the measurement uncertainty is included for informational purposes. The values given are the measurement uncertainty values with an expanded uncertainty of k=2.

150 kHz to 30 MHz: +/- 2.8 dB

### Test Equipment Used:

Description:	Manufacturer:	Model:	Asset Number:	Cal Date:	Cal Due:
Cable TT4	Andrews	Cable TT4	211404	05/11/2006	05/11/2007
Coaxial Cable, 6ft, N(Male) to N(Male)	Mini-Circuits	CBL-6FT-NMNM	TT1	05/11/2006	05/11/2007
EMI Receiver	Hewlett Packard	8546A	211388	08/04/2006	08/04/2007
EMI Receiver, Preselector section	Hewlett Packard	85460A	211389	08/04/2006	08/04/2007
LISN (TT4)	Fischer Custom Comm	FCC-LISN-50-50-M	211406	09/15/2005	09/15/2006
Spectrum Analyzer, 20 Hz to 40 GHz	Rohde & Schwarz	FSEK30	200062	01/12/2006	01/12/2007
Transient Limiter	Hewlett Packard	11947A	213100	07/12/2006	07/12/2007

**Results: The sample tested was found to Comply.**

## 6.0 Conducted emissions on AC power lines (Conducted Emissions)

Photo:



Conducted Emissions Front Test Setup

## 6.0 Conducted emissions on AC power lines (Conducted Emissions)


**Photo:**



Conducted Emissions Rear Test Setup

## 6.0 Conducted emissions on AC power lines (Conducted Emissions)

Plot:

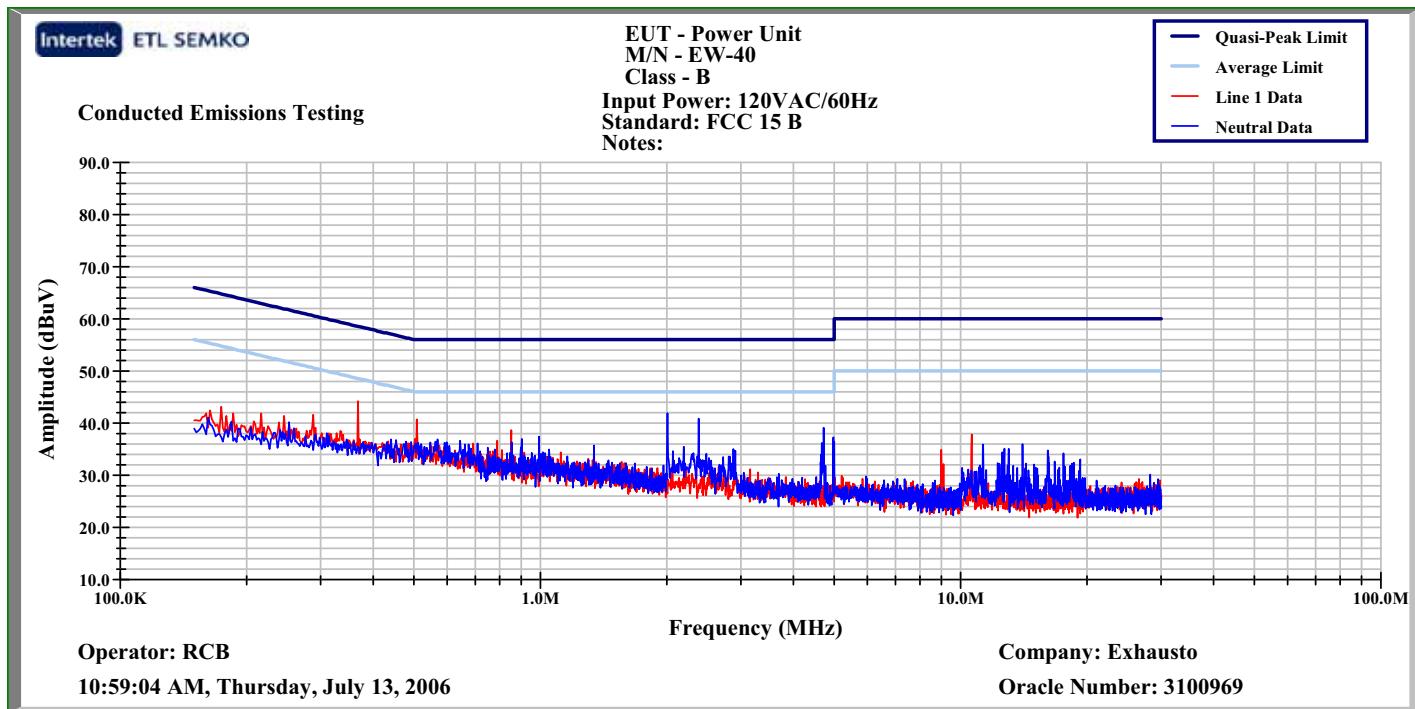

Conducted Emissions Test Plot

**6.0 Conducted emissions on AC power lines (Conducted Emissions)****Data:****Date:** 7-13-2006**Frequency Range (MHz):** .150to30**Limit:** CISPR Class B**Input power:** 120VAC/60Hz**Modifications for compliance (y/n):** N

A	B	C	D	E	F	G	H	I
LISN Number 1,2	Detector (P,QP, A)	Frequency MHz	Reading dBuV	Cable Loss dB	LISN Ins. Loss dB	Net dBuV	Limit dBuV	Margin dB
1	P	0.368	37.1	0.6	6.1	43.8	48.6	-4.8
1	P	0.501	33.0	0.6	6.0	39.6	46.0	-6.4
1	P	8.965	29.1	0.6	6.1	35.8	50.0	-14.2
1	P	10.620	32.1	0.6	6.1	38.8	50.0	-11.2
2	P	2.001	34.5	0.6	6.0	41.1	46.0	-4.9
2	P	2.360	33.1	0.6	6.0	39.7	46.0	-6.3
2	P	4.720	29.9	0.6	6.0	36.5	46.0	-9.5
2	P	4.966	26.4	0.6	6.0	33.0	46.0	-13.0
<b>Calculations</b>		$G=D+E+F$			$I=G-H$			

Note: Peak measurements are compared to the average limit.

## 7.0 Radiated emissions (E-field) (Radiated Emissions)

### Method:

Measurements in the frequency range of 30 MHz to 1000 MHz shall be performed with a quasi-peak detector instrument that meets the requirements of Section One of CISPR 16. The measuring antenna shall correlate to a balanced dipole. Above 1 GHz, average measurements are made. When peak detectors are used, it shall be clearly indicated in the test data.

#### Bandwidths:

30 MHz to 1000 MHz: RBW=120 kHz, VBW=1MHz

Above 1GHz: RBW=1MHz, VBW=3MHz

Measurements of the radiated field are made with the antenna located at a distance of 3 or 10 meters from the EUT. The limit applied to the measurement shall be appropriate for the test distance. The test distance shall be indicated in the results section.

The EUT shall be arranged and connected with cables terminated in accordance with the product specification.

Exploratory tests should be carried out while varying the cable positions to determine the maximum or near-maximum emission level. During manipulation, cables shall not be placed under or on top of the system test components unless such placement is required by the inherent equipment design.

The antenna shall be adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth shall be varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) shall be varied during the measurements to find the maximum field-strength readings.

If the EUT is intended for tabletop use, it shall be placed on a table whose top is 0.8m above the ground plane. The table shall be constructed of non-conductive materials. Its dimensions are at least 1m by 1.5m, but may be extended for larger EUT.

If EUT is floor standing, the EUT was placed on a horizontal metal ground plane and isolated from the ground plane by up to 12 mm of insulating material.

Equipment setup for radiated disturbance tests shall follow the guidelines of ANSI C63.4:2003, RSS-210, RSS-GEN.

### TEST SITE

The test site for radiated emissions is located at 1950 Evergreen Blvd, Suite 100, Duluth, Georgia 30096.

### MEASUREMENT UNCERTAINTY

Compliance of the product is based on the measured value. However, the measurement uncertainty is included for informational purposes. The values given are the measurement uncertainty values with an expanded uncertainty of k=2.

30 MHz to 1000 MHz at 3 meters: +/- 3.9 dB

30 MHz to 1000 MHz at 10 meters: +/- 3.6 dB

1 GHz to 18 GHz at 3 meters: +/- 4.2 dB


### Test Equipment Used:

Description:	Manufacturer:	Model:	Asset Number:	Cal Date:	Cal Due:
Antenna, BiLog (20MHz to 2GHz)	Chase	CBL6112A	211518	12/08/2005	12/08/2006
Antenna, Horn, 1-18 GHz	EMCO	3115	213061	03/28/2006	03/28/2007
Cable E01 (Formerly PE7000N-N2 or N2)	Pasternack	RG214/U	E01	05/11/2006	05/11/2007
Cable E05 (Formerly HS 1500 N-N)	Huber-Suhner	Sucoflex 104PEA	E05	05/11/2006	05/11/2007
Cable E06 (Formerly HS 1500 N-SMA)	Huber-Suhner	Sucoflex 104PEA	E06 211268	05/11/2006	05/11/2007
Cable E11 (Formerly HS 7000 N-SMA)	Huber-Suhner	Sucoflex 104PEA	E11 211266	05/11/2006	05/11/2007
Cable, 18 GHz, N, 394 inches	Megaphase	G919-NKNK-394	MP3	05/11/2006	05/11/2007
EMI Receiver	Hewlett Packard	8546A	211388	08/04/2006	08/04/2007
EMI Receiver, Preselector section	Hewlett Packard	85460A	211389	08/04/2006	08/04/2007
Preamplifier, 10 MHz to 2000 MHz, 27 dB gain	Mini-Circuits	ZKL-2	200074	01/24/2006	01/24/2007
Preamplifier, 1-26 GHz	Hewlett Packard	8449B	213191	05/04/2006	05/04/2007
Spectrum Analyzer, 20 Hz to 40 GHz	Rohde & Schwarz	FSEK30	200062	01/12/2006	01/12/2007
Temperature/Humidity Recorder	Dickson	THDX	213013	07/31/2006	07/31/2007

**Results: The sample tested was found to Comply.**

## 7.0 Radiated emissions (E-field) (Radiated Emissions)

**Photo:**

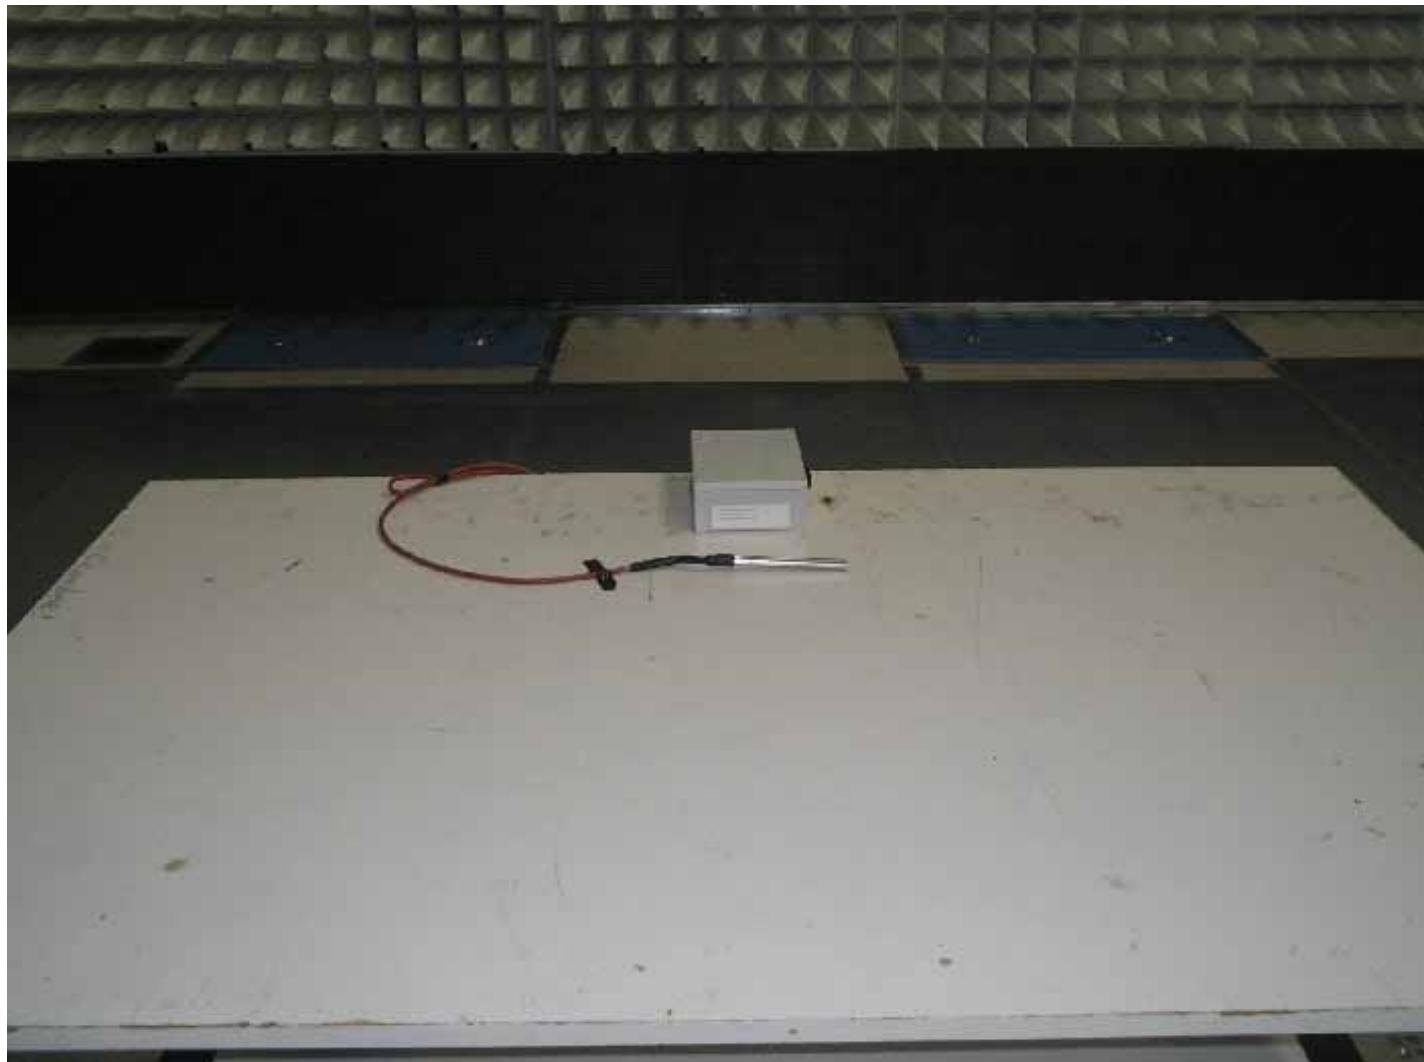

Radiated Emissions Front Test Setup

## 7.0 Radiated emissions (E-field) (Radiated Emissions)


Photo:



Radiated Emissions Rear Test Setup

## 7.0 Radiated emissions (E-field) (Radiated Emissions)

### Photo:

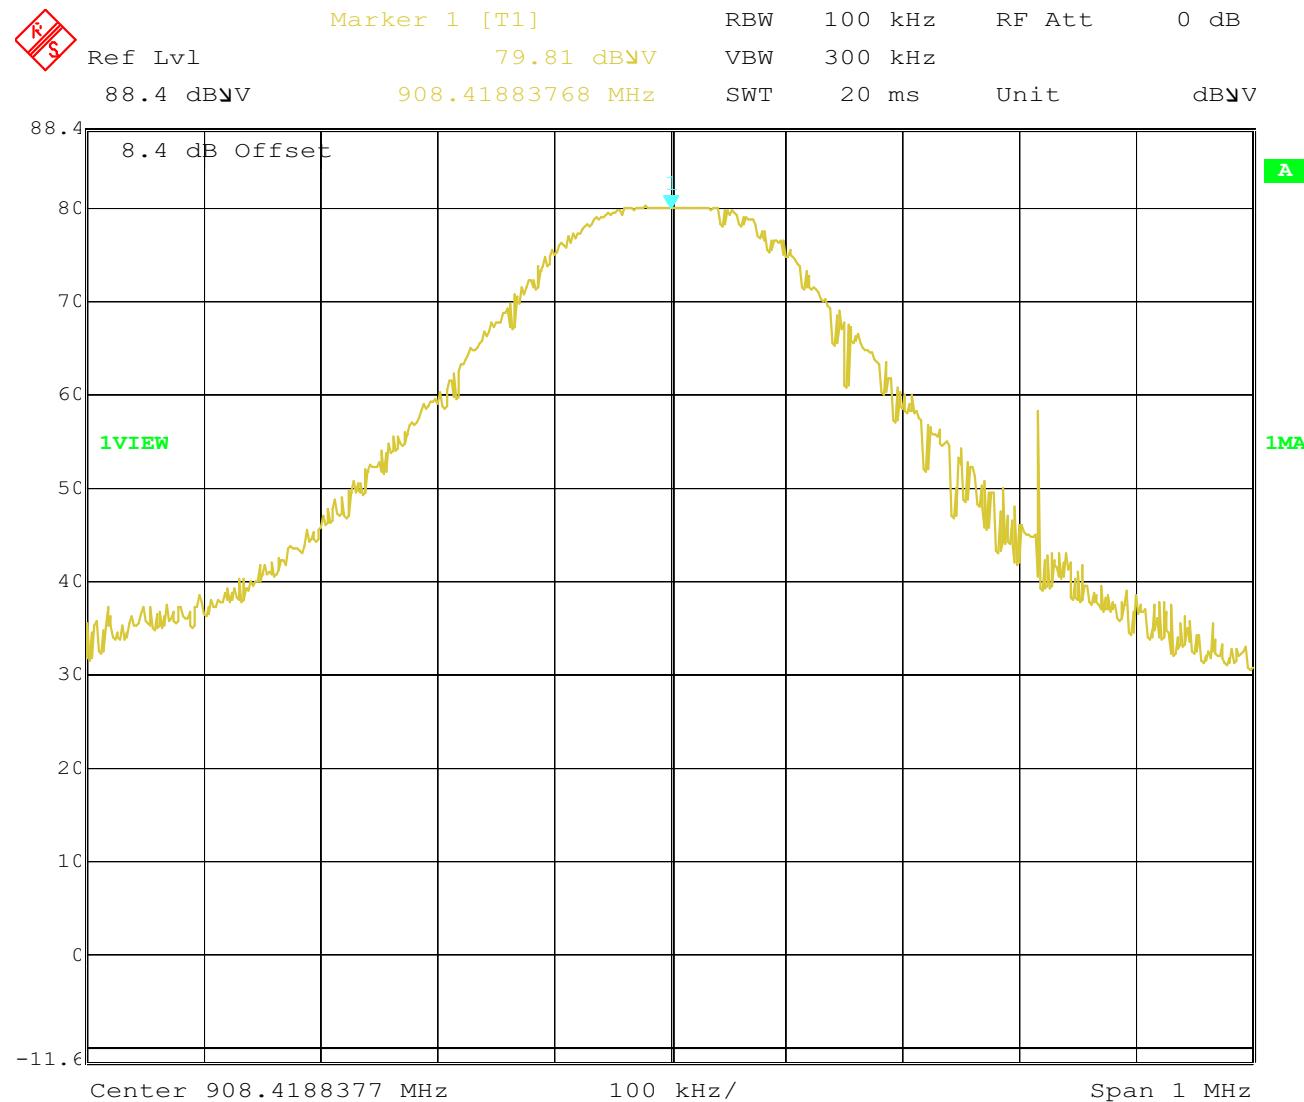


Date: 7.AUG.2006 21:02:02

Radiated Emissions Plot Fundamental

## 7.0 Radiated emissions (E-field) (Radiated Emissions)


Plot:

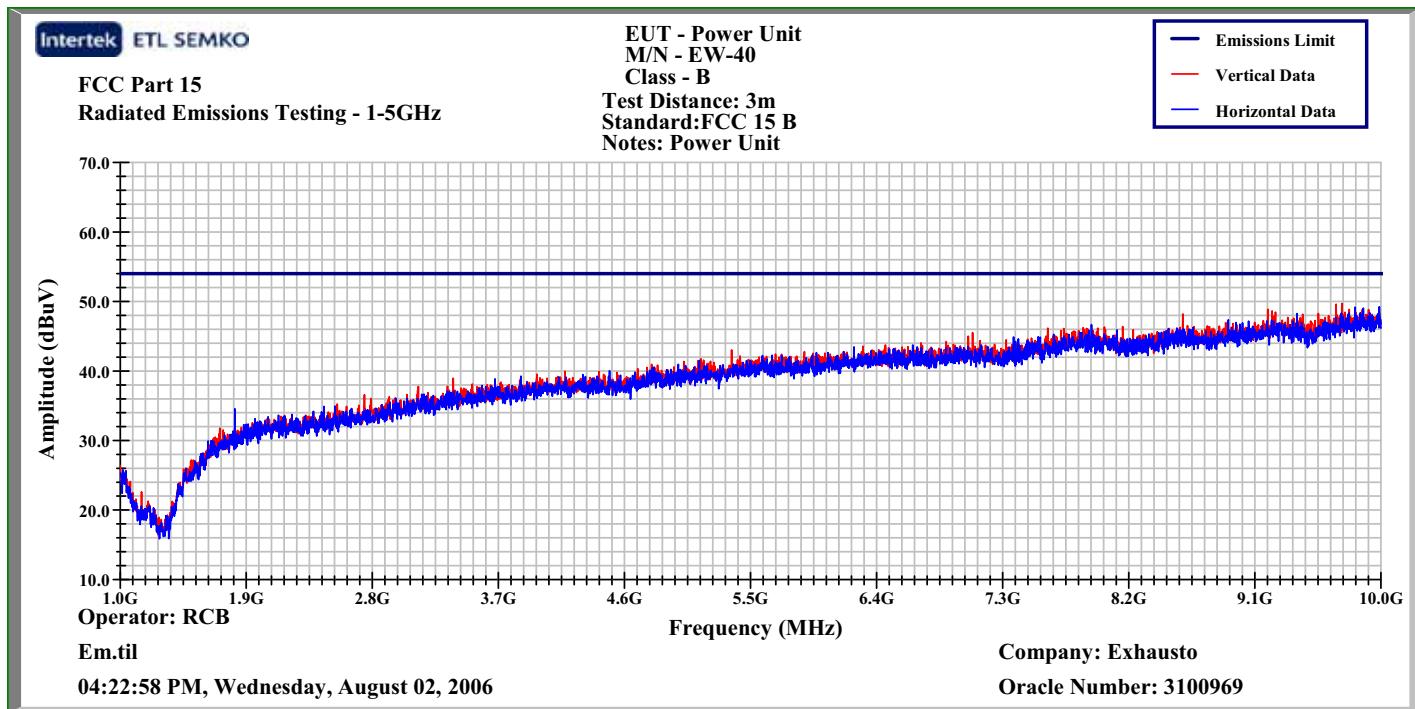

Radiated Emissions Plot 1000MHz - 10000MHz

## 7.0 Radiated emissions (E-field) (Radiated Emissions)

Plot:

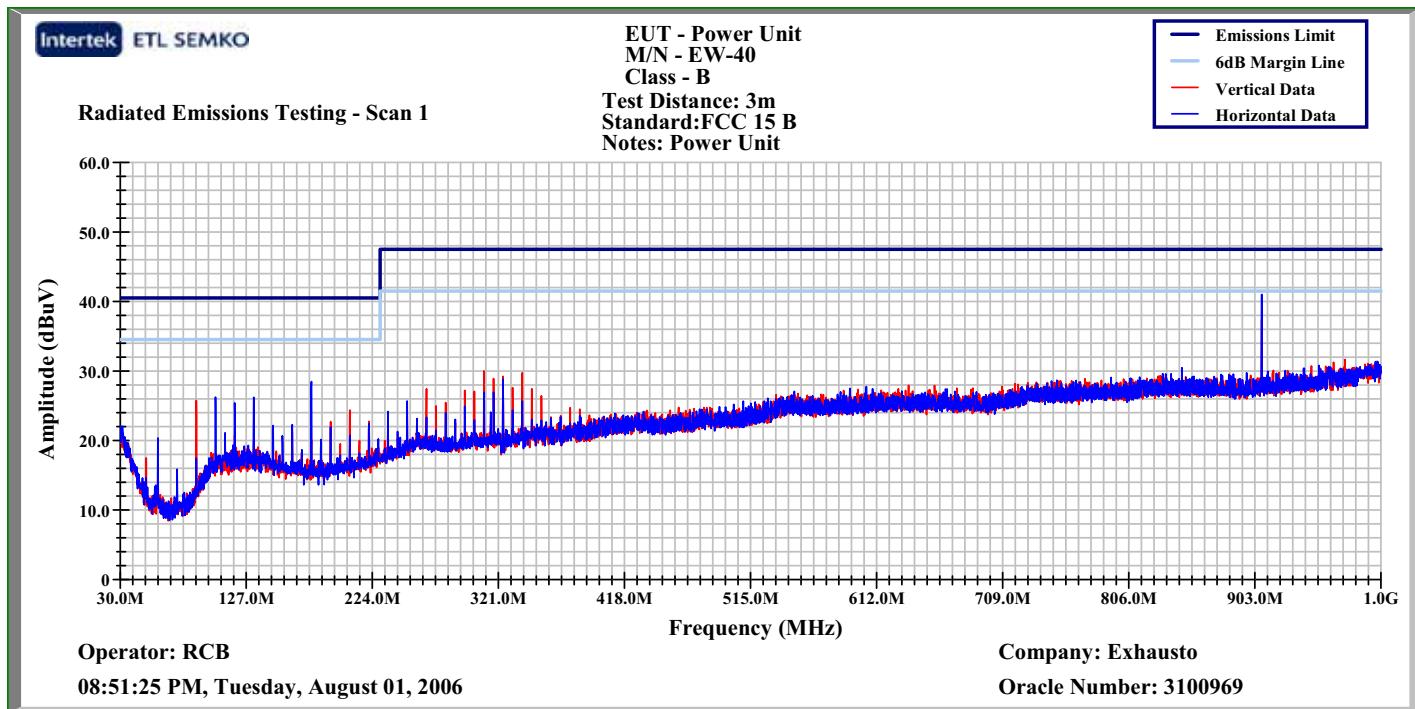

Radiated Emissions Plot 30MHz - 1000MHz

## 7.0 Radiated emissions (E-field) (Radiated Emissions)

## Data:

Date: 7-13-2006

Limit: FCC Part 15.249

Frequency Range (MHz): 30 to 10,000MHz

Test Distance (m): 3

Input power: 120VAC/60Hz

Modifications for compliance (y/n): No

A	B	C	D	E	F	G	H	I	J
Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Net dB(uV/m)	3m Limit dB(uV/m)	Margin dB	Notes
V	103.278	39.5	12.8	1.8	28.0	26.1	40.5	-14.4	1,4
H	118.050	40.7	12.7	1.8	28.0	27.2	40.5	-13.3	1,4
V	162.285	41.4	10.9	1.8	28.0	26.1	40.5	-14.4	1,4
H	177.050	44.1	10.0	1.8	28.0	27.9	40.5	-12.6	1,4
H	191.810	41.3	9.8	1.8	28.0	24.9	40.5	-15.6	1,4
V	908.418	71.4	20.6	15.5	27.6	79.8	94.0	-14.2	1,3,4
H	1817.560	40.2	25.1	2.6	36.2	31.7	54.0	-22.3	2,4
Calculations		G=C+D+E-F			I=G-H				

Note 1: Quasi-peak measurement

Note 2: Peak measurement

Note 3: Fundamental emission

Note 4: EUT rotated through all 3 orthogonal axes