

# A Test Lab Techno Corp.

No.140-1, Chang-an St., Bade City, Tao-Yuan County 334, Taiwan (R.O.C.) Tel: +886-3-2710188 / Fax: +886-3-2710190

# **P15C Measurement Report**





Report No. 0907FR12

**Applicant Hearth & Home Technologies** 

**Product Type Remote Control Transmitter** 

**Trade Mark HEARTH & HOME TECHNOLOGIES** 

**Model No RC200** 

FCC ID **ULE-RC200** 

**Dates of Test** May 21 ~ Jun. 09, 2009

**Test Specification FCC Part 15 Subpart C (15.231)** 

Canada RSS-210 Issue 7(June 2007)

Canada RSS-Gen Issue 2(June 2007)

ANSI C63.4-2003

Location of Test Lab. Chang-an Lab.

- 1. The test operations have to be performed with cautious behavior, the test results are as attached.
- 2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
- 3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full. This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp.
- 4. This document may be altered or revised by A Test Lab Techno. Corp. personnel only, and shall be noted in the revision section of the document.

Approve Signer

20090<del>71</del>5

**Testing Engineer** 



# **CERTIFICATION**

# We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2003. All test were conducted by *A Test Lab Techno Corp. No.140-1, Chang-an St., Bade City, Tao-Yuan County 334, Taiwan (R.O.C.)* Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with Class B radiated and conducted emission limit of FCC Rules Part 15 Subpart C (15.231) & Canada RSS-210 Issue 7(June 2007).

**EUT** : Remote Control Transmitter

Applicant : Hearth & Home Technologies

20802 Kensington Blvd Lakeville Minnesota United States 55044

Trade Mark : HEARTH & HOME TECHNOLOGIES

Model No : RC200

FCC ID : ULE-RC200

Approved by:

Prepared by :

ohr√Cheng 2009/07/15

A Test Lab Techno Corp.

No.140-1, Chang-an St., Bade City, Tao-Yuan County 334, Taiwan (R.O.C.) Tel: 03-2710188 / Fax: 03-2710190



# **Contents**

1. GENERAL	4
2. Radiated Emissions Requirements	7
3. 99% Bandwidth / 20dB Bandwidth	17
Appendix A - EUT Photographs	20

Rev.00



#### 1. GENERAL

# 1.1 Description of Equipment under Test (EUT)

Applicant : Hearth & Home Technologies

20802 Kensington Blvd Lakeville Minnesota United States 55044

Manufacturer : GRAND MATE CO., LTD.

Manufacturer Address : NO.38, YUAN-CHEN RD, TAIPING CITY, TAICHUNG,

TAIWAN, R.O.C.

Trade Mark : HEARTH & HOME TECHNOLOGIES

Product Model : RC200

Product Type : Remote Control Transmitter

FCC ID : ULE-RC200 Frequency Range : 433.89 MHz

**Channel Number** : 1 CH **Type of Modulation** : ASK

Power Supply : 12 Vdc (32A Battery)

Type of Antenna : PCB Antenna

During testing the EUT was operated at Tx or Rx mode for each emission measured. This was done in order to ensure that maximum emission levels were attained.

#### 1.2 Introduction

The following measurement report is submitted on behalf of **Hearth & Home Technologies** In support of a Class B Digital Device certification in accordance with Part2 Subpart J and Part 15 Subpart A and B&C and RSS-210 of the Commission's and Regulations.



# 1.3 Summary of Tests

Applied Standard : FCC Part 15, Subpart C (Section 15.231); RSS-210						
Refer	ence	Test	Results	Note		
Part 15 C	RSS-210	1621	Results	Note		
15.231 (b), 15.209	A1.1.2	Radiated Emissions	PASS			
15.231 (c)	A1.1.3	99% Bandwidth / 20dB Bandwidth	PASS			

# 1.4 Description of Support Equipment

Describe	Manufacturer	Model	Serial No.	FCC ID
N/A				

# 1.5 Configuration of System under Test

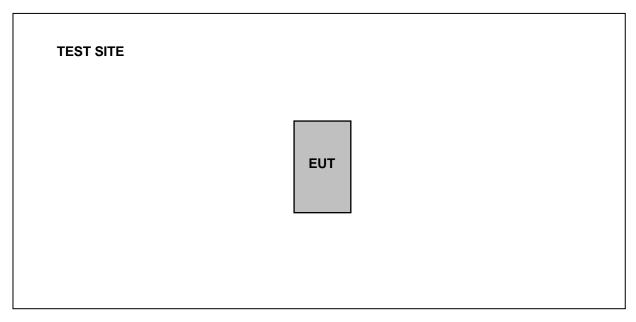


Figure 1. Configuration of System Under Test

During testing (LINK) put the EUT (Remote Control Transmitter)'s on the table.




#### 1.6 Test Procedure

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4-2003 "Measurement of un-Intentional Radiators."

#### 1.7 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated. Using a test program which sent a continuous data and transferred data to and from the EUT was proven to worst case emissions. The system's physical layout and cabling was randomly arranged to ensure that maximum emission levels were attained.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report

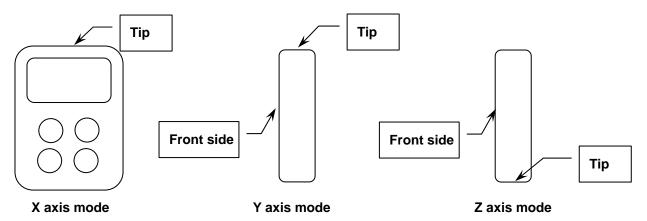

#### 1.8 General Information of Test Site

Test Site Location: No. 140 -1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.

TEL: 886-3-271-0188 FAX: 886-3-271-0190

Registration Number: 854525 Designation Number: TW1330

The chamber meets the characteristics of ANSI C63.4-2006. This site is on file with the FCC.



# 2. Radiated Emissions Requirements

#### 2.1 Test Procedure

Radiated emission measurements frequency range were performed from 30MHz to 5GHz. Spectrum Analyzer Resolution Bandwidth set to 100kHz or greater for frequencies from 30MHz to 1GHz, and set 1MHz Resolution Bandwidth for frequencies above 1GHz. The EUT is place on non-conductive turntable for the test. If peripheral devices apply to the EUT, the peripheral devices will be connected to EUT and whole system. During the emission test, the signal is maximized through rotation and all cables were present worst-case emissions. The height of antenna and polarization is constantly changed for exploring maximum signal reading. The height of antenna can be up form reference ground to 4 meter and down to 1 meter.


# 2.2 Test Equipment List:

Describe	Manufacturer	Model	Serial Number	Calibration		
Describe	Mariaracturer	Wodel	Serial Number	Cal. Date	Due Date	
Spectrum Analyzer	Agilent	E4408B	MY45107753	Jun. 05, 2009	Jun. 05, 2010	
Pre Amplifier	Agilent	8449B	3008A02455	Feb. 05, 2009	Feb. 05, 2010	
Pre Amplifier	Agilent	8447D	2944A10961	Jun. 10, 2008	Jun. 10, 2009	
Test Receiver	R&S	ESCI	100367	Jun. 05, 2009	Jun. 05, 2010	
Biconilog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	Jun. 26, 2008	Jun. 26, 2009	
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	Jun. 26, 2008	Jun. 26, 2009	
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	Jun. 05, 2009	Jun. 09, 2010	
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120E	0899	Jun. 26, 2008	Jun. 26, 2009	



# 2.3 Test Configuration:

### Measurement of radiated emission

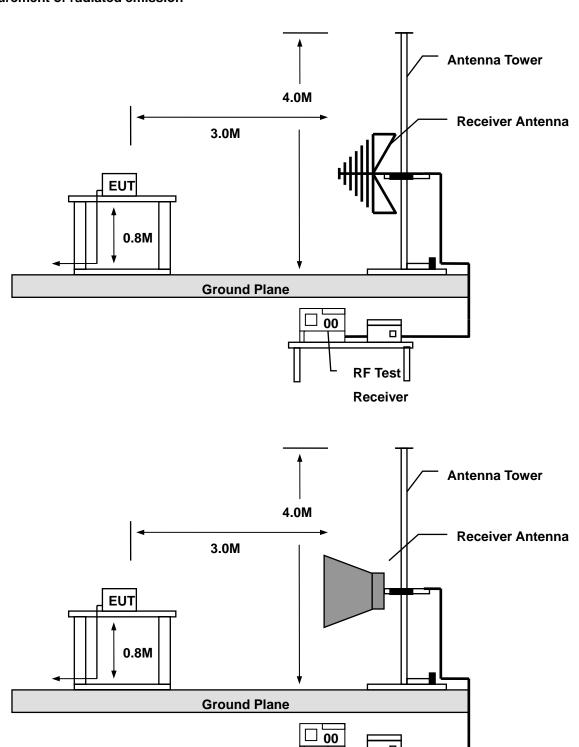

RF Test Receiver



# 2.4 Test Setup:



Figure 2. Front View of the Test Configuration (under 1GHz)



Figure 3. Rear View of the Test Configuration (under 1GHz)



### 2.5 Test condition:

EUT tested in accordance with the specifications given by the manufacturer, and exercised in the most unfavorable manner.

#### 2.6 Radiated Emissions Limits:

According to FCC 15.231(b) & RSS-210 A1.1.2 requirement:

In addition to the provisions of §15.205, the field strength of emissions from intentional radiator operated under this section shall not exceed the following:

#### Fundamental and harmonics emission limits

Frequency range	Field Strength	of Fundamental	Field Strength	of Harmonics
(MHz)	(μV/m@3m) (dBμV/m@3m)		( μ V/m@3m) (dB μ V/m@	
433.89	10990.01	80.82	1099.01	60.82

#### **General Radiated emission Limit**

Frequency range	15.209 Limits		
(MHz)	(μV/m@3m)	(dB $\mu$ V/m@3m)	
30 – 88	100	40	
88 – 216	150	43.5	
216 – 960	200	46	
Above 960	500	54	

#### Remark

- 1. The table above tighter limit applies at the band edges.
- 2. The measurement distance in meters, which that between form closest point of EUT to instrument antenna.



# 2.7 Calculation of Average Factor

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

Please see the diagrams below.

- (\*) Canada: When the field strength (or envelope power) is not constant or when it is in pulses, and an averaging detector is specified to be used, the value of field strength or power over one complete pulse train, excluding blanking intervals, shall be averaged as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 seconds, the average value (of field strength or output power) shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.
- (\*) FCC: When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.



### **Duty Cycle Results**

Item	Results	Note
Length of a complete pulse train	216.8 > 100.00 ms	Section 2.7 (*)
Long Pluse (Number of Pluse)	24.00	
Short Pluse (Number of Pluse)	28.00	
Long Pluse (T)	1.075 ms	
Short Pluse (T)	0.525 ms	
Total ON interval in a complete pulse train	40.5 ms	
Duty Cycle	0.405	
Averaging Factor (20 log * Duty Cycle )	-7.85	

Please see the diagrams below.


#### Note:

- 1. RB=100 KHz, VB=300 KHz, SPAN=0
- 2. Total ON interval in a complete pulse train = (Long Pluse \* Long Pluse( Number of Pluse))+( Short Pluse \* Short Pluse (Number of Pluse))
- 3. Duty Cycle= Total On Interval in a Complete Pulse Train


  Length of a Complete Pulse Train



#### **Duty Cycle Test Diagrams**

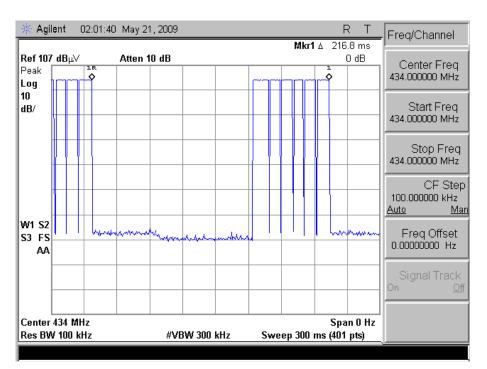


### **Duty cycle 1**

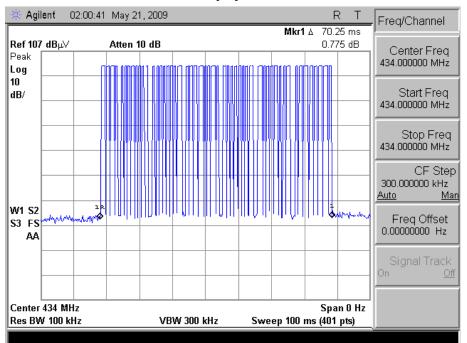


**Duty cycle 2** 



#### **Time Slot Test Diagrams**

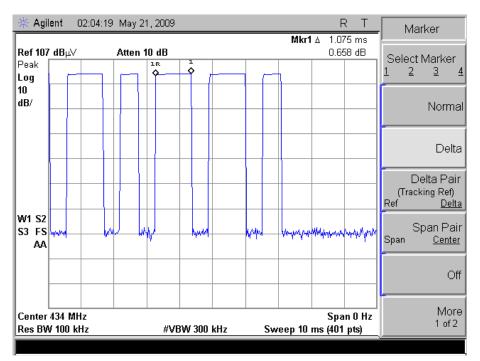


#### Time Slot 1

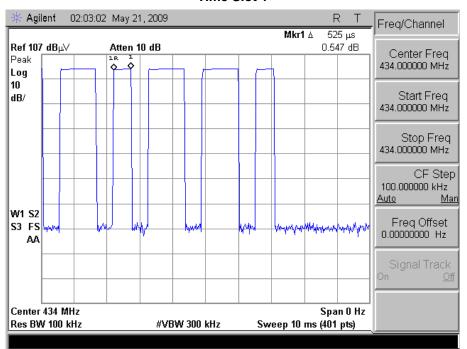

Time Slot 2



The EUT was complied with the requirement of FCC 15.231 (a) (1), which employed a switch that will automatically deactivate the transmitter within less than 5 seconds of being released.

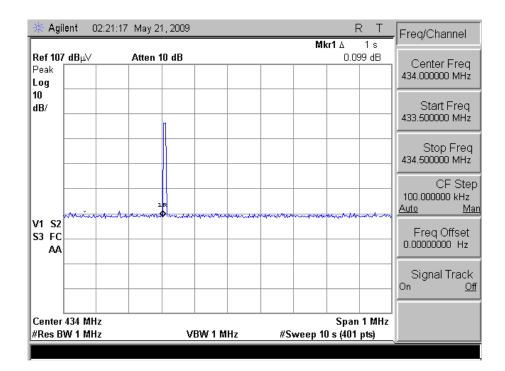



### 2.8 Test Result:

The final test emission data is shown on as following tables.

Applicant : Hearth & Home Technologies

Model No : RC200

EUT : Remote Control Transmitter

Test Mode : Radiated Emission below 1GHz

Test Date : 06/09/2009

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Corrected Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Det. Mode
40.98	V	35.47	-11.88	23.59	40.00	-16.41	Peak
98.74	V	35.29	-11.84	23.45	43.50	-20.05	Peak
189.19	V	34.78	-13.43	21.35	43.50	-22.15	Peak
222.94	V	50.12	-12.25	37.87	46.00	-8.13	Peak
278.14	V	34.77	-10.49	24.28	46.00	-21.72	Peak
298.37	V	35.28	-10.04	25.24	46.00	-20.76	Peak
329.18	V	38.77	-9.44	29.33	46.00	-16.67	Peak
516.11	V	42.62	-6.78	35.84	46.00	-10.16	Peak
717.48	V	35.57	-3.58	31.99	46.00	-14.01	Peak
945.28	V	35.27	0.23	35.50	46.00	-10.50	Peak
44.72	Н	34.44	-11.83	22.61	40.00	-17.39	Peak
102.78	Н	36.27	-11.90	24.37	43.50	-19.13	Peak
150.27	Н	35.37	-16.00	19.37	43.50	-24.13	Peak
199.42	Н	34.97	-13.17	21.80	43.50	-21.70	Peak
226.62	Н	40.57	-12.07	28.50	46.00	-17.50	Peak
294.38	Н	35.68	-10.19	25.49	46.00	-20.51	Peak
346.22	Н	32.42	-9.05	23.37	46.00	-22.63	Peak
508.38	Н	40.18	-6.78	33.40	46.00	-12.60	Peak
667.45	Н	34.78	-4.21	30.57	46.00	-15.43	Peak
944.78	Н	37.28	0.23	37.51	46.00	-8.49	Peak

#### Notes:

- 1. Margin= Corrected Level Limits
- 2. Corrected Level = Reading + Correction Factor
- 3. Correction Factor = Antenna Factor + Cable Loss Preamp
- 4. The EUT was worst case on X axis after pretest on X & Y & Z axis setting.



Applicant : Hearth & Home Technologies

Model No : RC200

EUT : Remote Control Transmitter

Test Mode : Fundamental and harmonics emissions

Test Date : 06/09/2009

Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Correction Factor (dB/m)	Average Factor (dB)	Corrected Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Det. Mode
433.89	V	95.11	-8.01	-7.85	79.25	80.82	-1.57	Peak
868.40	V	50.17	-0.77	-7.85	41.55	60.82	-19.27	Peak
433.89	Н	79.86	-8.01	-7.85	64.00	80.82	-16.82	Peak
868.40	Н	50.43	-0.77	-7.85	41.81	60.82	-19.01	Peak

#### Notes:

- 1. Margin= Corrected Level Limits
- 2. Corrected Level = Reading + Correction Factor
- 3. Correction Factor = Antenna Factor + Cable Loss Preamp
- 4. The present spurious points only shows that above noise level and the frequency range test from 30MHz to 10th harmonic of frequency.
- 5. The EUT was worst case on X axis after pretest on X & Y & Z axis setting.




# 3. 99% Bandwidth / 20dB Bandwidth

## 3.1 Test Condition & Setup:

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The spectrum analyzer used the following settings:

- 1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
- 2. VBW ≥ RBW
- 3. Sweep = auto
- 4. Detector function = peak
- 5. Trace = max hold

# 3.2 Test Instruments Configuration:

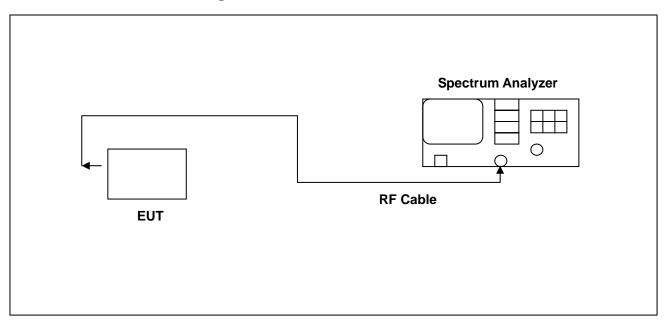



# 3.3 Test Equipment List:

Describe	Manufacturer	Model	Serial Number	Calib	ration
Describe	Manuacturei	Wiodei	Serial Nulliber	Cal. Date	Due Date
Spectrum Analyzer	Agilent	E4445A	MY46181986	May 14, 2009	May 14, 2010

#### 3.4 Limits

According to FCC 15.231(c) & RSS-210 Section A1.1.3 requirement:

The 99% bandwidth shall be no wider than 0.25% of the centre frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the centre frequency.


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

B.W (20dBc) Limit = 0.25% \* f (MHz) = 0.25% \* 433.89 MHz = 1084.73 kHz



#### 3.5 Test Result

Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Note
434	63.7391	1084.73	RB=10KHz , VB=30KHz

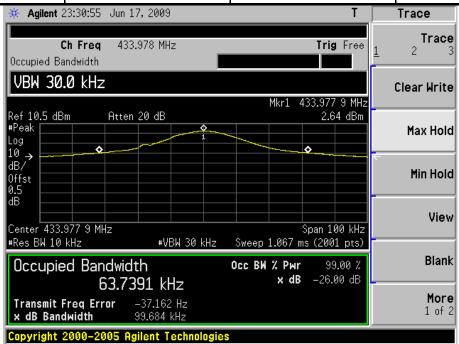

Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Note
434	150	1084.73	RB=30KHz, VB=30KHz





# Appendix A - EUT Photographs

EUT Photo \_ 1 of 18





EUT Photo \_ 2 of 18





EUT Photo \_ 3 of 18





EUT Photo \_ 4 of 18





EUT Photo \_ 5 of 18





EUT Photo \_ 6 of 18





EUT Photo \_ 7 of 18





EUT Photo \_ 8 of 18





EUT Photo \_ 9 of 18





EUT Photo \_ 10 of 18






# EUT Photo \_ 11 of 18






# EUT Photo \_ 12 of 18

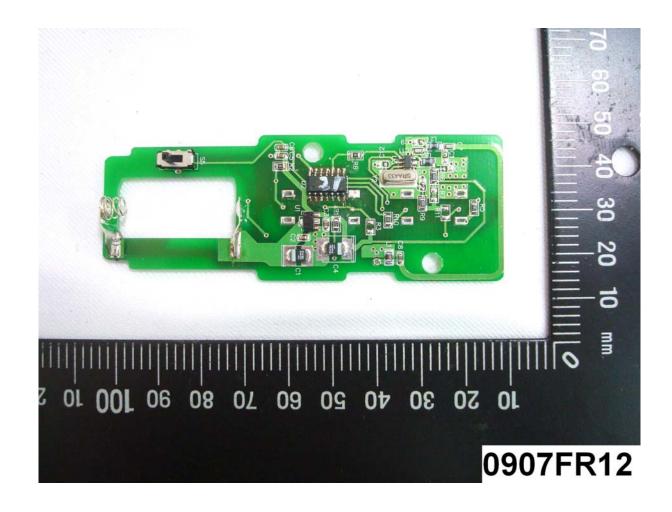



EUT Photo \_13 of 18

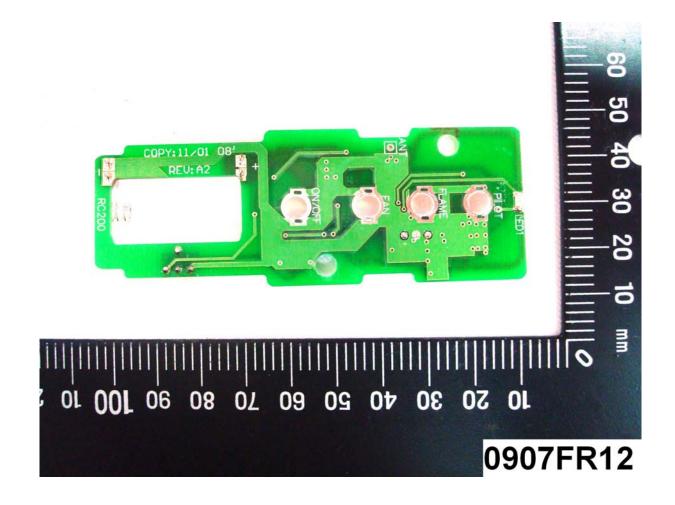



# EUT Photo \_14 of 18





EUT Photo \_15 of 18





### EUT Photo \_16 of 18





# EUT Photo \_17 of 18





### EUT Photo \_18 of 18

