# FCC 47 CFR PART 15 SUBPART B TEST REPORT

Report No.: T100323001-D

for

**Motion Sensor Presenter** 

**MODEL: RC240; RC240-X** 

Test Report Number: T100323001-D

Issued to:

#### FORMOSA21 Inc.

8F-6, NO.351, CHUNG SHAN RD., SEC.2, CHUNG HO CITY, TAIPEI, TAIWAN, R.O.C.

Issued by:

**Compliance Certification Services Inc.** 

Sindian BU.

No.163-1, Jhongsheng Rd., Sindian City, Taipei County 23151, Taiwan

TEL: 886-2-22170894

FAX: 886-2-22171029

Issued Date: April 16, 2010







**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.

# **Revision History**

Report No.: T100323001-D

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 16, 2010	Initial Issue	ALL	Eva Fan

# Report No.: T100323001-D

# **TABLE OF CONTENTS**

1	TEST RESULT CERTIFICATION	4
2	EUT DESCRIPTION	5
3	TEST METHODOLOGY	6
3.1.	DECISION OF FINAL TEST MODE	6
3.2.		
4	SETUP OF EQUIPMENT UNDER TEST	7
4.1.	DESCRIPTION OF SUPPORT UNITS	7
4.2.	CONFIGURATION OF SYSTEM UNDER TEST	7
5	FACILITIES AND ACCREDITATIONS	8
5.1.	FACILITIES	8
5.2.		
5.3.	MEASUREMENT UNCERTAINTY	
6	CONDUCTED EMISSION MEASUREMENT	
6.1.	LIMITS OF CONDUCTED EMISSION MEASUREMENT	g
6.2.	TEST INSTRUMENTS	g
	TEST PROCEDURES	-
6.4.	TEST SETUP	11
6.5.	DATA SAMPLE	11
6.6.		
7	RADIATED EMISSION MEASUREMENT	
7.1.		
	TEST INSTRUMENTS	
	TEST PROCEDURES	
	TEST SETUP	
	DATA SAMPLE	
	TEST RESULTS	
8	PHOTOGRAPHS OF THE TEST CONFIGURATION	20
APPF	NDIX 1 - PHOTOGRAPHS OF EUT	

# 1 TEST RESULT CERTIFICATION

**Product:** Motion Sensor Presenter

**Model:** RC240; RC240-X (X=0~9 or A~Z)

Brand: aim

Applicant: FORMOSA21 Inc.

8F-6, NO.351, CHUNG SHAN RD., SEC.2, CHUNG HO CITY,

Report No.: T100323001-D

TAIPEI, TAIWAN, R.O.C.

Manufacturer: FORMOSA21 Inc.

8F-6, NO.351, CHUNG SHAN RD., SEC.2, CHUNG HO CITY,

TAIPEI, TAIWAN, R.O.C.

**Tested:** April 13, 2010 & April 15, 2010

EMISSION					
Standard	Item	Result	Remarks		
FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 4	Conducted (Power Port)	PASS	Meet Class B limit		
ANSI C63.4-2003	Radiated	PASS	Meet Class B limit		

**Note:** 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.

2. The information of measurement uncertainty is available upon the customer's request.

Deviation from Applicable Standard	
None	

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Vince Chiang Assistant Manager Reviewed by:

Vesta Hsu

Supervisor of report document dept.

# **2 EUT DESCRIPTION**

Product	Motion Sensor Presenter
Brand Name	aim
Model	RC240; RC240-X (X=0~9 or A~Z)
Applicant	FORMOSA21 Inc.
Housing material	Plastic
Identify Number	T100323001
Received Date	March 23, 2010
EUT Power Rating	5VDC from Host PC Power Supply
AC Power During Test	120VAC / 60Hz

Report No.: T100323001-D

#### **Model Differences**

	Model Name	Difference	Tested (Checked)
Original	RC240	The external are differences.	$\boxtimes$
Additional	RC240-X (X=0~9 or A~Z)	THE EXICITIAL ARE UILLEFINES.	

#### I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
1. USB Port	1	1

Note: Client consigns only one model sample to test (Model Number: RC240).

# 3 TEST METHODOLOGY

#### 3.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the above additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

Report No.: T100323001-D

The test configuration/ modes are as the following:

#### Modes:

1	Charge Mode
2	Normal Mode

Conduction: Mode 1
Radiation: Mode 2

#### 3.2. EUT SYSTEM OPERATION

1. Windows XP boots system.

2. Run Emctest.exe to activate all peripherals and display "H" pattern on monitor screen.

Note: Test program is self-repeating throughout the test.

# 4 SETUP OF EQUIPMENT UNDER TEST

#### 4.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Report No.: T100323001-D


#### **Peripherals Devices:**

No.	Equipment	Model No.	Serial No.	FCC ID / BSMI ID	Trade Name	Data Cable	Power Cord
1	PS/2 Mouse	M071KC	443029438	DOC BSMI: R41108	DELL	Shielded, 1.8m	N/A
2	PS/2 Keyboard	SK-8110	N/A	DOC BSMI: T3A002	DELL	Shielded, 1.8m	N/A
3	Printer	C60	DR3K039402	BSMI ID: 3902E006	EPSON	Shielded, 1.8m	Unshielded, 1.8m
4	Monitor	XL24	ED24H2DPB00001W	DOC BSMI: R33475	SAMSUNG	Shielded, 1.8m with two cores	Unshielded, 1.8m
5	Host PC	HD075AV	SGH948QGVW	DOC BSMI: R33001	HP	Shielded, 1.8m	Unshielded, 1.8m
6	Modem	AL-56ERM	0MERM04A0212	DOC	GALILEO	Shielded, 0.6m	Unshielded, 1.8m

#### Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.2. CONFIGURATION OF SYSTEM UNDER TEST

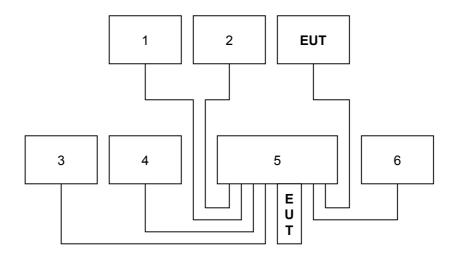

# 5 FACILITIES AND ACCREDITATIONS

#### 5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at CCS Taiwan Sindian BU. at No.163-1, Jhongsheng Rd., Sindian City, Taipei County 23151, Taiwan.

Report No.: T100323001-D

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4 and CISPR 16-1-5.

# 5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
USA	A2LA

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Norway	Nemko
Japan	VCCI
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <a href="http://www.ccsrf.com">http:///www.ccsrf.com</a>

#### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty	
Conducted emissions	0.15MHz~30MHz	± 1.1089	
Radiated emissions	30MHz ~ 200MHz	± 3.8792	
Naulateu emissions	200MHz ~1000MHz	± 3.8914	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22: 2005, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than  $U_{CISPR}$  which is 3.6dB and 5.2dB respectively. CCS values (called  $U_{Lab}$  in CISPR 16-4-2) is less than  $U_{CISPR}$  as shown in the table above. Therefore, MU need not be considered for compliance.

# 6 CONDUCTED EMISSION MEASUREMENT

#### 6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
TREQUERCT (IMITE)	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Report No.: T100323001-D

#### NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

# **6.2. TEST INSTRUMENTS**

Conducted Emission room # B						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
TEST RECEIVER	R&S	ESCI	100234	06/11/2010		
LISN (EUT)	FCC	FCC-LISN-50-32-2	08009	03/25/2011		
LISN	EMCO	3825/2	1382	01/11/2011		
BNC CABLE	Huber+Suhner	RG 223/U	BNC B2	01/12/2011		
Pulse Limiter	R&S	ESH3-Z2	100374	08/23/2010		
THERMO- HYGRO METER	ТОР	HA-202	9303-3	01/31/2011		
Test S/W	EZ-EMC					

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.

# **6.3. TEST PROCEDURES** (please refer to measurement standard or CCS SOP PA-031)


### **Procedure of Preliminary Test**

- The EUT and support equipment, if needed, were set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.
- All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- The test equipment EUT installed by AC 120VAC/60Hz main power, through a Line Impedance Stabilization Network (LISN), which was supplied power source and was grounded to the ground plane.
- All support equipment power by from a second LISN.
- The test program of the EUT was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 3.1 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.

# **Procedure of Final Test**

- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- The test data of the worst-case condition(s) was recorded.

# 6.4. TEST SETUP

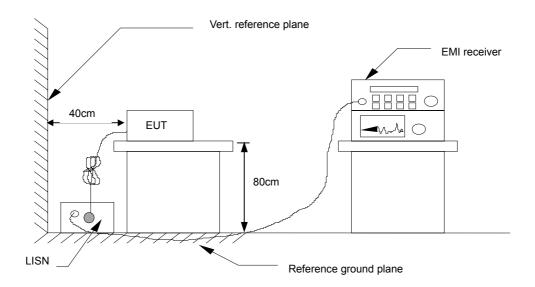

Report No.: T100323001-D

• For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

# 6.5. DATA SAMPLE

Freq.	Reading	Factor	Result	Limit	Margin	Detector	Line
(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	(P/Q/A)	(L1/L2)
X.XX	42.95	0.55	43.50	56	-12.50	Q	

Freq. = Emission frequency in MHz

Reading = Uncorrected Analyzer/Receiver reading Factor = Insertion loss of LISN + Cable Loss

Result = Reading + Factor
Limit = Limit stated in standard
Margin = Reading in reference to limit

P = Peak Reading
Q = Quasi-peak Reading
A = Average Reading

L1 = Hot side L2 = Neutral side

#### **Calculation Formula**

Margin (dB) = Result (dBuV) – Limit (dBuV)

# 6.6. TEST RESULTS

Model No.	RC240	6dB Bandwidth	10 kHz
Environmental Conditions	20deg.C, 62% RH, 1008hPa	Test Mode	Mode 1
Tested by	Brian Chen		

Report No.: T100323001-D

(The chart below shows the highest readings taken from the final data.)

	Six Highest Conducted Emission Readings							
Frequ	Frequency Range Investigated				150 kHz to	30 MHz		
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)	
0.2140	39.02	10.76	49.78	63.04	-13.26	Р	L1	
0.8620	25.92	10.62	36.54	56.00	-19.46	Р	L1	
1.1460	31.13	10.62	41.75	56.00	-14.25	Р	L1	
0.2100	39.44	10.61	50.05	63.20	-13.15	Р	L2	
0.2300	36.17	10.60	46.77	62.45	-15.68	Р	L2	
1.1460	31.42	10.56	41.98	56.00	-14.02	Р	L2	

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

<sup>2.</sup> The emission level was or more than 2dB below the Average limit, so no re-check anymore.

# 7 RADIATED EMISSION MEASUREMENT

### 7.1. LIMITS OF RADIATED EMISSION MEASUREMENT

## Below 1GHz (for digital device)

FREQUENCY (MHz)	dBuV/m (At 10m)		
TREGOENOT (MITZ)	Class A	Class B	
30 ~ 230	40	30	
230 ~ 1000	47	37	

Report No.: T100323001-D

# Limit tables for non-digital device:

#### Class A Radiated Emission limit at 10m (for others)

Frequency (MHZ)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	90	39
88 - 216	150	43.5
216 – 960	210	46.4
Above 960	300	49.5

#### Class B Radiated Emission limit at 3m (for others)

Frequency (MHZ)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	100	40
88 - 216	150	43.5
216 – 960	200	46
Above 960	500	54

### Above 1GHz(for all device)

Frequency	Class A (dBu	V/m) (At 10m)	Class B (dB	uV/m) (At 3m)
(MHZ)	Average Peak		Average	Peak
Above 1000	49.5	69.5	54	74

**NOTE**: (1) The lower limit shall apply at the transition frequencies.

- (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- (3) The measurement above 1GHz is at close-in distances 3m,and determine the limit L2 corresponding to the close-in distance d2 by applying the following relation: L2 = L1 (d1/d2), where L1 is the specified limit in microvolts per metre (uV/m) at the distance d1 (10m), L2 is the new limit for distance d2 (3m).

So the new Class A limit above 1GHz at 3m is as following table:

Frequency	Class A (dBu	V/m) (At 3m)
(MHZ)	Average	Peak
Above 1000	60	80

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Report No.: T100323001-D

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.75	30
1.75-108	1000
108-500	2000
500-1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40GHz, whichever is lower

# 7.2. TEST INSTRUMENTS

	Open Area Test Site # I						
Name of Equipment	Manufacturer	Model	Serial Number	<b>Calibration Due</b>			
MEASURE RECEIVER	SCHAFFNER	SCR3501	338	07/07/2010			
SPECTRUM ANALYZER	ADVANTEST	R3132	120900008	No Calibration Required			
ANTENNA	SCHAFFNER	CBL 6112B	2809	09/06/2010			
AMPLIFIER	SCHAFFNER	CPA9231A	3626	10/11/2010			
CABLE	BELDEN	9913	N-TYPE #I2	02/21/2011			
THERMO- HYGRO METER	TECPEL	DTM-303	090639	05/24/2010			
Test S/W	EZ-EMC						

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

<sup>2.</sup> N.C.R = No Calibration Request.

# **7.3. TEST PROCEDURES** (please refer to measurement standard or CCS SOP PA-031)

#### **Procedure of Preliminary Test**

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.4.
- All I/O cables were positioned to simulate typical usage as per ANSI C63.4.
- The EUT received AC 120VAC/60Hz power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- The antenna was placed at 3 or 10 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 40GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 3.1 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.


### **Procedure of Final Test**

 EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

Report No.: T100323001-D

- The Analyzer / Receiver scanned from 30MHz to 40GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 or 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recording at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. Below 1GHz the Q.P. reading and above 1GHz the Peak and Average reading are presented.
- The test data of the worst-case condition(s) was recorded.

#### 7.4. TEST SETUP

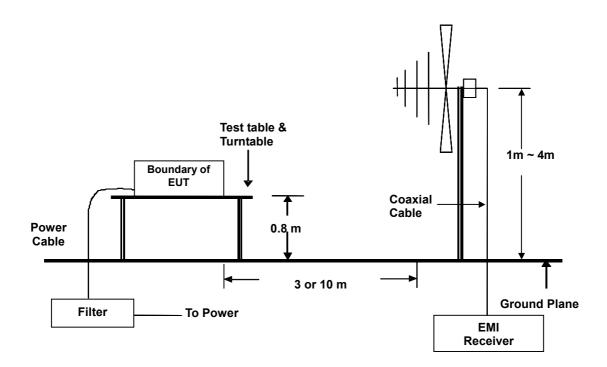

 For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

# 7.5. DATA SAMPLE

#### **Below 1GHz**

Freq.	Reading	Factor	Result	Limit	Margin	Detector	Pol.
(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(P/Q)	(H/V)
X.XX	14.0	12.2	26.2	30	-3.8	Q	

Report No.: T100323001-D

#### **Above 1GHz**

Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
X.XX	42.95	0.55	43.50	54	-10.50	Α	Н

Freq. = Emission frequency in MHz

Reading = Uncorrected Analyzer/Receiver reading Factor = Antenna Factor + Cable Loss - Amplifier Gain

Result = Reading + Factor Limit = Limit stated in standard Margin = Reading in reference to limit

P = Peak Reading
Q = Quasi-peak Reading
A = Average Reading

H = Antenna Polarization: Horizontal
V = Antenna Polarization: Vertical

# **Calculation Formula**

Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)



# 7.6. TEST RESULTS

#### **Below 1GHz**

Model No.	RC240	Test Mode	Mode 2
Environmental Conditions	26deg.C, 60% RH, 1012hPa	6dB Bandwidth	120 kHz
Antenna Pole	Vertical / Horizontal	Antenna Distance	10m
<b>Detector Function</b>	Quasi-peak.	Tested by	Willy Hsu

Report No.: T100323001-D

(The chart below shows the highest readings taken from the final data.)

Six Highest Radiated Emission Readings							
Frequency Range Investigated				30 MHz to 1000 MHz at 10m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/Q)	Pol. (H/V)
36.1699	39.30	-13.75	25.55	30.00	-4.45	Q	٧
125.0100	40.30	-16.05	24.25	30.00	-5.75	Q	V
156.2000	37.90	-17.36	20.54	30.00	-9.46	Q	٧
429.7700	40.30	-9.49	30.81	37.00	-6.19	Q	٧
485.9000	39.20	-8.05	31.15	37.00	-5.85	Q	٧
750.0100	33.90	-4.19	29.71	37.00	-7.29	Q	V

(The chart below shows the highest readings taken from the final data.)

	Six Highest Radiated Emission Readings							
Frequency Range Investigated				30 MHz to 1000 MHz at 10m				
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/Q)	Pol. (H/V)	
144.5900	42.30	-16.94	25.36	30.00	-4.64	Q	Н	
160.1000	42.60	-17.49	25.11	30.00	-4.89	Q	Н	
187.1400	40.20	-17.97	22.23	30.00	-7.77	Q	Н	
204.7000	41.20	-17.71	23.49	30.00	-6.51	Q	Н	
570.1000	34.20	-6.08	28.12	37.00	-8.88	Q	Н	
747.7000	31.30	-4.24	27.06	37.00	-9.94	Q	Н	

Note: 1. 30MHz to 1000MHz test is Applicable CISPR 22 / EN 55022 standard.

2. The other emission levels were very low against the limit.

3. P= Peak Reading; Q= Quasi-peak Reading.

# Above 1GHz

Model No.	N/A	Test Mode	N/A
Environmental Conditions	N/A	6dB Bandwidth	N/A
Antenna Pole	N/A	Antenna Distance	N/A
Highest frequency generated or used	12MHz	Upper frequency	See note
Detector Function	N/A	Tested by	N/A

Report No.: T100323001-D

**Note:** No applicable, when the highest frequency of the internal sources of the EUT is less than 108MHz, the measurement shall only be made up to 1 GHz.



# 8 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST







# **RADIATED EMISSION TEST**



