

Model No.AT6101 Operation Manual


■ Key Features

- 】 Built-in 2.4GHz RF modules
- 】 Transmitting Range :100m/300ft
- 】 IP44 Waterproof camera with microphone
- 】 Receiver can connect to DVD/VCR for recording
- 】 Good for real time monitoring
- 】 Package include camera bracket for easy installation
- 】 Auto detecting and auto switching function enabled in receiver


Parts Included with This System:

1. 2.4GHZ Wireless color camera * 1 PC
2. 2.4GHZ Wireless receiver * 1 PC
3. Camera Stand * 1 PC
4. 7.5V AC/DC Adaptor for camera and receiver * 2PCS
5. A/V Cable * 1 PC

2.4GHz wireless waterproof IP44 color camera

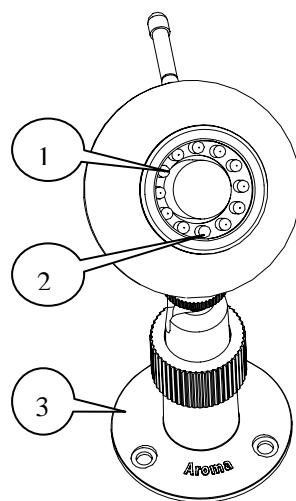


- 1.IR
- 2.CDS
- 3.Stand

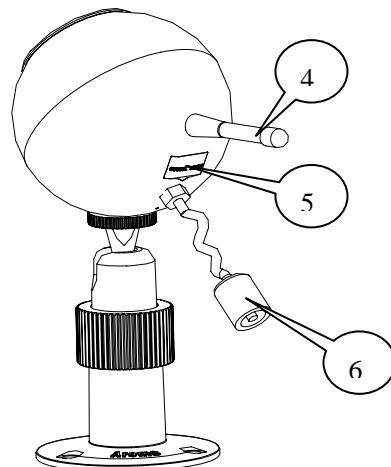

- 4.Antenna
- 5.Channel select switch
- 6.DC input cord

△ Set-up the camera

1. Connect the 7.5V/300mA adaptor cord into the DC input jack of the camera.
2. Plug the adaptor into a standard (110---240V AC) outlet .
3. Be sure to select the same channel to both camera and receiver to display, and the camera is ready to use now.

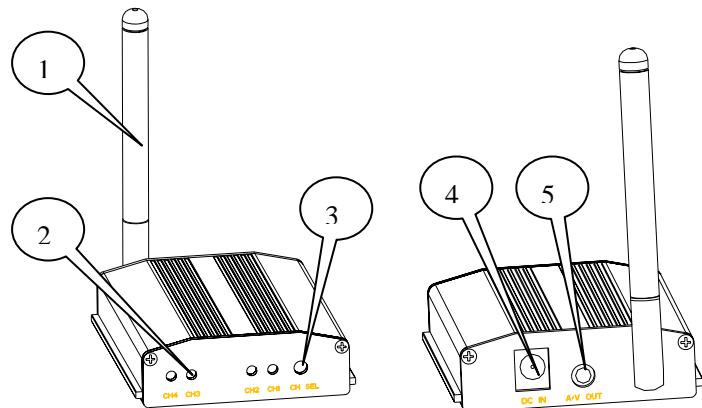

1.Antenna
 2.4 Channels LED
 3.Channel select switch
 4.DC power input
 5.Audio /Video output

Operation for receiver

1. Connect the 7.5V/300mA adaptor cord into the DC input.
2. Connect the A/V cable to the TV monitor.
3. Plug the adaptor into a standard (110---240Vac)outlet and power on the receiver .The receiver will auto detect the transmitter .When have more than one transmitter power on ,will set at auto scan and auto switch next channel each 5 seconds .For example ,have channel 1 and 3 power on ,it will auto switch between these two channels, as channel 1 → 5 seconds → channel 2 → 5 seconds --> channel 1
4. You can use the channel switch to select the channel that you want to show .Sequence as CH1 → CH2 → CH3 → CH4 → Auto detect

■ Specifications

	Camera	Receiver
Frequency	2.4–2.4835GHz	
Transmitting Range	100m/300ft	
Channel	4 channels	4 channels with auto scan
IR LED	11	N/A
Video Format	NTSC/PAL	
H Resolution	330 Horizontal TV Lines	N/A
Operation Temperature	14–122°F ~-10~50°C	
Power Supply	7.5V/300mA Adapter	7.5V DC/300mA Adapter
Video Output	N/A	1 Vp-p/75 ohm
Audio Output	N/A	1 Vp-p/600 ohm
Size (mm)	54.1*50.4*54.1mm	74*61*20mm
Weight	0.15Kg	0.1Kg
Accessories	7.5V Adapter, Bracket With Swivel Base	7.5V DC Adapter
Microphone	Built-in	N/A
Channel selected	Key select	Key select

■ IR Extender

Lens	Board Lens F6.0mm (64°)/F2.0
Image Sensor	1/3" Color CMOS Sensor
Pixel	510x492 (NTSC) or 628x582 (PAL)
Resolution	330 Lines
Illumination	<0 Lux
E Shutter Speed	1/60–1/15000 second
S/N Ratio	>48 db

FCC Caution: To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment (Example – use only shielded interface cables when connecting to computer or peripheral devices).

FCC ID: ULUAT-6101T

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:
 (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND
 (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING
 INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.

Made in China

Brand Name: AROMA