

RF Test Report

Applicant : Grand Mate Co., Ltd
Product Type : TX-01 Remote controller
Trade Name : GRANDMATE
Model Number : TX-01
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Jun. 01, 2018
Test Period : Jun. 04 ~ Jun. 05, 2018
Issue Date : Jun. 22, 2018

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jun. 13, 2018	Initial Issue	Nina Lin
01	Jun. 22, 2018	Revised report information	Nina Lin

Verification of Compliance

Issued Date: Jun. 22, 2018

Applicant : Grand Mate Co., Ltd
Product Type : TX-01 Remote controller
Trade Name : GRANDMATE
Model Number : TX-01
FCC ID : UMPTX-01
EUT Rated Voltage : DC 12V (23A Battery * 1PCS)
Test Voltage : DC 12V
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number:
1330<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)



TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result.....	5
1.2.	Measurement Uncertainty.....	5
2	EUT Description.....	6
3	Test Methodology.....	7
3.1.	Mode of Operation	7
3.2.	EUT Exercise Software.....	7
3.3.	Configuration of Test System Details	8
3.4.	Test Instruments	9
3.5.	Test Site Environment.....	9
4	Measurement Procedure.....	10
4.1.	Radiated Emissions Measurement	10
4.2.	20 dB Bandwidth Measurement.....	14
5	Test Results	15
	Annex A. Conducted Test Results	15
	Annex C. Radiated Emissions Measurement	16



1 General Information

1.1. Summary of Test Result

Reference	Test	Results	Remark
FCC Part 15.231			
15.207	AC Power Conducted Emission	N/A	This device use DC power source.
15.231(a)	Transmitter Deactivation Time	PASS	----
15.231(b)	Transmitter Radiated Emissions	PASS	----
15.231(c)	20 dB Bandwidth	PASS	----
CFR 47 Part 15.231(2010) / ANSI C63.10:2013			

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.7
Radiated Emission	30MHz ~ 1000MHz	5.7
	1000MHz ~ 18000MHz	5.5
	18000MHz ~ 26500MHz	4.8
	26500MHz ~ 40000MHz	4.8
RF Bandwidth	4.96%	



2 EUT Description

Applicant	Grand Mate Co., Ltd No. 30 Lugong S 2nd Rd, Lugang Town, Changhua Hsien 505, Taiwan
Manufacturer	Grand Mate Co., Ltd No. 30 Lugong S 2nd Rd, Lugang Town, Changhua Hsien 505, Taiwan
Product Type	TX-01 Remote controller
Trade Name	GRANDMATE
Model Number	TX-01
FCC ID	UMPTX-01
Class II Permissive Change	1. The value of electrical impedance is changed: Before : L2=150nH · L3=10nH · R20=2.7k Ohm After : L2=180nH · L3=180nH · R20=1k Ohm 2. The model number is changed from TX-01/650A/B to TX-01. There is no influence on RF Test results and any RF specification.
Frequency Range	315 MHz
Modulation Type	ASK
Number of Channels	1 Channel
Antenna Type	PCB Antenna
Operate Temp. Range	0 ~ +50 °C


3 Test Methodology

3.1. Mode of Operation

Test Mode
Mode 1: Transmitter Mode
Mode 2: Continuous TX Mode

Then, the above highest fundamental level mode of the configuration of the EUT and antenna was chosen for all final test items.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “X axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

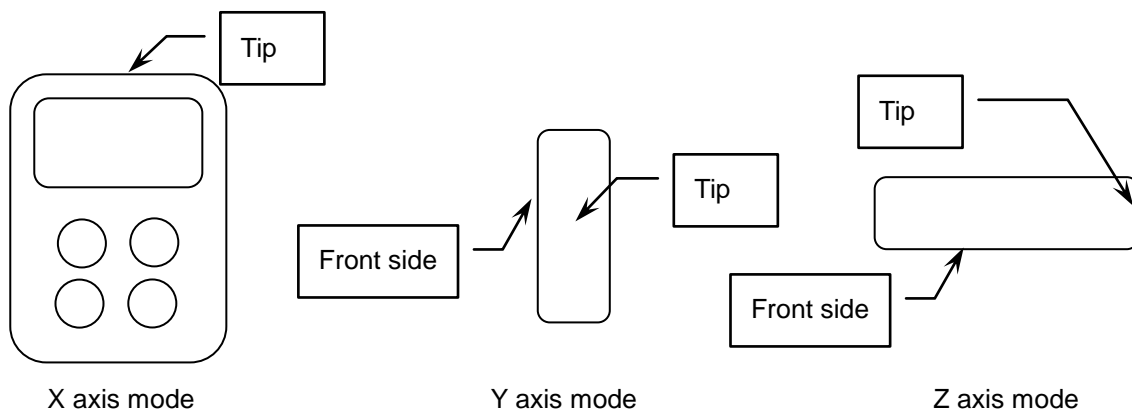


3.2. EUT Exercise Software

1.	Setup the EUT shown on “Configuration of Test System Details”.
2.	Turn on the power of all equipment.
3.	The EUT will start to operate function.



3.3. Configuration of Test System Details

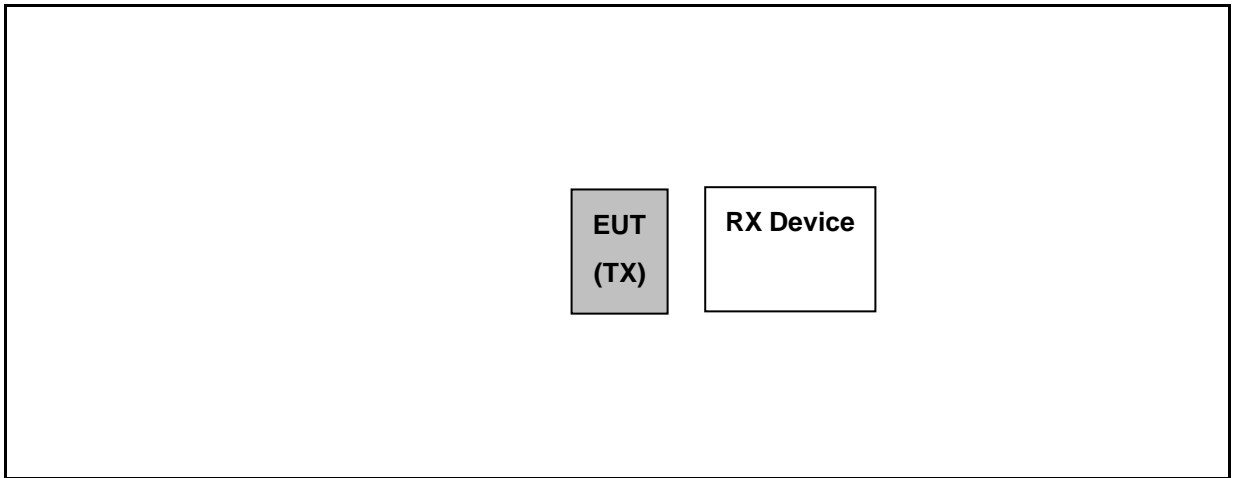

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	RX Device	GRANDMATE	TX-01	N/A	N/A



3.4. Test Instruments

For Radiated Emissions

Test Period: Jun. 05, 2018

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
EXA Signal Analyzer	Keysight	N9010A	MY52221312	01/15/2018	1 year
Amplifier	Agilent	8449B	3008A02237	10/16/2017	1 year
Amplifier	Agilent	8447D	2944A11119	01/10/2018	1 year
Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB 9168	416	10/26/2017	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/20/2017	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/19/2017	1 year

For Conducted

Test Period: Jun. 04 ~ Jun. 05, 2018

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	N9020A	US47520902	09/21/2017	1 year

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Measurement Procedure

4.1. Radiated Emissions Measurement

■ Limit

According to FCC Part 15.231(b) requirement:

In addition to the provisions of §15.205, the field strength of emissions from intentional radiator operated under this section shall not exceed the following:

Fundamental and harmonics emission limits

Frequency range (MHz)	Average Field Strength of Fundamental ($\mu\text{V}/\text{m}@3\text{m}$) ($\text{dB}\mu\text{V}/\text{m}@3\text{m}$)		Peak Field Strength of Fundamental ($\text{dB}\mu\text{V}/\text{m}@3\text{m}$)
315	6041.772	75.62	95.62

General Radiated emission Limit


Frequency range (MHz)	Field Strength of Fundamental ($\mu\text{V}/\text{m}$ at 3m)	Field Strength of Harmonics ($\mu\text{V}/\text{m}$ at 3m)
40.66 to 40.70	2250 (67.04 dBuV)	225 (47.04 dBuV)
70 to 130	1250 (61.94 dBuV)	125 (41.94 dBuV)
130 to 174	1250 (61.94 dBuV) to 3750 (71.48 dBuV)	125 (41.94 dBuV) to 375 (51.48 dBuV)
174 to 260	3750 (71.48 dBuV)	375 (51.48 dBuV)
260 to 470	3750 (71.48 dBuV) to 12500 (81.94 dBuV)	375 (51.48 dBuV) to 1250 (61.94 dBuV)
470 and above	12500 (81.94 dBuV)	1250 (61.94 dBuV)

Remark: 1. The table above tighter limit applies at the band edges.


2. The measurement distance in meters, which that between form closest point of EUT to instrument antenna.

■ Setup

Below 1GHz

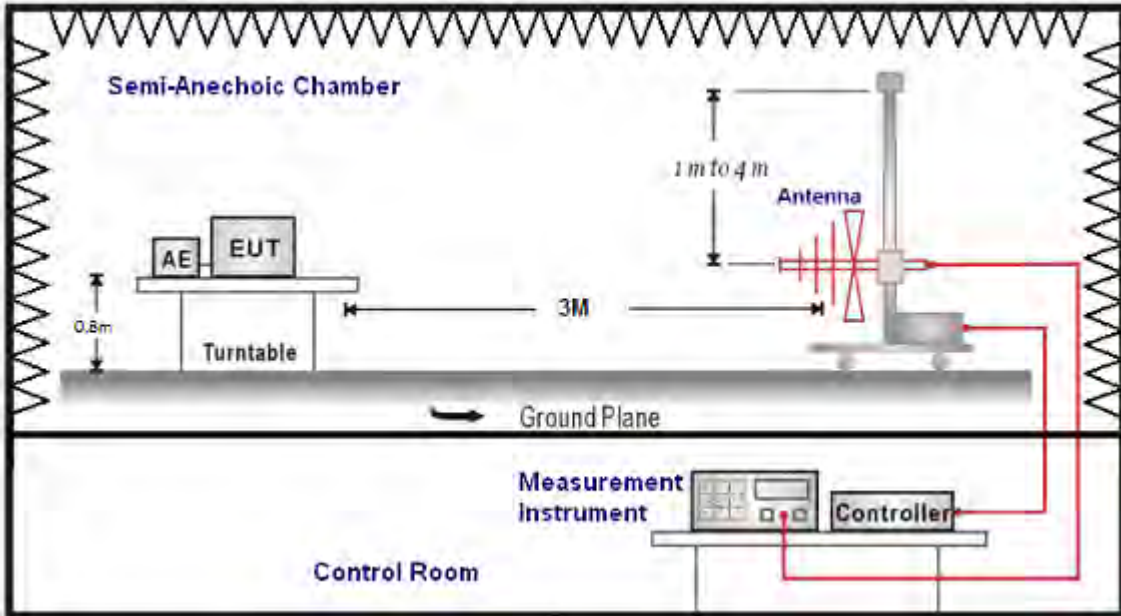

Above 1GHz

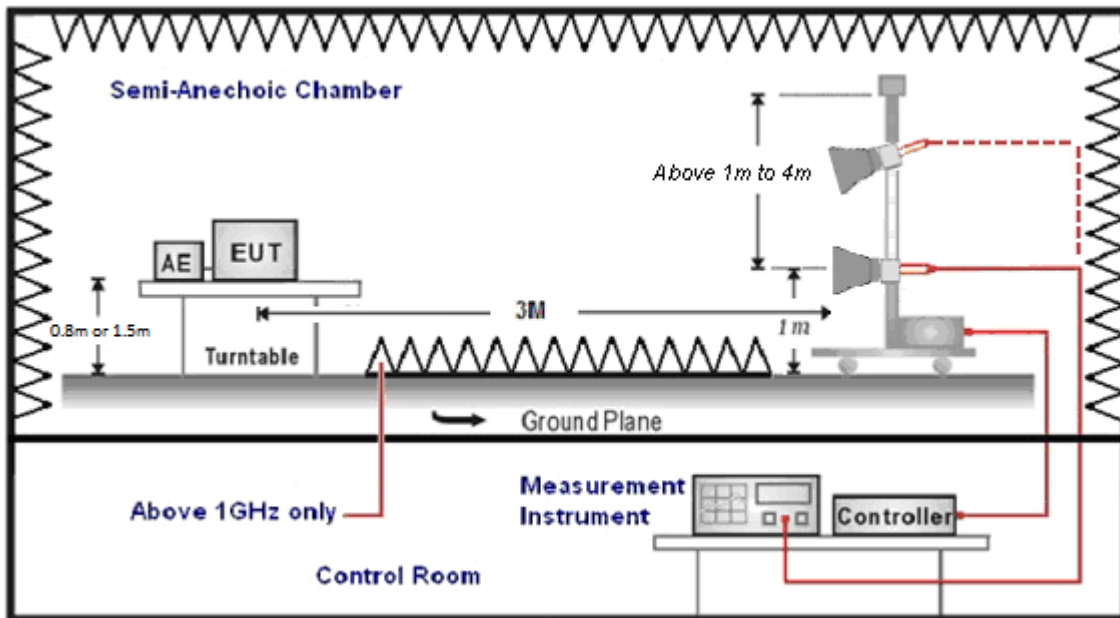



■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Calculation of Average Factor

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

Please see the diagrams below.

(*) When the field strength (or envelope power) is not constant or when it is in pulses, and an averaging detector is specified to be used, the value of field strength or power over one complete pulse train, excluding blanking intervals, shall be averaged as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 seconds, the average value (of field strength or output power) shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.

4.2. 20 dB Bandwidth Measurement


■ Limit

According to FCC Part 15.231(c) requirement:

The 20dB

$$\text{B.W Limit} = 0.25\% * f \text{ (MHz)} = 0.25\% * 315 \text{ MHz} = 787.5 \text{ kHz}$$

■ Test Setup

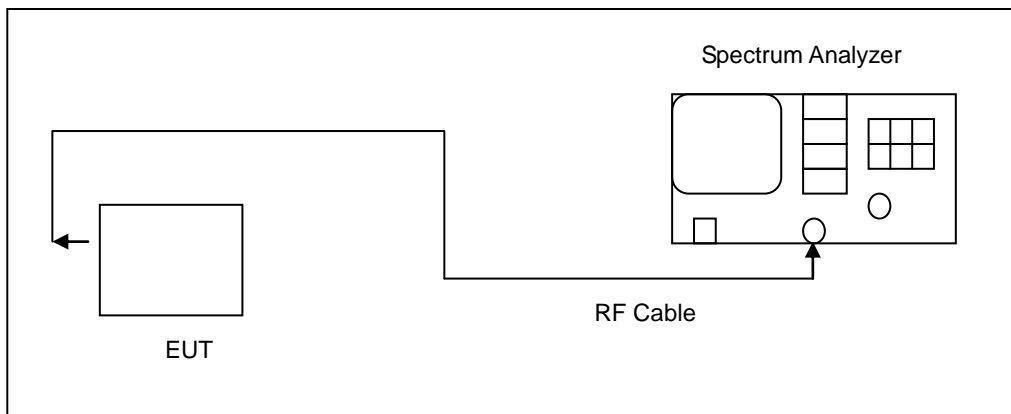

■ Test Procedure

20dB Bandwidth

The RF output port of the Equipment-Under-Test is directly coupled to the input of the analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The RF function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = 1 MHz
2. RBW \geq 1% of the 20dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.


5 Test Results

Annex A. Conducted Test Results

20 dB Measurement


Test Mode	Mode 2	
Frequency (MHz)	20 dB Bandwidth (KHz)	Limited (KHz)
315	51.745	787.5000

■ Test Graphs

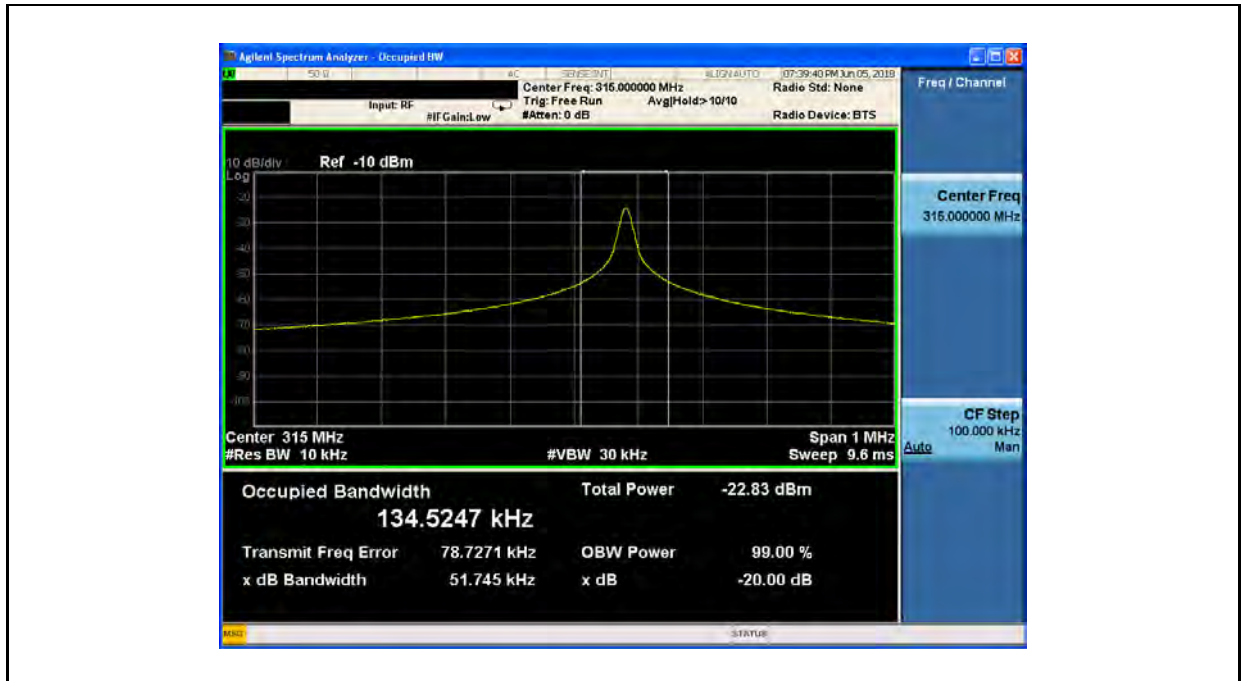


Annex C. Radiated Emissions Measurement

Duty Cycle Test Diagrams

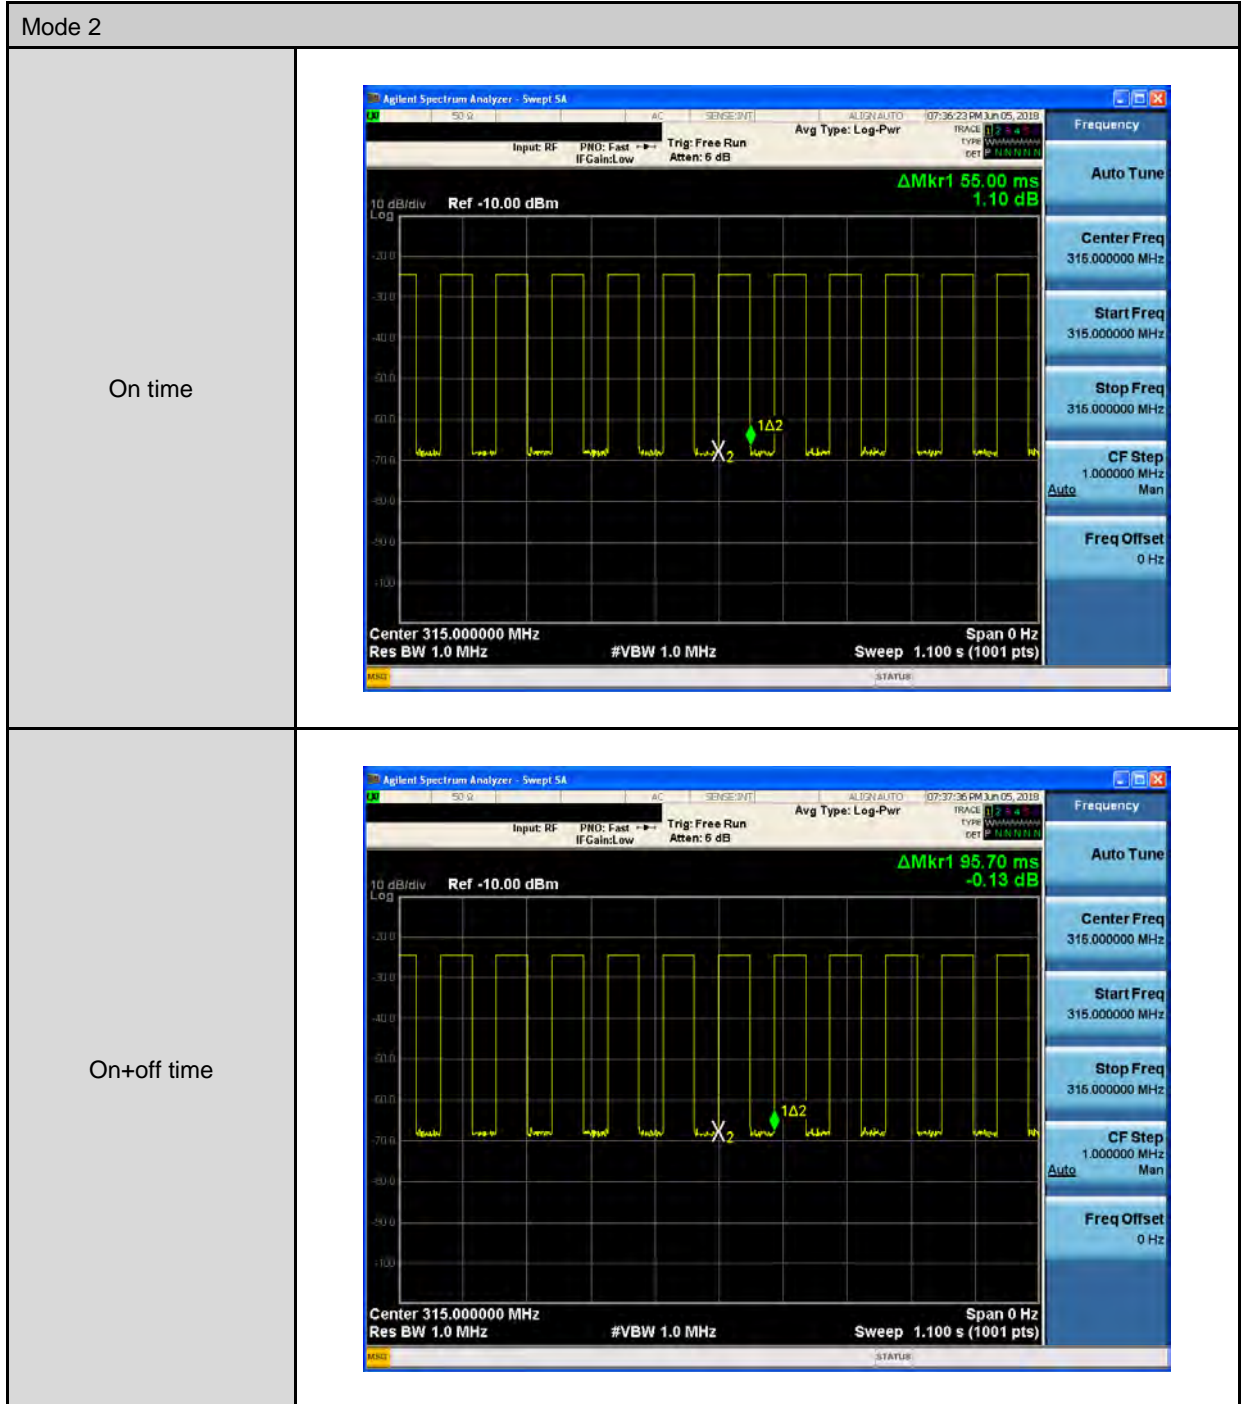

The EUT was complied with the requirement of FCC 15.231 (a) (1), which employed a switch that will automatically deactivate the transmitter within less than 5 seconds of being released.

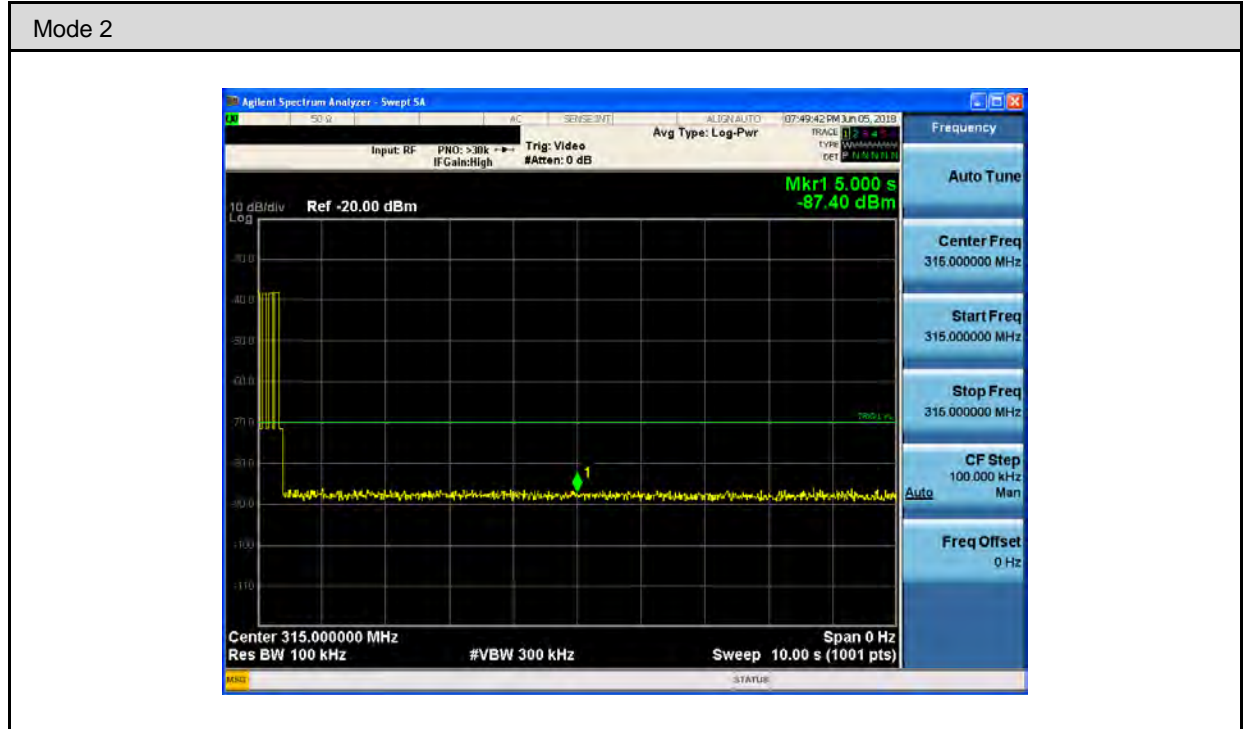

Duty Cycle Results

Test Mode	Mode 2		
Item	Results	Note	
Ton	55 ms	----	
Tp	95.7 ms	----	
Duty Cycle	0.5747	----	
Averaging Factor (20 log * Duty Cycle)	-4.81	----	

Please see the diagrams below.

Note:

1. RB=100 KHz, VB=300 KHz, SPAN=0
2. Duty Cycle= Ton/Tp

**Fundamental Frequency Test Results**

Standard:	FCC Part 15.231	Test Distance:	3m
Test item:	Fundamental Frequency	Power:	DC 12V
Test Mode:	Mode 2	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Horizontal		
Description:			

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	315.0800	69.79	-3.46	66.33	75.62	-9.29	AVG

Standard:	FCC Part 15.231	Test Distance:	3m
Test item:	Fundamental Frequency	Power:	DC 12V
Test Mode:	Mode 2	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Vertical		
Description:			


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	315.0800	68.22	-3.46	64.76	75.62	-10.86	AVG

Note: Measured result is lower than AV and therefore PK is not measured.



Below 1GHz

Standard:	FCC Part 15.231	Test Distance:	3m
Test item:	Transmitter Unwanted Emissions	Power:	DC 12V
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Horizontal		

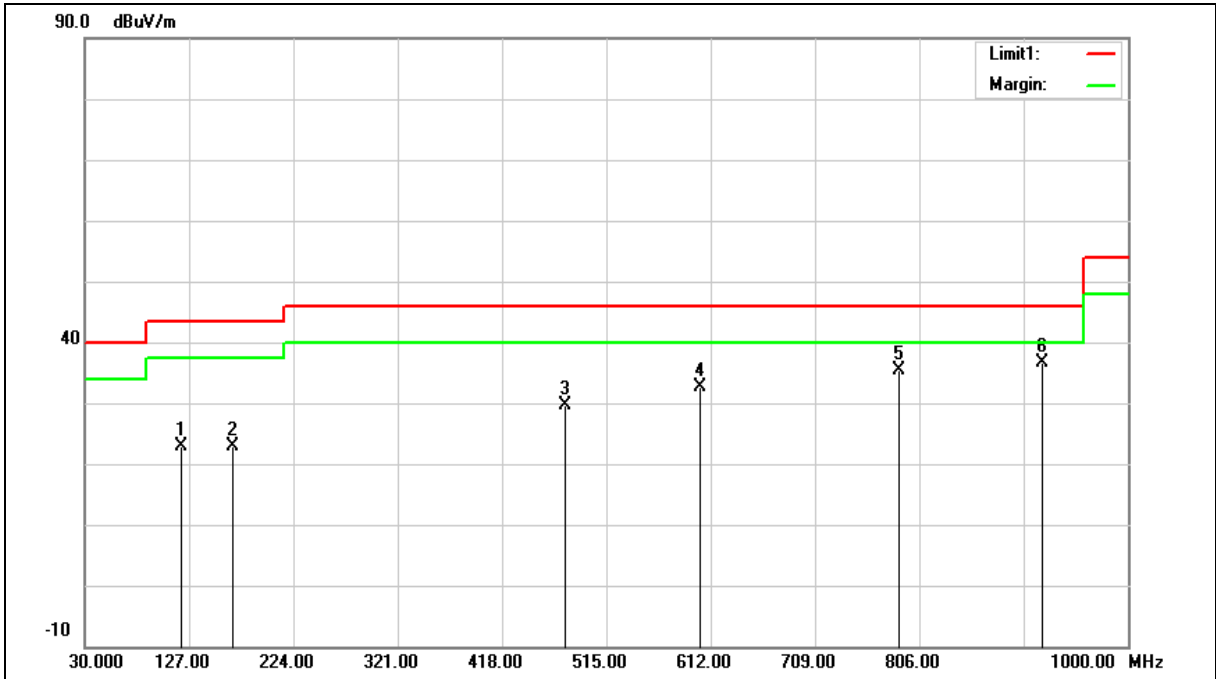

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	120.2100	31.28	-8.29	22.99	43.50	-20.51	QP
2	167.7400	28.41	-5.61	22.80	43.50	-20.70	QP
3	476.2000	29.62	-0.10	29.52	46.00	-16.48	QP
4	602.3000	30.04	2.51	32.55	46.00	-13.45	QP
5	787.5700	29.42	6.07	35.49	46.00	-10.51	QP
6	920.4600	28.20	8.36	36.56	46.00	-9.44	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.231	Test Distance:	3m
Test item:	Transmitter Unwanted Emissions	Power:	DC 12V
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Ant.Polar.:	Vertical		

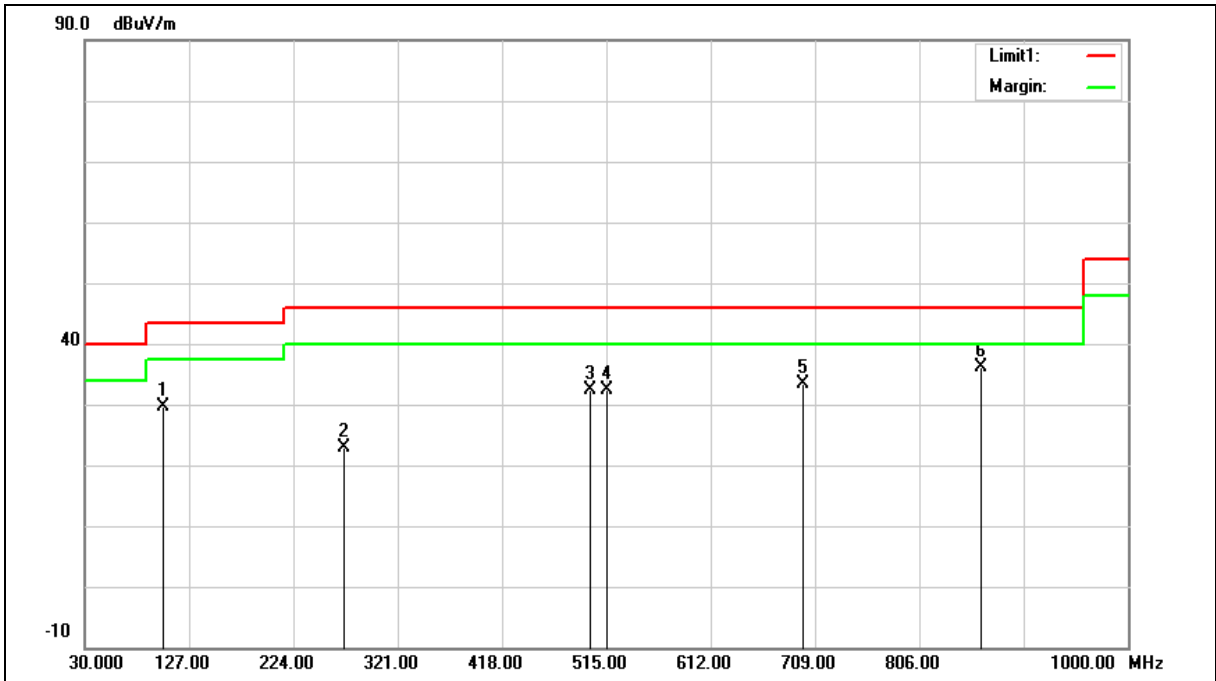

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	102.7500	40.29	-10.61	29.68	43.50	-13.82	QP
2	271.5300	27.47	-4.71	22.76	46.00	-23.24	QP
3	499.4800	32.19	0.14	32.33	46.00	-13.67	QP
4	515.0000	31.99	0.42	32.41	46.00	-13.59	QP
5	697.3600	29.24	4.19	33.43	46.00	-12.57	QP
6	863.2300	28.83	7.36	36.19	46.00	-9.81	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

**Above 1GHz**

Standard:	FCC Part 15.231	Test Distance:	3m				
Test item:	Transmitter Unwanted Emissions	Power:	DC 12V				
Test Mode:	Mode 2	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2205.000	58.51	-2.17	56.34	74.00	-17.66	peak	H
2205.000	53.66	-2.17	51.49	54.00	-2.51	AVG	H
3465.000	55.24	1.42	56.66	74.00	-17.34	peak	H
3465.000	44.81	1.42	46.23	54.00	-7.77	AVG	H
3465.000	43.83	1.42	45.25	74.00	-28.75	peak	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.