FCC Part 15 Subpart D Test Report

of

E.U.T. : DECT phone with CID,

speakerphone and TAM

(Base Station FP)

MODEL : ID555

Serial No. : ID555 Duo

FCC ID. : UMQID555

for

APPLICANT : Philips consumer electronics

ADDRESS : 9, rue Maurice Trintignant-72000 Le Mans-France

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34. LIN 5. DINGFU TSUEN, LINKOU SHIANG TAIPEI COUNTY, TAIWAN, 24442, R.O.C.

TEL: (02)26023052 FAX: (02)26010910

http://www.etc.org.tw; e-mail: emc@etc.org.tw

Report Number: 08-06-RBF-007-01

TEST REPORT CERTIFICATION

Applicant : Philips consumer electronics

9, rue Maurice Trintignant-72000 Le Mans-France

Manufacturer : Huiyang CCT Telecommunications Products Co. Ltd.

CCT Technology Park, San He Economic Developmental Zone, Huiyang District, Huizhou City, Guangdong Province, PRC

Description of EUT

a) Type of EUT : DECT phone with CID, speakerphone and TAM (Base Station FP)

b) Trade Name : Philipsc) Model No. : ID555

d) Serial No. : ID555 Duo

(Model ID555 is identical to ID555 Duo except for the different

combination and model name. ID555 is consist of base +handset, ID555

Duo is consist of base + 2 handsets +charger.)

e) Power Supply : Adaptor : AC120V 60Hz 0.2A, DC 7.5V, 500mA

f) Frequency Range : 1921.536~1928.448MHz

Regulation Applied : FCC Rules and Regulations Part 15 Subpart D (2006)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.17-2006/ ANSI C63.4-2003, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.

2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Issued Date:	Jun. 1	11, 2008
Test Engineer :	Itapen	ng Chen)
Approve & Author	rized Signer :	Will Yano
		Will Yauo, Manager
		EMC Dept. II of ELECTRONICS TESTING CENTER, TAIWAN

Ί	Table of Contents	Page
1	GENERAL INFORMATION	1
	1.1 Testing Laboratory	1
	1.2 Client Information	1
	1.3 Manufacturer	1
2	TEST INFORMATION	2
	2.1 Descriptino of Tested Device(s)	2
	2.2 Test Environment	
3	TEST REPORT SUMMARY	3
	3.1 Test Summary	3
	3.2 Devices for Tested System	
4	TEST SETUP	4
	4.1 Frequency and Timing Measurements	4
	4.2 Conducted Emission Tests	
	4.3 Radiated Emission Tests	
	4.4 Power Line Conducted Tests	
5	TEST EQUIPMENT LIST	6
6	TEST RESULT	7
	6.1 Corrdination with fixed microwave	7
	6.2 Cross Reference	8
	6.3 Labeling Requirements	9
	6.4 Power Line Conducted Emissions	10
	6.5 Antenna Requirement	21
	6.6 digital Modulation Techniques	21
	6.7 Peak Power Output	22
	6.8 Power Spectral Density	25
	6.9 Antenna Gain	
	6.10 Automatic discontinuation of transmission	
	6.11 Safety exposure levels	
	6.12 Emission Bandwidth B.	
	6.13 Emissions inside and outside the subband	
	6.14 Frame period and jitter	
	6.15 Carrier frequency stability	50

Sheet 1 of 52 Sheet FCC ID.: UMQID555

1 GENERAL INFORMATION

1.1 Testing Laboratory

Name : Electronics Testing Center, Taiwan

Address : No. 34, Lin 5, Dingfu Tsuen, Linkou Shiang, Taipei County,

Taiwan, 24442, R.O.C.

Telephone : 886-2-26023052 Fax : 886-2-26010910

NVLAP lab registration# : 200133-0 IC OATS registration# : IC 2949A-1

1.2 Client Information

Name : Philips consumer electronics

Address : 9, rue Maurice Trintignant-72000 Le Mans-France

Telephone : 33(02)44 02 77 79

Contact person : Anthony Raucoule

1.3 Manufacturer

Name : Huiyang CCT Telecommunications Products Co. Ltd.

Address : CCT Technology Park, San He Economic Developmental

Zone, Huiyang District, Huizhou City, Guangdong Province,

PRC

Sheet 2 of 52 Sheet FCC ID. : UMQID555

2 TEST INFORMATION

2.1 Descriptino of Tested Device(s)

The tested equipment is a DECT base station which complies with ETSI EN 300175. The frequencies have been reprogrammed to comply with the FCC requirements to an Isochronous UPCS device after FCC Part 15D.

The EUT is a responding device as described in ANSI C63.17 and is designed to operate togerter with a DECT handset, which is then the initiating device.

Frequency Channel	Frequency	Test Frequency
СН0	1928.448 MHz	F_{H}
СН1	1926.720 MHz	-
СН2	1924.992 MHz	-
СН3	1923.264 MHz	-
СН4	1921.536 MHz	F_L

2.2 Test Environment

Normal test condition

Temperature:	20 – 25° C
Relative humidty:	55 – 75%

Extreme test condition (declared by manufacture)

Please see the manufacturer declaration form.

Sheet 3 of 52 Sheet FCC ID.: UMQID555

3 TEST REPORT SUMMARY

3.1 Test Summary

Requirement	FCC Paragraph #	Required	Customer Declaration	Test Pass
Coordination with fixed microwave	15.307(b)			
Cross Reference	15.309(b)			
Labeling requirements	15.311 , 15.19(a)(3)			
Power line Conducted Emission	15.315 , 15.207			
Antenna Requirement	15.315, 15.203			
Digital Modulation Techniques	15.319(b)			
Peak transmit Power	15.319(c)			
Power spectral Density	15.319(d)			
Antenna gain	15.319(e)			
Automatic discontinuation of transmission	15.319(f)	•		
Safety exposure levels	15.319(i)			
Emission Bandwidth	15.323(a)			
Emissions inside and outside the subband	15.323(d)			
Frame period and jitter	15.323(e)			
Carrier frequency stability	15.323(f)			

3.2 Devices for Tested System

All measurements are traceable to national standards.


The tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR47 Part 15, Paragraph 15.232 for Isochronous UPCS Devices and Industry Canada RSS-213 Issue 2.

The conducted test methods have been in accordance with ANSI C63.17-2006 Draft where applicable. Radiated tests were conducted is accordance with ANSI C63.4-2003.

Sheet 4 of 52 Sheet FCC ID.: UMQID555

4 TEST SETUP


4.1 Frequency and Timing Measurements



Test Set-up 1

This setup is used for measuring Frame stability, Jitter, Carrier frequency stability at normal and extremet temperatures.


4.2 Conducted Emission Tests

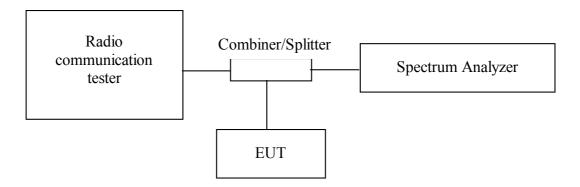

Test Set-up 2

This setup is used for all conducted emission tests.


4.3 Radiated Emission Tests

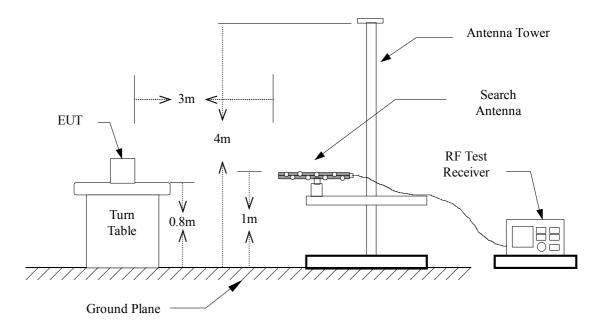

Test Set-up 3

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10 m, for all toher frequencies it is 3m. Emissions above 1 GHz were measured with the Spectrum Analyzer, Horn Antenna and the preamplifier after the antenna.

4.4 Power Line Conducted Tests

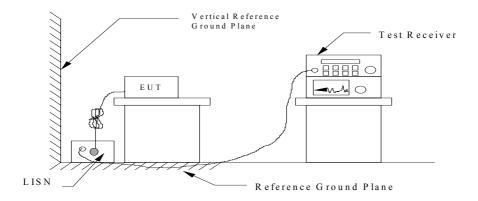

Test Set-up 4

5 TEST EQUIPMENT LIST

To facilitate inclusion on each page of the test equipment used for related test, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.

Equipment	Manufacturer	Model No.	Next Cal. Due
Test Receiver	Rohde & Schwarz	ESCS 30	2009/01/25
Amplifier	HP	8447D	2008/09/19
Bi-Log Antenna	Schaffner	CBL 6111	2009/05/23
Log-periodic Antenna	EMCO	3146	2008/10/24
Biconical Antenna	EMCO	3110	2008/12/20
EMI Test Receiver	Rohde & Schwarz	ESCI	2008/12/26
Spectrum	R&S	FSP3	2008/12/26
Signal generator	HP	8656B	2008/11/28
Double Ridged Antenna	EMCO	3115	2009/05/17
Amplifier	HP	8449B	2008/09/19
Amplifier	HP	83051A	2009/05/27
Spectrum	R&S	FSP40	2008/08/12
CTS60 DIGITAL RADIO TEST	R&S	CTS60	2008/12/25
Line Impedance Stabilization network	EMCO	3625/2	2008/10/08
Line Impedance Stabilization network	Rohde & Schwarz	ESH2-Z5	2008/09/20
Monitor	IBM	E54	N.C.R.
Printer	HP	LaserJet 1000	N.C.R.
Shielded Room	Riken		N.C.R.
Computer	Acer	Veriton	N.C.R.

Sheet 7 of 52 Sheet FCC ID.: UMQID555

6 TEST RESULT

6.1 Corrdination with fixed microwave

6.1.1 Standard Applicable

FCC 15.307 (b)

Each application for certification of equipment operating under the provisions of this Subpart munst be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfill the obligations attendant to participation in UTAM, Inc., the Commissin may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices coveed by the grant of certification, including but not limited to revoking certification.

Result

The affidavit from UTAM, Inc. is included in the documentation supplied by the applicant:

Yes

□ No

Sheet 8 of 52 Sheet FCC ID. : UMQID555

6.2 Cross Reference

6.2.1 Standard Applicable

15.309(b)

The requirements of Subpart D apply only to the radio transmitter contained in the PCS device. Other aspecgts of the operation of a PCS device may be subject to requirements contained else where in this Chapter. In particular, a PCS device that includes digital circuitry not direct associated with the radio transmitter also is subject to the requirements for unintentional radiators in Subpart B.

15.109(a)

For unintentional device, according to FCC §15.109(a), the field strength of radiated emissions from unintentional except for class A digital device radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated μV/m	Radiated dB μ V/m
30 - 88	3	100	40.0
88 - 216	3	150	43.5
216 - 960	3	200	46.0
Above 960	3	500	54.0

6.2.2 Test Results

This requirement is not applicable because test sample do not included digital circuitry which is not direct associated with the radio transmitter	
For test results according to FCC 15 subpart B, see the EMC report as attached	
For test results according to FCC 15 subpart B, see the measurement data as follow	
This requirement is covered b results of power line conducted emission test according to FCC 15.315	

Sheet 9 of 52 Sheet FCC ID.: UMQID555

6.3 Labeling Requirements

6.3.1 Standard Applicable

FCC 15.19

The FCC Identifier shall be displayed on the label, and the device(s) shall bear the following statement in a conspicuous location on the device or in the user manual if the device is too small:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this deivce may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause underired operation.

The label itself shall be of a permanent type, not a paper label, and shall last the lifetime of the equipments.

6.3.2 Result

See separate documents showing the label design and the placement of the label on the EUT.

Sheet 10 of 52 Sheet FCC ID.: UMQID555

6.4 Power Line Conducted Emissions

6.4.1 Standard Applicable

15.315

An unlicensed PCS device that is designed to connected to the public utility (AC) power line must meet the limites specified in Section 15.207.

15.207(a)

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

^{*} Decreases with the logarithm of the frequency

6.4.2 Measurement procedure

ANSI C63.4-2003 using 50 μ H/50 ohms LISN.

6.4.3 Test Results: Complies

Measurement Data: See attached graph, (Peak detector)

Highest measured value (L1 and L2):

All emissions were below the QP and Average limits when measured with Peak detector.

A. Adaptor 1

Operation Mode: <u>Base Charging</u> <u>Neutral</u>

Test Date : Jun. 07, 2008 Temperature : 22 °C Humidity : 65 %

T.	Meter Reading		Factor	Result		Limit		Margin		
Frequency	$(dB \mu V)$			(dB)	$(dB \mu V)$		$(dB \mu V)$		$(dB\mu V)$	
(MHz)	Q.P	AVG	(dB)	Q.P	AVG	Q.P	AVG	Q.P	AVG	
0.763	40.7		0.3	41.0		56.0	46.0	-15.0		
0.876	44.7		0.3	45.0		56.0	46.0	-11.0		
0.896	42.5		0.3	42.8		56.0	46.0	-13.2		
0.919	50.2	39.7	0.3	50.5	40.0	56.0	46.0	-5.5	-6.0	
0.931	43.6		0.3	43.9		56.0	46.0	-12.1		
0.958	41.5		0.3	41.8		56.0	46.0	-14.2		


Operation Mode: <u>Base Charging</u> <u>Line</u>


Test Date : Jun. 07, 2008 Temperature : 22 °C Humidity : 65 %

	<u> </u>								
E	Meter Reading		Factor	Result		Limit		Margin	
Frequency	$(dB \mu V)$		(dB)	(dB)	$(dB \mu V)$		$(dB \mu V)$		μV)
(MHz)	Q.P	AVG	(ub)	Q.P	AVG	Q.P	AVG	Q.P	AVG
0.759	41.9		0.3	42.2		56.0	46.0	-13.8	
0.888	47.8	38.7	0.3	48.1	39.0	56.0	46.0	-7.9	-7.0
0.903	44.5		0.3	44.8		56.0	46.0	-11.2	
0.927	52.6	42.8	0.3	52.9	43.1	56.0	46.0	-3.1	-2.9
0.935	43.5		0.3	43.8		56.0	46.0	-12.2	
0.962	46.9	39.4	0.3	47.2	39.7	56.0	46.0	-8.8	-6.3

Note:

- 1. "***" means the value was too low to be measured.
- 2. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
- 3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

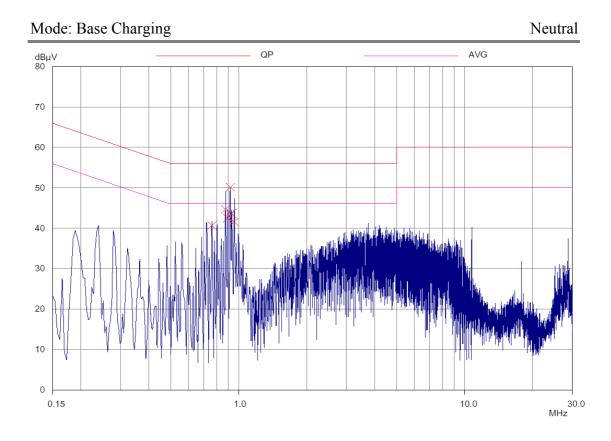

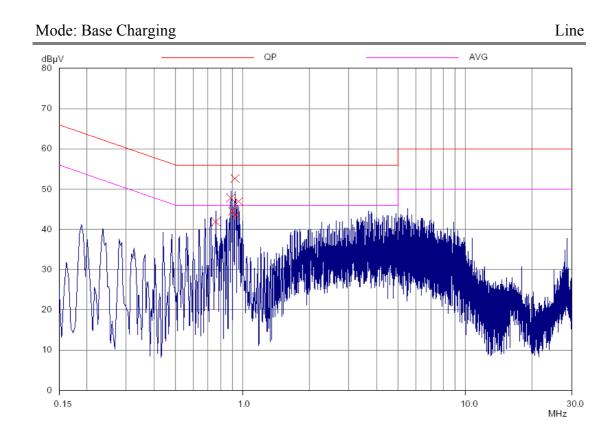

Sheet 13 of 52 Sheet FCC ID.: UMQID555

Operation Mode: <u>Base On Line</u> <u>Neutral</u>

Test Date : Jun. 07, 2008 Temperature : 22 °C Humidity : 65 %

Т.	Meter Reading		Factor	Result		Limit		Margin	
Frequency	$(dB \mu V)$		(dB)	$(dB \mu V)$		$(dB \mu V)$		(dBµV)	
(MHz)	Q.P	AVG	(ub)	Q.P	AVG	Q.P	AVG	Q.P	AVG
0.720	36.4		0.3	36.7		56.0	46.0	-19.3	
0.872	34.1		0.3	34.4		56.0	46.0	-21.6	
0.888	42.6		0.3	42.9		56.0	46.0	-13.1	
0.907	36.9		0.3	37.2		56.0	46.0	-18.8	
0.927	44.9		0.3	45.2		56.0	46.0	-10.8	
0.966	38.6		0.3	38.9		56.0	46.0	-17.1	


Operation Mode: <u>Base On Line</u> <u>Line</u>


Test Date : Jun. 07, 2008 Temperature : 22 °C Humidity : 65 %

T	Meter I	Reading	Factor	Res	sult	Liı	mit	Ma	rgin
Frequency	(dB)	$\mu V)$	(dB)	(dB)	μV)	(dB	μV)	(dB	μV)
(MHz)	Q.P	AVG	(ub)	Q.P	AVG	Q.P	AVG	Q.P	AVG
0.525	36.9		0.3	37.2		56.0	46.0	-18.8	
0.845	42.6		0.3	42.9		56.0	46.0	-13.1	
0.884	45.4	37.1	0.3	45.7	37.4	56.0	46.0	-10.3	-8.6
0.923	49.3	39.8	0.3	49.6	40.1	56.0	46.0	-6.4	-5.9
0.935	37.8		0.3	38.1		56.0	46.0	-17.9	
6.839	40.1		0.7	40.8		60.0	50.0	-19.2	

Note :

- 1. "***" means the value was too low to be measured.
- 2. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
- 3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

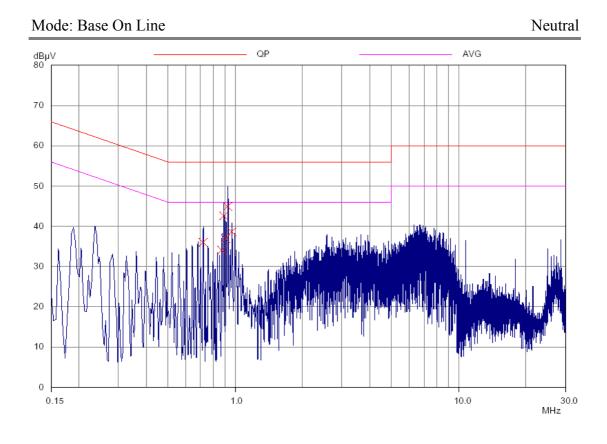

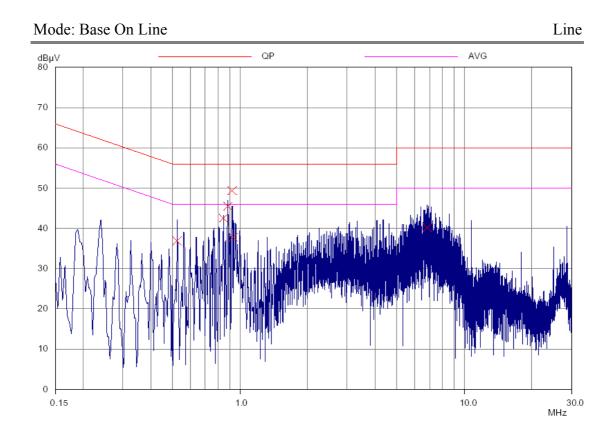

B. Adaptor 2

Operation Mode: <u>Base Charging</u> <u>Neutral</u>

Test Date : Jun. 07, 2008 Temperature : 22 °C Humidity : 65 %

F.	Meter F	Reading	Factor	Res	sult	Liı	mit	Ma	rgin
Frequency	(dB)	uV)	(dB)	(dB	μV)	(dB	μV)	(dB	μV)
(MHz)	Q.P	AVG	(ub)	Q.P	AVG	Q.P	AVG	Q.P	AVG
0.622	38.1		0.3	38.4		56.0	46.0	-17.6	
0.634	44.4		0.3	44.7		56.0	46.0	-11.3	
0.708	40.3		0.3	40.6		56.0	46.0	-15.4	
0.786	38.4		0.3	38.7		56.0	46.0	-17.3	
0.860	35.1		0.3	35.4		56.0	46.0	-20.6	
4.949	36.5		0.6	37.1		56.0	46.0	-18.9	


Operation Mode: <u>Base Charging</u> <u>Line</u>


Test Date : Jun. 07, 2008 Temperature : 22 °C Humidity : 65 %

Т.	Meter I	Reading	Factor	Res	sult	Liı	mit	Ma	rgin
Frequency	(dB)	μV)	(dB)	(dB	μV)	(dB	μV)	(dB	μV)
(MHz)	Q.P	AVG	(ub)	Q.P	AVG	Q.P	AVG	Q.P	AVG
0.595	43.2		0.3	43.5		56.0	46.0	-12.5	
0.630	42.4		0.3	42.7		56.0	46.0	-13.3	
0.653	41.9		0.3	42.2		56.0	46.0	-13.8	
0.685	42.8		0.3	43.1		56.0	46.0	-12.9	
0.708	42.8		0.3	43.1		56.0	46.0	-12.9	
0.743	43.0		0.3	43.3		56.0	46.0	-12.7	

Note:

- 1. "***" means the value was too low to be measured.
- 2. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
- 3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

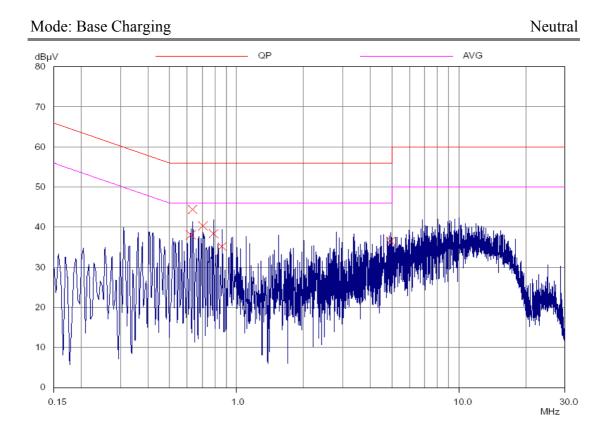

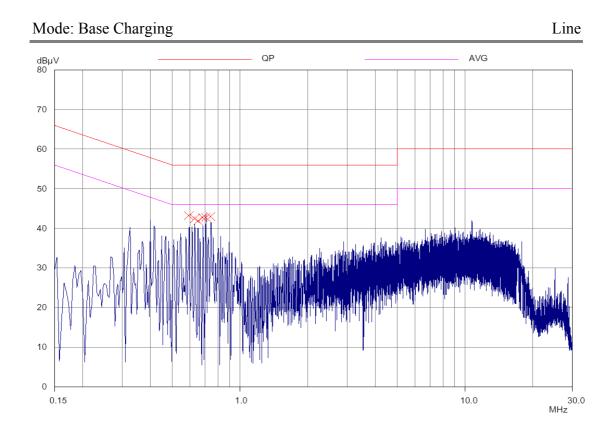

Sheet 17 of 52 Sheet FCC ID.: UMQID555

Operation Mode: <u>Base On Line</u> <u>Neutral</u>

Test Date : Jun. 07, 2008 Temperature : 22 °C Humidity : 65 %

T.	Meter I	Reading	Factor	Res	sult	Liı	nit	Ma	rgin
Frequency	(dB)	uV)	(dB)	(dB)	μV)	(dB)	μ V)	(dB	μV)
(MHz)	Q.P	AVG	(ub)	Q.P	AVG	Q.P	AVG	Q.P	AVG
0.349	42.1		0.3	42.4		59.0	49.0	-16.6	
0.396	42.5		0.3	42.8		57.9	47.9	-15.1	
0.571	40.6		0.3	40.9		56.0	46.0	-15.1	
0.579	40.7		0.3	41.0		56.0	46.0	-15.0	
0.759	40.2		0.3	40.5		56.0	46.0	-15.5	
10.738	42.1		0.8	42.9		60.0	50.0	-17.1	


Operation Mode: <u>Base On Line</u> <u>Line</u>


Test Date : Jun. 07, 2008 Temperature : 22 °C Humidity : 65 %

T.	Meter I	Reading	Factor	Res	sult	Liı	mit	Ma	rgin
Frequency	(dB)	$\mu V)$	(dB)	(dB	μV)	(dB)	μV)	(dB	μV)
(MHz)	Q.P	AVG	(ub)	Q.P	AVG	Q.P	AVG	Q.P	AVG
0.478	40.0		0.3	40.3		56.4	46.4	-16.1	
0.493	40.4		0.3	40.7		56.1	46.1	-15.4	
0.622	41.0		0.3	41.3		56.0	46.0	-14.7	
0.657	39.5		0.3	39.8		56.0	46.0	-16.2	
0.696	40.7		0.3	41.0		56.0	46.0	-15.0	
0.716	40.2		0.3	40.5		56.0	46.0	-15.5	

Note :

- 1. "***" means the value was too low to be measured.
- 2. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
- 3. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

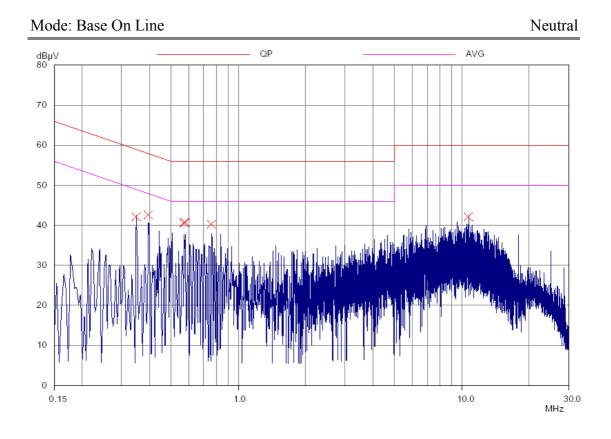

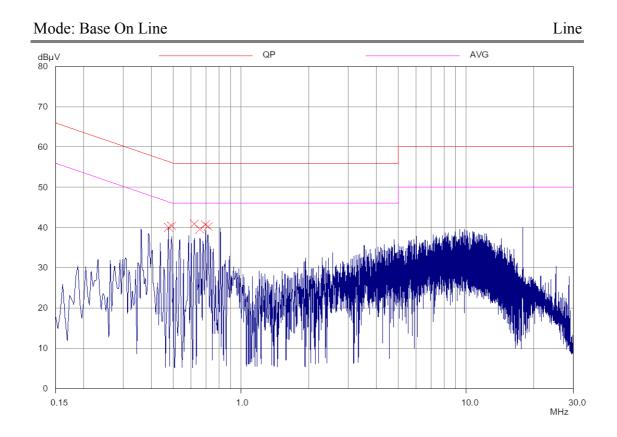

6.4.4 Photos of Conduction Measuring Setup

Mode: Base Charging











Sheet 21 of 52 Sheet FCC ID.: UMQID555

6.5 Antenna Requirement

6.5.1 Standard Applicable FCC 15.317, 15.203 Does the EUT have detachable antenna? ☐ Yes ■ No If detachable, is the antenna connector non-standard? ☐ Yes

The tested equipment has only integral antennas. The conducted tests were performed on a sample with a temporary antenna connects.

6.6 digital Modulation Techniques

6.6.1 Standard Applicable

FCC 15.319(b)

☐ No

All transmissions must use only digital modulation techniques.

6.6.2 Result: Meets the requirement

Please see the declaration provided by applicant

Sheet 22 of 52 Sheet FCC ID.: UMQID555

6.7 Peak Power Output

6.7.1 Standard Applicable

FCC 15.319(c)(f)

Peak transmit power shall not exceed 100 microwatts multiplie by the square root of the emission bandwidth in Hz.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

6.7.2 Measurement procedure

Measurement method according to ANSI C63.17 2006 paragraph 6.1.2

6.7.3 Test Results: Complies

Measurement Data:

Channel	Frequency (MHz)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (mw)	FCC Limit (dBm)
$\mathrm{F_{L}}$	1921.530	17.33	54.08	20.84
F_{H}	1928.450	17.23	52.84	20.85


Limit:

Peak Transmit Power = $100 \text{ uW x } \sqrt{\text{BW}}$

BW = Emission Bandwidth in Hz.

Sheet 23 of 52 Sheet FCC ID.: UMQID555


Maximum Peak Output Power: CH F_L

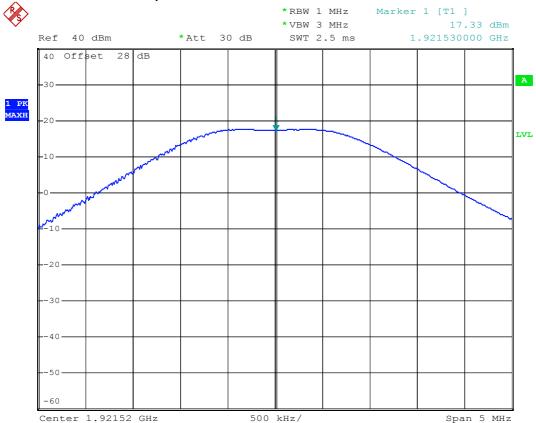

Date: 5.JUN.2008 20:08:10

Sheet 24 of 52 Sheet FCC ID.: UMQID555

Maximum Peak Output Power: CH F_H

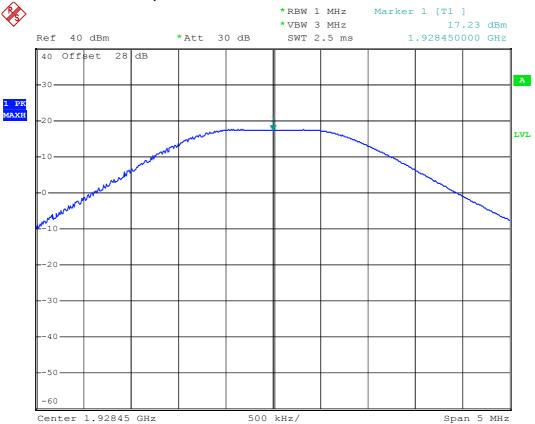

Date: 5.JUN.2008 20:09:33

Sheet 25 of 52 Sheet FCC ID.: UMQID555

6.8 Power Spectral Density

6.8.1 Standard Applicable: FCC 15.319(d)

Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

6.8.2 Measurement procedure

Measurement method according to ANSI C63.17 2006 paragraph 6.1.5


6.8.3 Test Results: Complies

Measurement Data:

Channel	Frequency (MHz)	Power spectral Density (dBm)	FCC Limit (dBm)
F_{L}	1921.570	3.20	4.77
F_{H}	1928.474	1.79	4.77


Sheet 26 of 52 Sheet FCC ID.: UMQID555



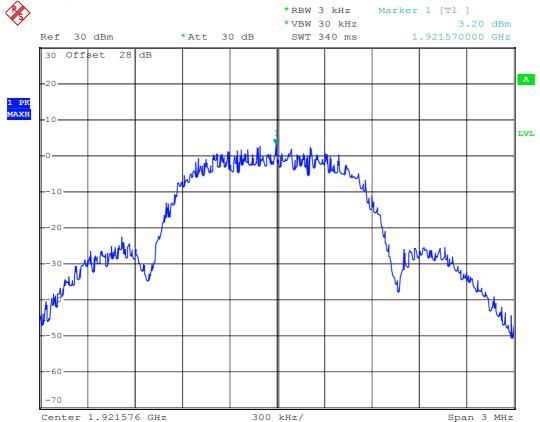

Date: 5.JUN.2008 20:11:40



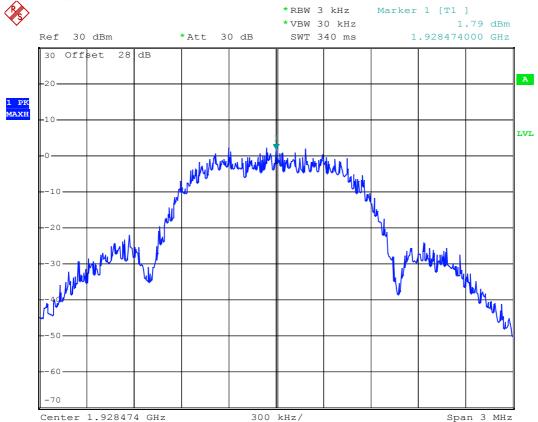

Date: 5.JUN.2008 20:14:34

6.9 Antenna Gain

6.9.1 Standard Applicable: FCC 15.323(e)

The peak transmit power shall be reduced by the amount in decibels that the mzximum directional gain of the antenna exceeds 3 dBi.

6.9.2 Results: Meets the requirement

The antenna gain value provided by manufacturer is 0 dBi.

6.10 Automatic discontinuation of transmission

6.10.1 Standard Applicable: FCC 15.319(f)

The device shall automatically discontinue transmissionin case of either absence of information to transmit or opwerational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

6.10.2 Procedure

Please see the declaration provided by applicant.

6.10.3 Results: Meets the requirement

Sheet 29 of 52 Sheet FCC ID.: UMQID555

6.11 Safety exposure levels

6.11.1 Standard Applicable: FCC 15.319(i)

UPCS devices are subject to the radio frequency radiation exposure requirements specified in FCC parts 1.1307 (b), 2.1091 and 2.1093, as appropriate. All equipment shall be considered to operate in a "general population / uncontrolled environment. For portable devices tests according to IEEE 1528 are requested, applicable.

6.11.2 Measurement procedure

Consideration of radio frequency radiation exposure for EUT is done as

SAR test according IEEE 1528 (for PP)	
MPE calculation as below (for FP, Repeater)	

SAR test results: not applicable

MPE calculation:

The EUT is considered as a mobile device according to OET Bulletin 65, Edition –97-01. Therefore distance to human body of min. 20 cm is determined.

The limit of Power density for General Population / Umcontrolled Exposure is 1.0 mW/cm².

Formula:

$$S = EIRP/4_{TT}R^2$$

Calculation:

EIRP	Radiated Power (dBm)	17.33
EIRP	Radiated Power (mW)	54.07
R	Disance (cm)	20
S	Power Density (mW/cm ²)	0.043

6.11.3 Results: Complies

Sheet 30 of 52 Sheet FCC ID.: UMQID555

6.12 Emission Bandwidth B

6.12.1 Standard Applicable: FCC 15.323(a)

The 26 dB Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz.

6.12.2 Measurement procedure

Measurement method according to ANSI C63.17 2006 paragraph 6.1.3


6.12.3 Test Results: Complies

Measurement Data:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
$F_{ m L}$	1921.54	1.47
F_{H}	1928.46	1.48

Sheet 31 of 52 Sheet FCC ID.: UMQID555


26 dB Bandwidth B: CH FL

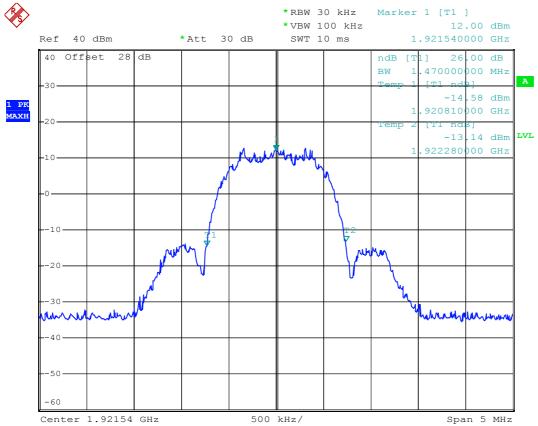

Date: 5.JUN.2008 20:16:44

Sheet 32 of 52 Sheet FCC ID.: UMQID555

26 dB Bandwidth B: CH F_H

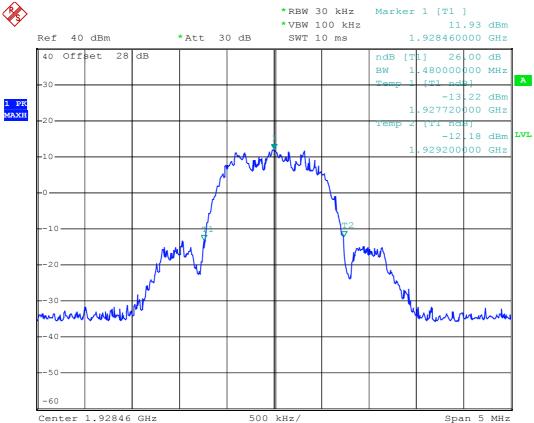

Date: 5.JUN.2008 20:18:03

ETC Report No.: 08-06-RBF-007-01

Sheet 33 of 52 Sheet FCC ID.: UMQID555

6.13 Emissions inside and outside the subband

6.13.1 Standard Applicable: FCC 15.323(d)

Emissions inside the subband

 $B < f \le 2B$: less than or equal to 30dB below max. permitted peak power level $2B < f \le 3B$: less than or equal to 50 dB below max. permitted peak power level $3B < f \le UPCs$ Band Edge: less than or equal to 60 dB below max. permitted peak power level

Emissions outside the subband

 $f \le 1.25 MHz$ outside UPCS band: $\le -9.5 dBm$ $1.25 MHz \le f \le 2.5 MHz$ outside UPCS band: $\le -29.5 dBm$

 $f \ge 2.5 MHz$ outside UPCS band: The EUT shall pass the test either a) or

b) as follow:

a) In the region at 2.5 MHz or greater below and above the lower and upper band edges respectively, the measured emission level shall not exceed –39.5 dBm	
b) In the region at 2.5MHz or greater below and above the lower and upper band edges respectively, the measured emission level shali not exceed the limits of 47CFR15.209. Measurement shall be made as a radiated test.	

6.13.2 Measurement procedure

Measurement method according to ANSI C63.17 2006 paragraph 6.1.6


6.13.3 Results: Complies

Measurement Data:

See plots.

Sheet 34 of 52 Sheet FCC ID.: UMQID555


In-band Unwanted Emission: CH F_L

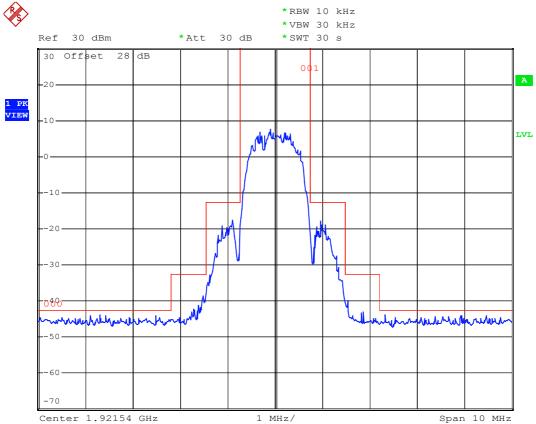

Date: 5.JUN.2008 20:35:07

Sheet 35 of 52 Sheet FCC ID.: UMQID555

In-band Unwanted Emission: CH F_H

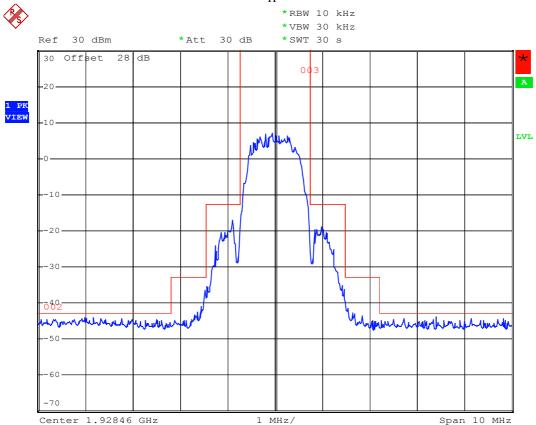

Date: 5.JUN.2008 20:43:47

Sheet 36 of 52 Sheet FCC ID.: UMQID555

Out-of -band Unwanted Emission:

Out-of -band Unwanted Emission (below 1GHz)

A. Adaptor 1

a)

Operation Mode : <u>Base Charging</u>

Test Da	te :	Jun. 07, 20	<u>08</u> To	emperature	: <u>22</u> °C	Hu	midity:	<u>65</u> %
Frequency	Ant-Pol	Meter	Corrected	Result	Limit	Margin	Table	Ant.
		Reading	Factor	@3m	@3m		Degree	High
(MHz)	H/V	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(Deg.)	(m)
39.490	V	46.3	-11.7	34.6	40.0	-5.4	60	1.0
130.270	V	40.4	-11.5	28.9	43.5	-14.6	145	1.0
140.030	V	39.9	-10.8	29.1	43.5	-14.4	330	1.1
343.400	Н	42.1	-9.5	32.6	46.0	-13.4	55	1.5
365.800	Н	36.0	-7.6	28.4	46.0	-17.6	40	1.4
407.800	V	32.7	-6.1	26.6	46.0	-19.4	65	1.0

b)

Operation Mode : <u>Base On Line</u>

Test Da	ite :	Jun. 07, 20	<u>08</u> Te	emperature	: <u>22</u> °C	Hu	midity :	<u>65</u> %
Frequency	Ant-Pol	Meter	Corrected	Result	Limit	Margin	Table	Ant.
		Reading	Factor	@3m	@3m		Degree	High
(MHz)	H/V	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(Deg.)	(m)
39.210	V	47.8	-11.6	36.2	40.0	-3.8	150	1.0
77.150	V	42.7	-15.4	27.3	40.0	-12.7	230	1.0
140.030	V	40.6	-10.8	29.8	43.5	-13.7	45	1.1
309.800	Н	36.7	-6.9	29.8	46.0	-16.2	185	1.5
323.800	Н	33.3	-6.7	26.6	46.0	-19.4	155	1.5
343.400	Н	41.9	-9.5	32.4	46.0	-13.6	220	1.4

^{1.} Remark "---" means that the emissions level is too low to be measured.

^{2.} The expanded uncertainty of the radiated emission tests is 3.53 dB.

Sheet 37 of 52 Sheet FCC ID.: UMQID555

B. Adaptor 2

a)

Operation Mode : <u>Base Charging</u>

: <u>22</u> °C Test Date : Jun. 07, 2008 Temperature Humidity : <u>65</u> % Ant-Pol Meter Corrected Result Limit Table Ant. Frequency Margin Reading Factor @3m @3m Degree High (dB) (MHz) H/V (dBuV) (dBuV/m) (dBuV/m) (Deg.) (dB) (m) 48.160 V 39.3 -13.7 25.6 40.0 -14.4 40 1.0 180.410 Η 40.4 -9.1 31.3 43.5 -12.2 105 1.5 283.390 V 35.7 -2.5 33.2 46.0 -12.8 230 1.1 343.400 Η 42.0 -9.5 32.5 46.0 -13.5 50 1.5 365.800 Η 35.8 -7.6 28.2 46.0 -17.8 45 1.5 V 407.800 32.4 -6.1 26.3 46.0 -19.7 35 1.0

b)

Operation Mode : <u>Base On Line</u>

Test Da	ite :	Jun. 07, 20	<u>08</u> To	emperature	: <u>22</u> °C	Hu	midity:	<u>65</u> %
Frequency	Ant-Pol	Meter	Corrected	Result	Limit	Margin	Table	Ant.
		Reading	Factor	@3m	@3m		Degree	High
(MHz)	H/V	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(Deg.)	(m)
46.800	V	38.0	-13.4	24.6	40.0	-15.4	155	1.0
180.410	Н	40.8	-9.1	31.7	43.5	-11.8	250	1.5
297.210	Н	35.2	-1.1	34.1	46.0	-11.9	130	1.4
309.800	Н	36.5	-6.9	29.6	46.0	-16.4	95	1.5
323.800	Н	32.9	-6.7	26.2	46.0	-19.8	165	1.5
343.400	Н	41.8	-9.5	32.3	46.0	-13.7	210	1.4

- 1. Remark "---" means that the emissions level is too low to be measured.
- 2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

ETC Report No.: 08-06-RBF-007-01 Sheet 38 of 52 Sheet FCC ID.: UMQID555

a) CH F_L

Out-of -band Unwanted Emission (above 1GHz): CH F_L

Operation Mode : Transmitting

Fundamental : 1921.536MHz

Frequency

Test Date : Jun. 08, 2008 Temperature : 23 °C Humidity : 61 %


Reading (dBuV) Factor Result @3m Limit @3m Margin Table

Frequency	F	Reading	(dBuV	')	Factor	Result	@3m	Limit	@3m	Margin	Table	Ant.
	I	H	7	V	(dB)	(dBu	V/m)	(dBu	V/m)		Deg.	High
(MHz)	Peak	Ave	Peak	Ave	Corr.	Peak	Ave	Peak	Ave	(dB)	(Deg.)	(m)
3842.280	60.5	33.5	58.0	33.3	-2.6	57.8	30.9	74.0	54.0	-16.2	330	1.6
5763.840	52.0	32.2	52.6	32.1	0.7	53.3	32.9	74.0	54.0	-20.7	310	1.5
7684.920	51.8	31.8	56.4	32.0	3.3	59.7	35.4	74.0	54.0	-14.3	30	1.3
9606.000	46.0	31.7	44.9	31.8	4.1	50.1	35.9	74.0	54.0	-18.1	45	1.7
11531.280	54.2	31.8	57.7	32.0	7.2	64.9	39.2	74.0	54.0	-9.1	320	1.8

- 1. Item of margin shown in above table refer to average limit.
- 2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "***" means that Peak result is meet average limit.
- 3. Remark "---" means that the emissions level is too low to be measured.
- 4. Item "Margin" referred to Average limit while there is only peak result.
- 5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Sheet 39 of 52 Sheet FCC ID.: UMQID555


Out-of -band Unwanted Emission: CH F_L

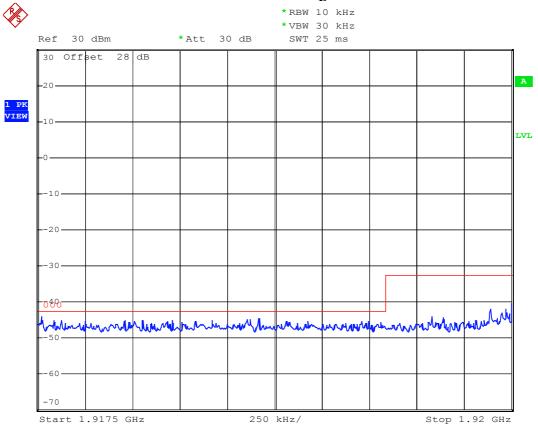

Date: 5.JUN.2008 20:45:17

Sheet 40 of 52 Sheet FCC ID.: UMQID555

Out-of -band Unwanted Emission: CH FL

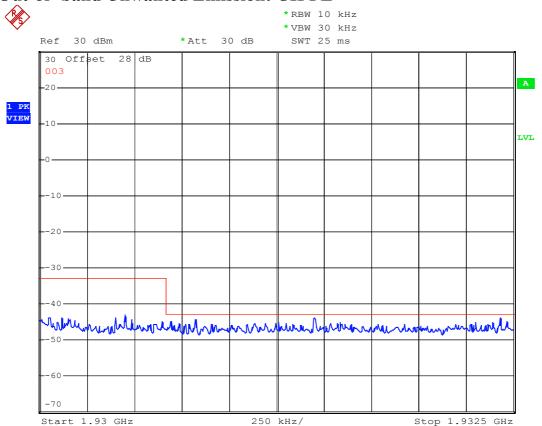

Date: 5.JUN.2008 20:46:04

ETC Report No.: 08-06-RBF-007-01 Sheet 41 of 52 Sheet FCC ID.: UMQID555

b) CH F_H

Out-of -band Unwanted Emission (above 1GHz): CH F_H

Operation Mode: Transmitting

Fundamental : <u>1928.448MHz</u>

Frequency


Test Date : Jun. 08, 2008 Temperature : 23 °C Humidity : 61 %

Frequency	F	Reading	(dBuV)	Factor	Result	(@3m	Limit	@3m	Margin	Table	Ant.
	I	I	7	V	(dB)	(dBu	V/m)	(dBu	V/m)		Deg.	High
(MHz)	Peak	Ave	Peak	Ave	Corr.	Peak	Ave	Peak	Ave	(dB)	(Deg.)	(m)
3857.560	60.2	33.7	58.5	33.6	-2.6	57.6	31.1	74.0	54.0	-16.4	340	1.4
5784.240	52.3	32.1	51.6	32.0	0.7	53.0	32.8	74.0	54.0	-21.0	320	1.3
7712.320	53.5	31.9	53.6	31.9	3.3	57.0	35.3	74.0	54.0	-17.0	300	1.5
9640.720	45.3	32.0	46.0	31.9	4.1	50.2	36.1	74.0	54.0	-17.9	50	1.7
11572.920	55.5	31.9	58.1	32.0	7.2	65.3	39.2	74.0	54.0	-8.7	140	1.6

- 1. Item of margin shown in above table refer to average limit.
- 2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "***" means that Peak result is meet average limit.
- 3. Remark "---" means that the emissions level is too low to be measured.
- 4. Item "Margin" referred to Average limit while there is only peak result.
- 5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Sheet 42 of 52 Sheet FCC ID.: UMQID555


Out-of-band Unwanted Emission: CH FH

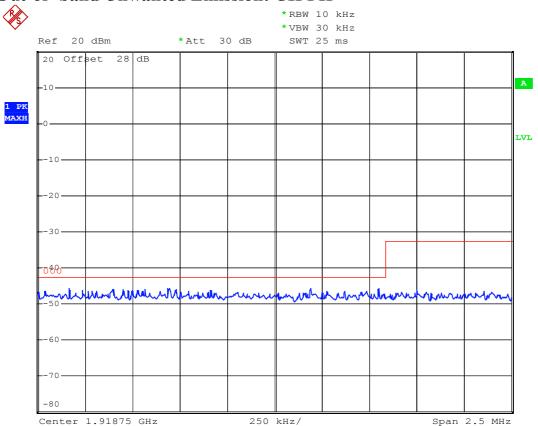

Date: 11.JUN.2008 17:07:03

Sheet 43 of 52 Sheet FCC ID.: UMQID555

Out-of-band Unwanted Emission: CH FH

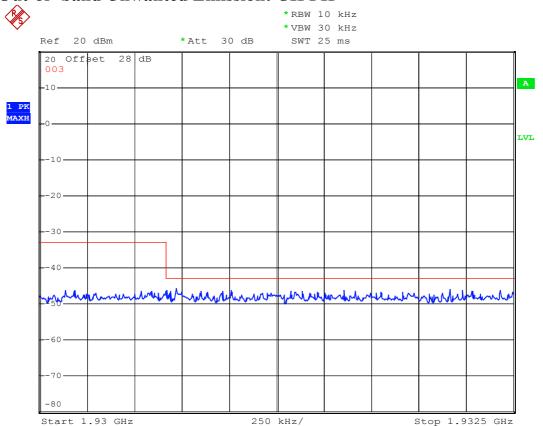

Date: 11.JUN.2008 17:08:20

6.13.4 Photos of Radiation Measuring Setup

Mode: Base Charge











Sheet 46 of 52 Sheet FCC ID.: UMQID555

6.14 Frame period and jitter

6.14.1 Standard Applicable: FCC 15.323(e)

The frame period (a set of consecutive time slots in which the position of each time slot can cbe identified by reference to a synchronizing source) of an intentinal radiator operating in these subbnads shall be 20 missliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintainging a duplex connection on a given frequency carrier shall maintaina frame repetition rate with a frequency stability of at least 50 parts per millions (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-releated, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

6.14.2 Measurement procedure

- Frame frequency stability ≤ 50 ppm
- TDMA frame frequency stability ≤ 10 ppm (That translates to frequency drift of 19.2 kHz/slot for 1920 MHz carrier)
- Frame jitter $\leq 25 \mu s$

Sheet 47 of 52 Sheet FCC ID.: UMQID555

6.14.3 Test Results: Complies


Measurement Data

Channel No.	Frequ (KHz	uency z/slot)	Jitter (us)		
	Drift	Limit	Result	Limit	
$F_{ m L}$	-5	19.2	-0.00	25	
F_{H}	-5	19.2	-0.00	25	


Photos of worst-case disply follow:

Sheet 48 of 52 Sheet FCC ID.: UMQID555

Frequency Drift

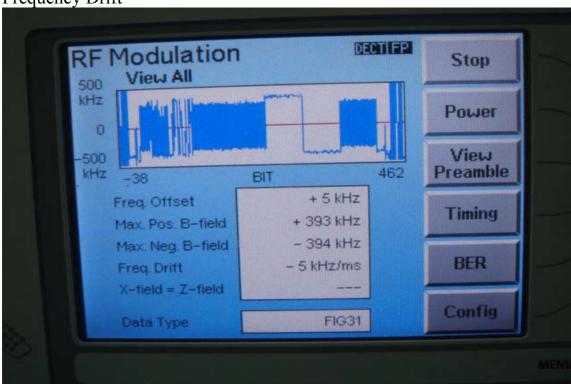


TDMA Frame Jitter

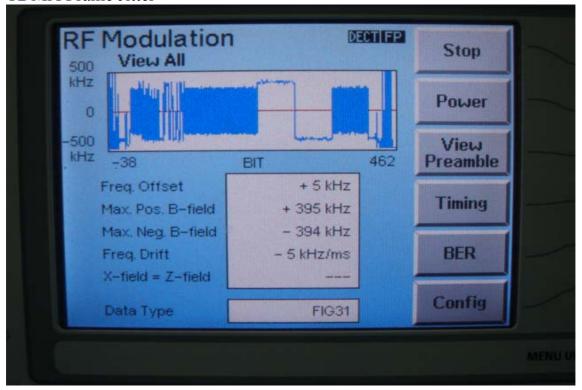


Sheet 49 of 52 Sheet FCC ID.: UMQID555

Frequency Drift

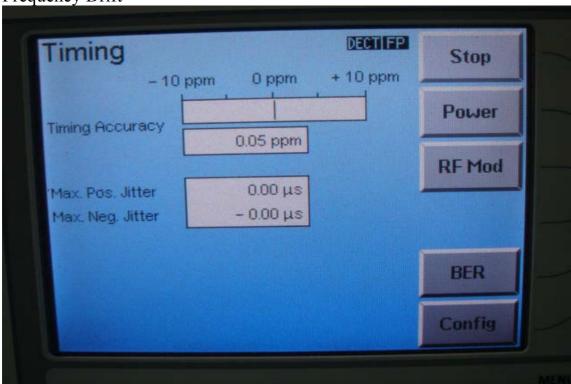

TDMA Frame Jitter

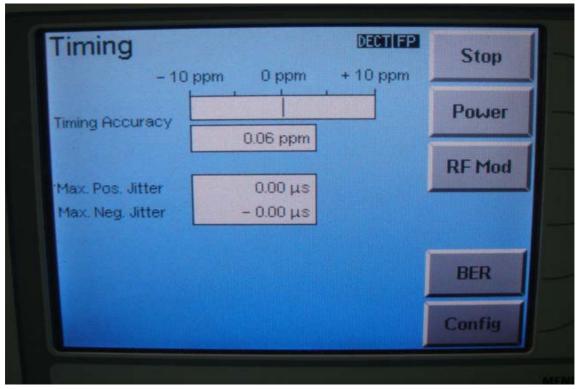

Sheet 50 of 52 Sheet FCC ID.: UMQID555

6.15 Carrier frequency stability

6.15.1 Standard Applicable: FCC 15.323(f)

The frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20 °C to +50 °C degrees C at normal supply voltage, a nd over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20 °C. For equipment that is capable only of operating form a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

6.15.2 Measurement Requirement

- Carrier frequency stability ≤ 10 ppm over 1 hour or interval between channel access monitoring, whichever is shorter (That translates to frequency drift of 19.2 kHz for 1920 MHz carrier)
- Carrier frequency stability over -20°C to +50°C at normal supply voltage, and over 85% to 115% of rated supply voltage (voltage variation not required for battery operated device)

Sheet 51 of 52 Sheet FCC ID.: UMQID555

6.15.3 Test Results: Complies

Measurement Data

a) Carrier Frequncy Stability with Supply Voltage

Channel No.		Limit (KHz)		
	102V (85%)	120V (Normal)	138V (115%)	(IXIIZ)
$F_{ m L}$	-4	-3	-4	±19.2
F_{H}	-4	-2	-4	±19.2

b) Carrier Frequency Stablility with Temperature and Time

Channel No.		Limit (KHz)		
	-20°C	20°C	50°C	(KIIZ)
$F_{ m L}$	-3	-3	-2	±19.2
F_{H}	-2	-3	-3	±19.2

Sheet 52 of 52 Sheet FCC ID.: UMQID555

Test was conducted for duration longer than 1 hour. Photo of worst-case display follows:

