



*FCC PART 15, SUBPART B and C
TEST REPORT*

for

WIRELESS MONITOR TRANSMITTER
MODEL: 950 T1

Prepared for
IRRIMETER COMPANY, INC.
P.O. BOX 2424
RIVERSIDE, CALIFORNIA 92516

Prepared by: *Kyle Fujimoto*

KYLE FUJIMOTO

Approved by: *James Ross*

JAMES ROSS

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: NOVEMBER 5, 2007

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	16	2	2	2	12	7	41

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. DESCIRPTION OF TEST CONFIGURATION	8
4.1 Description Of Test Configuration - EMI	8
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. TEST PROCEDURES	13
7.1 Radiated Emissions (Spurious and Harmonics) Test	13
7.2 Radiated Emissions (Spurious and Harmonics) Test (Continued)	14
7.3 Bandwidth of the Fundamental	15
8. CONCLUSIONS	16

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos <ul style="list-style-type: none"> • Test Setup Diagrams • Radiated Emissions Photos • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of 3 Meter Radiated Test Site

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: Wireless Monitor Transmitter
 Model: 950 T1
 S/N: N/A

Product Description: See Expository Statement

Modifications: The EUT was not modified during the testing.

Manufacturer: Irrrometer Company, Inc.
 P.O. Box 2424
 Riverside, California 92516

Test Dates: October 29 and 30, 2007

Test Specifications: EMI requirements
 CFR Title 47, Part 15 Subpart B; and Subpart C, Sections 15.205, 15.209 and 15.231

Test Procedure: ANSI C63.4


Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.
2	Radiated RF Emissions, 10 kHz – 4.4 GHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Wireless Monitor Transmitter Model: 950 T1. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.

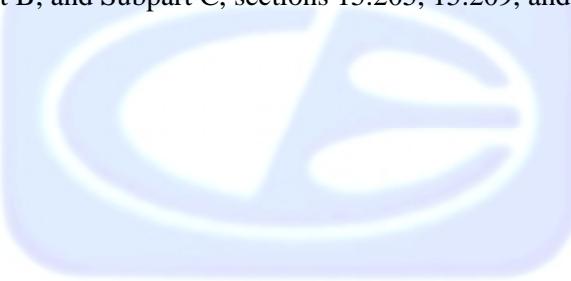

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Irrometer Company, Inc.

Tom Penning President

Compatible Electronics, Inc.

James Ross Test Engineer
Kyle Fujimoto Test Engineer

2.4 Date Test Sample was Received

The test sample was received prior to the initial test date of October 29, 2007.

2.5 Disposition of the Test Sample

The sample was returned to the Irrometer Company, Inc. on October 31, 2007.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Model
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
TX	Transmit
RX	Receive
PCB	Printed Circuit Board

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2003	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description Of Test Configuration - EMI

Setup and operation of the equipment under test.

The Wireless Monitor Transmitter Model: 950 T1 (EUT) was connected from each EUT port (#1, #2, #3, and #4) to ground via four 5600 ohm resistors. The EUT was also connected to a nine-volt battery. Please see the cable construction and termination for exact details on how the EUT was connected. The EUT was tested while it was continuously transmitting. The EUT has a reverse SMA connector.

During normal operation, the transmission of the EUT will turn off after 750 ms of being activated. This is accomplished by the firmware of the EUT.

The final radiated data was taken in the mode above. Please see Appendix E for the data sheets.

4.1.1 Cable Construction and Termination

Cable 1 This is a 1 meter cable connecting the EUT's port #1 to the EUT's ground port via a 5600 ohm resistor. The cable was hard wire at each end. The cable was bundled to a length of 40 centimeters.

Cable 2 This is a 1 meter cable connecting the EUT's port #2 to the EUT's ground port via a 5600 ohm resistor. The cable was hard wire at each end. The cable was bundled to a length of 40 centimeters.

Cable 3 This is a 1 meter cable connecting the EUT's port #3 to the EUT's ground port via a 5600 ohm resistor. The cable was hard wire at each end. The cable was bundled to a length of 40 centimeters.

Cable 4 This is a 1 meter cable connecting the EUT's port #4 to the EUT's ground port via a 5600 ohm resistor. The cable was hard wire at each end. The cable was bundled to a length of 40 centimeters.

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID
WIRELESS MONITOR TRANSMITTER (EUT)	IRROMETER COMPANY, INC.	950 T1	N/A	UOR-MOD950T1107





5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
GENERAL TEST EQUIPMENT USED FOR ALL RF EMISSIONS TESTS					
Computer	Hewlett Packard	4530	US91912319	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100149	November 15, 2005	Nov. 15, 2007
Monitor	Hewlett Packard	D5258A	TW74500641	N/A	N/A
RF RADIATED EMISSIONS TEST EQUIPMENT					
Preamplifier	Com Power	PA-102	1017	January 16, 2007	Jan. 16, 2008
Biconical Antenna	Com Power	AB-900	15227	March 8, 2007	March 8, 2008
Log Periodic Antenna	Com Power	AL-100	16060	July 9, 2007	July 9, 2008
Loop Antenna	Com Power	AL-130	17089	September 24, 2007	Sept. 24, 2008
Horn Antenna	Antenna Research	DRG-118/A	1053	March 6, 2006	March 6, 2008
Microwave Preamplifier	Com Power	PA-122	181921	Feb. 27, 2007	Feb. 27, 2008
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT is battery powered and was not grounded.

7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 Radiated Emissions (Spurious and Harmonics) Test

The EMI Receiver was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com-Power Active Loop Antenna Model: AL-130 was used for frequencies from 9 kHz to 30 MHz, the Com-Power Preamplifier Model: PA-102 was used for frequencies from 30 MHz to 1 GHz, and the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies from 1 GHz to 4.4 GHz. The spectrum analyzer and EMI Receiver were used in the peak detect mode with the "Max Hold" feature activated. In this mode, the EMI Receiver records the highest measured reading over all the sweeps.

The quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets.

The readings were averaged by a "duty cycle correction factor", derived from $20 \log$ (dwell time / one pulse train with blanking interval).

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
10 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 4.4 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.

7.2**Radiated Emissions (Spurious and Harmonics) Test (Continued)**

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain final test data. The final qualification data sheets are located in Appendix E.

Test Results:


The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.231.

7.3 Bandwidth of the Fundamental

The -20 dB bandwidth was checked to see that it was within 0.25% of the fundamental frequency for the EUT. The data sheet of the -20 dB bandwidth is located in Appendix E.

Test Results:

The EUT complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.231 [c].

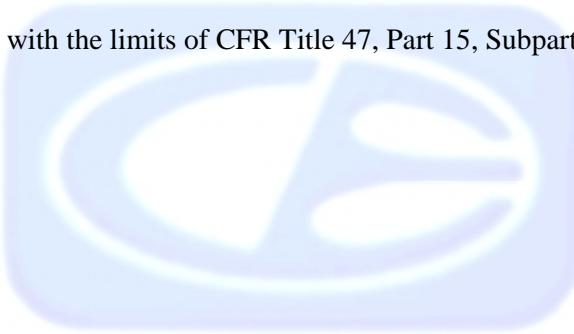

8. CONCLUSIONS

The Wireless Monitor Transmitter Model: 950 T1 meets all of the **Class B** specification limits defined in CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.



APPENDIX A

LABORATORY RECOGNITIONS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY RECOGNITIONS

Compatible Electronics has the following agency accreditations:

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

Compatible Electronics is recognized or on file with the following agencies:

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)

APPENDIX B

MODIFICATIONS TO THE EUT

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.231 or FCC Class B specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



APPENDIX C

ADDITIONAL MODELS COVERED UNDER THIS REPORT

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Wireless Monitor Transmitter
Model: 950 T1
S/N: N/A

There are no additional models covered under this report.



APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700


Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**FIGURE 1: PLOT MAP AND LAYOUT OF
3 METER RADIATED TEST SITE**

OPEN LAND > 15 METERS

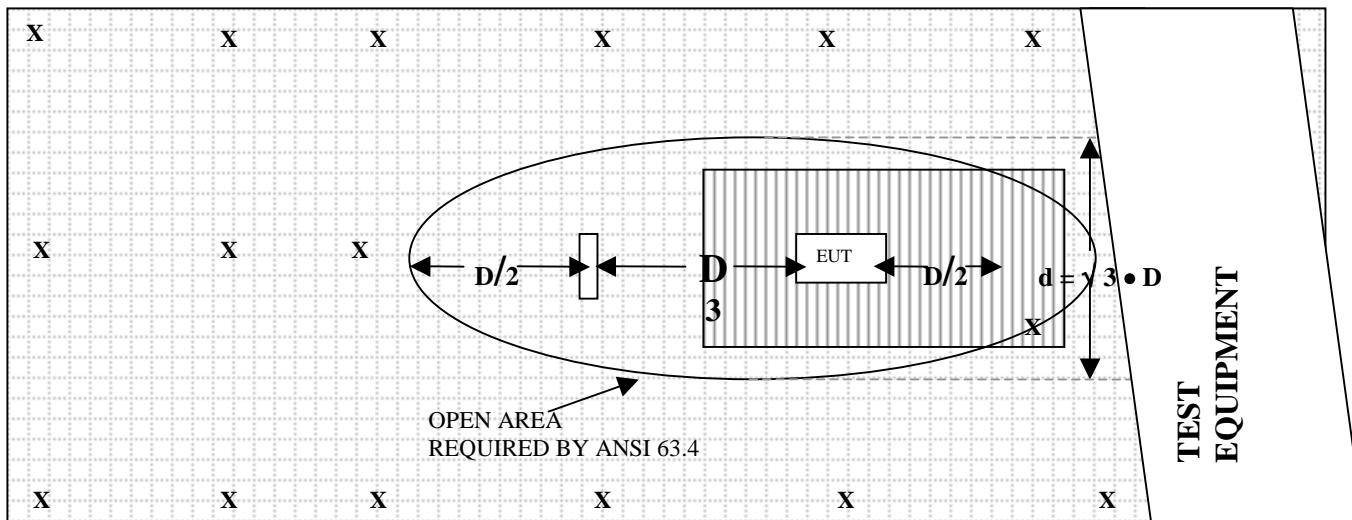

OPEN LAND > 15 METERS

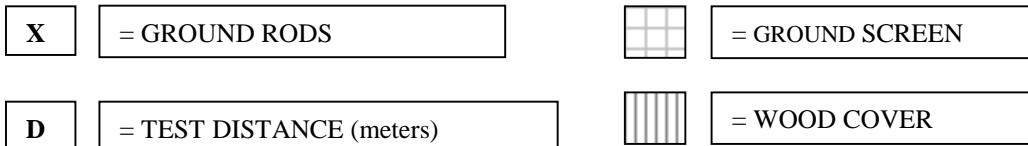

COM-POWER AB-900
BICONICAL ANTENNA
S/N: 15227
CALIBRATION DATE: MARCH 8, 2007

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	12.6	100	12.3
35	10.0	120	14.7
40	9.5	140	13.0
45	9.2	160	13.7
50	9.4	180	16.4
60	7.4	200	17.2
70	6.5	250	14.6
80	7.0	275	19.0
90	8.0	300	22.3

COM-POWER AL-100**LOG PERIODIC ANTENNA****S/N: 16060****CALIBRATION DATE: JULY 9, 2007**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
300	13.5	700	20.5
400	15.8	800	21.6
500	17.0	900	21.3
600	19.2	1000	22.2

COM-POWER PA-102

PREAMPLIFIER

S/N: 1017

CALIBRATION DATE: JANUARY 16, 2007

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	38.4	300	38.2
40	38.3	350	38.2
50	38.2	400	38.1
60	38.3	450	37.8
70	38.4	500	37.8
80	38.6	550	38.1
90	38.3	600	37.8
100	38.4	650	37.8
125	38.3	700	37.6
150	38.2	750	37.9
175	38.4	800	37.6
200	38.4	850	37.2
225	38.4	900	37.4
250	38.3	950	37.0
275	38.3	1000	37.2

COM-POWER PA-122
PREAMPLIFIER
S/N: 181921
CALIBRATION DATE: FEBRUARY 27, 2007

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	36.2	10.0	35.1
1.5	35.4	10.5	34.8
2.0	34.7	11.0	33.5
2.5	34.8	11.5	33.9
3.0	34.8	12.0	34.0
3.5	34.6	12.5	34.4
4.0	34.2	13.0	34.4
4.5	34.1	13.5	34.7
5.0	34.1	14.0	36.0
5.5	34.7	14.5	35.7
6.0	35.6	15.0	36.1
6.5	36.8	15.5	35.6
7.0	36.7	16.0	35.4
7.5	34.9	16.5	35.3
8.0	33.3	17.0	34.9
8.5	33.6	17.5	33.7
9.0	34.6	18.0	33.3
9.5	35.9		

ANTENNA RESEARCH DRG-118/A

HORN ANTENNA

S/N: 1053

CALIBRATION DATE: MARCH 6, 2006

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	24.46	10.0	39.55
1.5	25.05	10.5	39.86
2.0	28.42	11.0	38.49
2.5	29.91	11.5	40.71
3.0	31.46	12.0	40.59
3.5	31.91	12.5	40.17
4.0	31.55	13.0	39.70
4.5	31.94	13.5	40.84
5.0	32.90	14.0	41.58
5.5	34.07	14.5	45.14
6.0	35.69	15.0	42.20
6.5	33.11	15.5	39.42
7.0	36.51	16.0	38.80
7.5	37.27	16.5	41.08
8.0	37.21	17.0	44.11
8.5	37.16	17.5	46.29
9.0	38.27	18.0	41.61
9.5	39.73		

COM-POWER AL-130
LOOP ANTENNA
S/N: 17089
CALIBRATION DATE: SEPTEMBER 24, 2007

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-41.27	10.23
0.01	-41.96	9.54
0.02	-41.73	9.77
0.03	-40.46	11.04
0.04	-40.56	10.94
0.05	-42.00	9.50
0.06	-41.30	10.20
0.1	-41.43	10.07
0.2	-43.90	7.60
0.3	-41.43	10.07
0.4	-41.40	10.10
0.5	-41.40	10.10
0.6	-40.93	10.57
1	-40.83	10.67
2	-40.3	11.20
5	-40.2	11.30
8	-40.6	10.90
9	-40.1	11.40
10	-40.4	11.10
15	-41.67	9.83
20	-41.10	10.40
25	-42.8	8.70
30	-42.8	8.70

**FRONT VIEW**

IRRIMETER COMPANY, INC.
WIRELESS MONITOR TRANSMITTER
MODEL: 950 T1

FCC SUBPART B AND C – RADIATED EMISSIONS – LAB D – 10 kHz to 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**REAR VIEW**

IRRIMETER COMPANY, INC.
WIRELESS MONITOR TRANSMITTER
MODEL: 950 T1

FCC SUBPART B AND C – RADIATED EMISSIONS – LAB D – 10 kHz to 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**FRONT VIEW**

IRRIMETER COMPANY, INC.
WIRELESS MONITOR TRANSMITTER
MODEL: 950 T1

FCC SUBPART B AND C – RADIATED EMISSIONS – LAB B – 1 GHz to 4.4 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**REAR VIEW**

IRRIMETER COMPANY, INC.
WIRELESS MONITOR TRANSMITTER
MODEL: 950 T1

FCC SUBPART B AND C – RADIATED EMISSIONS – LAB B – 1 GHz to 4.4 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX E

DATA SHEETS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

RADIATED EMISSIONS
DATA SHEETS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FCC 15.231

Irrometer Company, Inc.
Wireless Monitor Transmitter
Model: 950 T1

Date: 10/30/07
Labs: B and D
Tested By: Kyle Fujimoto

Duty Cycle: 23.94897845%

FCC 15.231

Irrometer Company, Inc.
Wireless Monitor Transmitter
Model: 950 T1

Date: 10/30/07
Labs: B and D
Tested By: Kyle Fujimoto

Duty Cycle: 23.94897845%

FCC 15.231 and FCC Class B

Irrometer Company, Inc.
Wireless Monitor Transmitter
Model: 950 T1

Date: 10/29/07
Labs: B and D
Tested By: Kyle Fujimoto

Digital Portion - 10 kHz to 4400 MHz - Vertical and Horizontal Polarization

Non Harmonic Emissions from the Tx - 10 kHz to 4400 MHz - Vertical and Horizontal Polarization

-20 dB BANDWIDTH


DATA SHEET

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

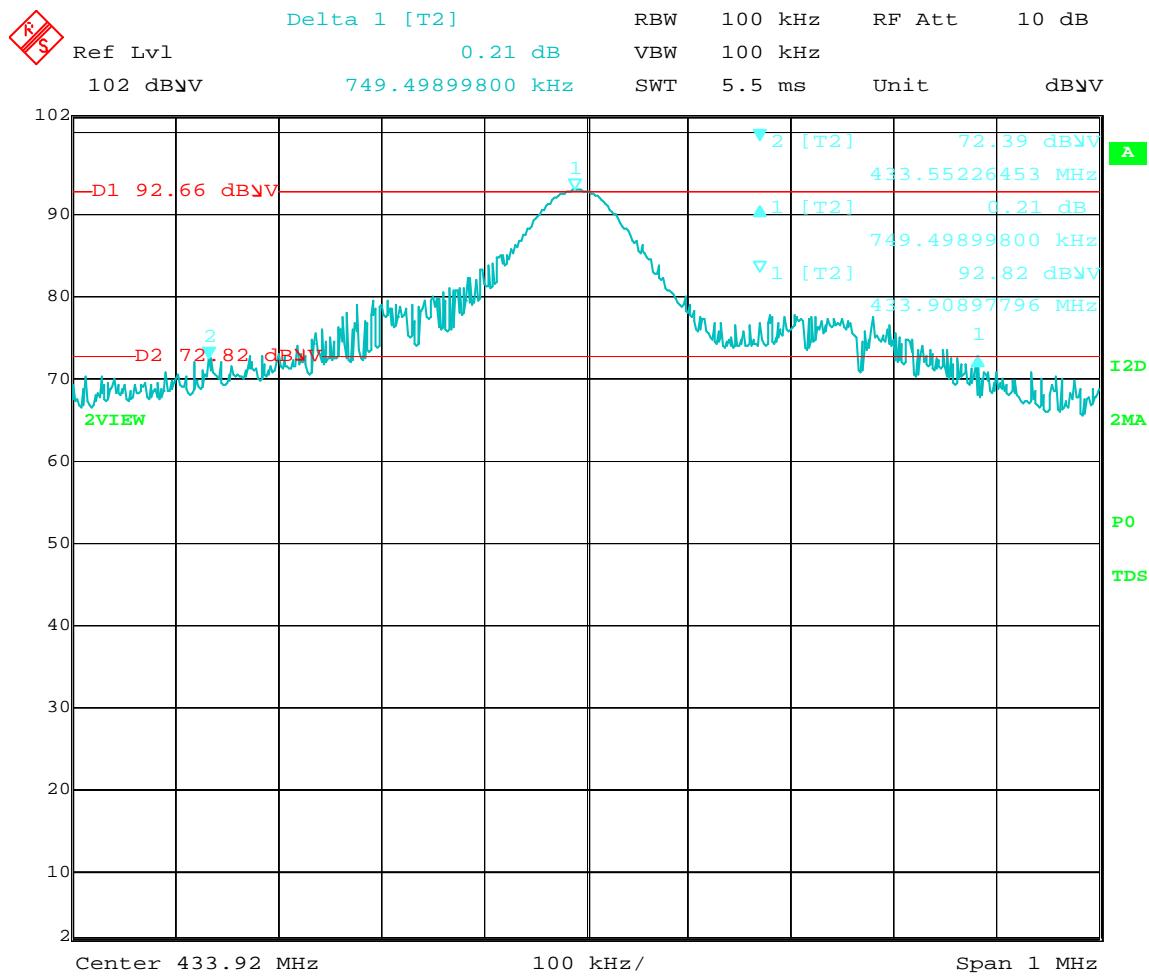

Date: 30.OCT.2007 08:30:00

20 dB Bandwidth of the Fundamental