FCC Test Report

Report No.: AGC06P120901F2C

FCC ID : UOSAM62

PRODUCT DESIGNATION: Mobile Phone

BRAND NAME : AMGOO

MODEL NAME : AM62

CLIENT : Amgoo Telecom Co., Ltd.

DATE OF ISSUE : Sep. 24, 2012

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 1 of57

VERIFICATION OF COMPLIANCE

	-				
Applicant	Amgoo Telecom Co., Ltd.				
Арріісані	6/F,Block 3,Tongjian Building,NO.2013,Middle Shennan Rd.,Futian District, Shenzhen,China				
	Topology Communication Technology(Shenzhen)CO.,LTD				
Manufacturer	KaiXinDa Technology Park,No.49 Zhou Shi Road,Shiyan County,Bao'an District,Shenzhen,China				
Product Designation	Mobile Phone				
Brand Name	AMGOO				
Test Model	AM62				
FCC ID	UOSAM62				
Report Number	AGC06P120901F2C				
Date of Test	Sep.17, 2012 to Sep.21, 2012				

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Test By:

Bart Xie Sep. 24, 2012

Forrest Lei Sep. 24, 2012

Authorized By:

Solger Zhang Sep. 24, 2012

Page 2 of57

TABLE OF CONTENTS

1.	. GENERAL INFORMATION	4
	1.1 PRODUCT DESCRIPTION 1.2 TABLE OF CARRIER FREQUENCYS 1.3 IEEE 802.11N MODULATION SCHEME 1.4 RELATED SUBMITTAL(S) / GRANT (S) 1.5 TEST METHODOLOGY 1.6 TEST FACILITY 1.7 SPECIAL ACCESSORIES 1.8 EQUIPMENT MODIFICATIONS	
2.	. SYSTEM TEST CONFIGURATION	
	2.1 CONFIGURATION OF EUT SYSTEM	6
3.	. SUMMARY OF TEST RESULTS	7
4.	. DESCRIPTION OF TEST MODES	7
5.	. PEAK OUTPUT POWER	8
	5.1 MEASUREMENT PROCEDURE 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 5.3 MEASUREMENT EQUIPMENT USED 5.4 LIMITS AND MEASUREMENT RESULT	8 8
6.	. 6 DB BANDWIDTH	11
	6.1 MEASUREMENT PROCEDURE	11 11
7.	. CONDUCTED SPURIOUS EMISSION	19
	7.1 MEASUREMENT PROCEDURE	19
8.	. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	21
	8.1 MEASUREMENT PROCEDURE	
	8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 8.3 MEASUREMENT EQUIPMENT USED	
	8.4 LIMITS AND MEASUREMENT RESULT	
9.	. RADIATED EMISSION MEASUREMENT	
	9.1 MEASUREMENT PROCEDURE	29
	9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	29
	9.3 MEASUREMENT EQUIPMENT USED	30 31
10	0. BAND EDGE EMISSION	
- 1	10.1 MEASUREMENT PROCEDURE	
	10.2 TEST SET-UP	36
	10.3 TEST RESULT	
44	4 FCC LINE CONDUCTED EMISSION TEST	15

Page 3 of 57

11.1 LIMITS OF LINE CONDUCTED EMISSION TEST	45
11.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	45
11.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	46
11.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
11.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST	47
APPENDIX I	49
PHOTOGRAPHS OF THE EUT	49
APPENDIX II	57
PHOTOGRAPHS OF THE TEST SETUP	57

Page 4 of 57

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is designed as an "Wifi Device". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz to 2.462GHz
Max. Output Power	11b:12.47dBm,11g:11.48dBm,11n(20):10.44dBm,11n(40):10.39dBm
Modulation	CCK/OFDM: BPSK,GPSK,16-QAM,64-QAM
Data Rate	DSSS(1/2/5.5/11),OFDM(6/9/12/18/24/36/48/54) See section 1.3 for 802.11n
Number of channels	11
Antenna Designation	Integrated Antenna
Antenna Gain	Antenna (max): 1.0dBi
Power Supply	DC 3.7V by lithium battery

1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	1	2412MHZ
	2	2417MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
0400 0400 514117	6	2437 MHZ
2400~2483.5MHZ	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11 For 40MHZ bandwidth system use Channel 3 to Channel 9

Page 5 of 57

1.3 IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NCBPS NDBPS Data rate(MI 800nsG		NDBPS -				
macx					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation	
NSS	Number of spatial streams	
R	Code rate	
NBPSC	Number of coded bits per single carrier	
NCBPS	Number of coded bits per symbol	
NDBPS	Number of data bits per symbol	
GI	guard interval	

1.4 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: UOSAM62, filling to comply with the FCC Part 15 requirements.

1.5 TEST METHODOLOGY

Because the EUT received power from DC3.7V lithium battery, so only radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.6 TEST FACILITY

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance (Shenzhen) Co., Ltd. 2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and IC requirements in documents RS212.

FCC register No.: 259865

1.7 SPECIAL ACCESSORIES

Refer to section 2.2.

1.8 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 6 of 57

2. SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF EUT SYSTEM

Configure 1: Configure Normal mode (WiFi) or continous transmitting mode.



Note: All the accessories have been used during the test.

2.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile Phone	AM62	FCC ID: UOSAM62	EUT
2	ADAPTER	AMGOO	CH7	Accessory
3	BATTERY	AMGOO	AM-4LB	Accessory
4	EARPHONE	N/A	N/A	Accessory
5	USB Cable	N/A	N/A	Accessory

Note: the following "EUT" in setup diagram means EUT system.

Page 7 of 57

3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

***Note:

The EUT received power from DC3.7V lithium battery.

4. DESCRIPTION OF TEST MODES

TEST MODES
Low Channel(TX)
Middle Channel(TX)
High Channel(TX)
Normal (Wi-Fi)

Note: Transmit by 802.11b with Date rate(1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate(6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Date rate

(13.5/27/40.5/54/81/108/121.5/135)

Note: 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency individually.

- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report.
- 3. For Radiated Emission, 3 axis were chosen for testing for each applicable modes.

Page 8 of 57


5. PEAK OUTPUT POWER

5.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to power meter through an RF attenuator
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set the RBW greater than 6DB bandwidth of emission.
- 5. Record the maximum power from the power meter.
- 6. The maximum peak power shall be less 1 Watt (30dBm).

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

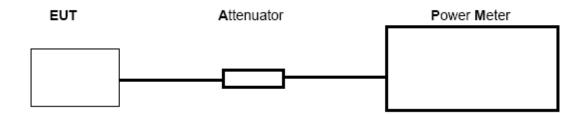

5.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Power meter	R&S	NRP-Z23	N/A	07/18/2012	07/17/2013
RF attenuator	N/A	RFA20db	N/A	N/A	N/A
AGILENT	Agilent	E4440A	N/A	07/18/2012	07/17/2013

Page 9 of 57

5.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	PEAK POWER
TEST MODE	802.11b with data rate 1

LIMITS AND MEASUREMENT RESULT					
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail	
2.412	11.22	12.46	30	Pass	
2.437	11.43	12.47	30	Pass	
2.462	11.40	12.39	30	Pass	

TEST ITEM	PEAK POWER
TEST MODE	802.11g with data rate 6

LIMITS AND MEASUREMENT RESULT					
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail	
2.412	10.55	11.48	30	Pass	
2.437	10.53	11.43	30	Pass	
2.462	10.51	11.41	30	Pass	

Page 10 of57

TEST ITEM	PEAK POWER
TEST MODE	802.11n 20 with data rate 6.5

LIMITS AND MEASUREMENT RESULT					
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail	
2.412	9.77	10.44	30	Pass	
2.437	9.76	10.42	30	Pass	
2.462	9.72	10.38	30	Pass	

TEST ITEM	PEAK POWER
TEST MODE	802.11n 40 with data rate 13.5

	LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail	
2.422	9.66	10.36	30	Pass	
2.437	9.71	10.39	30	Pass	
2.452	9.63	10.32	30	Pass	

Page 11 of 57


6. 6 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW≥RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

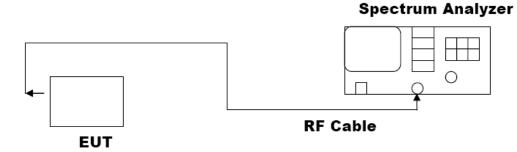

6.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	07/18/2012	06/17/2013
RF attenuator	N/A	RFA20db	N/A	N/A	N/A

6.4 LIMITS AND MEASUREMENT RESULTS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11b with data rate 11

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data (MHz)		Criteria	
	Low Channel	12.12	PASS	
>500KHZ	Middle Channel	12.13	PASS	
	High Channel	12.11	PASS	

Page 12 of 57

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11g with data rate 54

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data (MHz)		Criteria	
	Low Channel	16.36	PASS	
>500KHZ	Middle Channel	16.36	PASS	
	High Channel	16.36	PASS	

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11n 20 with data rate 65

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
	Low Channel	16.99	PASS	
>500KHZ	Middle Channel	17.20	PASS	
	High Channel	17.18	PASS	

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11n 40 with data rate 135


LIMITS AND MEASUREMENT RESULT				
Applicable Limits		Measurement Result		
Applicable Littlis	Test Da	Criteria		
	Low Channel	35.78	PASS	
>500KHZ	Middle Channel	35.77	PASS	
	High Channel	35.58	PASS	

Page 13 of 57

802.11b TEST RESULT

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL


🗯 Agilent

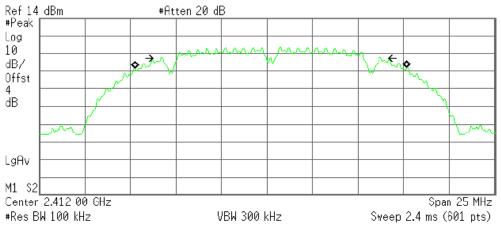

Occupied Bandwidth 14,9172 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 219.412 kHz x dB Bandwidth 12.118 MHz

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

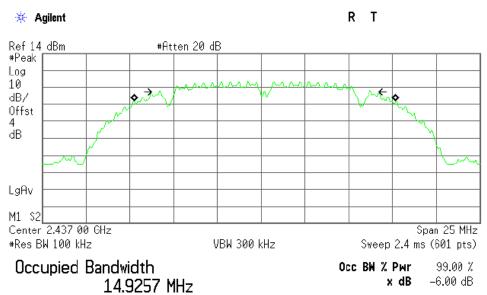


Transmit Freq Error 215.248 kHz x dB Bandwidth 12.127 MHz

Page 14 of 57

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



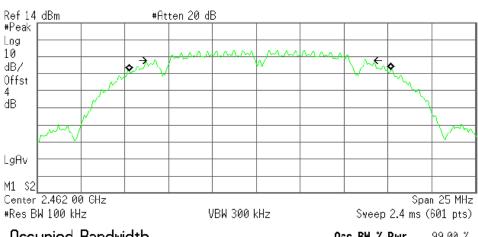


Occupied Bandwidth 14,9204 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 222.937 kHz x dB Bandwidth 12.113 MHz

802.11g TEST RESULT

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



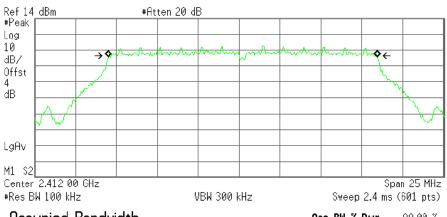


Occupied Bandwidth 16.4110 MHz Осс ВМ % Рыг 99.00 % х dB -6.00 dB

Transmit Freq Error 209.573 kHz x dB Bandwidth 16.358 MHz

Page 15 of 57

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




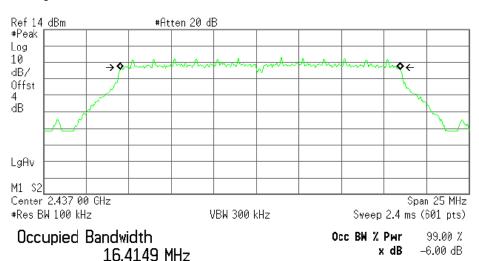

Transmit Freq Error 211.094 kHz x dB Bandwidth 16.356 MHz

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

🔆 Agilent

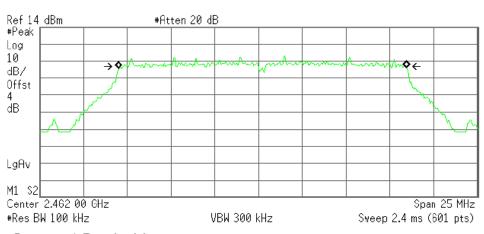

Occupied Bandwidth 16.4221 MHz Осс ВW % Рыг 99.00 % х dB -6.00 dB


Transmit Freq Error 213.852 kHz x dB Bandwidth 16.356 MHz

Page 16 of 57

802.11n(20) TEST RESULT

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



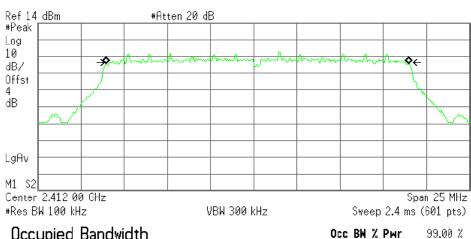


Occupied Bandwidth 17.5187 MHz Occ BW % Pwr x dB -6.00 dB

Transmit Freq Error 215.204 kHz x dB Bandwidth 16.989 MHz

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

* Agilent

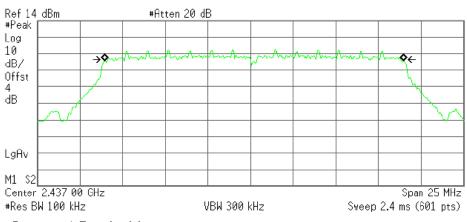


Occupied Bandwidth 17.5160 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 213.995 kHz 17.195 MHz x dB Bandwidth

Page 17 of 57

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

🐺 Agilent

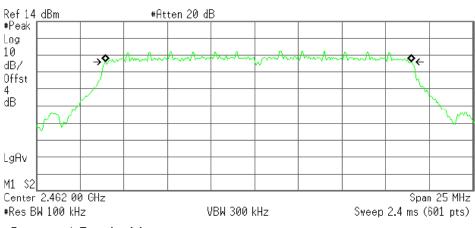


Occupied Bandwidth 17.5190 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 215.644 kHz x dB Bandwidth 17.180 MHz

802.11n 40 TEST RESULT

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

🔆 Agilent

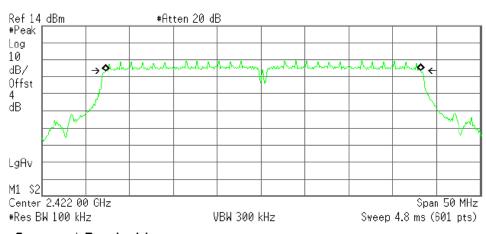


Occupied Bandwidth 35.8485 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 219.755 kHz x dB Bandwidth 35.783 MHz

Page 18 of 57

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



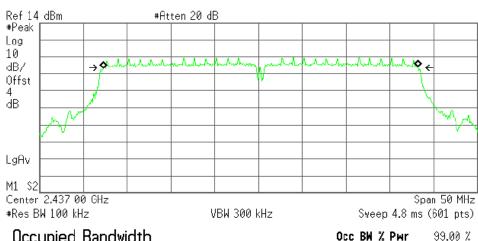


Occupied Bandwidth 35.8425 MHz
 Occ BW % Pwr
 99.00 %

 x dB
 -6.00 dB

Transmit Freq Error 222.453 kHz x dB Bandwidth 35.773 MHz

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

* Agilent

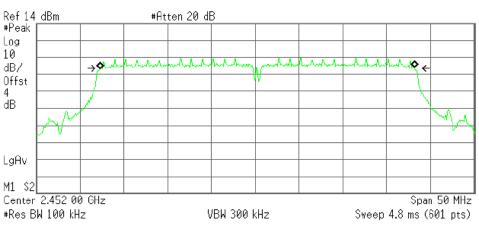

Occupied Bandwidth 35.8487 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 224.500 kHz x dB Bandwidth 35.576 MHz

Page 19 of 57

7. CONDUCTED SPURIOUS EMISSION

7.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 6.2

7.3 MEASUREMENT EQUIPMENT USED


The same as described in section 6.3

7.4 LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS		
level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		

Page 20 of 57

TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11b MIDDLE CHANNEL FOR MODULATION

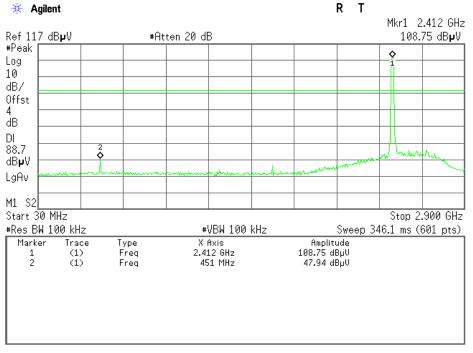

30MHz~2.9GHz

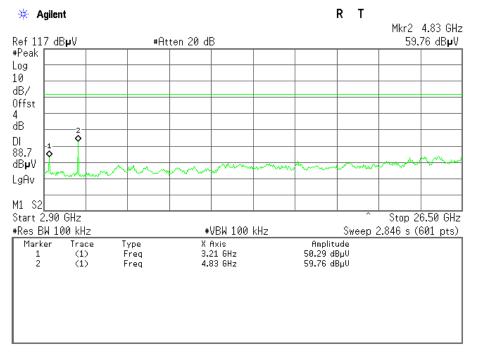

2.9GHz~26.5GHz

Page 21 of 57

8. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

8.1 MEASUREMENT PROCEDURE

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3), Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Set RBW= 100 kHz, VBW \geqslant 300KHz, SPAN to 5-30 % greater than the EBW, Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF = 10log (3 kHz/100kHz = -15.2 dB).

8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 6.2

8.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.3

8.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11b with data rate 1

Channel No.	Reading Value	BWCF	PSD	Limit	Result
	(dBm)	(dB)	(dBm)	(dBm)	
Low Channel	7.71	-15.2	-7.49	8	Pass
Middle Channel	8.84	-15.2	-6.36	8	Pass
High Channel	9.58	-15.2	-5.62	8	Pass

TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11g with data rate 6

Channel No.	Reading Value	BWCF	PSD	Limit	Result
	(dBm)	(dB)	(dBm)	(dBm)	
Low Channel	0.07	-15.2	-15.13	8	Pass
Middle Channel	1.80	-15.2	-13.40	8	Pass
High Channel	3.01	-15.2	-12.19	8	Pass

Report No.: AGC06P120901F2C Page 22 of57

TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11n 20 with data rate 6.5


Channel No.	Reading Value	BWCF	PSD	Limit	Result
	(dBm)	(dB)	(dBm)	(dBm)	
Low Channel	0.41	-15.2	-14.79	8	Pass
Middle Channel	1.74	-15.2	-13.46	8	Pass
High Channel	2.49	-15.2	-12.71	8	Pass


TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11n 40 with data rate 13.5

Channel No.	Reading Value	BWCF	PSD	Limit	Result
	(dBm)	(dB)	(dBm)	(dBm)	
Low Channel	-4.45	-15.2	-19.65	8	Pass
Middle Channel	-3.36	-15.2	-18.56	8	Pass
High Channel	-2.81	-15.2	-18.01	8	Pass

Page 23 of 57


802.11b TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

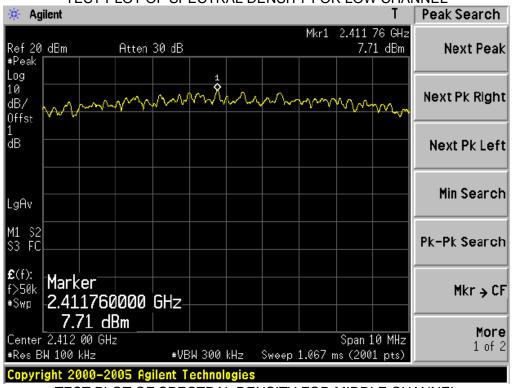

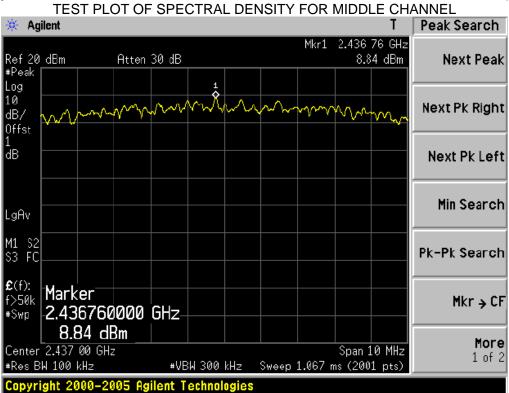


Page 24 of 57

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

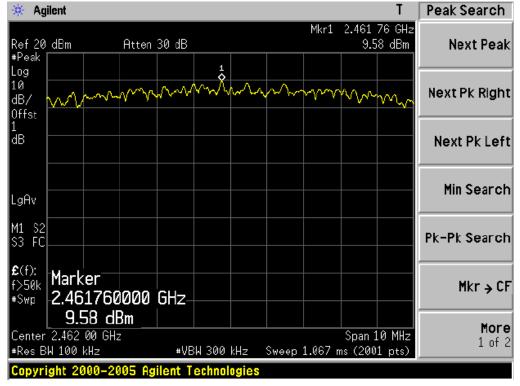


802.11g TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

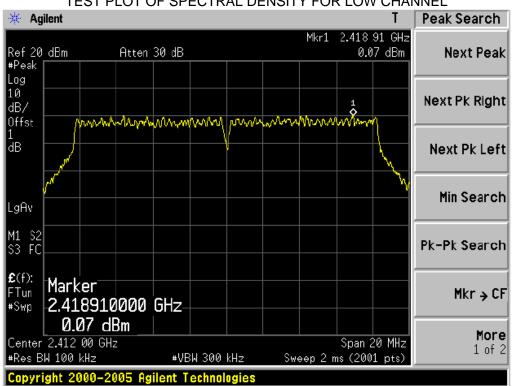


Page 25 of 57

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

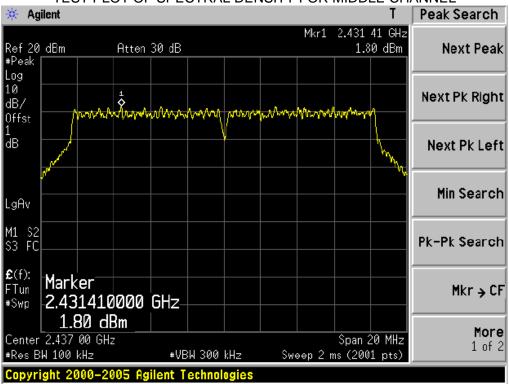


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

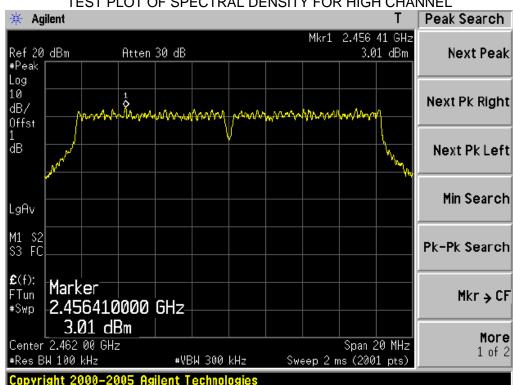


Page 26 of 57

802.11n 20 TEST RESULT



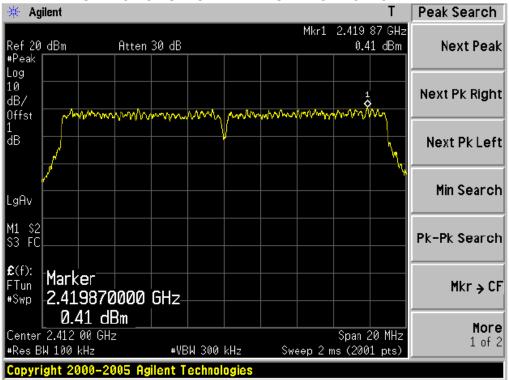


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

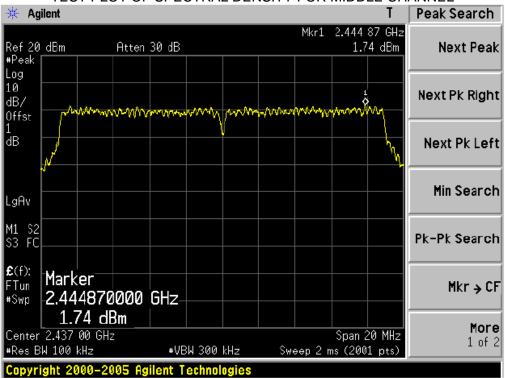


Page 27 of 57



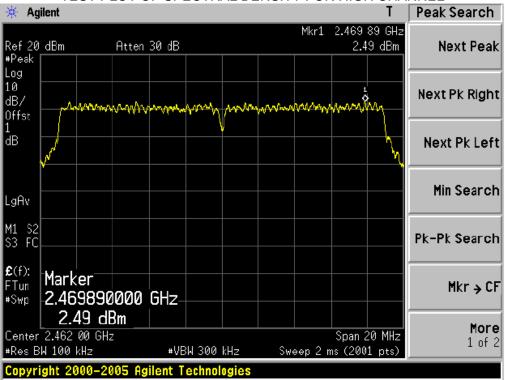


802.11n 40 TEST RESULT

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

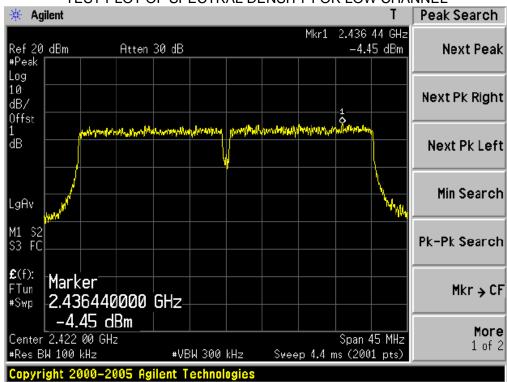


Page 28 of 57

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

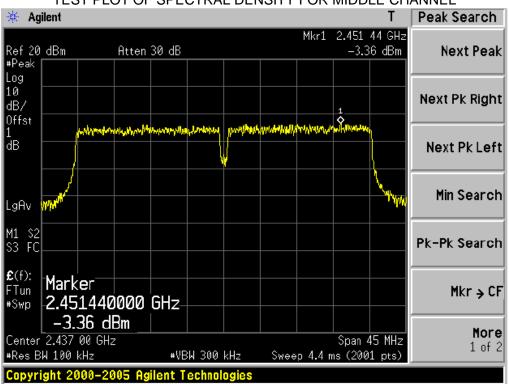

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

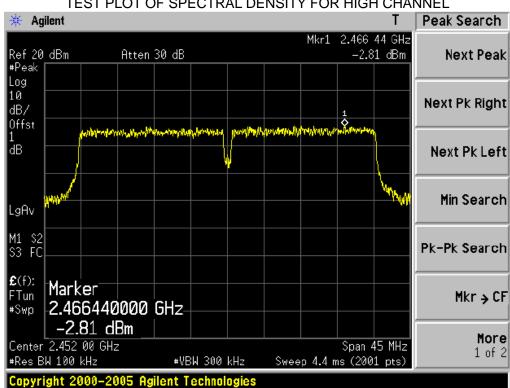

Page 29 of 57


9. RADIATED EMISSION MEASUREMENT

9.1 MEASUREMENT PROCEDURE

- 1 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 Meter above ground. The phase center of the receiving antenna mounted on the top of a height-Variable antenna tower was placed 3 meters far away from the turntable.
- 2 Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine The position of the highest radiation.
- 3 The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4 For each suspected emissions, the antenna tower was scan(from 1M to 4M) and then the turntable was Rotated(from 0 degree to 360degrees) to find the maximum reading.
- 5 Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode
- 6 For emission above 1GHZ, use 1MHZ VBW and RBW for peak reading. Then 1MHZ RBW and 10Hz VBW For average reading in spectrum analyzer.
- 7 When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one Complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative(provided the transmitter operates for longer than 0.1 seconds) or in cases where the Pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 seconds interval during which the field strength is at its maximum value.
- 8 If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9 For testing above 1GHZ,the emissions level of the EUT in peak mode was lower than average limit(that Means the emissions level in peak mode also complies with the limit in average mode)then testing will be Stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average Mode again and reported.
- 10 in case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded Data should be QP measured by receiver. High-Low scan is not required in this case.


9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

RADIATED EMISSION TEST SETUP BELOW 30MHz

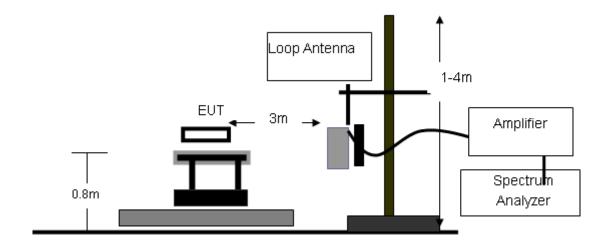


Page 30 of57

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

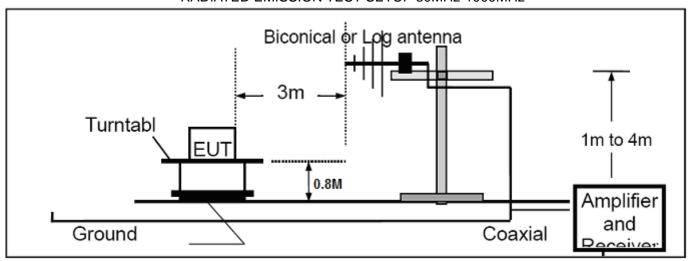

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

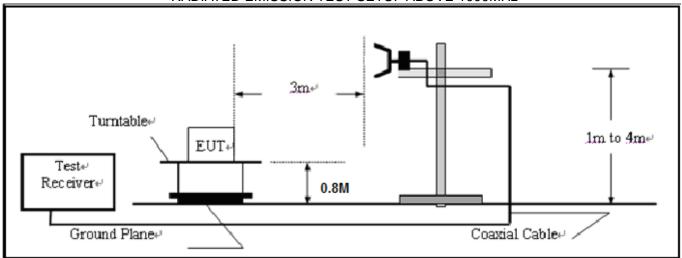

9.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	07/18/2012	07/17/2013
Amplifier	EM	EM30180	0607030	07/18/2012	07/17/2013
Horn Antenna	EM	EM-AH-10180	N/A	07/18/2012	07/17/2013
Horn Antenna	A.H. Systems Inc.	SAS-574		07/18/2012	07/17/2013
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	07/18/2012	07/17/2013
Amplifier	EM	EM30180	N/A	07/18/2012	07/17/2013
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	07/18/2012	07/17/2013
Loop Antenna	A.H.	SAS-526B	264	07/18/2012	07/17/2013
Isolation Transformer	LETEAC	LTBK		07/18/2012	07/17/2013

Page 31 of 57

9.4 LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Note: All modes were tested For restricted band radiated emission, the test records reported below are the worst result compared to other modes.

Page 32 of 57

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequency to 30MHz.

RADIATED EMISSION BELOW 1GHZ

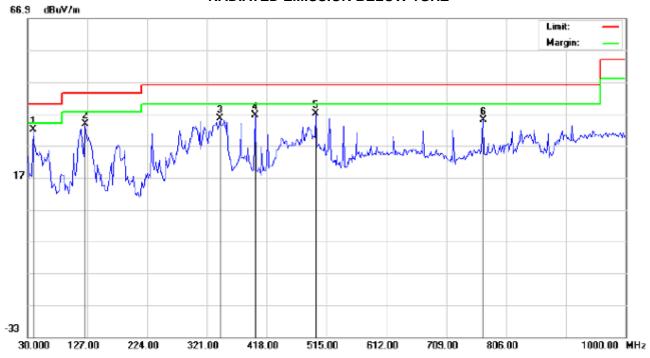

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60HHz Humidity: 60 %

EUT: Mobile Phone Distance: 3m


M/N: AM62

Mode: Middle channel

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1	*	39.7000	21.72	10.26	31.98	40.00	-8.02	peak			
2		123.7667	16.77	16.89	33.66	43.50	-9.84	peak			
3		342.0167	16.42	18.99	35.41	46.00	-10.59	peak			
4		398.6000	15.89	20.72	36.61	46.00	-9.39	peak			
5		497.2167	14.36	22.78	37.14	46.00	-8.86	peak			
6		768.8167	7.22	27.81	35.03	46.00	-10.97	peak			

Page 33 of 57

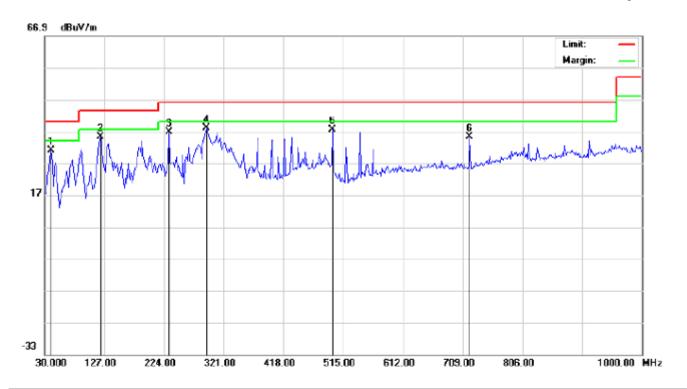

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60HHz Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: Middle Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		41.3167	25.86	5.21	31.07	40.00	-8.93	peak			
2		120.5333	18.13	17.22	35.35	43.50	-8.15	peak			
3		232.0833	20.97	15.86	36.83	46.00	-9.17	peak			
4	*	293.5167	21.00	17.06	38.06	46.00	-7.94	peak			
5		497.2167	14.70	22.78	37.48	46.00	-8.52	peak			
6		720.3167	9.06	26.15	35.21	46.00	-10.79	peak			

Note: Measurement= Reading + Factor, Over=Measure-Limit.

Page 34 of 57

RADIATED EMISSION ABOVE 1GHZ

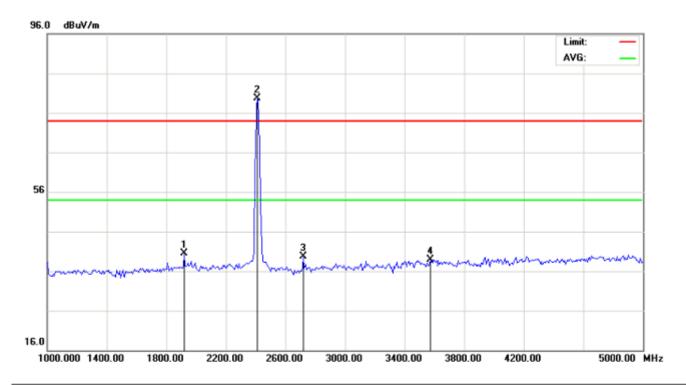

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mobile Phone Distance: 3m


M/N: AM62

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1920.000	31.42	9.04	40.46	74.00	-33.54	peak			
2	±	2413.333	69.33	10.33	79.66	74.00	5.66	peak			
3		2720.000	28.70	10.96	39.66	74.00	-34.34	peak			
4		3573.333	26.32	12.56	38.88	74.00	-35.12	peak			

Page 35 of 57

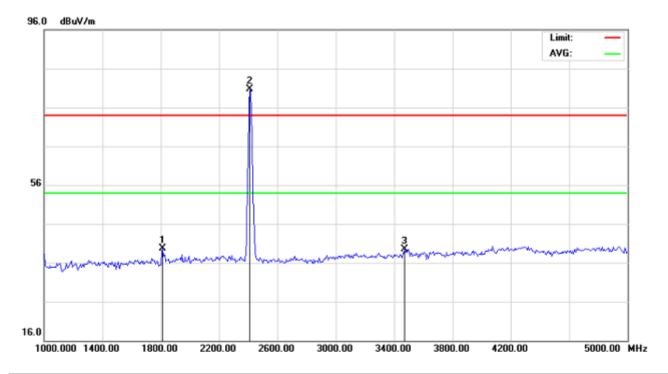

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1813.333	31.75	7.92	39.67	74.00	-34.33	peak			
2	ŧ	2413.333	70.33	10.33	80.66	74.00	6.66	peak			
3		3473.333	27.45	12.08	39.53	74.00	-34.47	peak			

Note: The other modes radiation emissions have more than 20dB margin.

Measurement= Reading + Factor, Over=Measure-Limit.

All modes radiation emission from 5GHz to 25GHz at least have 20dB margin.

Page 36 of 57

10. BAND EDGE EMISSION

10.1 MEASUREMENT PROCEDURE


- 1, Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW= 1MHz, VBW= 1MHz.
- 3. The band edges was measured and recorded.

10.2 TEST SET-UP

The Same as described in section 8.2

10.3 TEST RESULT

Page 37 of 57

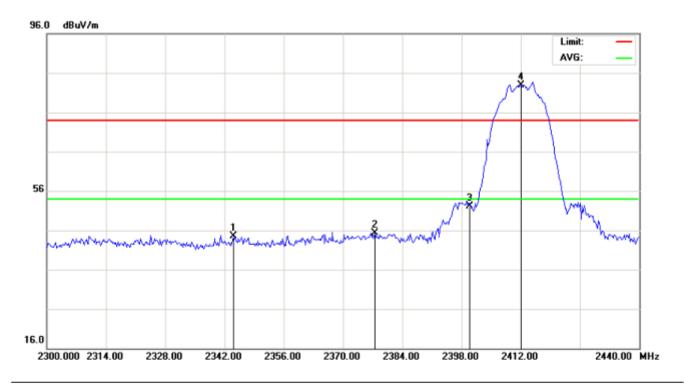

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: 802.11b-Low TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2344.100	34.25	10.26	44.51	74.00	-29.49	peak			
2		2377.467	35.05	10.30	45.35	74.00	-28.65	peak			
3		2400.000	41.87	10.32	52.19	74.00	-21.81	peak			
4	*	2412.000	72.51	10.33	82.84	74.00	8.84	peak			

Page 38 of 57

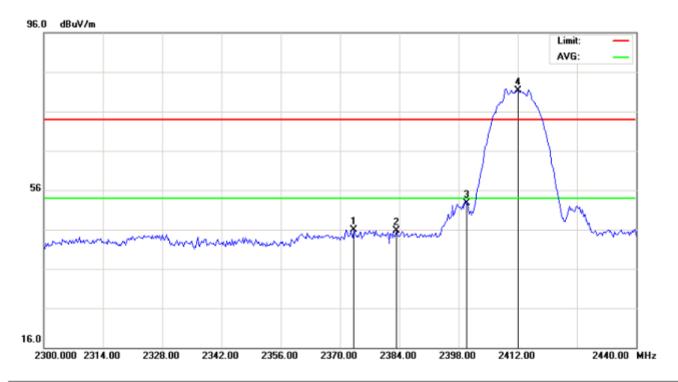

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: 802.11b-Low TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2373.267	35.64	10.29	45.93	74.00	-28.07	peak			
2		2383.300	35.36	10.30	45.66	74.00	-28.34	peak			
3		2400.000	42.46	10.32	52.78	74.00	-21.22	peak			
4	*	2412.000	70.94	10.33	81.27	74.00	7.27	peak			

Page 39 of 57

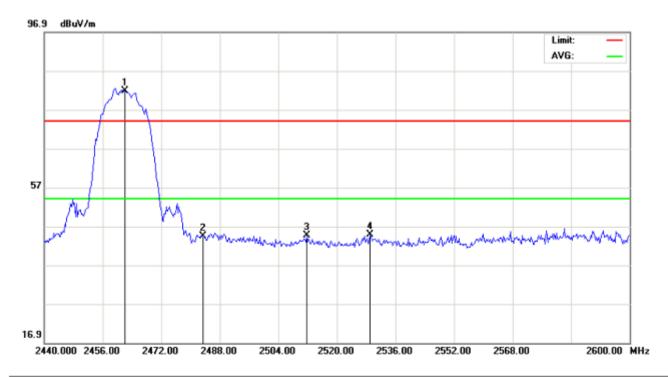

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: 802.11b-High TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	71.44	10.39	81.83	74.00	7.83	peak			
2		2483.500	34.00	10.41	44.41	74.00	-29.59	peak			
3		2511.733	34.18	10.46	44.64	74.00	-29.36	peak			
4		2529.067	34.36	10.50	44.86	74.00	-29.14	peak			

Page 40 of57

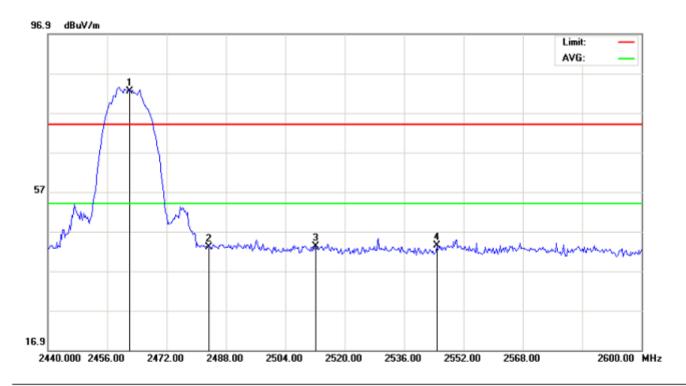

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: 802.11b-High TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	72.03	10.39	82.42	74.00	8.42	peak			
2		2483.500	32.56	10.41	42.97	74.00	-31.03	peak			
3		2512.267	32.80	10.46	43.26	74.00	-30.74	peak			
4		2544.800	32.95	10.54	43.49	74.00	-30.51	peak			

Page 41 of57

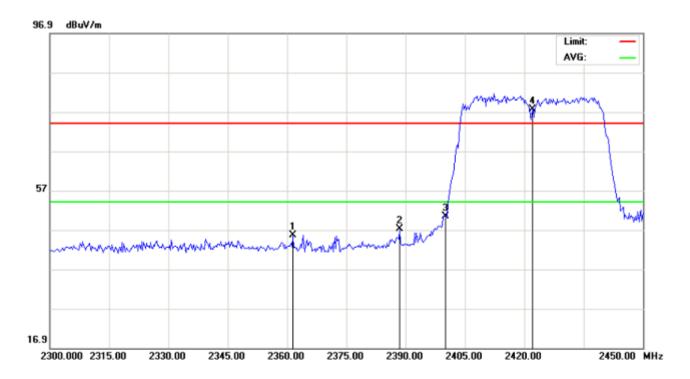

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: 802.11n 40-Low TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2361.500	35.42	10.28	45.70	74.00	-28.30	peak			
2		2388.500	36.96	10.31	47.27	74.00	-26.73	peak			
3		2400.000	40.07	10.32	50.39	74.00	-23.61	peak			
4	*	2422.000	67.33	10.34	77.67	74.00	3.67	peak			

Page 42 of57

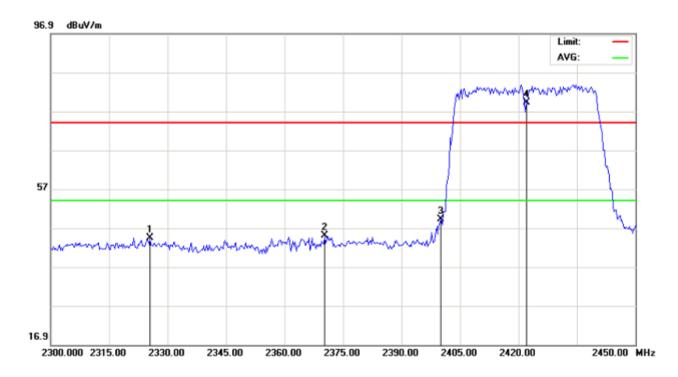

Site: site #1 Polarization: Vertical Temperature: 26 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: 802.11n 40-Low TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2325.500	34.15	10.24	44.39	74.00	-29.61	peak			
2		2370.250	34.64	10.29	44.93	74.00	-29.07	peak			
3		2400.000	38.93	10.32	49.25	74.00	-24.75	peak			
4	*	2422.000	68.83	10.34	79.17	74.00	5.17	peak			

Page 43 of 57

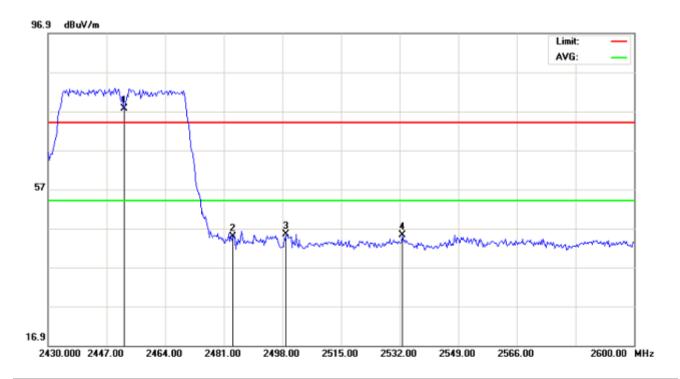

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %


EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: 802.11n 40-High TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2452.000	67.17	10.38	77.55	74.00	3.55	peak			
2		2483.500	34.41	10.41	44.82	74.00	-29.18	peak			
3		2499.133	34.99	10.43	45.42	74.00	-28.58	peak			
4		2532.850	34.61	10.51	45.12	74.00	-28.88	peak			

Page 44 of 57

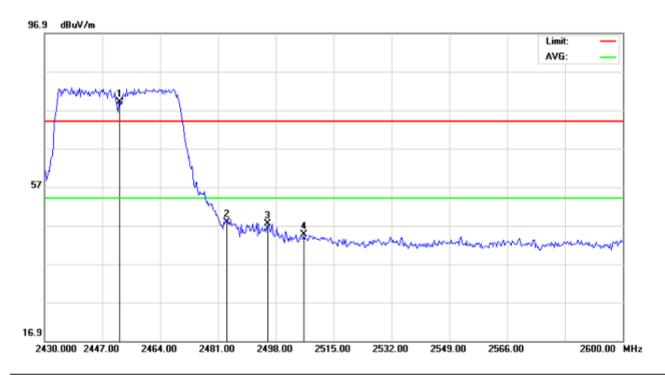

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: AM62

Mode: 802.11n 40-High TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2452.000	68.57	10.38	78.95	74.00	4.95	peak			
2		2483.500	37.37	10.41	47.78	74.00	-26.22	peak			
3		2495.733	36.96	10.43	47.39	74.00	-26.61	peak			
4		2506.217	34.08	10.44	44.52	74.00	-29.48	peak			

Note: the other modes radiation emission have enough 20dB margin. Measurement= Reading + Factor, Over=Measure-Limit.

Page 45 of 57


11.FCC LINE CONDUCTED EMISSION TEST

11.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguency	Maximum RF	Line Voltage
Frequency	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

^{**}Note: 1. The lower limit shall apply at the transition frequency.

11.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

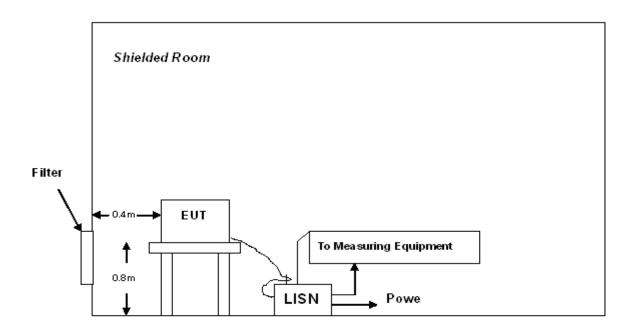

A: Powered through filter

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 46 of 57

11.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V power from a LISN, if any.
- 5) The EUT received DC 5V power by adapter which received 120V/60Hz power from a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing. All the test mode were in the worst case(the lowest rate).

11.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 60 %

Page 47 of 57

11.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST

TEST RESULT OF L LINE

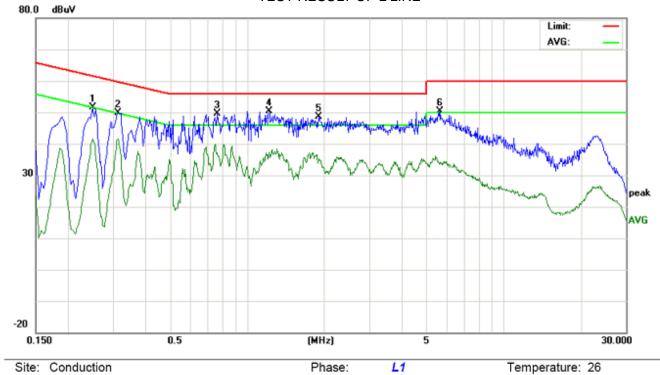

Limit: FCC Class B Conduction(QP)

EUT: Mobile Phone

M/N: AM62

Mode: Norml(WIFI)


Note:

No.	Freq.	Rea	ding_L (dBuV)		Correct Factor	Measurement (dBuV)			1	nit uV)		rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2500	41.25		31.45	10.27	51.52		41.72	61.75	51.75	-10.23	-10.03	Р	
2	0.3140	39.64		31.40	10.30	49.94		41.70	59.86	49.86	-9.92	-8.16	Р	
3	0.7660	39.37		26.75	10.30	49.67		37.05	56.00	46.00	-6.33	-8.95	Р	
4	1.2219	39.95		27.10	10.37	50.32		37.47	56.00	46.00	-5.68	-8.53	Р	
5	1.9059	38.33		25.06	10.25	48.58		35.31	56.00	46.00	-7.42	-10.69	Р	
6	5.6658	40.05		23.36	10.26	50.31		33.62	60.00	50.00	-9.69	-16.38	Р	

Power:

Page 48 of 57

TEST RESULT OF N LINE

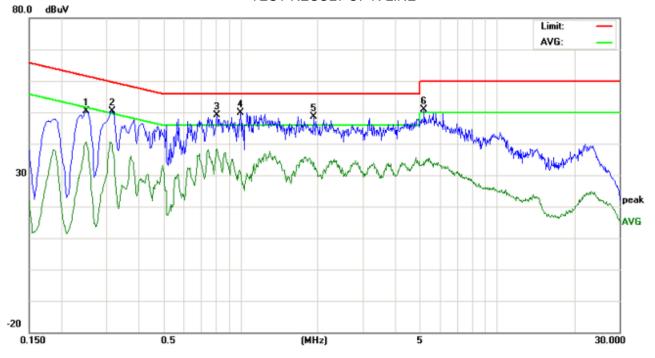

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: Mobile Phone

M/N: AM62

Mode: Normal(WIFI)

No.	Freq.	1	ding_L (dBuV)		Correct Factor		asuren (dBuV)		Lir (dB	nit uV)	Mai (d	rgin (B)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2500	39.99		30.45	10.27	50.26		40.72	61.75	51.75	-11.49	-11.03	Р	
2	0.3180	40.13		27.36	10.30	50.43		37.66	59.76	49.76	-9.33	-12.10	Р	
3	0.8100	38.88		28.17	10.29	49.17		38.46	56.00	46.00	-6.83	-7.54	Р	
4	1.0020	39.60		20.81	10.37	49.97		31.18	56.00	46.00	-6.03	-14.82	Р	
5	1.9297	38.35		23.80	10.24	48.59		34.04	56.00	46.00	-7.41	-11.96	Р	
6	5.2179	40.68		24.16	10.24	50.92		34.40	60.00	50.00	-9.08	-15.60	Р	

Page 49 of 57

APPENDIX I PHOTOGRAPHS OF THE EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



Page 50 of57





Page 51 of 57






Page 52 of 57






Page 53 of 57






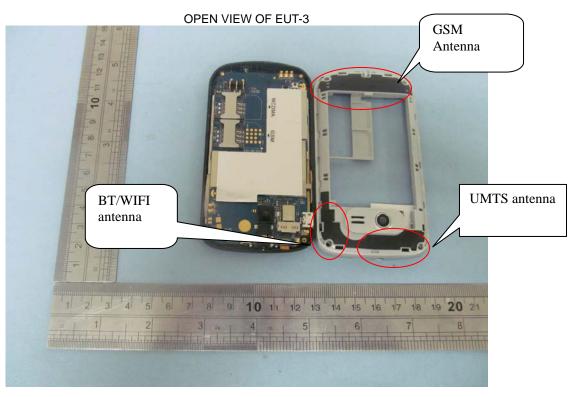

Page 54 of 57



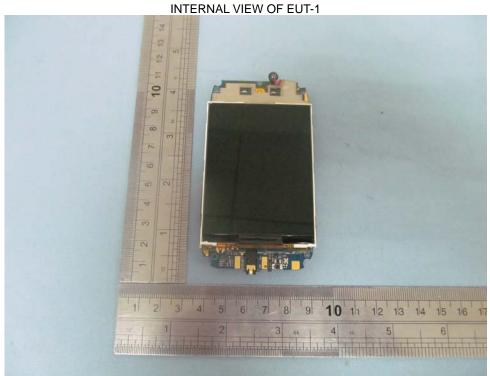

INTERNAL VIEW OF EUT-2



Page 55 of 57







INTERNAL VIEW OF EUT-4



Page 56 of 57

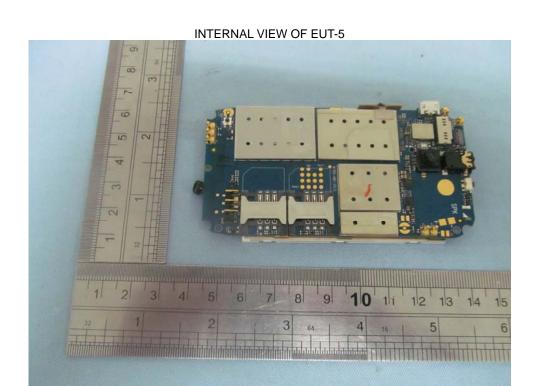

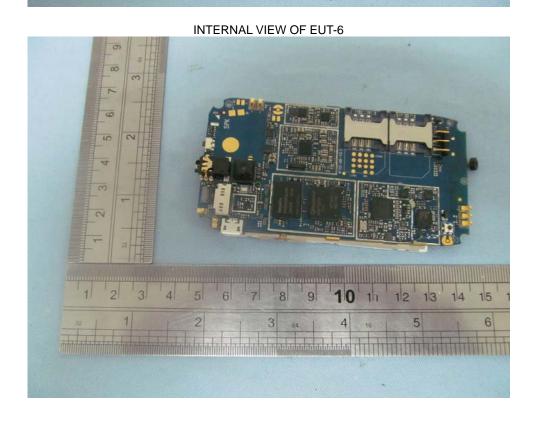


Page 57 of 57

APPENDIX II

PHOTOGRAPHS OF THE TEST SETUP

CONDUCTED EMISSION



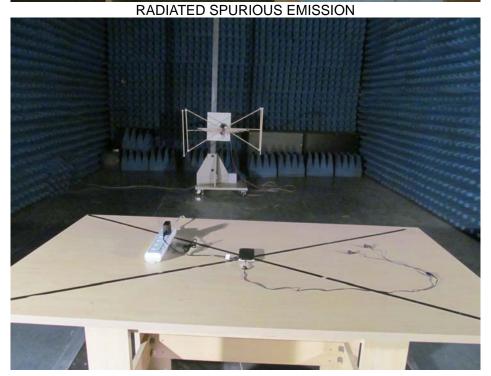

----END OF REPORT----