# **FCC Test Report**

Report No.: AGC06P110501F2B

FCC ID : UOSAM83

**PRODUCT DESIGNATION**: Mobile Phone

**BRAND NAME** : AMGOO

TEST MODEL : AM83

**CLIENT** : Amgoo Telecom Co.,Ltd.

**DATE OF ISSUE** : May 28,2011

**STANDARD(S)** : FCC Part 15 Rules

## Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 1 of 41

## **VERIFICATION OF COMPLIANCE**

Applicant	Amgoo Telecom Co.,Ltd.  6/F, Block 3, Tongjian Building, Middle Shennan Rd, Futian District, Shenzhen, China
Manufacturer	Amgoo Telecom Co.,Ltd.
Manufacturer	6/F, Block 3, Tongjian Building, Middle Shennan Rd, Futian District, Shenzhen, China
Product Designation Mobile Phone	
Brand Name	AMGOO
Model Name	AM83
FCC ID	UOSAM83
Report Number	AGC06P110501F2B
Date of Test May 24, 2011 to May 28, 2011	

#### **WE HEREBY CERTIFY THAT:**

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Checked By:

Curoky Chen May 28, 2011

Authorized By

Forrest Lei

May 28, 2011

## **TABLE OF CONTENTS**

1 GENERAL INFORMATION	······································
1.1PRODUCT DESCRIPTION	
1.2TABLE OF CARRIER FREQUENCYS	
1.3RECEIVER INPUT BANDWIDTH  1.4EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	
1.4EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	
1.6RELATED SUBMITTAL(S) / GRANT (S)	
1.7TEST METHODOLOGY	
1.8TEST FACILITY	<i>.</i>
1.9SPECIAL ACCESSORIES	
1.10EQUIPMENT MODIFICATIONS	
2 SYSTEM TEST CONFIGURATION	
2.1CONFIGURATION OF TESTED SYSTEM	
2.2EQUIPMENT USED IN TESTED SYSTEM	
3 SUMMARY OF TEST RESULTS	
4. DESCRIPTION OF TEST MODES	
5 PEAK OUTPUT POWER	9
5.1 MEASUREMENT PROCEDURE	
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
5.3 MEASUREMENT EQUIPMENT USED	10
5.4 LIMITS AND MEASUREMENT RESULT	
6 20 DB BANDWIDTH	
6.1 MEASUREMENT PROCEDURE	
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 6.3 MEASUREMENT EQUIPMENT USED	
6.4 LIMITS AND MEASUREMENT RESULTS	
7. CONDUCTED SPURIOUS EMISSION	
7.1 MEASUREMENT PROCEDURE	
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 7.3 MEASUREMENT EQUIPMENT USED	13
7.4 LIMITS AND MEASUREMENT RESULT	
8. RADIATED EMISSION	
8.1 MEASUREMENT PROCEDURE	
8.2 TEST SETUP 8.2 TEST EQUIMENT LIST	
8.3 TEST RESULT	
9 BAND EDGES EMISSION	
9.1 MEASUREMENT PROCEDURE	
9.1 MEASUREMENT PROCEDURE	
9.3 TEST RESULT	
10. NUMBER OF HOPPING FREQUENCY	
10.1 MEASUREMENT PROCEDURE  10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3 MEASUREMENT EQUIPMENT USED	
10.4 LIMITS AND MEASUREMENT RESULT	

Report No.: AGC06P110501F2B Page 3 of 41

11.	TIME OF OCCUPANCY (DWELL TIME)	27
	1 MEASUREMENT PROCEDURE	
	2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
	3 MEASUREMENT EQUIPMENT USED	
	4 LIMITS AND MEASUREMENT RESULT	
12. FF	REQUENCY SEPARATION	30
12.1	1 MEASUREMENT PROCEDURE	30
	2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
	3 MEASUREMENT EQUIPMENT USED	
12.4	4 LIMITS AND MEASUREMENT RESULT	30
13 FC	C LINE CONDUCTED EMISSION TEST	31
13.1	1 LIMITS OF LINE CONDUCTED EMISSION TEST	31
13.2	2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	31
13.3	3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	32
	4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
13.5	5 TEST RESULT OF LINE CONDUCTED EMISSION TEST	33
APPE	NDIX I	35
	OGRAPHS OF THE EUT	
APPE	NDIX II	41
PHOT	TOGRAPHS OF THE TEST SETUP	41

Page 4 of 41

#### 1 GENERAL INFORMATION

#### 1.1 PRODUCT DESCRIPTION

The EUT is a **Mobile Phone** designed as an "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz	
Rated Output Power	4.02 dBm(max)	
Bluetooth Version	V2.1 + EDR	
Modulation	GFSK, π /4-DQPSK, 8-DPSK	
Number of channels	79	
Antenna Designation	Integrated Antenna	
Antenna Gain	0.8dBi	
Power Supply	DC3.7V by Built-in Li-ion Battery(charged by adapter)	

#### 1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402MHZ
	1	2403MHZ
2400~2483.5MHZ	:	:
2400~2403.5WITZ	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

#### 1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Page 5 of 41

#### 1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01,51,03,55,05,04

#### 1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values: 1 LAP/UAP of the master of the connection

2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and Is never turned off. For synchronization with other units only offset are used. It has no relation to the time Of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations) are performed to generate te

Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter)than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

#### 1.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: UOSAM83** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 1.7 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Page 6 of 41

#### 1.8 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Attestation of Global Compliance Co., Ltd.

1F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

#### 1.9 SPECIAL ACCESSORIES

Refer to section 2.2.

## 1.10 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 7 of 41


## **2 SYSTEM TEST CONFIGURATION**

## 2.1 CONFIGURATION OF TESTED SYSTEM

**Configure 1**(Normal Hopping)



Configure 2(Charging by adapter)



Note: Above two configures may include continuous transmitting.

## 2.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	1 Mobile Phone AMGOO		AM83	EUT
2	Adapter	AMGOO	CH4	accessory
3	battery	AMGOO	AM-5BB	accessory
4	USB Cable	N/A	N/A	accessory

Page 8 of 41

## **3 SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant
§15.207	Line Conduction Emission	Compliant

## 4. DESCRIPTION OF TEST MODES

The EUT has been operate in three modulations: GFSK,  $\pi$  /4-DQPSK, 8-DPSK independently. For each kind of configuration, the following operating modes were applied for the related test items. For Radiated Emission, 3 axis were chosen for testing for each applicable modes.

No.	TEST MODES	
1	Low Channel(TX)	
2	Middle Channel(TX)	
3	High Channel(TX)	
4	Normal Hopping Powered by Battery	
5	Normal Hopping Charging by adapter	

**Note:** Only the result of the worst case was recorded in the report.


Page 9 of 41

## **5 PEAK OUTPUT POWER**

#### **5.1 MEASUREMENT PROCEDURE**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 5 times the 20 dB bandwidth, centered on a hoping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

## **5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)**

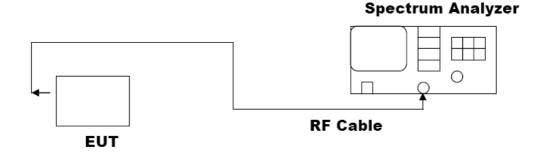

Page 10 of 41

## **5.3 MEASUREMENT EQUIPMENT USED**

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/29/2010	06/28/2011

## **5.4 LIMITS AND MEASUREMENT RESULT**

PEAK OUTPUT POWER MEASUREMENT RESULT WITH THE WORST CASE OF 1MBPS FOR GFSK MODULATION					
Frequency (GHz) Result Applicable Limits (dBm) Pass or					
2.402	4.02	30	Pass		
2.441	3.94	30	Pass		
2.480	3.95	30	Pass		

PEAK OUTPUT POWER MEASUREMENT RESULT FOR Π /4-DQPSK, 8-DPSK MODULATION					
Frequency (GHz)	Test Result 2 Mbps (dBm)	Test Result 3 Mbps (dBm)	Applicable Limits (dBm)	Pass or Fail	
2.402	3.19	3.02	30	Pass	
2.441	3.00	2.93	30	Pass	
2.480	3.03	2.99	30	Pass	

Page 11 of 41

#### 6 20 DB BANDWIDTH

#### **6.1 MEASUREMENT PROCEDURE**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

## 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in Section 5.2


#### **6.3 MEASUREMENT EQUIPMENT USED**

The same as described in Section 5.3

#### **6.4 LIMITS AND MEASUREMENT RESULTS**


THE MEASUREMENT RESULT WITH THE WORST CASE OF 3MBPS FOR 8-DPSK MODULATION					
Applicable Limite	Measurement Result				
Applicable Limits	Test Da	Criteria			
	Low Channel	1.387	PASS		
	Middle Channel	1.380	PASS		
	High Channel	1.383	PASS		



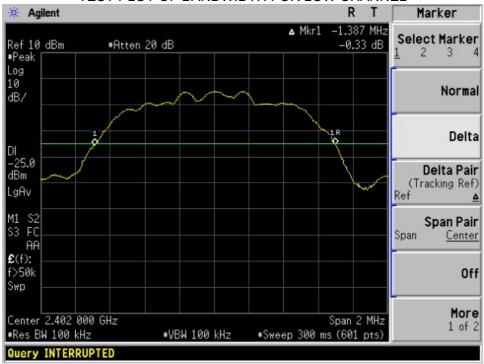


Page 12 of 41

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

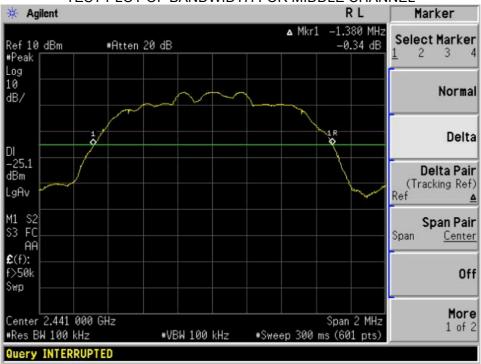

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

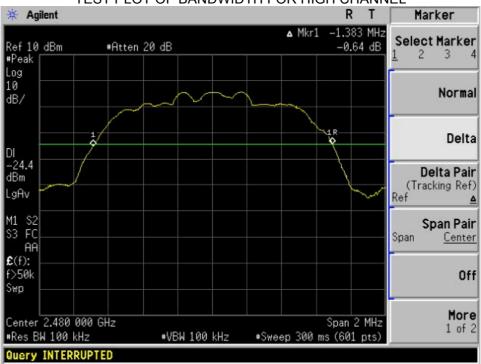

Page 13 of 41

## 7. CONDUCTED SPURIOUS EMISSION

#### 7.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  - RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

## 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in section 5.2

#### 7.3 MEASUREMENT EQUIPMENT USED


The Same as described in section 5.3


#### 7.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT								
Applicable Limite	Measurement Result							
Applicable Limits	Test Data	Criteria						
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS						
level of the desired power.  In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS						

Page 14 of 41

## TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 3 MBPS FOR 8-DPSK MODULATION

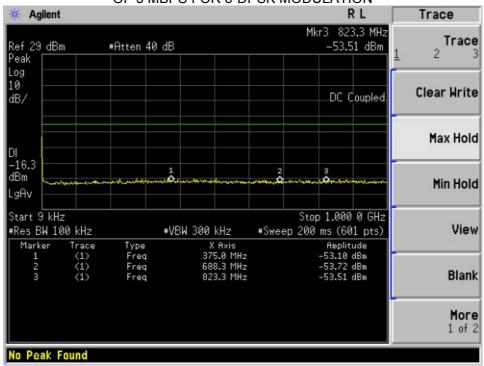

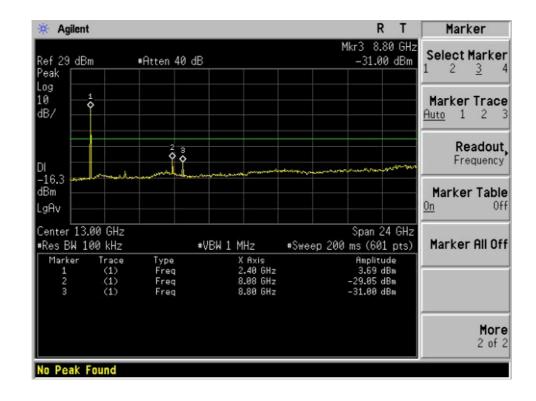

Page 15 of 41

#### 8. RADIATED EMISSION

#### **8.1 MEASUREMENT PROCEDURE**

 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

Page 16 of 41


The following table is the setting of spectrum analyzer and receiver.'

Spectrum Parameter	Setting
Start Frequency	1GHz
Stop Frequency	26.5GHz
RB/VB(Emission in restricted band)	1MHz/1MHz for Peak, 1MHz/10Hz for Average
RB/VB(Emission in non-restricted band)	1MHz/1MHz for Peak

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


## **8.2 TEST SETUP**

## RADIATED EMISSION TEST SETUP BELOW 30MHz

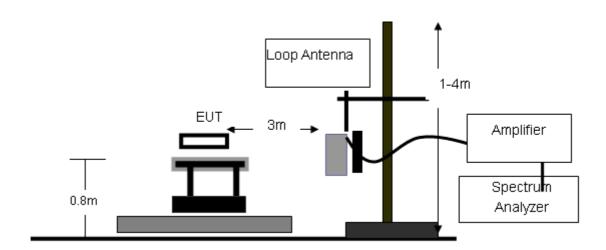


Page 17 of 41

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

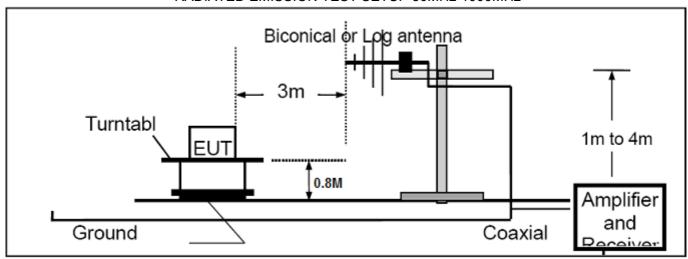

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

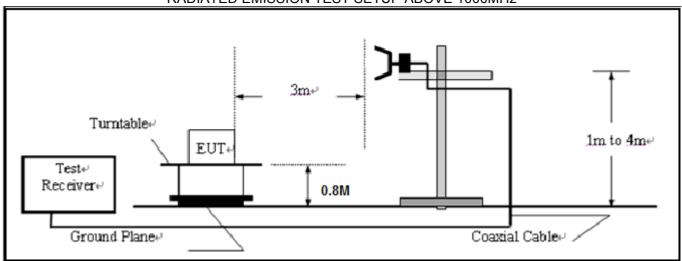

## **8.2 TEST EQUIMENT LIST**

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/29/2010	06/28/2011
Amplifier	EM	EM30180	0607030	06/29/2010	06/28/2011
Horn Antenna	EM	EM-AH-10180	N/A	06/29/2010	06/28/2011
Horn Antenna	A.H. Systems Inc.	SAS-574		06/29/2010	06/28/2011
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	06/29/2010	06/28/2011
Amplifier	EM	EM30180	N/A	06/29/2010	06/28/2011
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	06/29/2010	06/28/2011
Loop Antenna	Daze	ZN30900N	SEL0097	06/29/2010	06/28/2011
Isolation Transformer	LETEAC	LTBK		06/29/2010	06/28/2011

Page 18 of 41


## 8.3 TEST RESULT

## The worst case test result of middle channel on GFSK modulation was reported as following:

## **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHZ**

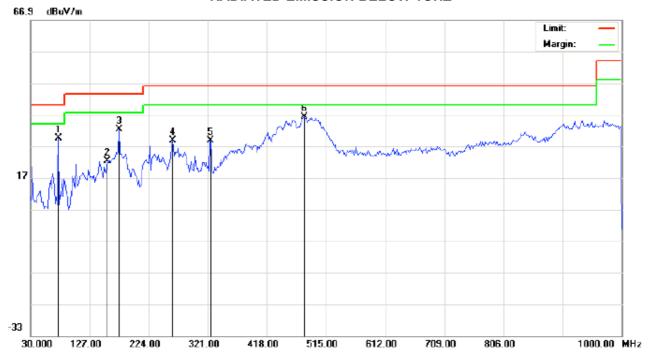


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: AM83 Mode: 2441TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		75.2667	20.07	9.34	29.41	40.00	-10.59	peak			
2		156.1000	8.42	13.74	22.16	43.50	-21.34	peak			
3		175.5000	15.04	17.16	32.20	43.50	-11.30	peak			
4		262.8000	12.04	16.86	28.90	46.00	-17.10	peak			
5		325.8500	10.30	18.51	28.81	46.00	-17.19	peak			
6	*	479.4333	14.63	21.67	36.30	46.00	-9.70	peak			

Report No.: AGC06P110501F2B Page 19 of 41

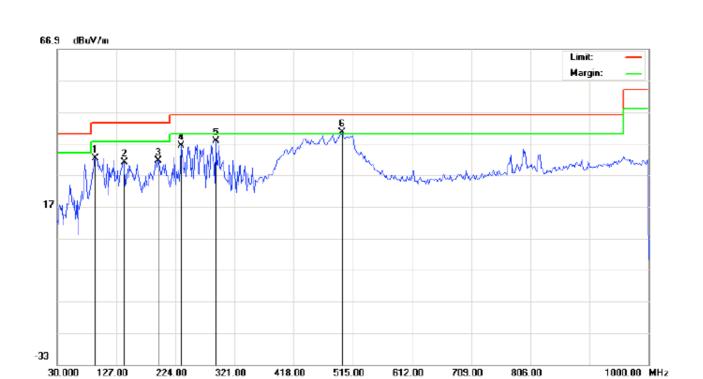

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %


EUT: Mobile Phone Distance: 3m

M/N: AM83 Mode: 2441TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		93.0500	21.70	10.62	32.32	43.50	-11.18	peak			
2		139.9333	17.30	13.72	31.02	43.50	-12.48	peak			
3		196.5167	15.73	15.79	31.52	43.50	-11.98	peak			
4		233.7000	20.26	16.14	36.40	46.00	-9.60	peak			
5		290.2833	20.57	17.10	37.67	46.00	-8.33	peak			
6	*	497.2167	17.64	22.78	40.42	46.00	-5.58	peak			

Page 20 of 41

## RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)

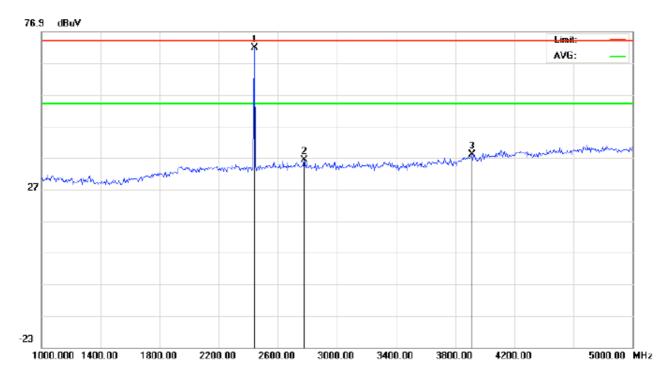


Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: 2441TX Mode: AM83

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dΒ	dBu∀	dBu∀	dΒ		cm	degree	
1	*	2441.000	81.31	-9.64	71.67	74.00	-2.33	peak			
2		2780.000	45.14	-8.89	36.25	74.00	-37.75	peak			
3		3913.333	43.39	-5.34	38.05	74.00	-35.95	peak			

Page 21 of 41

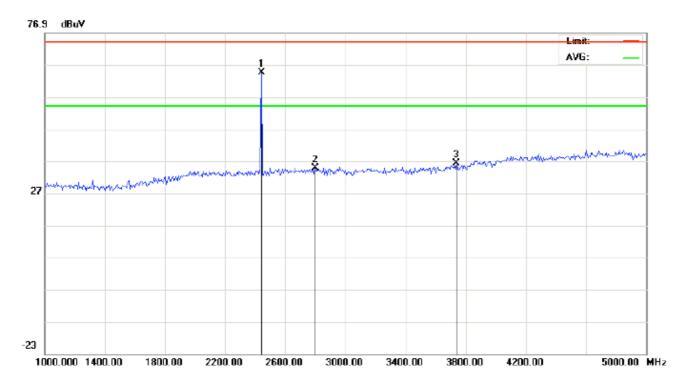

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: 2441TX Mode: AM83

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dΒ	dBu∀	dBu∀	dΒ		cm	degree	
1	*	2441.000	74.08	-9.64	64.44	74.00	-9.56	peak			
2		2800.000	43.72	-8.84	34.88	74.00	-39.12	peak			
3		3740.000	42.58	-6.41	36.17	74.00	-37.83	peak			

**Note:** 5~25GHz at least have 20dB margin. no recording in the test report. Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

Page 22 of 41

## 9 BAND EDGES EMISSION

## 9.1 MEASUREMENT PROCEDURE


- 1, Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW>=1%span, VBW>=RBW
- 3. The band edges was measured and recorded.

## 9.2 TEST SET-UP

The Same as described in section 8.2

#### 9.3 TEST RESULT

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)

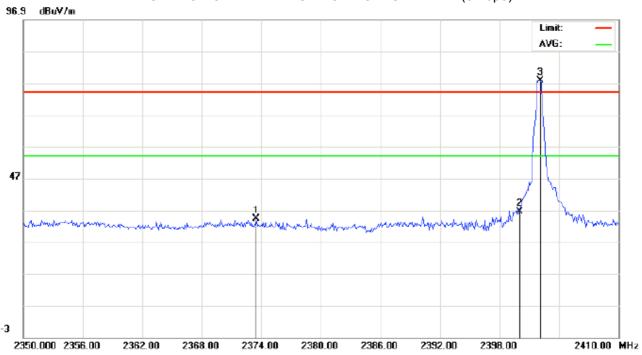


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: AM83 Mode: 2402TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dΒ		cm	degree	
1		2373.500	43.96	-9.71	34.25	74.00	-39.75	peak			
2		2400.000	46.11	-9.68	36.43	74.00	-37.57	peak			
3	*	2402.100	87.57	-9.68	77.89	74.00	3.89	peak			

Page 23 of 41

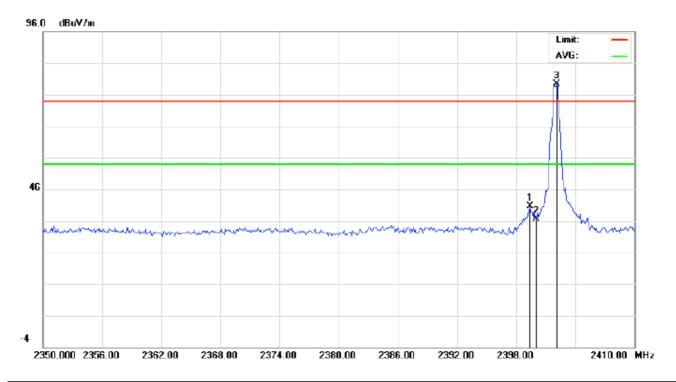

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120 V/60 Hz Humidity: 60 %


EUT: Mobile Phone Distance: 3m

M/N: AM83 Mode: 2402TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dΒ		cm	degree	
1		2399.400	50.31	-9.68	40.63	74.00	-33.37	peak			
2		2400.000	46.26	-9.68	36.58	74.00	-37.42	peak			
3	*	2402.100	89.14	-9.68	79.46	74.00	5.46	peak			

Page 24 of 41

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)

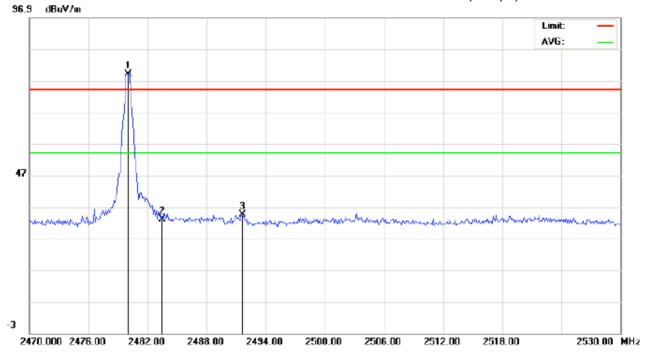


Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: AM83 Mode: 2480TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dΒ		cm	degree	
1	*	2480.000	88.61	-9.59	79.02	74.00	5.02	peak			
2		2483.500	42.69	-9.59	33.10	74.00	-40.90	peak			
3		2491.600	44.17	-9.58	34.59	74.00	-39.41	peak			

Page 25 of 41

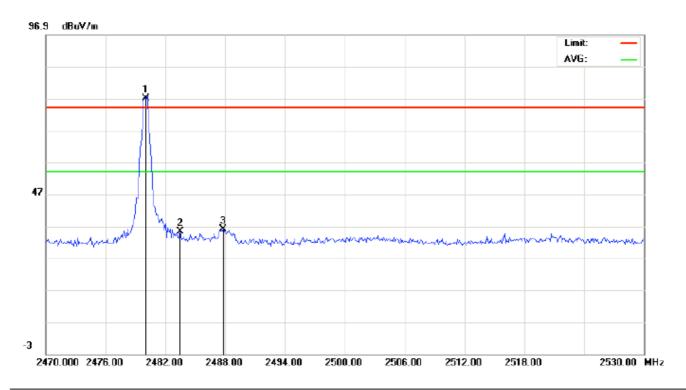

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1 GHZ(PK) Power: AC 120 V/60 Hz Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: AM83 Mode: 2480TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dΒ		cm	degree	
1	*	2480.000	86.55	-9.59	76.96	74.00	2.96	peak			
2		2483.500	44.94	-9.59	35.35	74.00	-38.65	peak			
3		2487.800	45.72	-9.58	36.14	74.00	-37.86	peak			

Page 26 of 41

#### 10. NUMBER OF HOPPING FREQUENCY

#### **10.1 MEASUREMENT PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

Copyright 2000-2005 Agilent Technologies

## 10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2 Conducted Method.

#### **10.3 MEASUREMENT EQUIPMENT USED**

The Same as described in section 5.3

#### **10.4 LIMITS AND MEASUREMENT RESULT**

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS



Page 27 of 41

## 11. TIME OF OCCUPANCY (DWELL TIME)

#### 11.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz,.

## 11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2 Conducted Method

#### 11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

## 11.4 LIMITS AND MEASUREMENT RESULT


**Bluetooth 3Mbps Test Result** 

Channel	Time of Pulse for DH5 (ms)						
Low	2.905	31.6	309.87	400			
Middle	2.905	31.6	309.87	400			
High	2.917	31.6	311.15	400			


Low Channel Time 2.905\*(1600/6)/79\*31.6=309.87ms Middle Channel Time 2.905\*(1600/6)/79\*31.6=309.87ms High Channel Time 2.917\*(1600/6)/79\*31.6=311.15ms

Report No.: AGC06P110501F2B Page 28 of 41

## TEST PLOT OF LOW CHANNEL

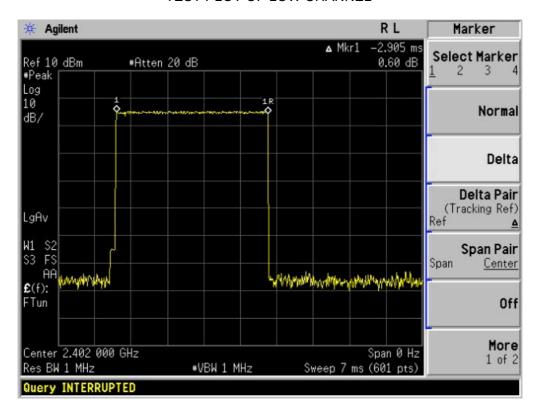


#### TEST PLOT OF MIDDLE CHANNEL

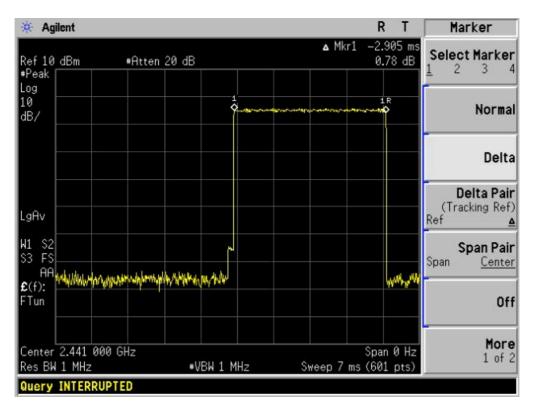

Page 29 of 41



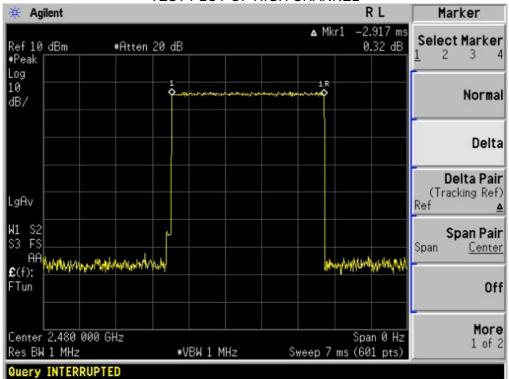

Page 30 of 41

## 12. FREQUENCY SEPARATION 12.1 MEASUREMENT PROCEDURE

## Place the EUT on the table and set it in transmitting mode

- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

## 12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

#### 12.3 MEASUREMENT EQUIPMENT USED


The same as described in section 5.3

#### 12.4 LIMITS AND MEASUREMENT RESULT

#### **BLUETOOTH 3MBPS TEST RESULT**

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT			
OHANNEL	KHz	KHz				
CH00-CH01	1025	>=25 KHz or 2/3 20 dB BW	Pass			

#### TEST PLOT FOR FREQUENCY SEPARATION

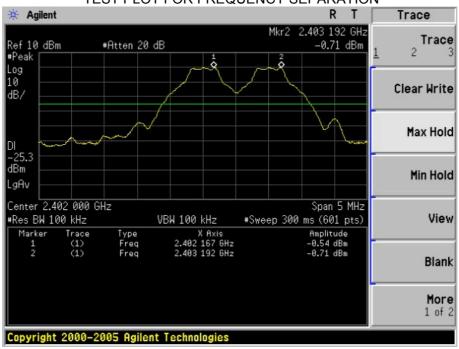


Page 31 of 41

## 13 FCC LINE CONDUCTED EMISSION TEST

## 13.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguanay	Maximum RF Line Voltage							
Frequency	Q.P.( dBuV)	Average( dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

## 13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

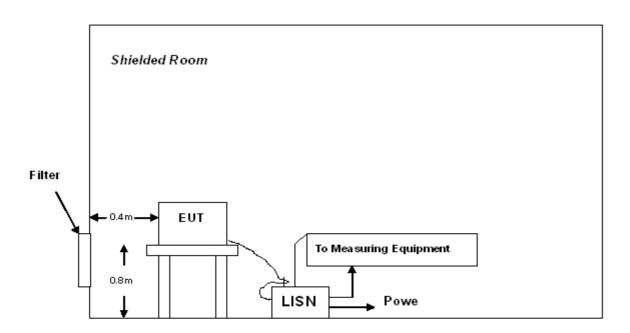

A: Powered through filter

<sup>\*\*</sup>Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 32 of 41

#### 13.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by PC though USB.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 13.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 60 %

Page 33 of 41

## 13.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

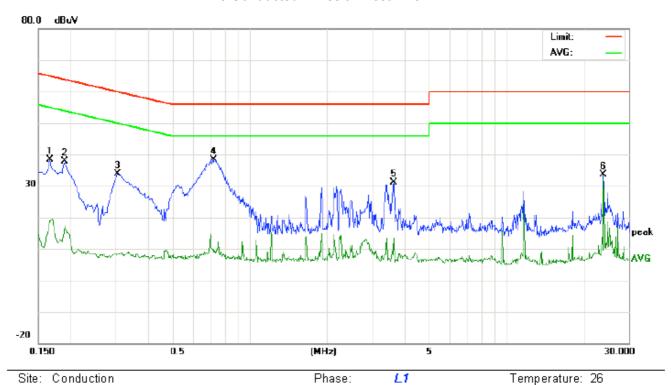

Limit: FCC Class B Conduction(QP)

EUT: Mobile Phone

M/N: AM83 Mode: Bluetooth

Note:

No.	No. Freq.		Reading_Level (dBuV)		Correct Measurement Factor (dBuV)		Limit (dBuV)		Margin (dB)		P/F	Comment		
	(MHz)	Peak	QP	AVG	dΒ	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	28.07		8.60	10.18	38.25		18.78	65.15	55.15	-26.90	-36.37	Р	
2	0.1900	27.79		7.16	10.20	37.99		17.36	64.03	54.03	-26.04	-36.67	Р	
3	0.3060	23.49		-1.60	10.29	33.78		8.69	60.08	50.08	-26.30	-41.39	Р	
4	0.7260	27.99		-1.26	10.33	38.32		9.07	56.00	46.00	-17.68	-36.93	Р	
5	3.6460	20.59		2.90	10.49	31.08		13.39	56.00	46.00	-24.92	-32.61	Р	
6	24.0140	23.56		21.95	10.11	33.67		32.06	60.00	50.00	-26.33	-17.94	Р	


Power:

AC 120V/60Hz

Humidity: 60 %

Page 34 of 41

## Line Conducted Emission Test Line 2-N

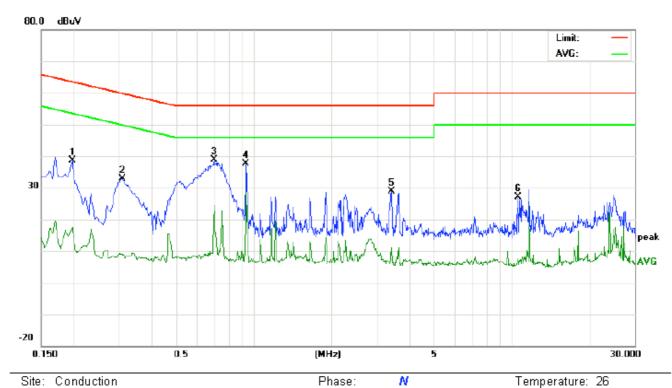

Limit: FCC Class B Conduction(QP)

EUT: Mobile Phone

M/N: AM83 Mode: Bluetooth

Note:

No.	No. Freq.		Reading_Leve (dBuV)		el Correct Factor		Measurement (dBuV)		Limit (dBu√)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1980	28.53		7.42	10.21	38.74		17.63	63.69	53.69	-24.95	-36.06	Ь	
2	0.3100	22.61		-1.39	10.29	32.90		8.90	59.97	49.97	-27.07	-41.07	Р	
3	0.7019	28.53		14.21	10.35	38.88		24.56	56.00	46.00	-17.12	-21.44	Р	
4	0.9380	27.23		18.55	10.39	37.62		28.94	56.00	46.00	-18.38	-17.06	Р	
5	3.4260	18.32		0.55	10.52	28.84		11.07	56.00	46.00	-27.16	-34.93	Р	
6	10.5780	16.95		-2.43	10.10	27.05		7.67	60.00	50.00	-32.95	-42.33	Р	

Power:

AC 120V/60Hz

Page 35 of 41

## APPENDIX I PHOTOGRAPHS OF THE EUT


TOP VIEW OF SAMPLE







Report No.: AGC06P110501F2B Page 36 of 41

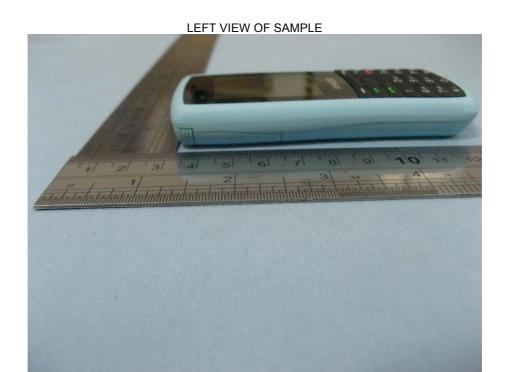



Report No.: AGC06P110501F2B Page 37 of 41





Report No.: AGC06P110501F2B Page 38 of 41










Page 39 of 41



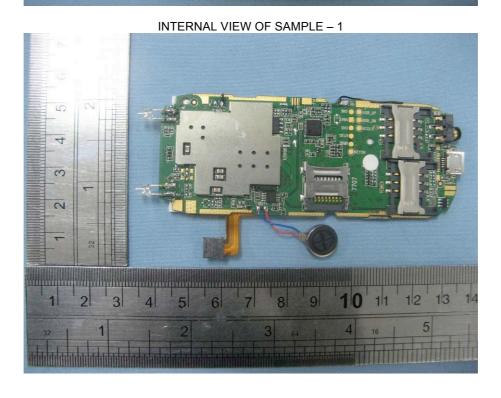

Report No.: AGC06P110501F2B Page 40 of 41

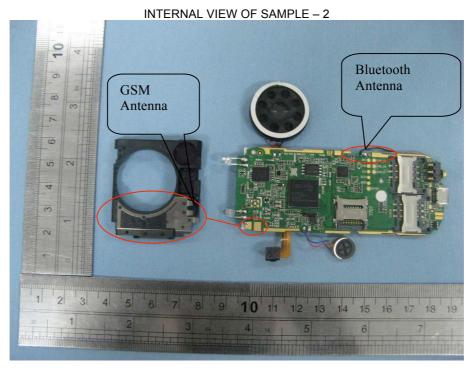

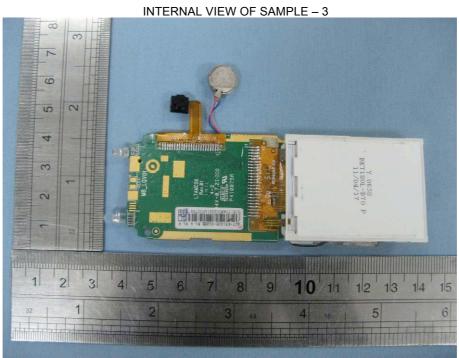

Report No.: AGC06P110501F2B Page 41 of 41

## **APPENDIX II** PHOTOGRAPHS OF THE TEST SETUP

**CONDUCTED EMISSION** 



RADIATED EMISSION



----END OF REPORT----