

FCC EMC Test Report

Report No.: JYTSZ-R01-2400159

Applicant: PICA Product Development

Address of Applicant: 4 Ash Street Extension, Derry, NH 03038 USA

Equipment Under Test (EUT)

Product Name: Skyhawk Hub

Model No.: HUB3VZW

Trade Mark: N/A

FCC ID: UOXSKYHAWKHUBTYP3

Applicable Standards: FCC CFR Title 47 Part 15B

Date of Sample Receipt: 15 Mar., 2024

Date of Test: 16 Mar., to 09 May, 2024

Date of report Issued: 10 May, 2024

Test Result: PASS

Project by: Jiye Li

Date: 10 May, 2024

Reviewed by: Project Engineer

Date: 10 May, 2024

Approved by: Janet Wei

Date: 10 May, 2024

Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	10 May, 2024	Original

2 Contents

	Page
Cover Page	1
1 Version	2
2 Contents	3
3 General Information	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode	4
3.4 Description of Test Auxiliary Equipment	5
3.5 Description of Cable Used.....	5
3.6 Measurement Uncertainty	5
3.7 Additions to, Deviations, or Exclusions from the Method.....	5
3.8 Laboratory Facility	5
3.9 Laboratory Location.....	6
3.10 Test Instruments List	6
4 Measurement Setup and Procedure	7
4.1 Test Setup	7
4.2 Test Procedure.....	8
5 Test Results.....	9
5.1 Summary	9
5.1.1 Clause and data summary	9
5.1.2 Test Limit.....	9
5.2 Radiated Emission	10

3 General Information

3.1 Client Information

Applicant:	PICA Product Development
Address:	4 Ash Street Extension, Derry, NH 03038 USA
Manufacturer:	PICA Product Development
Address:	4 Ash Street Extension, Derry, NH 03038 USA

3.2 General Description of E.U.T.

Product Name:	Skyhawk Hub
Model No.:	HUB3VZW
Power Supply:	DC 4.5V with 3*AA battery
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

3.3 Test Mode

Operating Mode	Detail Description
Working mode	Keep the EUT in Working mode(Worst case)
GPS mode	Keep the EUT in GPS receiver mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

3.4 Description of Test Auxiliary Equipment

Manufacturer	Description	Model	S/N	FCC ID/DoC
Lenovo	Laptop	ThinkPad T14 Gen 1	SL10Z47277	DoC

3.5 Description of Cable Used

Cable Type	Description	Length	From	To
N/A	N/A	N/A	N/A	N/A

3.6 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB
Radiated Emission (30MHz ~ 200MHz) (10m SAC)	4.3 dB
Radiated Emission (200MHz ~ 1000MHz) (10m SAC)	4.3 dB

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

3.7 Additions to, Deviations, or Exclusions from the Method

No

3.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.10 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-09-2023	01-08-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-05-2023	01-04-2024
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-27-2023	12-26-2024
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-27-2023	12-26-2024
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-27-2023	12-26-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-17-2024	01-16-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-17-2024	01-16-2025
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		


Radiated Emission(10m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
10m SAC	ETS	RFSD-100-F/A	WXJ090	04-28-2021	04-27-2026
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-1	01-05-2024	01-04-2025
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-2	12-28-2023	12-27-2024
EMI Test Receiver	R&S	ESR 3	WXJ090-3	12-27-2023	12-26-2024
EMI Test Receiver	R&S	ESR 3	WXJ090-4	12-27-2023	12-26-2024
Low Pre-amplifier	Bost	LNA 0920N	WXJ090-6	12-27-2023	12-26-2024
Low Pre-amplifier	Bost	LNA 0920N	WXJ090-7	12-27-2023	12-26-2024
Cable	Bost	JYT10M-1G-NN-10M	WXG002-7	01-17-2024	01-16-2025
Cable	Bost	JYT10M-1G-NN-10M	WXG002-8	01-17-2024	01-16-2025
Test Software	R&S	EMC32	Version: 10.50.40		

4 Measurement Setup and Procedure


4.1 Test Setup

1) Radiated emission measurement:

Below 1GHz (10m SAC)

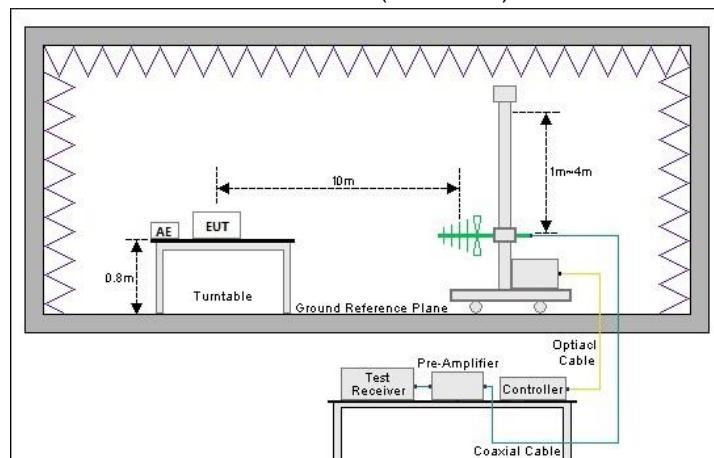

Above 1GHz (3m SAC)

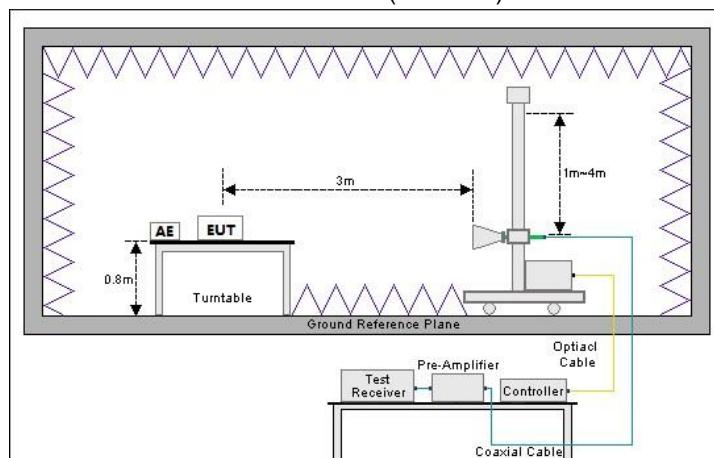

4.2 Test Procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none">1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.
Radiated emission	<p>For below 1GHz:</p> <ol style="list-style-type: none">1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 10 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 10 m.2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none">1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m.2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

5 Test Results

5.1 Summary

5.1.1 Clause and data summary

Test items	Standard clause	Test data	Result
Conducted Emission	Part 15.107	N/A	N/A
Radiated Emission	Part 15.109	See Section 5.2	Pass
Remark:			
1. The EUT is a Class B digital device. 2. Pass: The EUT complies with the essential requirements in the standard. 3. N/A: Not Applicable.			
Test Method:	ANSI C63.4:2014		

5.1.2 Test Limit


Test items	Limit				
	Frequency (MHz)	Class A Limit (dB μ V/m)		Class B Limit (dB μ V/m)	
Radiated Emission		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m
30 – 88	49.0	39.0	40.0	30.0	
88 – 216	53.5	43.5	43.5	33.5	
216 – 960	56.0	46.0	46.0	36.0	
960 – 1000	60.0	50.0	54.0	44.0	
Note: The more stringent limit applies at transition frequencies.					
	Frequency	Class A Limit (dB μ V/m) @ 3m		Class B Limit (dB μ V/m) @ 3m	
		Average	Peake	Average	Peake
	Above 1 GHz	60.0	80.0	54.0	74.0
Note: The measurement bandwidth shall be 1 MHz or greater.					

5.2 Radiated Emission

Below 1GHz:

Product Name:	Skyhawk Hub	Product Model:	HUB3VZW
Test By:	Asher	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

Full Spectrum

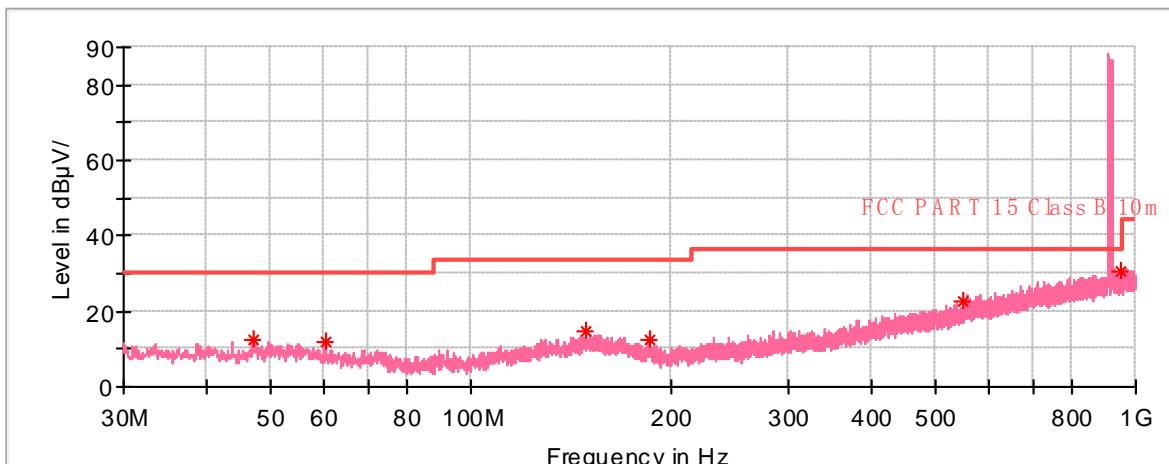

* Preview Result 2V-AVG
* Critical_Freqs AVG
◆ FCC PART 15 Class B 10m

* Preview Result 1V-PK+
* Critical_Freqs PK+
◆ Final_Result QPK

Critical_Freqs


Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
46.926500	12.69	30.00	17.31	100.0	V	45.0	-16.5	9:22:43 - 2024/3/21
60.506500	12.01	30.00	17.99	100.0	V	185.0	-17.1	9:22:43 - 2024/3/21
148.873500	14.84	33.50	18.66	100.0	V	230.0	-15.3	9:22:43 - 2024/3/21
185.345500	12.50	33.50	21.00	100.0	V	252.0	-17.7	9:22:43 - 2024/3/21
551.472000	22.51	36.00	13.49	100.0	V	75.0	-7.8	9:22:43 - 2024/3/21
946.892500	30.79	36.00	5.21	100.0	V	314.0	-0.2	9:23:39 - 2024/3/21

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Skyhawk Hub	Product Model:	HUB3VZW
Test By:	Asher	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

Full Spectrum

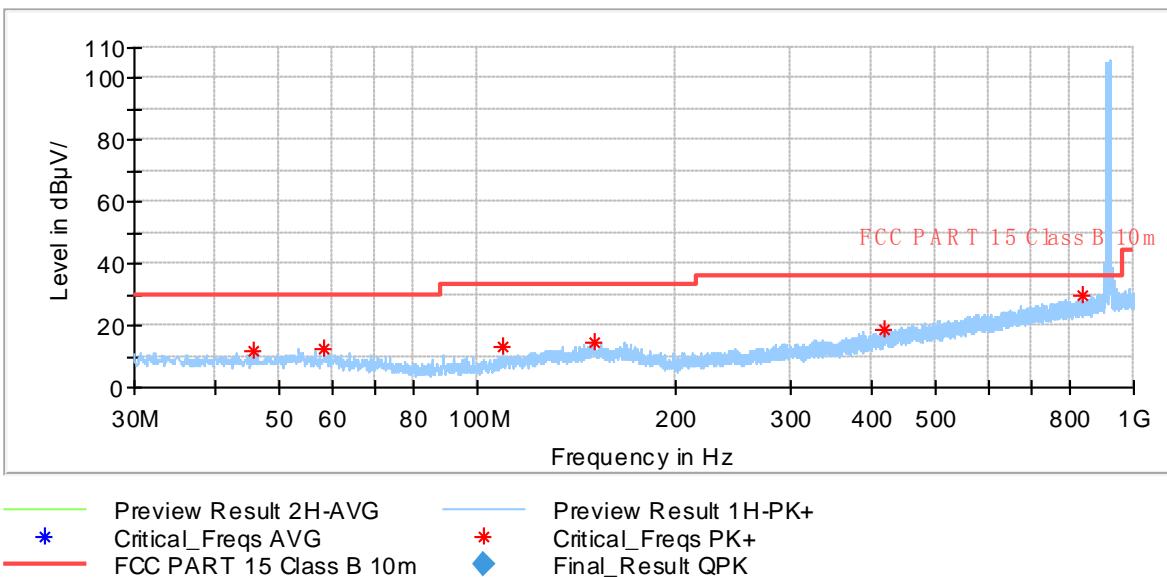

Critical_Freqs


Frequency (MHz)	MaxPeak (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
45.762500	11.84	30.00	18.16	100.0	H	154.0	-16.5	9:35:50 - 2024/3/21
58.372500	12.18	30.00	17.82	100.0	H	340.0	-16.9	9:36:09 - 2024/3/21
109.394500	13.23	33.50	20.27	100.0	H	4.0	-18.6	9:35:54 - 2024/3/21
150.813500	14.70	33.50	18.80	100.0	H	20.0	-15.3	9:35:55 - 2024/3/21
418.194000	18.92	36.00	17.08	100.0	H	179.0	-11.2	9:35:58 - 2024/3/21
832.723500	29.69	36.00	6.31	100.0	H	227.0	-2.2	9:36:01 - 2024/3/21

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Product Name:	Skyhawk Hub	Product Model:	HUB3VZW
Test By:	Robin	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

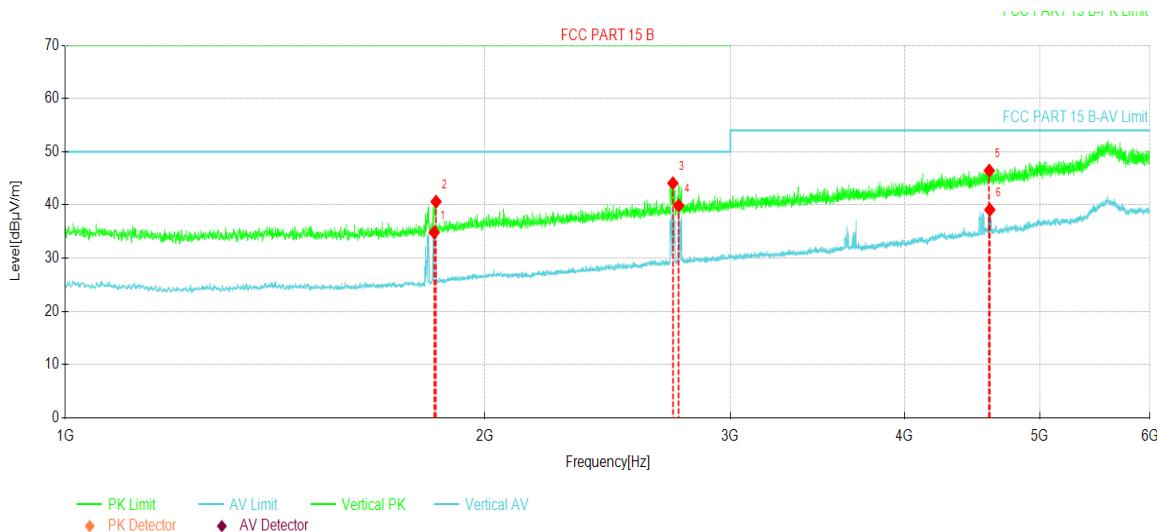


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1839.4799	56.76	34.83	-21.93	50.00	15.17	AV	Vertical
2	1845.1056	62.50	40.62	-21.88	70.00	29.38	PK	Vertical
3	2728.3410	62.42	44.09	-18.33	70.00	25.91	PK	Vertical
4	2754.5943	58.12	39.89	-18.23	50.00	10.11	AV	Vertical
5	4601.7002	57.49	46.44	-11.05	74.00	27.56	PK	Vertical
6	4605.4507	50.13	39.09	-11.04	54.00	14.91	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Skyhawk Hub	Product Model:	HUB3VZW
Test By:	Robin	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

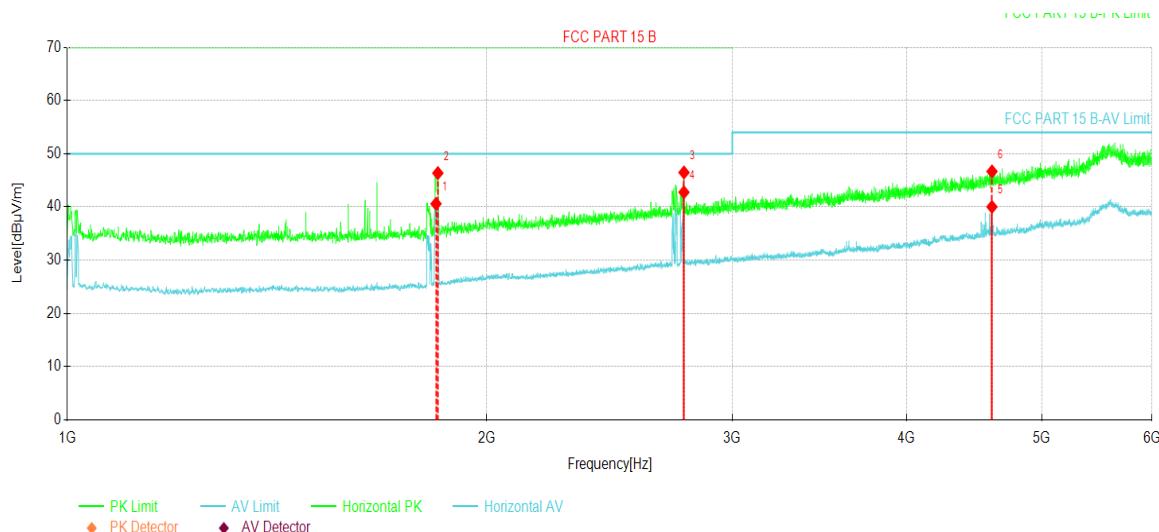

Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Trace	Polarity
1	1838.8549	62.52	40.59	-21.93	50.00	9.41	AV	Horizontal
2	1844.4806	68.25	46.36	-21.89	70.00	23.64	PK	Horizontal
3	2769.5962	64.65	46.48	-18.17	70.00	23.52	PK	Horizontal
4	2769.5962	60.93	42.76	-18.17	50.00	7.24	AV	Horizontal
5	4606.0758	51.06	40.02	-11.04	54.00	13.98	AV	Horizontal
6	4606.7008	57.71	46.67	-11.04	74.00	27.33	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

-----End of report-----