



Microtest
微 测 检 测

Test Report

Report No.: MTi220420004-01E4
Date of issue: 2022-09-23
Applicant: Lathem Time Corporation
Product: Time Clock
Model(s): PCEXPRESS
FCC ID: UP3-PCEXPRESS

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>



Instructions

1. The report shall not be partially reproduced without the written consent of the laboratory;
2. The test results of this report are only responsible for the samples submitted ;
3. This report is invalid without the seal and signature of the laboratory;
4. This report is invalid if transferred, altered or tampered with in any form without authorization ;
5. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.



Table of Contents

1	GENERAL INFORMATION	6
1.1	DESCRIPTION OF EUT	6
1.2	OPERATION CHANNEL LIST	7
1.3	TEST CHANNEL LIST	7
1.4	ANCILLARY EQUIPMENT LIST	8
1.5	DESCRIPTION OF SUPPORT UNITS	8
2	SUMMARY OF THE TEST RESULTS	9
3	TEST FACILITIES AND ACCREDITATIONS	10
3.1	TEST LABORATORY	10
3.2	ENVIRONMENTAL CONDITIONS	10
3.3	MEASUREMENT UNCERTAINTY	11
3.4	TEST SOFTWARE	11
4	EQUIPMENT LIST	12
5	TEST RESULTS	13
5.1	ANTENNA REQUIREMENT	13
5.1.1	Standard requirement	13
5.1.2	EUT Antenna	13
5.2	RF OUTPUT POWER	14
5.2.1	Limit	14
5.2.2	Test procedure	14
5.2.3	Test setup	14
5.2.4	Test results	15
5.3	POWER LINE CONDUCTED EMISSION	16
5.3.1	Limits	16
5.3.2	Test setup	16
5.3.3	Test procedure	17
5.3.4	Test results	18
5.4	26dB EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	22
5.4.1	Limit	22
5.4.2	Test procedure	22
5.4.3	Test setup	22
5.4.4	Test results	23
5.5	6dB BANDWIDTH	29
5.5.1	Limit	29
5.5.2	Test procedure	29
5.5.3	Test setup	29
5.5.4	Test results	29
5.6	CONDUCTED SPURIOUS EMISSION	33
5.6.1	Limits	33
5.6.2	Test setup	33
5.6.3	Test procedure	33
5.6.4	Test results	34
5.7	CONDUCTED BAND EDGE	42
5.7.1	Limits	42
5.7.2	Test setup	42
5.7.3	Test procedure	42
5.7.4	Test results	43
5.8	RADIATED SPURIOUS EMISSION	47
5.8.1	Radiated Emission Limits	47
5.8.2	Test procedure	49



5.8.3	Test setup	49
5.8.4	Test results.....	51
5.9	POWER SPECTRAL DENSITY	66
5.9.1	Limit	66
5.9.2	Test procedure	66
5.9.3	Test setup	67
5.9.4	Test results.....	67
5.10	FREQUENCY STABILITY MEASUREMENT	73
5.10.1	Limit.....	73
5.10.2	Test Procedures	73
5.10.3	Test Setup Layout.....	73
5.10.4	EUT Operation during Test.....	73
5.10.5	TEST RESULTS	74
5.11	DUTY CYCLE	80
5.11.1	Limit.....	80
5.11.2	Measuring instruments.....	80
5.11.3	Test setup.....	80
5.11.4	Test procedure.....	80
5.11.5	Test Results	81
PHOTOGRAPHS OF THE TEST SETUP		82
PHOTOGRAPHS OF THE EUT.....		84



TEST RESULT CERTIFICATION	
Applicant's name	Lathem Time Corporation
Address	210 The Bluffs, Suite 107 SW Austell, GA 30168 United States
Manufacturer's Name	SHENZHEN HEROFUN BIO-TECH CO., LTD
Address	West 401, Building A2, TianRui Industrial Park, No. 35 FuYuan 1st Road, XinHe Community, FuHai Street, BaoAn District, Shenzhen, China
Product description	
Product name	Time Clock
Trademark	Lathem
Model Name	PCEXPRESS
Serial Model	N/A
Standards	FCC Part 15.407
Test procedure	ANSI C63.10-2013 KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Date of Test	
Date (s) of performance of tests..... :	2022-04-29 ~ 2022-09-22
Test Result	Pass
This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.	

Testing Engineer

:

Yanice Xie

(Yanice Xie)

Technical Manager

:

Leon Chen

(Leon Chen)

Authorized Signatory

:

Tom Xue

(Tom Xue)



1 General information

1.1 Description of EUT

Equipment:	Time Clock
Model name:	PCEXPRESS
Serial model:	N/A
Model difference:	N/A
Frequency range:	U-NII-1: 5150 MHz to 5250 MHz, U-NII-3: 5725 MHz to 5850 MHz
Modulation type:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/ac;
Transfer rate:	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40):NSS1, MCS0-MCS9 802.11ac(VHT80) :NSS1,MCS0-MCS9
Channel bandwidth:	802.11a: 20 MHz 802.11ac: 20 MHz, 40 MHz, 80MHz
Antenna type:	FPC antenna
Antenna gain:	2.52 dBi
Max. output power:	U-NII-1: 0.95 dBm U-NII-3: -3.8 dBm
Bluetooth version:	V5.0
Hardware version:	V1.0
Software version:	V1.7
Power supply:	Input: DC 12V/1.25A Output: DC 5V/1.5A
Adapter information:	1. Adapter: Model: ADS-25E-12 12015EPCU Input: 100-240V~ 50/60Hz Max 0.7A Output: 12V=1.25A
Battery:	N/A
Serial number:	MTi220420004-01-S0001



1.2 Operation channel list

For U-NII-1:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5120
40	5200	46	5230	--	--
44	5220	--	--	--	--
48	5240	--	--	--	--

For U-NII-3:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	--	--
157	5785	--	--	--	--
161	5805	--	--	--	--
165	5825	--	--	--	--

1.3 Test channel list

U-NII-1 (5150 - 5250 MHz)			U-NII-3(5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	149	Low	5745
44	Mid	5220	157	Mid	5785
48	High	5240	165	High	5825

80 MHz	
Channel Number	Frequency (MHz)
42	5210

For 802.11ac (HT40)

U-NII-1 (5150 - 5250 MHz)			U-NII-3(5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	151	Low	5755
46	High	5230	159	High	5795

80 MHz	
Channel Number	Frequency (MHz)
155	5775



1.4 Ancillary equipment list

Equipment	Model	S/N	Manufacturer	Certificate type
/	/	/	/	/

1.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/
/	/	/	/	/	/

Note:

- (1)The support equipment was authorized by Declaration of Confirmation.
- (2)For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2 Summary of the Test Results

Test procedures according to the technical standards:

No.	Standard Section	Test Item	Result	Remark
1	15.203/15.407	Antenna Requirement	Pass	
2	15.407(a)	RF Output Power	Pass	
3	15.207	Power Line Conducted Emission	Pass	
4	15.407(a)	26dB Emission Bandwidth and Occupied bandwidth	Pass	
5	15.407(e)	6 dB bandwidth	Pass	
6	15.407(a)	Power Spectral Density	Pass	
7	15.407(b) 15.209	Radiation Spurious Emission	Pass	



3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.
FCC Registration No.:	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa



3.3 Measurement uncertainty

The reported uncertainty of measurement $y \pm U$ where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3.4 Test software

Software Name	Manufacturer	Model	Version
Bluetooth and WiFi Test System	Shenzhen JS tonscond co., ltd	JS1120-3	2.5.77.0418



4 Equipment list

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E043	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2022/05/05	2023/05/04
MTI-E044	TRILOG Broadband Antenna	schwarbeck	VULB 9163	9163-1338	2021/05/30	2023/05/29
MTI-E047	Amplifier	Hewlett-Packard	8447F	3113A06150	2022/05/05	2023/05/04
MTI-E089	ESG Vector Signal Generator	Agilent	N5182A	MY49060455	2022/05/05	2023/05/04
MTI-E058	ESG Series Analog Signal Generator	Agilent	E4421B	GB40051240	2022/05/05	2023/05/04
MTI-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2022/05/05	2023/05/04
MTI-E066	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2022/05/05	2023/05/04
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2022/05/05	2023/05/04
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2022/05/05	2023/05/04
MTI-E045	Double Ridged Broadband Horn Antenna	schwarbeck	BBHA 9120D	9120D-2278	2021/05/30	2023/05/29
MTI-E021	EMI Test Receiver	Rohde&schwarz	ESCS30	100210	2022/05/05	2023/05/04
MTI-E022	Pulse Limiter	Schwarzbeck	VSTD 9561-F	00679	2022/05/05	2023/05/04
MTI-E023	Artificial mains network	Schwarzbeck	NSLK 8127	NSLK 8127 #841	2022/05/05	2023/05/04
MTI-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519B	00044	2021/05/30	2023/05/29
MTI-E048	Amplifier	Agilent	8449B	3008A02400	2022/05/05	2023/05/04
MTI-E072	Thermometer Clock Humidity Monitor	-	HTC-1	/	2022/05/05	2023/05/04
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D8060152	2022/05/05	2023/05/04
Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).						



5 Test Results

5.1 Antenna requirement

5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.1.2 EUT Antenna

The antenna is FPC antenna, which was permanently affixed to the device and un-replaced, complies with 15.203. In addition, the maximum antenna gain is 2.52 dBi.



5.2 RF output power

5.2.1 Limit

For the 5.15-5.25 GHz band

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz band

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the band 5.725-5.85 GHz

The maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.2 Test procedure

The maximum AVG conducted output power may be measured using a broadband Average RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.

5.2.3 Test setup



5.2.4 Test results

Test Mode	Frequency [MHz]	AVG Power [dBm]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	5180	0.27	0.12	0.39	≤23.98	PASS
	5200	0.23	0.12	0.35	≤23.98	PASS
	5240	0.49	0.12	0.61	≤23.98	PASS
	5745	-4.34	0.12	-4.22	≤30.00	PASS
	5785	-5.38	0.12	-5.26	≤30.00	PASS
	5825	-5.97	0.12	-5.85	≤30.00	PASS
11AC20SISO	5180	-0.11	0.16	0.05	≤23.98	PASS
	5200	-0.35	0.16	-0.19	≤23.98	PASS
	5240	-0.06	0.16	0.1	≤23.98	PASS
	5745	-4.21	0.16	-4.05	≤30.00	PASS
	5785	-5.31	0.16	-5.15	≤30.00	PASS
	5825	-5.93	0.13	-5.8	≤30.00	PASS
11AC40SISO	5190	-0.35	0.32	-0.03	≤23.98	PASS
	5230	-0.30	0.32	0.02	≤23.98	PASS
	5755	-4.12	0.32	-3.8	≤30.00	PASS
	5795	-5.13	0.26	-4.87	≤30.00	PASS
11AC80SISO	5210	0.45	0.50	0.95	≤23.98	PASS
	5775	-4.35	0.50	-3.85	≤30.00	PASS



5.3 Power line conducted emission


5.3.1 Limits

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note

1. The tighter limit applies at the band edges.
2. The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.3.2 Test setup

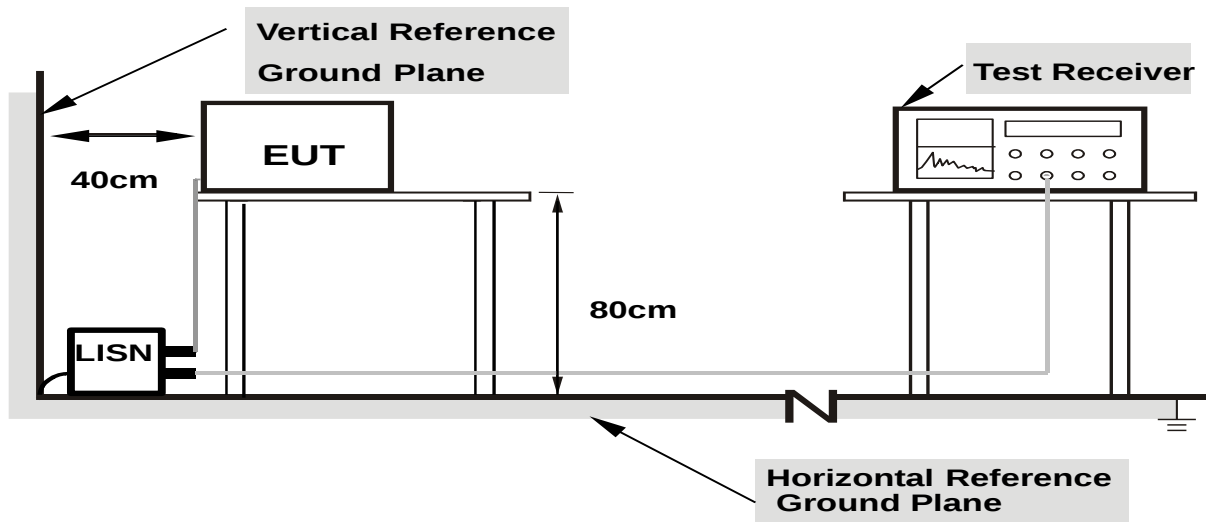

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes



5.3.3 Test procedure

a. EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b. The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- c. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f. LISN at least 80 cm from nearest part of EUT chassis.

For the actual test configuration, please refer to the related Item –EUT Test Photos.




5.3.4 Test results

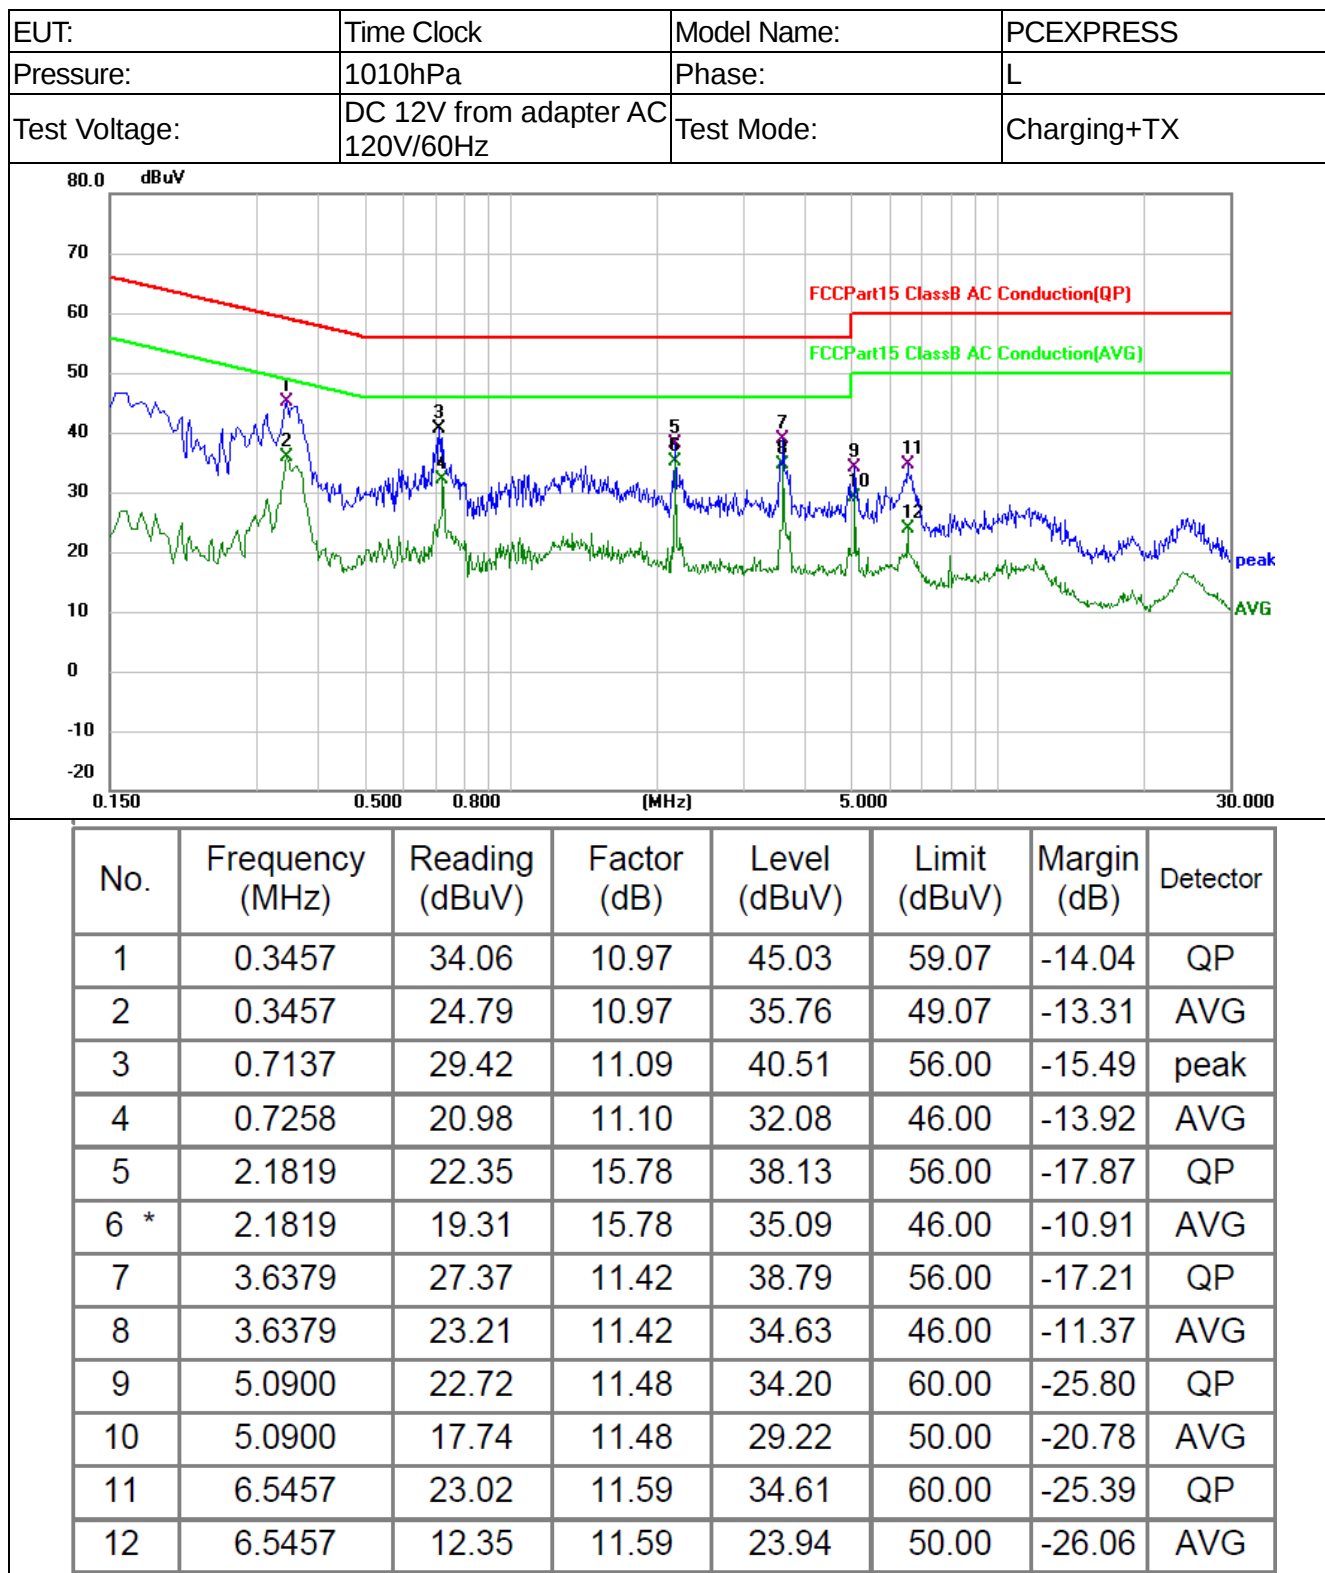




EUT:	Time Clock	Model Name:	PCEXPRESS
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 12V from adapter AC 120V/60Hz	Test Mode:	Charging+TX

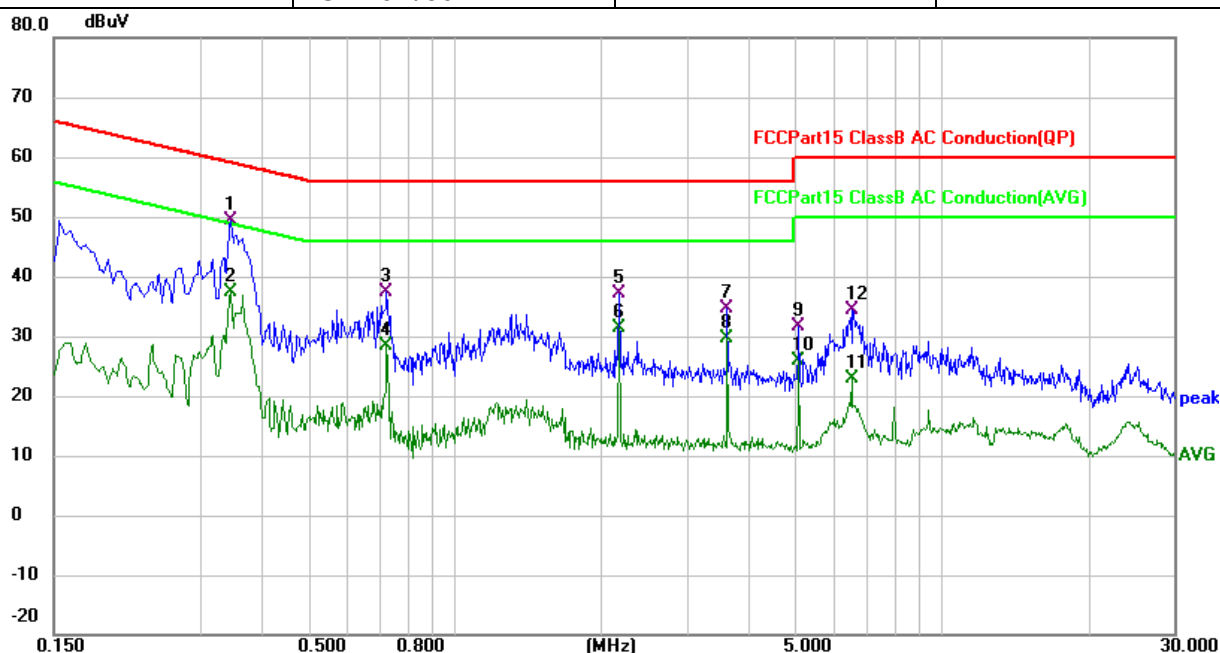

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.3457	38.43	10.89	49.32	59.07	-9.75	QP
2	0.3457	26.49	10.89	37.38	49.07	-11.69	AVG
3	0.7258	26.19	11.09	37.28	56.00	-18.72	QP
4	0.7258	17.39	11.09	28.48	46.00	-17.52	AVG
5	2.1819	21.27	15.76	37.03	56.00	-18.97	QP
6	2.1819	15.69	15.76	31.45	46.00	-14.55	AVG
7	3.6339	23.33	11.38	34.71	56.00	-21.29	QP
8	3.6339	18.37	11.38	29.75	46.00	-16.25	AVG
9	5.0900	20.25	11.39	31.64	60.00	-28.36	QP
10	5.0900	14.46	11.39	25.85	50.00	-24.15	AVG
11	6.5419	11.49	11.39	22.88	50.00	-27.12	AVG
12	6.5739	22.88	11.39	34.27	60.00	-25.73	QP




EUT:	Time Clock	Model Name:	PCEXPRESS
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 12V from adapter AC 240V/60Hz	Test Mode:	Charging+TX

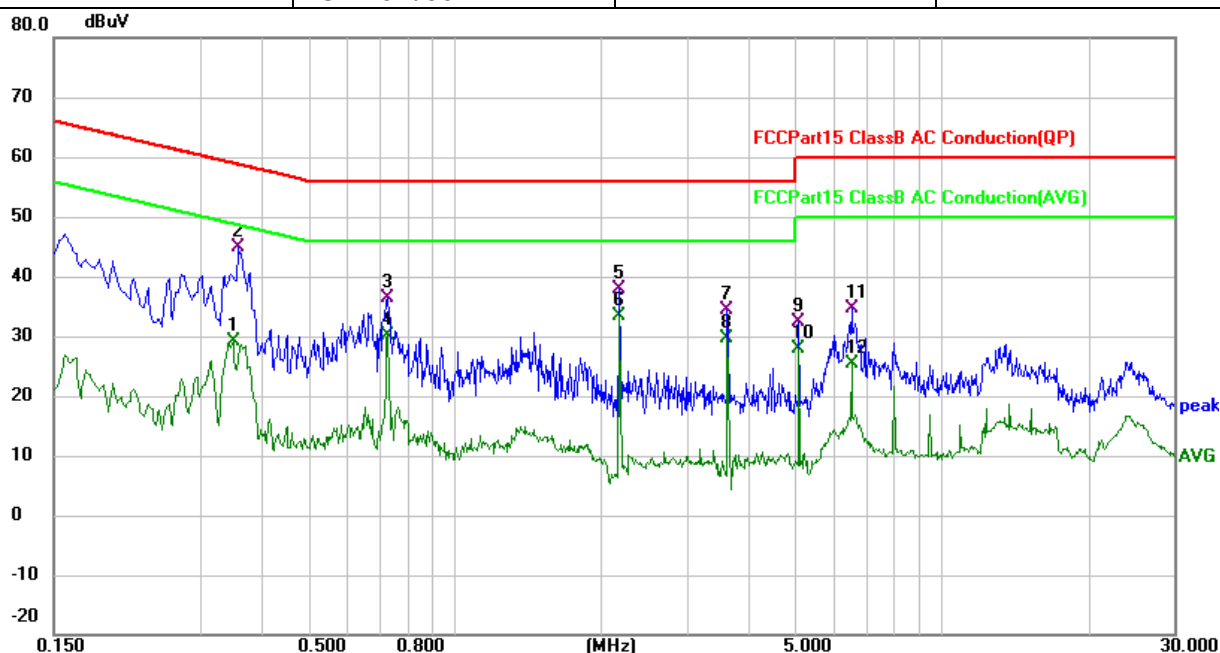

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3500	18.08	10.98	29.06	48.96	-19.90	AVG
2	0.3578	33.96	10.97	44.93	58.78	-13.85	QP
3	0.7300	25.19	11.10	36.29	56.00	-19.71	QP
4	0.7300	19.10	11.10	30.20	46.00	-15.80	AVG
5	2.1819	22.08	15.78	37.86	56.00	-18.14	QP
6 *	2.1819	17.57	15.78	33.35	46.00	-12.65	AVG
7	3.6379	23.06	11.42	34.48	56.00	-21.52	QP
8	3.6379	18.31	11.42	29.73	46.00	-16.27	AVG
9	5.0937	20.80	11.49	32.29	60.00	-27.71	QP
10	5.0937	16.49	11.49	27.98	50.00	-22.02	AVG
11	6.5500	23.13	11.59	34.72	60.00	-25.28	QP
12	6.5500	13.77	11.59	25.36	50.00	-24.64	AVG



EUT:	Time Clock	Model Name:	PCEXPRESS
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 12V from adapter AC 240V/60Hz	Test Mode:	Charging+TX

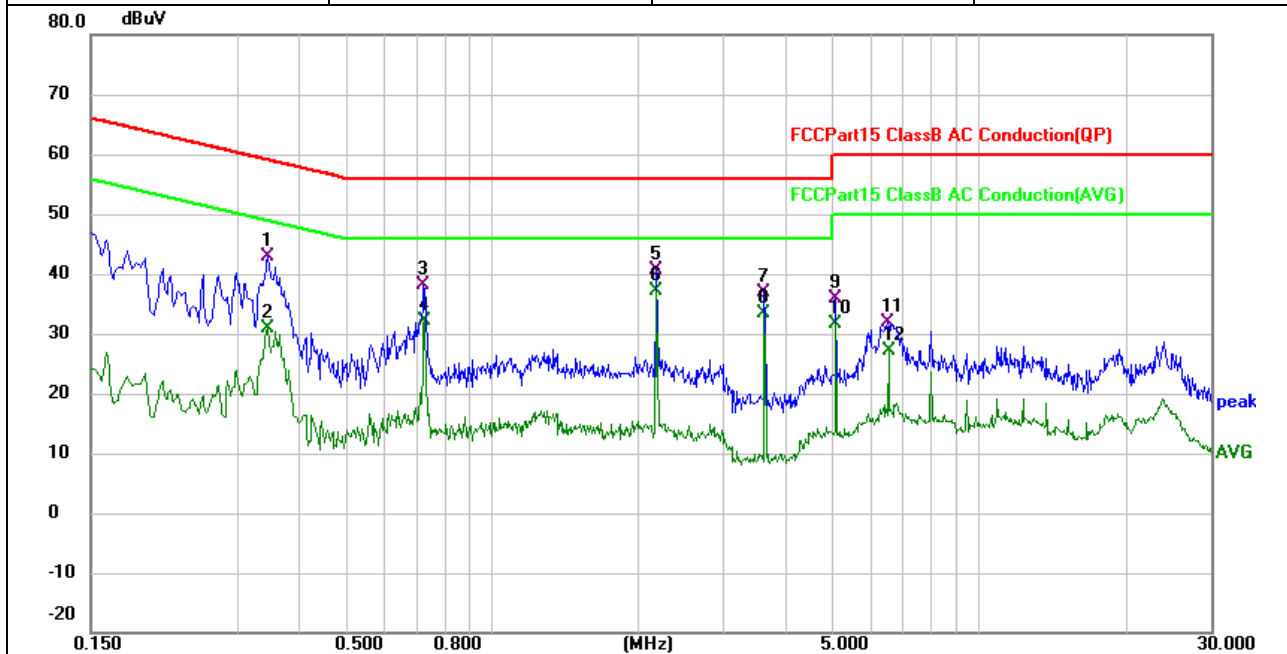

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3457	32.04	10.89	42.93	59.07	-16.14	QP
2	0.3457	20.07	10.89	30.96	49.07	-18.11	AVG
3	0.7258	27.00	11.09	38.09	56.00	-17.91	QP
4	0.7300	21.00	11.09	32.09	46.00	-13.91	AVG
5	2.1819	24.86	15.76	40.62	56.00	-15.38	QP
6 *	2.1819	21.41	15.76	37.17	46.00	-8.83	AVG
7	3.6379	25.46	11.38	36.84	56.00	-19.16	QP
8	3.6379	21.99	11.38	33.37	46.00	-12.63	AVG
9	5.0937	24.42	11.39	35.81	60.00	-24.19	QP
10	5.0937	20.26	11.39	31.65	50.00	-18.35	AVG
11	6.5179	20.49	11.39	31.88	60.00	-28.12	QP
12	6.5457	15.79	11.39	27.18	50.00	-22.82	AVG

Note:

1. All the mode has been tested for this test, just incarnate report the worst mode 11a CH36 data.
2. Emission Level = Reading Level + Factor, Margin = Emission Level - Limit, Factor = LISN modulus + Cable Loss.



5.4 26dB Emission Bandwidth and Occupied bandwidth

5.4.1 Limit

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier

5.4.2 Test procedure

26d Emission bandwidth

Set RBW = approximately 1% of the emission bandwidth.

Set VBW $\geq 3 \times \text{RBW}$

Detector = Peak.

Trace mode = Max hold.

Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

Set Span = 1.5 times to 5.0 times the OBW


Set RBW = 1% to 5% of the OBW.

Set VBW $\geq 3 \times \text{RBW}$, Detector = Peak.

Trace mode = Max hold.

Use the 99% power bandwidth function of the instrument.

5.4.3 Test setup

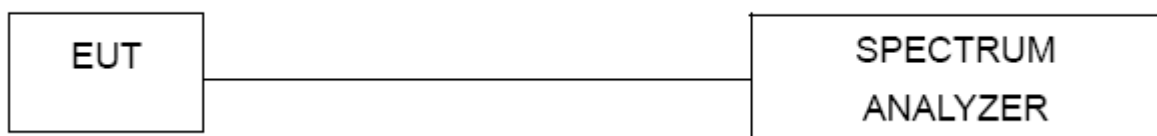



5.4.4 Test results

For U-NII-1

Channel	Test Channel	Frequency (MHz)	26dB bandwidth (MHz)	99% bandwidth	Limit (kHz)	Result
11a	CH36	5180	20.99	16.569	/	Pass
11a	CH40	5200	20.84	16.511	/	Pass
11a	CH48	5240	20.89	16.505	/	Pass

Channel	Test Channel	Frequency (MHz)	26dB bandwidth (MHz)	99% bandwidth	Limit (kHz)	Result
11ac (HT20)	CH36	5180	21.06	17.697	/	Pass
11ac (HT20)	CH40	5200	21.25	17.695	/	Pass
11ac (HT20)	CH48	5240	21.28	17.702	/	Pass
11ac (HT40)	CH38	5190	39.83	36.182	/	Pass
11ac (HT40)	CH46	5230	39.51	36.108	/	Pass
11ac (HT80)	CH42	5210	80.89	75.329	/	Pass



For U-NII-3

Channel	Test Channel	Frequency (MHz)	99% bandwidth	Limit (kHz)	Result
11a	CH149	5745	16.582	/	Pass
11a	CH157	5785	16.661	/	Pass
11a	CH165	5825	16.644	/	Pass

Channel	Test Channel	Frequency (MHz)	99% bandwidth	Limit (kHz)	Result
11ac (HT20)	CH149	5745	17.746	/	Pass
11ac (HT20)	CH157	5785	17.739	/	Pass
11ac (HT20)	CH165	5825	17.781	/	Pass
11ac (HT40)	CH151	5755	36.278	/	Pass
11ac (HT40)	CH159	5795	36.303	/	Pass
11ac (HT80)	CH155	5775	75.902	/	Pass




Test plots:

For U-NII-1


11a CH36



11a CH40

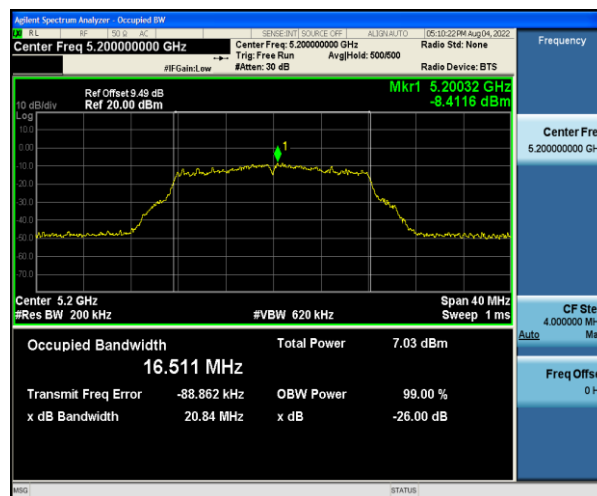


11a CH48

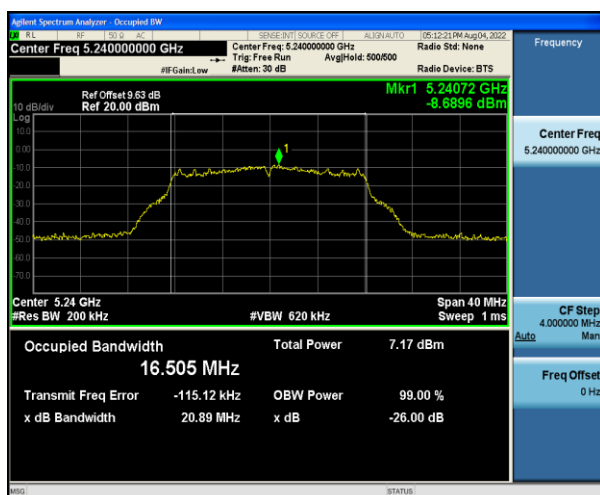


11ac (HT20) CH36



11ac (HT20) CH40

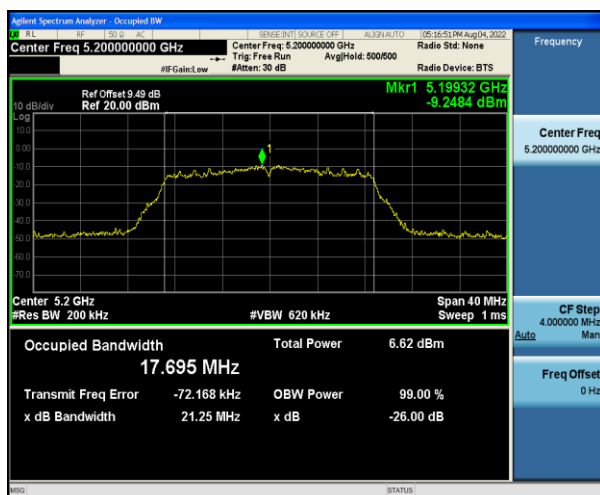


11ac (HT20) CH48

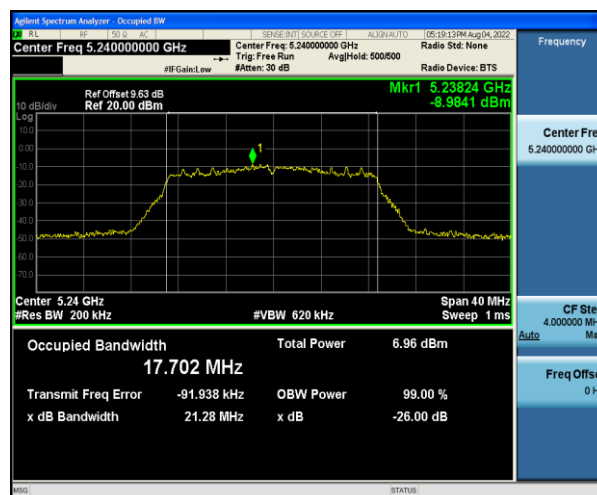





11ac (HT40) CH38

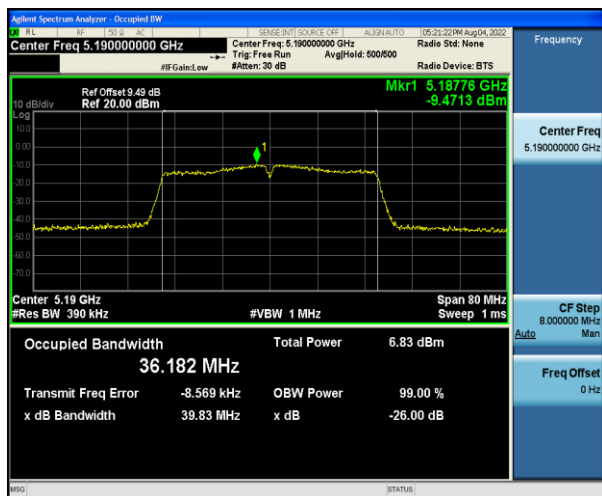

11ac (HT40) CH46

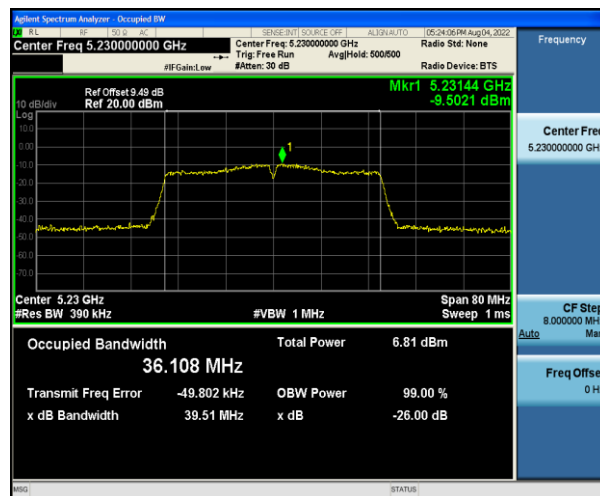


11ac (HT80) CH42

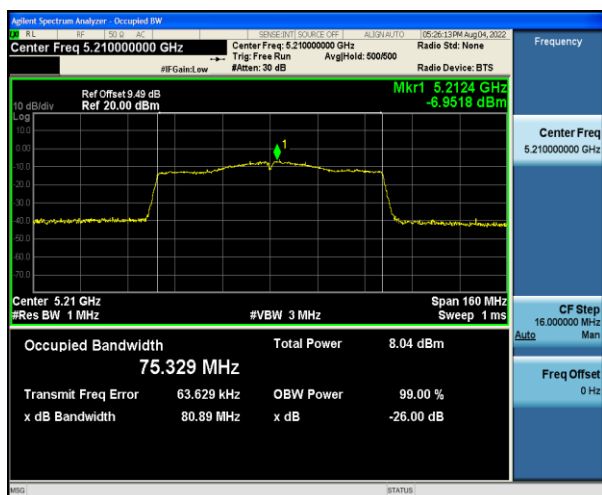


For U-NII-3

11a CH149

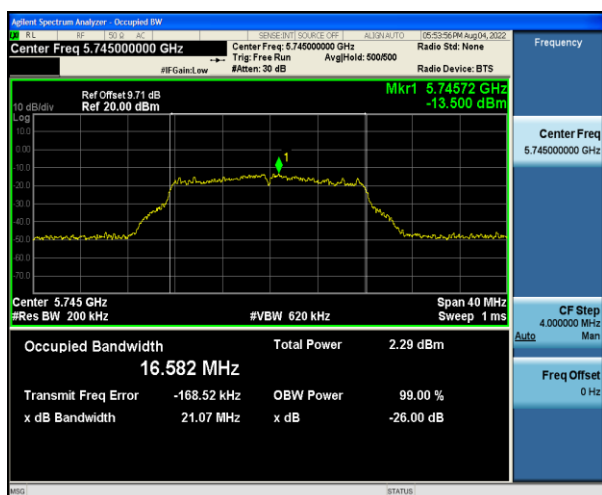


11a CH157

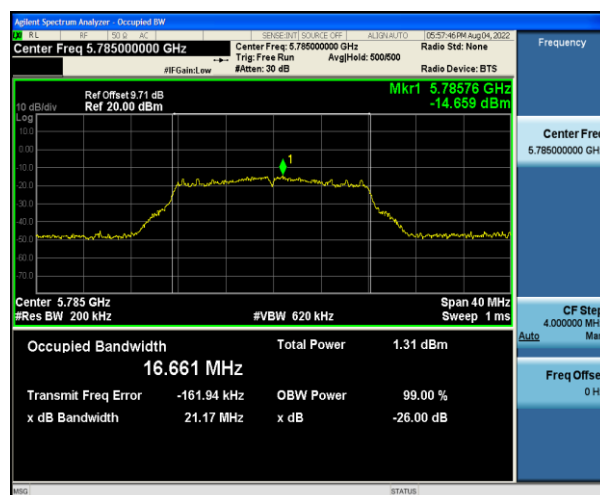





11a CH165

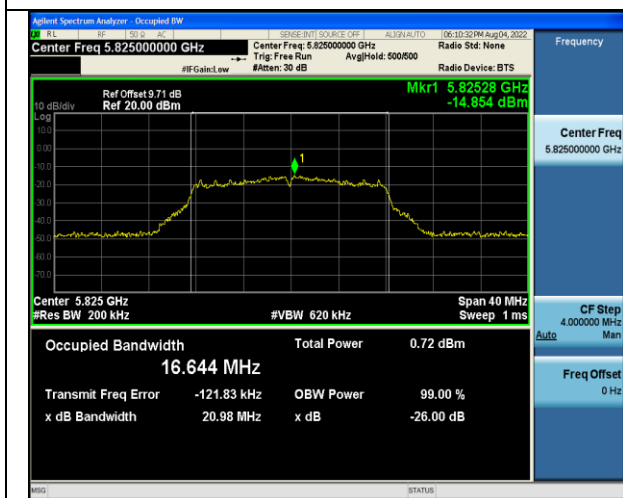


11ac (HT20) CH149

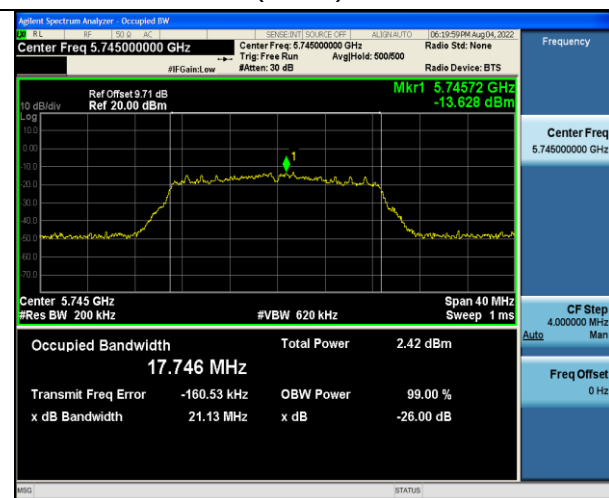


11ac (HT20) CH157

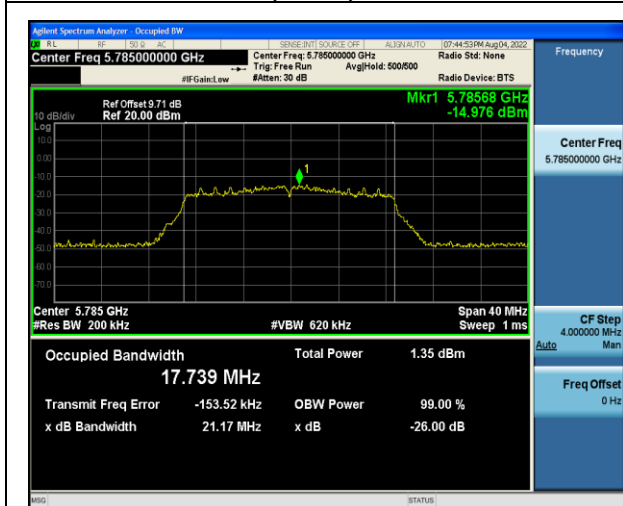


11ac(HT20) CH165

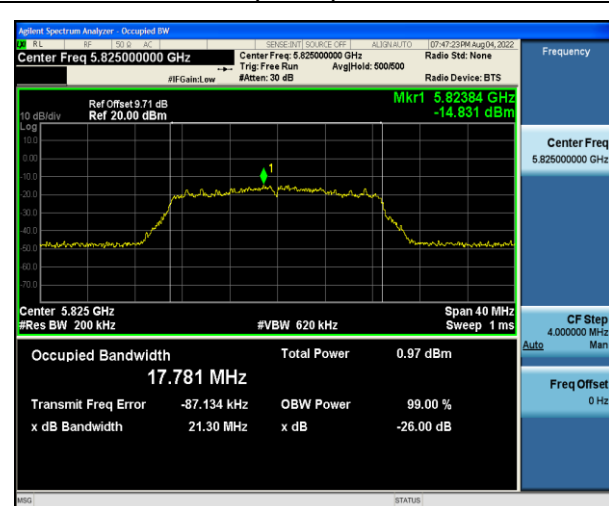


11ac(HT40) CH151

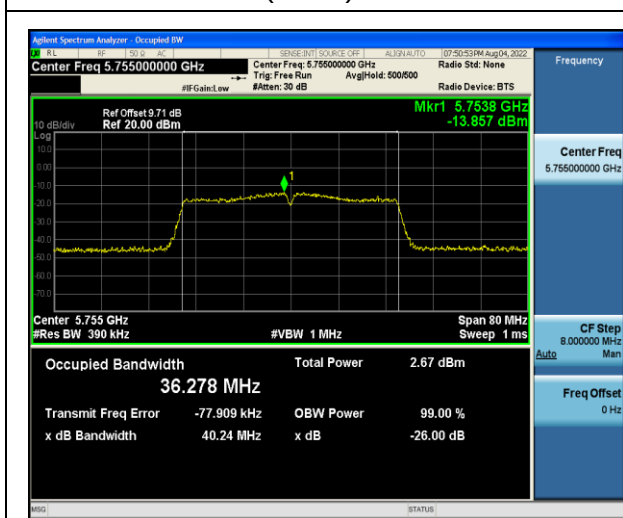

11ac(HT40) CH159

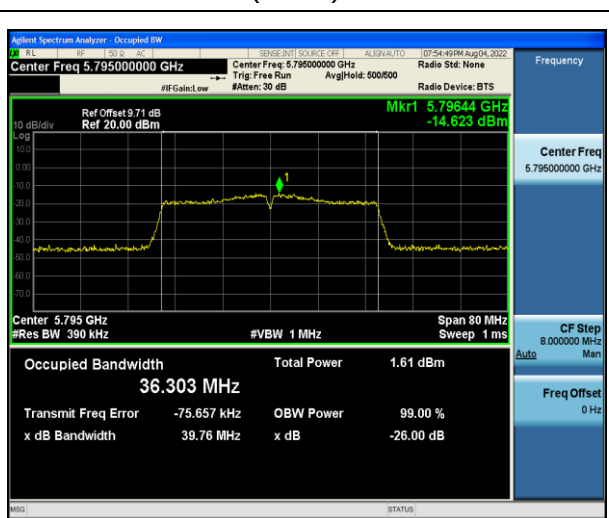

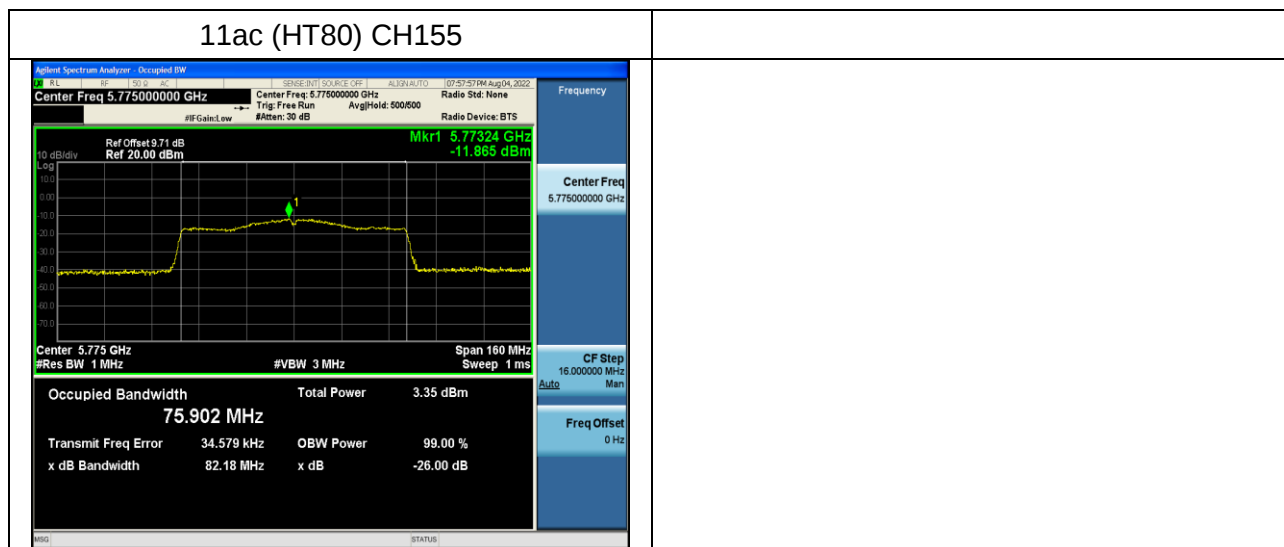



5.5 6dB Bandwidth


5.5.1 Limit

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier

5.5.2 Test procedure

1. Set RBW= 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

5.5.3 Test setup

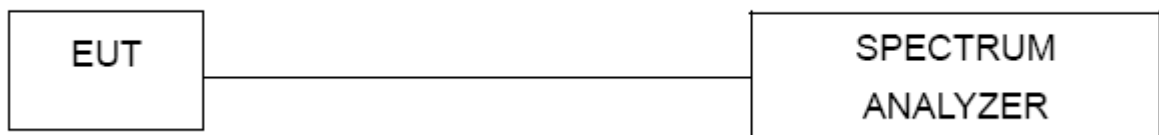

5.5.4 Test results



For U-NII-3


Channel	Test Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
11a	CH149	5745	15.64	500	Pass
11a	CH157	5785	15.94	500	Pass
11a	CH165	5825	16.03	500	Pass

Channel	Test Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
11ac (HT20)	CH149	5745	16.08	500	Pass
11ac (HT20)	CH157	5785	17.16	500	Pass
11ac (HT20)	CH165	5825	16.94	500	Pass
11ac (HT40)	CH151	5755	35.21	500	Pass
11ac (HT40)	CH159	5795	35.19	500	Pass
11ac (HT80)	CH155	5775	75.16	500	Pass




Test plots:

For U-NII-3

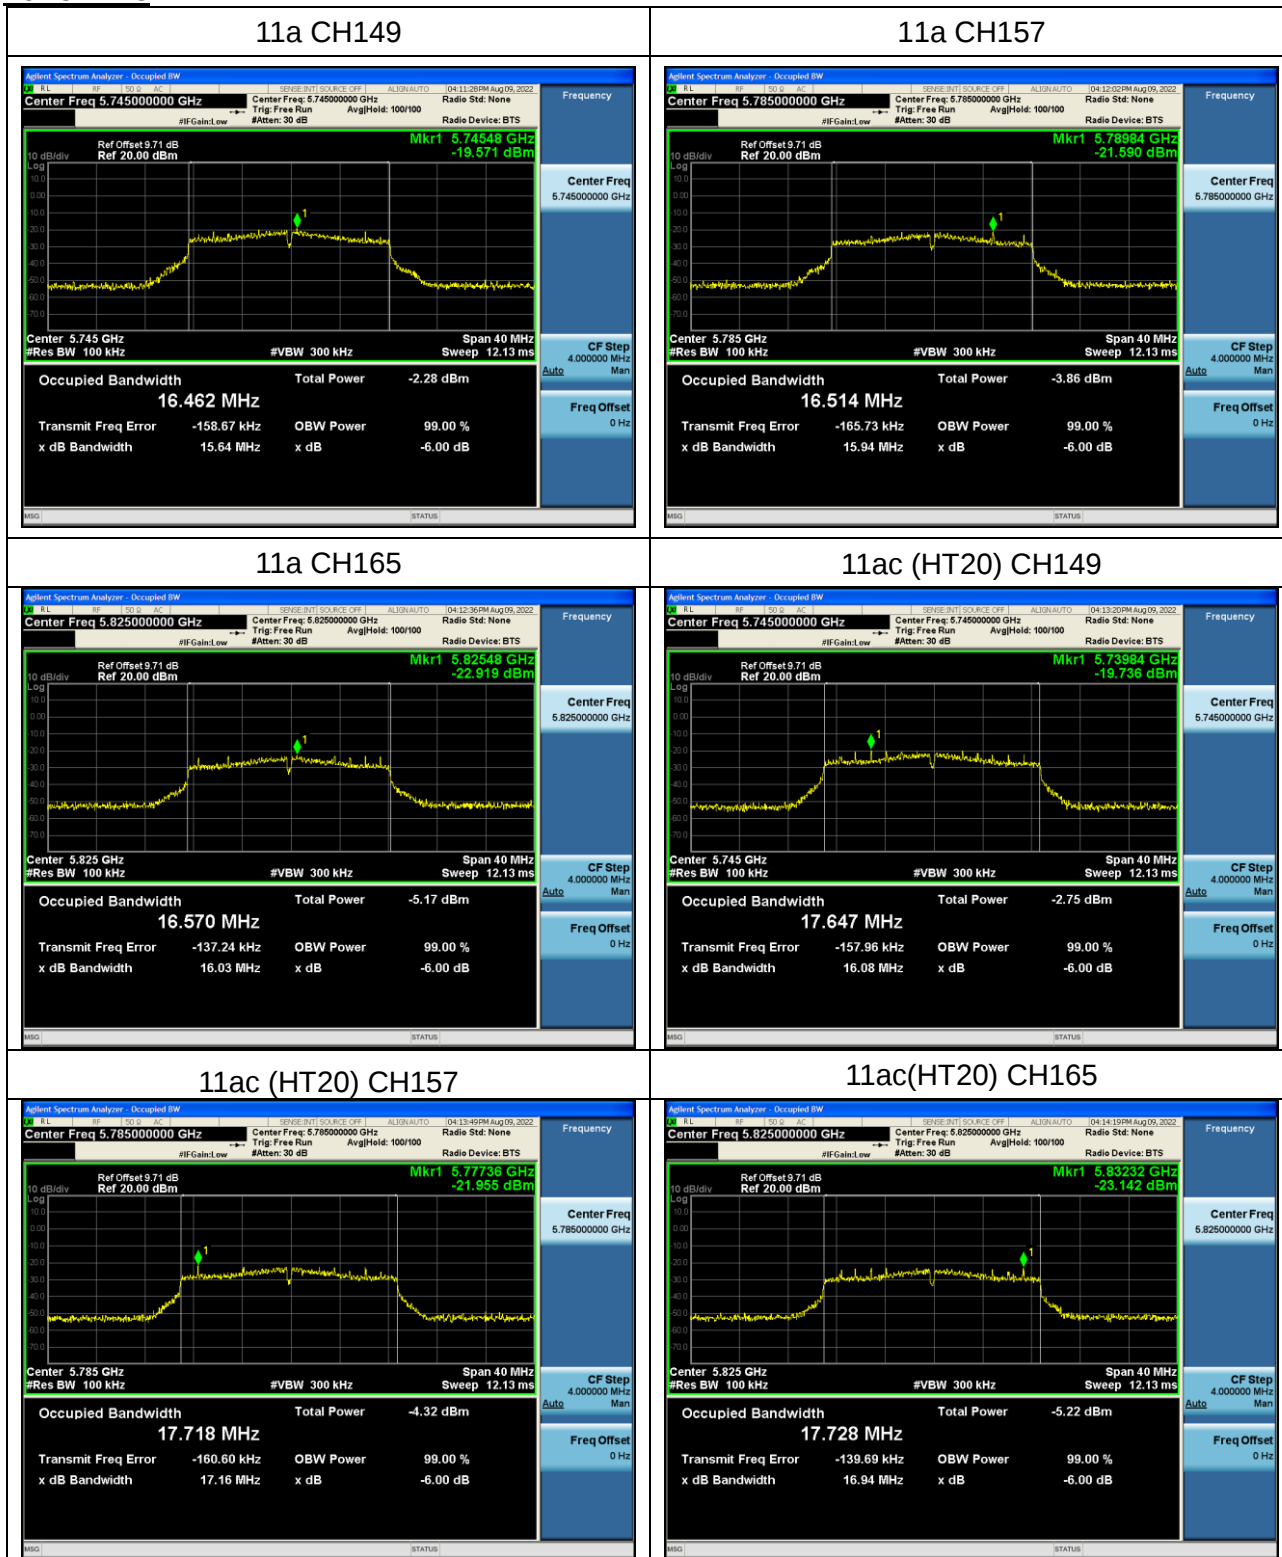





11ac(HT40) CH151

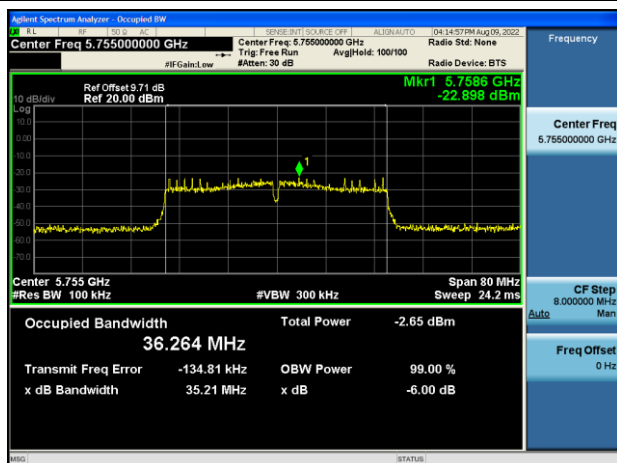

11ac(HT40) CH159

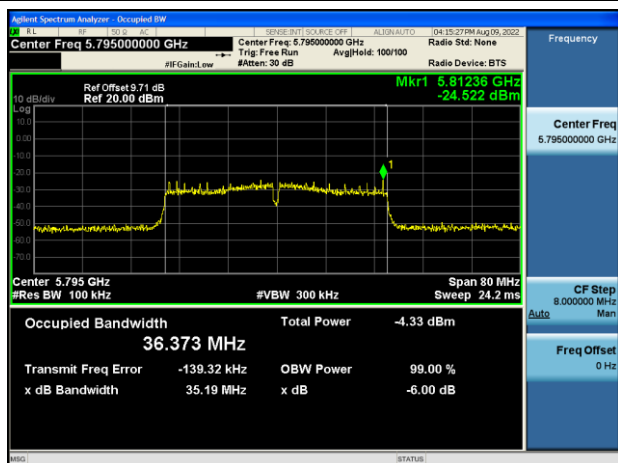

11ac(HT80) CH155

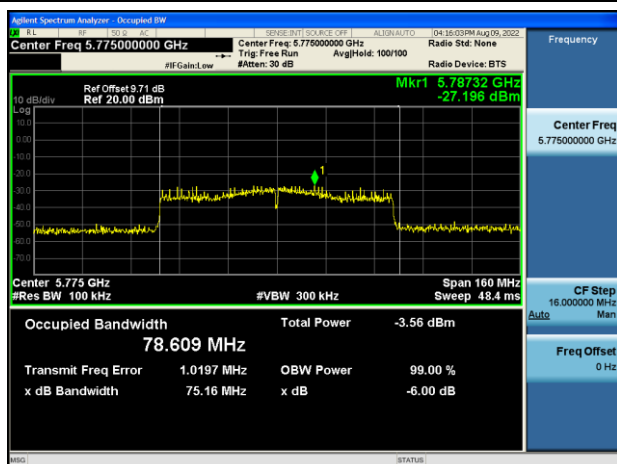



5.6 Conducted spurious emission

5.6.1 Limits

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

Frequency Band (MHz)	Limit
5150 - 5250	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5250 - 5350	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5470 - 5725	Outside of the 5.47-5.725 GHz band: e.i.r.p. -27 dBm
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.6.2 Test setup



5.6.3 Test procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize

NOTE: Two transmit chains had been tested, the ANT A was the worst case and record in the test report.

5.6.4 Test results


For U-NII-1

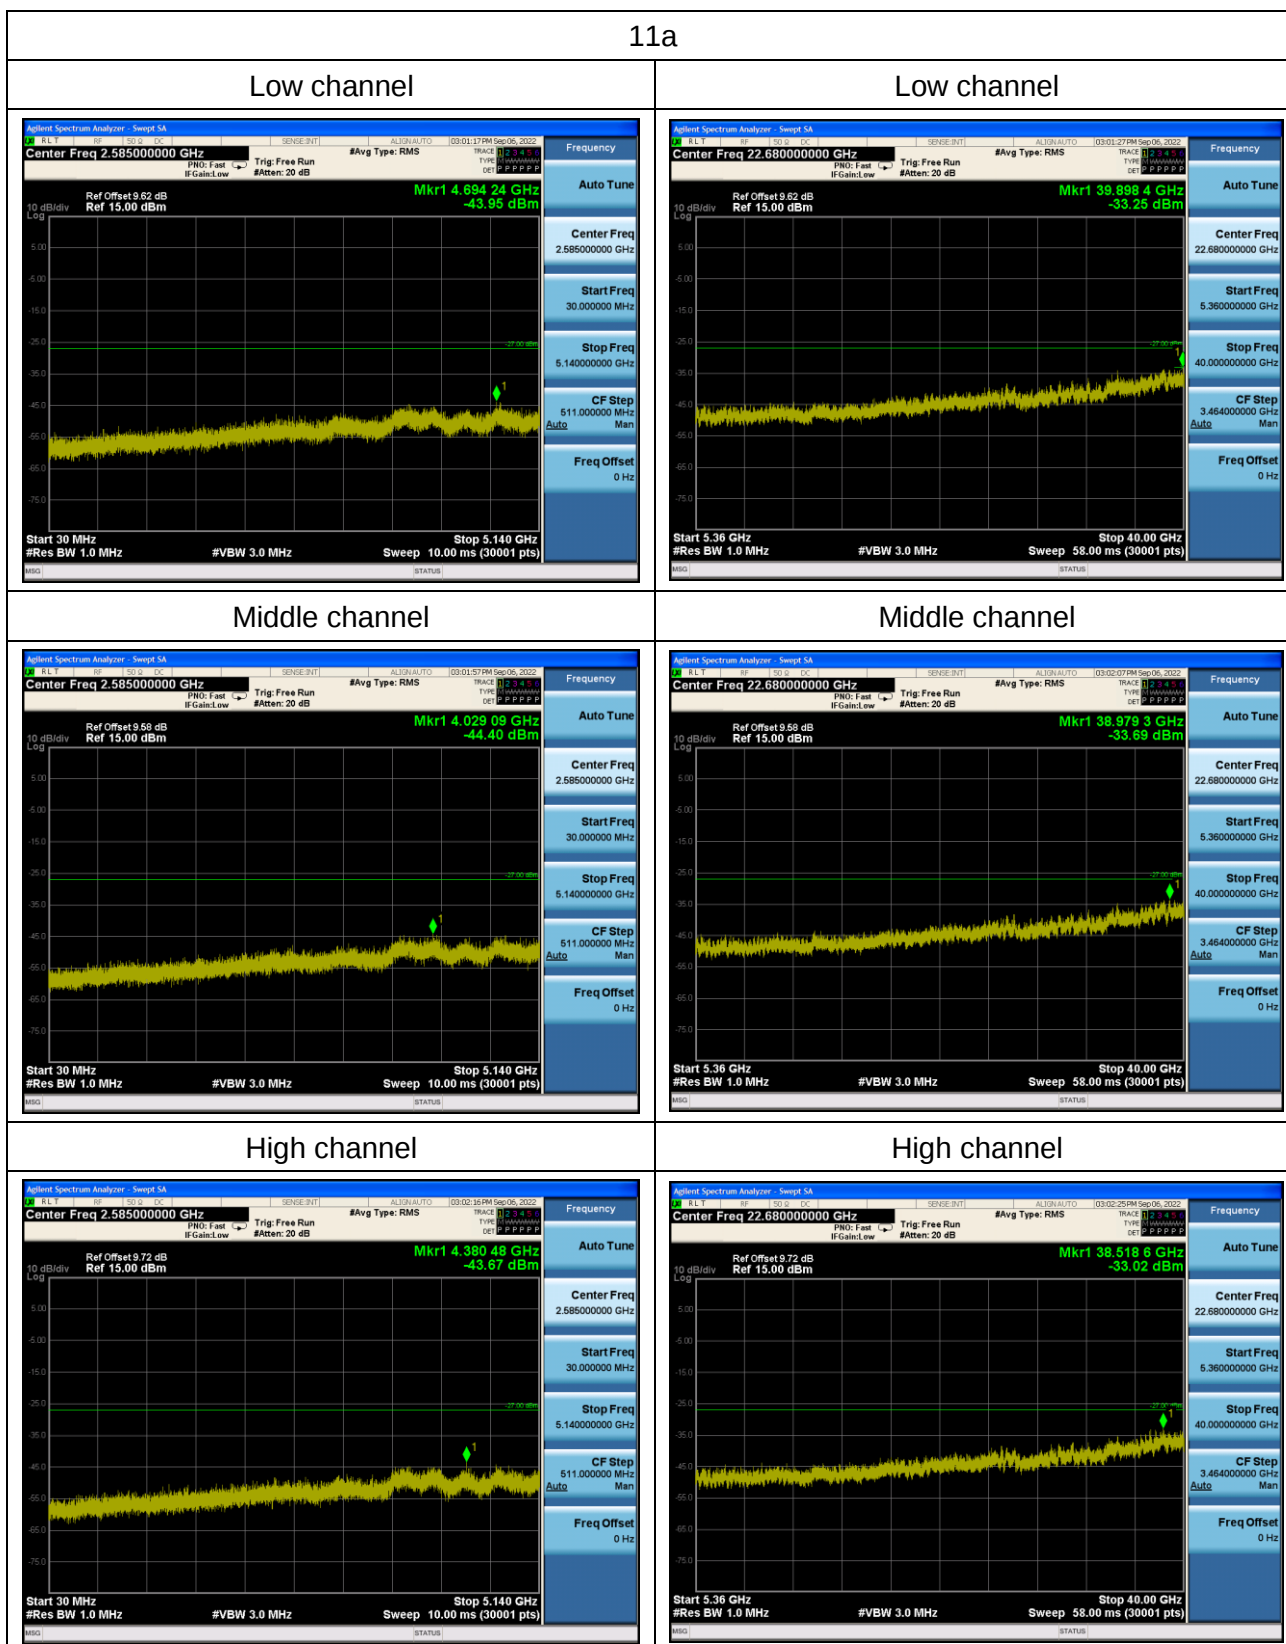




11ac20


Low channel

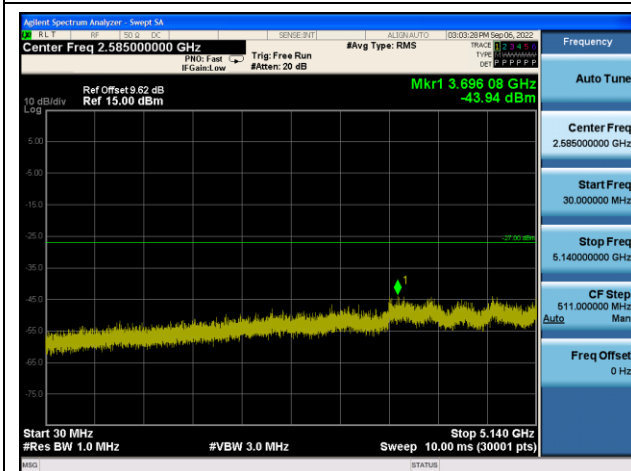


Low channel

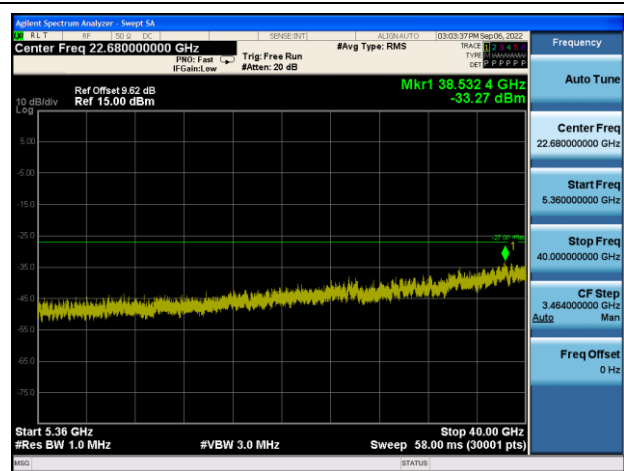


Middle channel

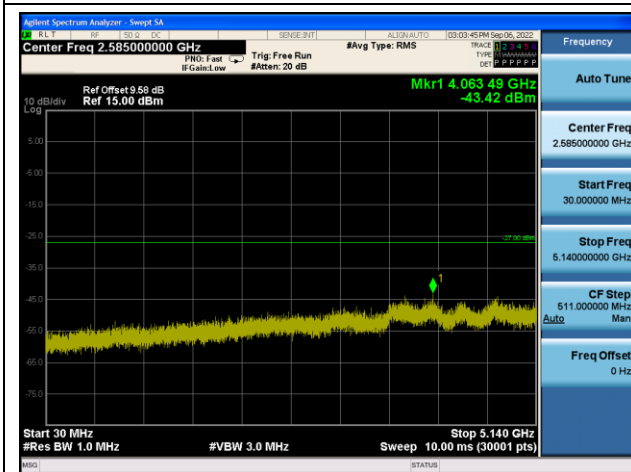


Middle channel

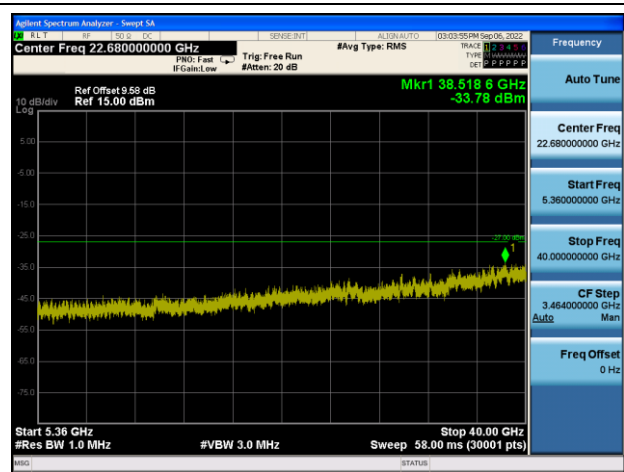



High channel

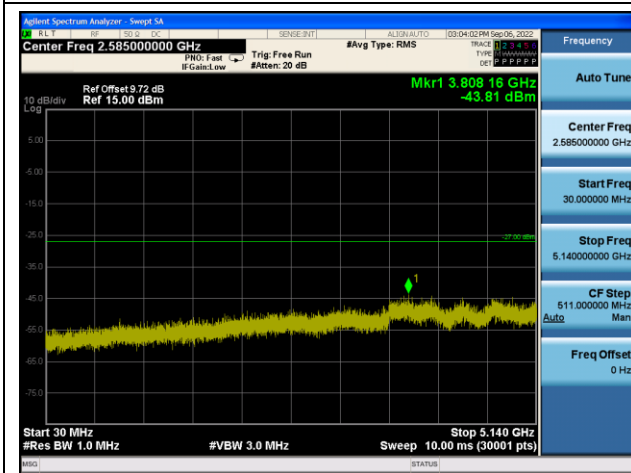

High channel

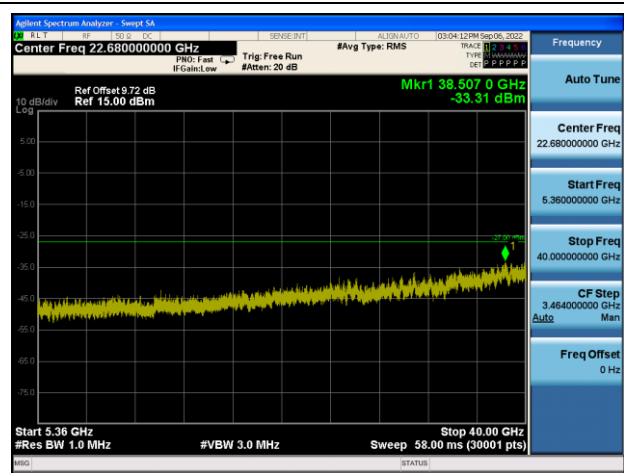

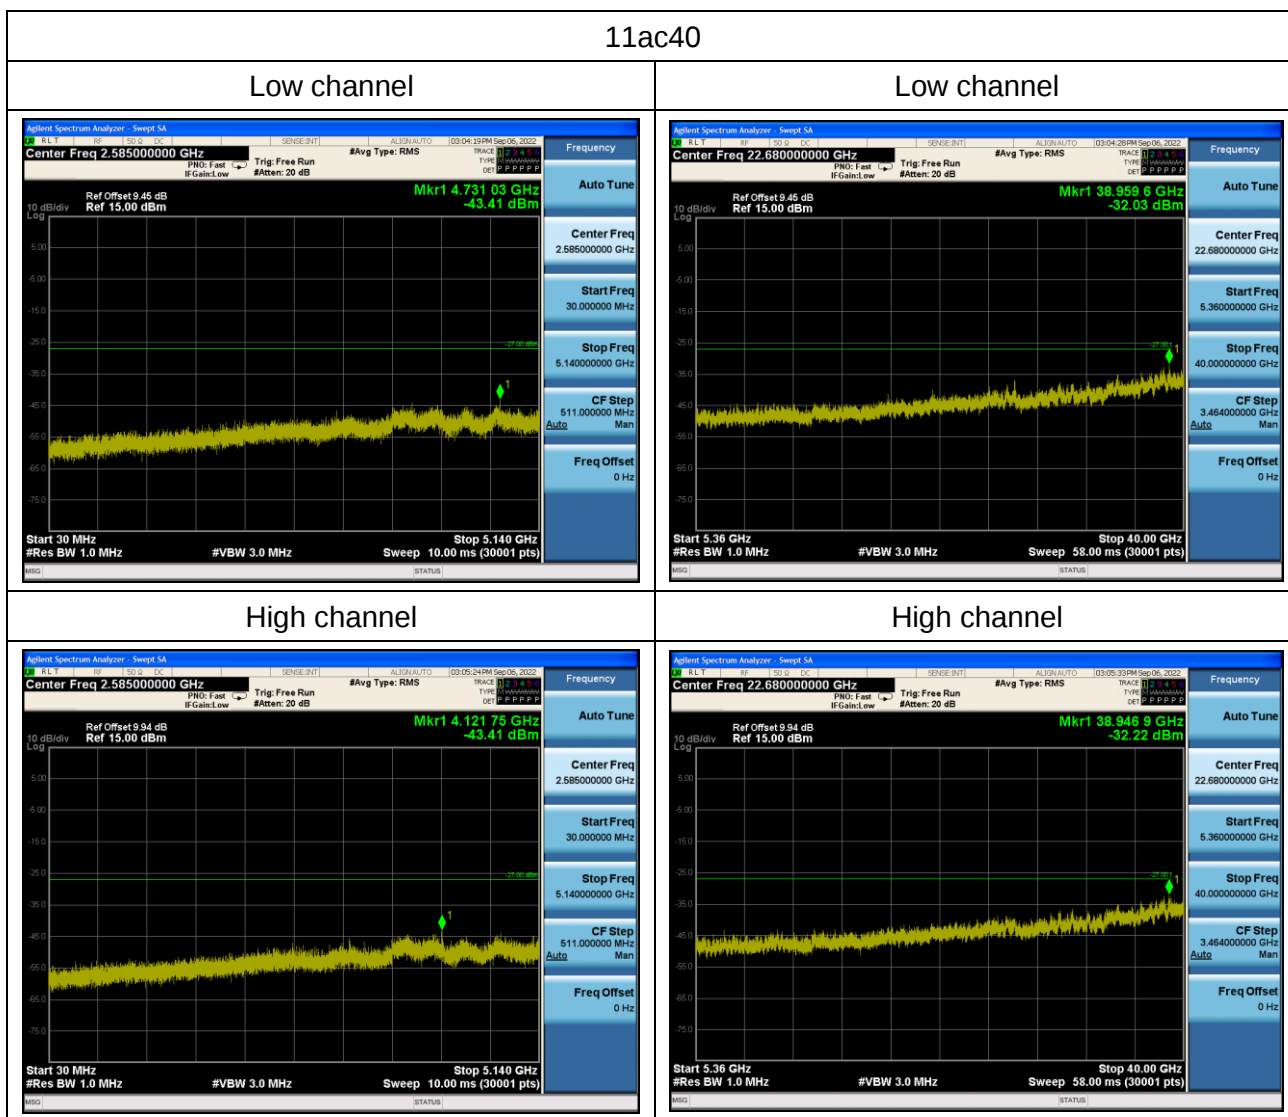


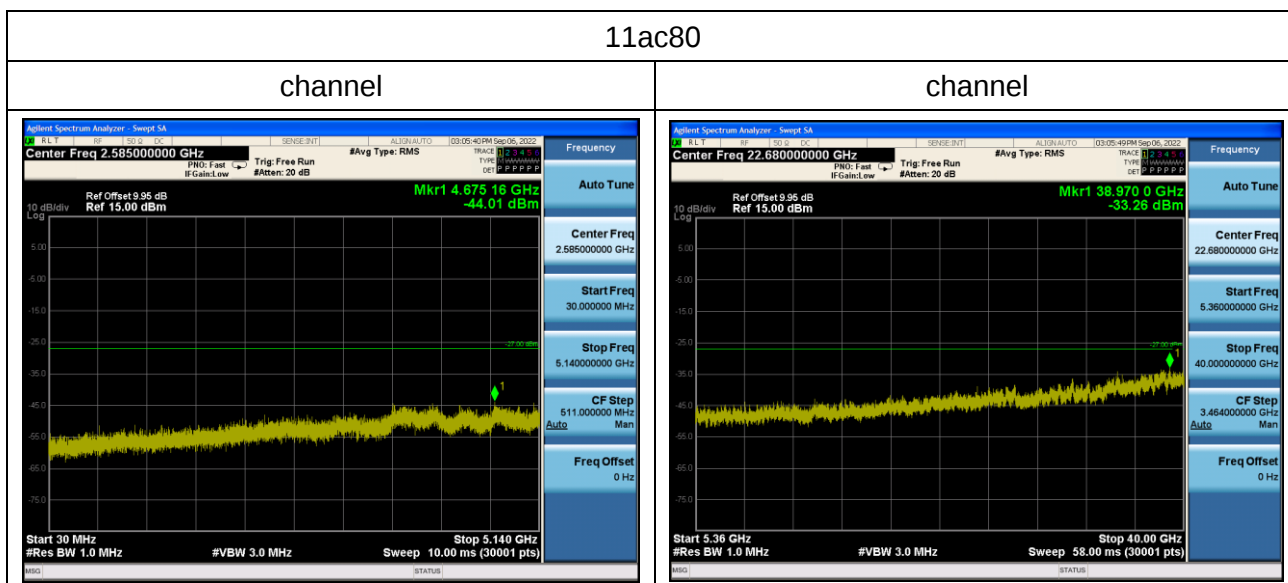


For U-NII-3

11a


Low channel

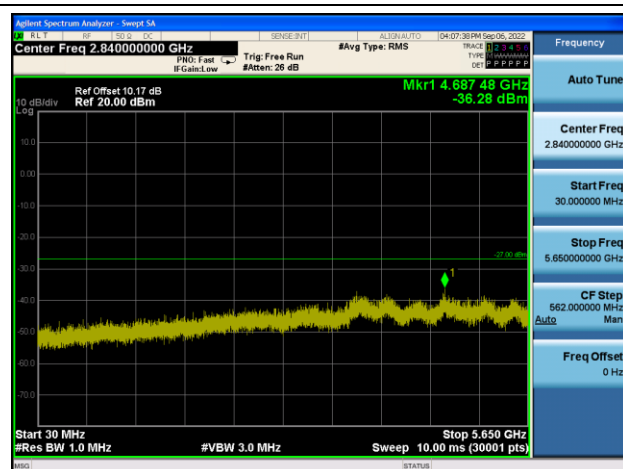


Low channel

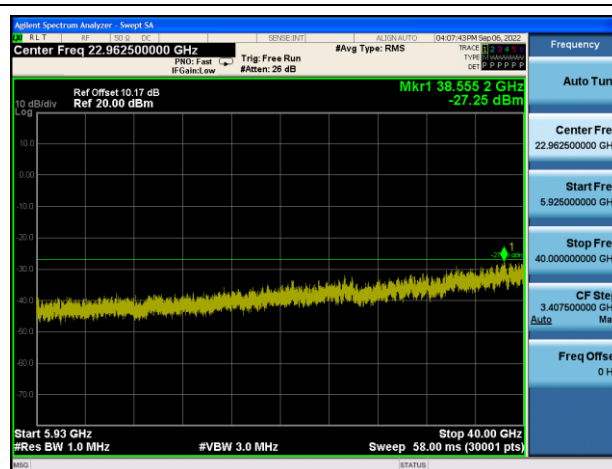


Middle channel

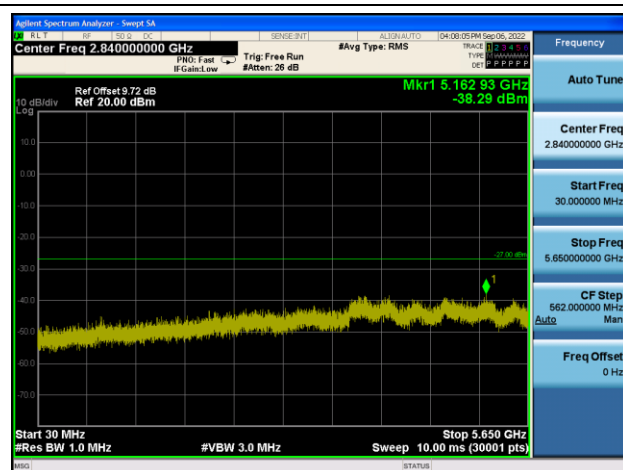


Middle channel

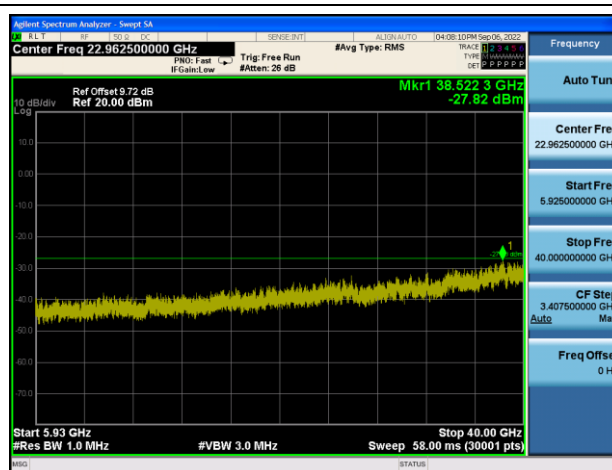

High channel

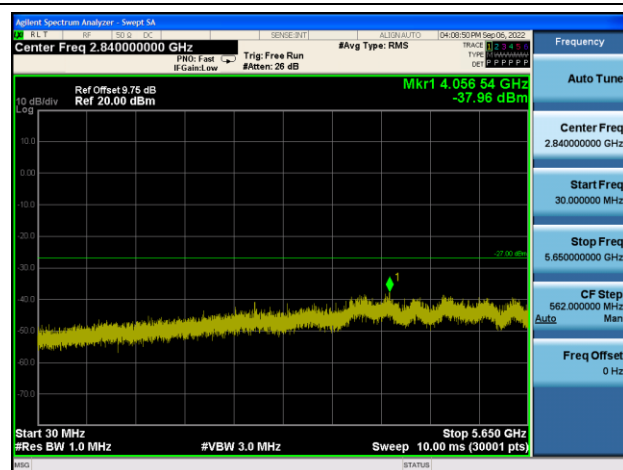


High channel

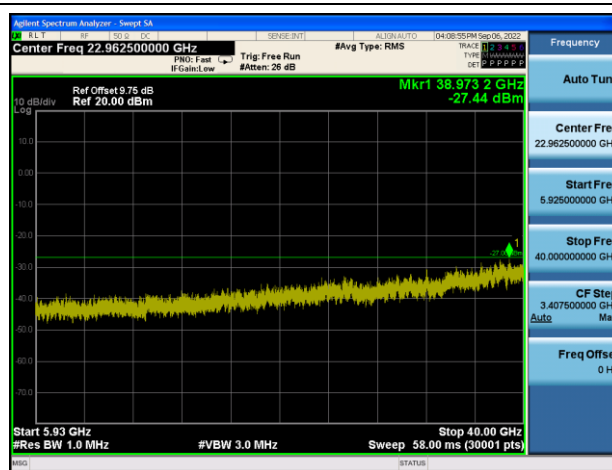




11ac20


Low channel

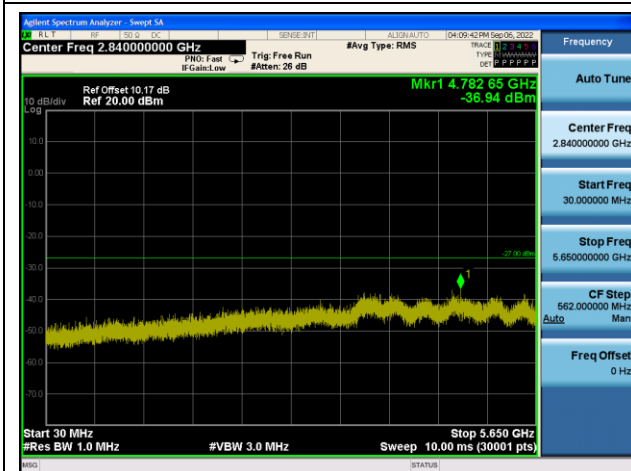


Low channel

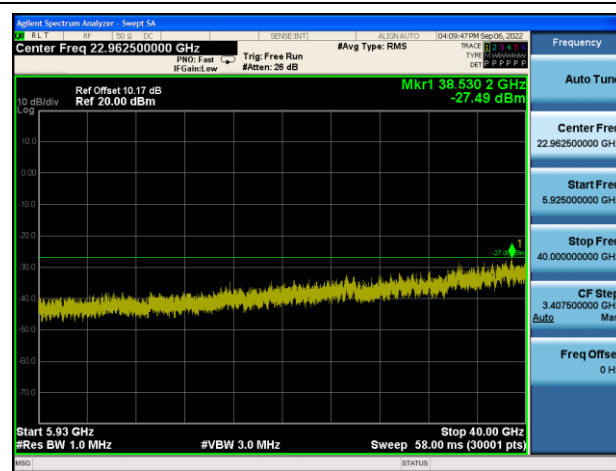


Middle channel

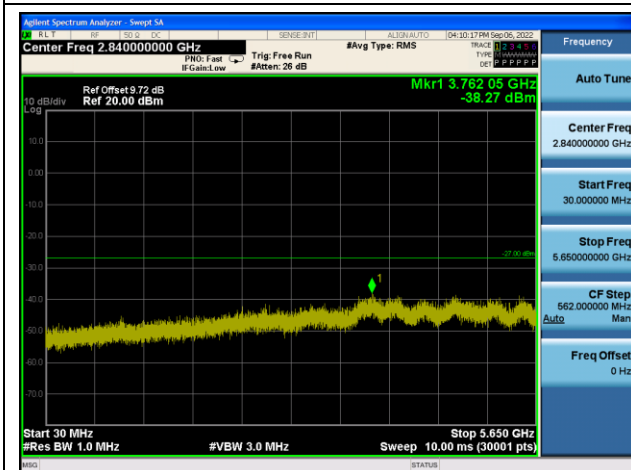

Middle channel

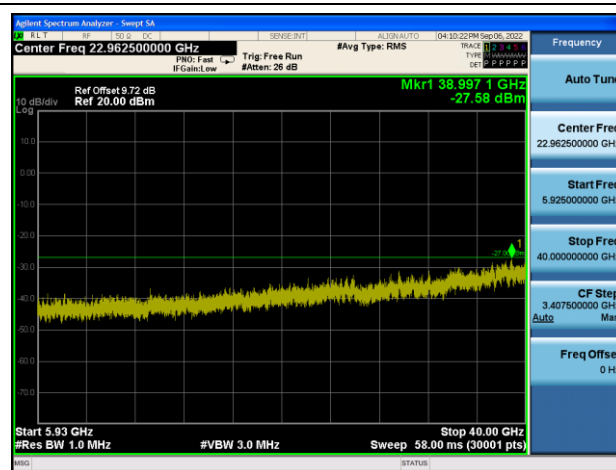

High channel

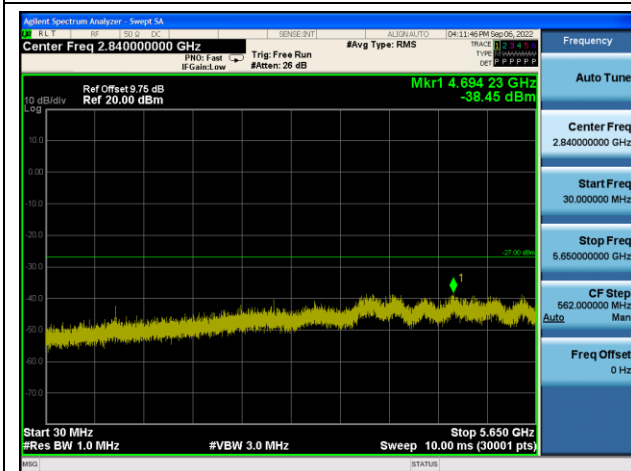

High channel

