


ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW POWER, NON-LICENSED TRANSMITTER

Test Report No. : E06OR-067
AGR No. : A069A-027
Applicant : Gaon Int Co., Ltd.
Address : Daelim Bldg., Suite 1406, 592-5, Dohwa1-dong, Nam-gu, Incheon, Korea
Manufacturer : FOUNDER TELECOMMUNICATION CORP., LTD.
Address : Da Tang Tou, Zhn Shan, Dong Cheng District, Dong Guan, P.R.C.
Type of Equipment : FM TRANSMITTER
FCC ID. : UP4GWT-102
Model Name : GWT-100
Serial number : N/A
Total page of Report : 15 pages (including this page)
Date of Incoming : July 10, 2006
Date of Issuing : October 25, 2006

SUMMARY

The equipment complies with the regulation of **FCC CRF 47 PART 15, SUBPART C, SECTION 15.239**.

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Young-Min, Choi / Project Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon / Director
EMC Div.
ONETECH Corp.

CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 MODEL DIFFERENCES.....	4
2.3 RELATED SUBMITTAL(S) / GRANT(S)	4
2.4 TEST SYSTEM DETAILS	4
2.5 TEST METHODOLOGY	4
2.6 TEST FACILITY	4
3. SYSTEM TEST CONFIGURATION.....	5
3.1 JUSTIFICATION	5
3.2 EUT EXERCISE SOFTWARE.....	5
3.3 CABLE DESCRIPTION	5
3.4 EQUIPMENT MODIFICATIONS	5
3.5 CONFIGURATION OF TEST SYSTEM	6
3.6 ANTENNA REQUIREMENT	6
4. PRELIMINARY TEST	6
4.1 AC POWER LINE CONDUCTED EMISSION TEST	6
4.2 RADIATED EMISSION TEST	6
5. FINAL RESULT OF MEASURMENT	7
5.1 RADIATED EMISSION TEST (WITHIN THE PERMITTED 200 KHZ BAND)	7
5.2 RADIATED EMISSION TEST (OUTSIDE OF THE SPECIFIED 200 KHZ BAND).....	8
5.3 BANDWIDTH OF THE OPERATING FREQUENCY	9
5.4 TUNING RANGE OF THE OPERATING FREQUENCY	11
6. FIELD STRENGTH CALCULATION	14
7. LIST OF TEST EQUIPMENT	15

1. VERIFICATION OF COMPLIANCE

-. APPLICANT : Gaon Int Co., Ltd.
 -. ADDRESS : Daelim Bldg., Suite 1406, 592-5, Dohwa1-dong, Nam-gu, Incheon, Korea
 -. CONTACT PERSON : Mr. T. J. Kim / Director
 -. TELEPHONE NO : +82-32-246-1800
 -. BRAND NAME : SOUND ON
 -. FCC ID : UP4GWT-102
 -. MODEL NAME : GWT-100
 -. SERIAL NUMBER : N/A
 -. DATE : October 25, 2006

DEVICE TYPE	DXX – Part 15 Low Power Communication Device Transmitter
E.U.T. DESCRIPTION	FM TRANSMITTER
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	Charter 7 and 13 of ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SECTION 15.239
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The Gaon Int Co., Ltd., Model GWT-100 (referred to as the EUT in this report) is a FM TRANSMITTER which threads sound sources such as MP3P, CDP, MDP, PMP, and PDA into radio frequency, allowing the enjoyment of portable audio device music via car audio system or home audio equipment without the need for earphones or headsets. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic-Inside was not coated with conducted material
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	8MHz
FREQUENCY RANGE	88.1 MHz ~ 107.9 MHz (range into 100 kHz Step)
USED ANTENNA	Curled Audio Input Cable
AUDIO INPUT RANGE	20Hz ~ 15kHz
NUMBER OF LAYER	Main Board: 4 Layers
EXTERNAL CONNECTOR	Audio Input, DC Input (No Microphone Interfacing Port)

2.2 Model Differences

- None

2.3 Related Submittal(s) / Grant(s)

- Original submittal only

2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
GWT-100	Gaon Int Co., Ltd.	UP4GWT-102	FM TRANSMITTER (EUT)	-
IMP-5000	Decktron Co., Ltd	P42IMP5000	MP3 Player	EUT
N/A	N/A	N/A	Cigar Jack	EUT
N/A	N/A	N/A	Battery	Cigar Jack

2.5 Test Methodology

The radiated testing was performed according to the procedures in chapter 7, 13 of ANSI C63.4: 2003 and performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 307-51 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-080, Korea. Description details of test facilities were submitted to the Commission on August 30, 2005. (Registration Number: 340658)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	FOUNDER TELECOMMUNICATION CORP., LTD.	N/A	N/A

3.2 EUT exercise Software

- The Model, GWT-100 is included a FM transmitter designed to operate on function in the 88.1 ~ 107.9 MHz. The EUT has an audio input port, so the input ports were connected to mp3 player and than the EUT was transmitted MP3 music files which was saved in MP3 player with maximum audio output level during the test.
- The EUT was tested with new internal battery and external battery condition, but the worst test data was recorded in this test report.

3.3 Cable Description

Ports Name	Shielded	Ferrite Bead	Metal Hood	Length (m)	Connected to
Audio In	N	N	BOTH END	1.5	MP3 Player
DC In	N	N	EUT END	1.2	Car Adaptor

3.4 Equipment Modifications

- None

3.5 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by 1.5V Alkaline or car battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The EUT has an audio input port, so the input ports were connected to mp3 player and than the EUT was transmitted MP3 music files which was saved in MP3 player with maximum audio output level during the test.

3.6 Antenna Requirement

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

FM transmitter antenna of the EUT is a curled audio input cable on the EUT and the end of cable was soldered on the PCB in the EUT, so no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the EUT shall be operated by 1.5V alkaline or car battery.	

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmit the RF Signal continuously	X

5. FINAL RESULT OF MEASURMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Radiated Emission Test (Within the permitted 200 kHz band)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>51%</u>		Temperature: <u>24°C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (b)</u>		
Type of Test	: <u>Low Power Communication Device Transmitter</u>		
Result	: <u>PASSED BY -2.27 dB at 88.10 MHz</u>		

EUT	: FM TRANSMITTER		Date: September 05, 2006
Distance	: 3 Meter		

Radiated Emission			Ant	Correction Factors		Total	Limit (dBuV/m)	Margin (dB)
Freq. (MHz)	Amp. (dBuV)	Detect Mode	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)		
88.10	36.10	Peak	H	7.89	1.74	45.73	48.00	-2.27
88.10	35.80	Peak	V	7.89	1.74	45.43	48.00	-2.57
97.90	27.80	Peak	H	9.67	1.90	39.37	48.00	-8.63
97.90	27.10	Peak	V	9.67	1.90	38.67	48.00	-9.33
107.90	27.10	Peak	H	11.07	1.90	40.07	48.00	-7.93
107.90	25.60	Peak	V	11.07	1.90	38.57	48.00	-9.43

Radiated Emission Tabulated Data

Remark: The peak values at each frequency were investigated under average limit, so the average mode was not performed.



Tested by: In-Sub, Youn / Test Engineer

5.2 Radiated Emission Test (Outside of the specified 200 kHz band)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>51%</u>	Temperature: <u>24°C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)</u>	
Type of Test	: <u>Low Power Communication Device Transmitter</u>	
Result	: <u>PASSED BY -5.36 dB at 172.80 MHz</u>	

EUT	: FM TRANSMITTER	Date: September 05, 2006
Frequency range	: 30MHz – 1000MHz	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)	
Distance	: 3 Meter	
Remark	: Other emissions	

Radiated Emission		Ant	Correction Factors		Total	FCC		
Freq. (MHz)	Amp. (dBuV)		Pol.	Ant. (dBuV/m)		Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
37.80	17.60	H		15.52	1.21	34.33	40.00	-5.67
82.40	18.80	V		6.82	1.75	27.37	40.00	-12.63
172.80	20.30	V		15.35	2.51	38.16	43.52	-5.36
204.60	12.30	V		16.31	2.84	31.45	43.52	-12.07
297.50	10.50	H		20.04	3.77	34.31	46.02	-11.71
365.40	9.70	H		16.24	4.26	30.20	46.02	-15.82



Tested by: In-Sub, Youn / Test Engineer

5.3 Bandwidth of the operating frequency



Humidity Level : 51 % Temperature: 24 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
 Result : PASSED


EUT : FM TRANSMITTER Date: September 05, 2006
 Operating Condition : Transmit the RF signal.
 Minimum Resolution : 10 kHz
 Bandwidth : 10 kHz
 Remark : Refer to test data in next page.

Frequency (MHz)	Measured Value (kHz)	Limit (kHz)	Margin (kHz)
88.1	181.5	200	-18.5
98.0	177.0		-23.0
107.9	184.0		-16.0



Tested by: In-Sub, Youn / Test Engineer

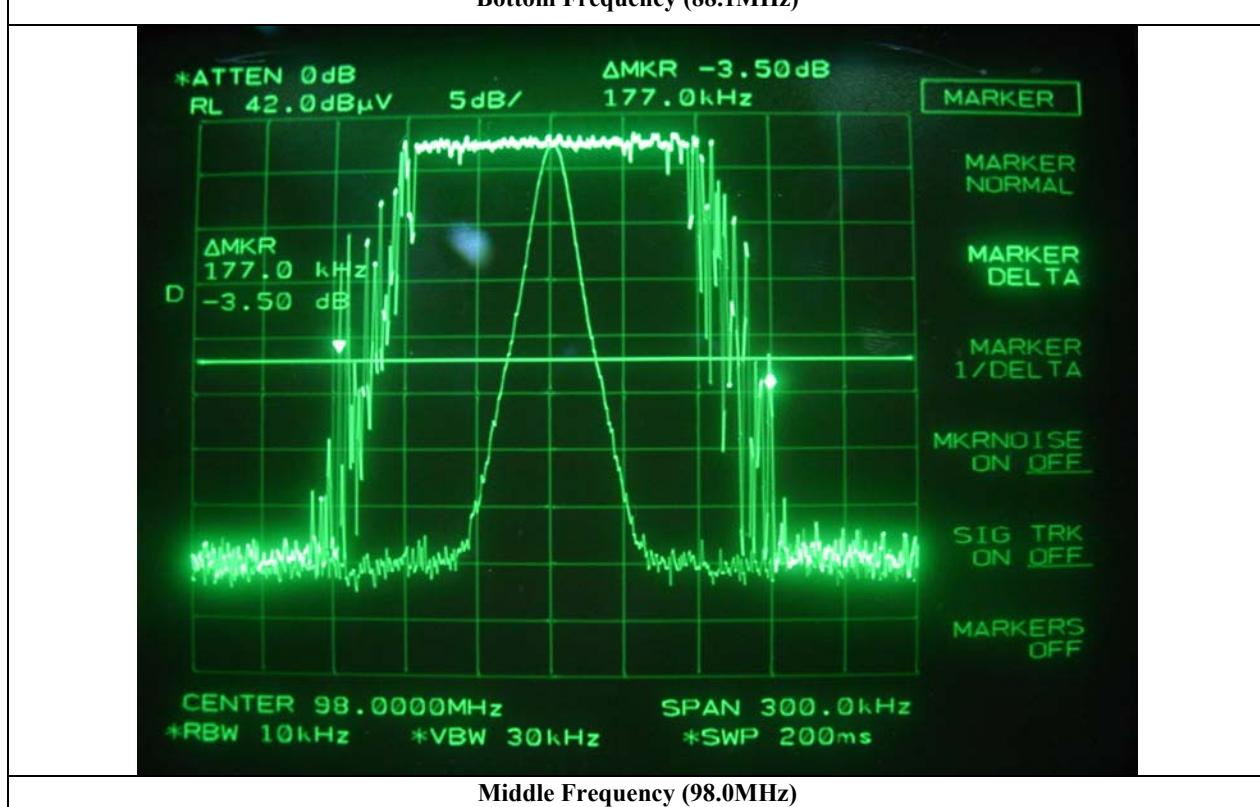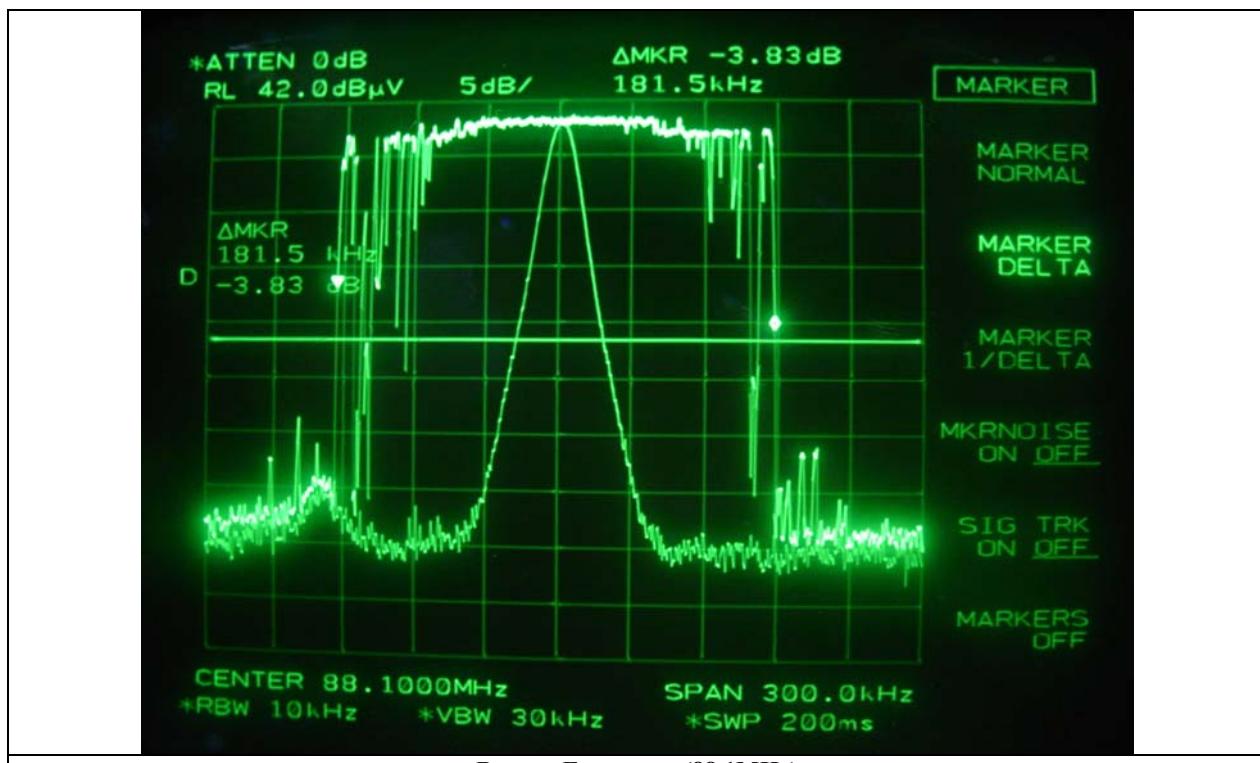

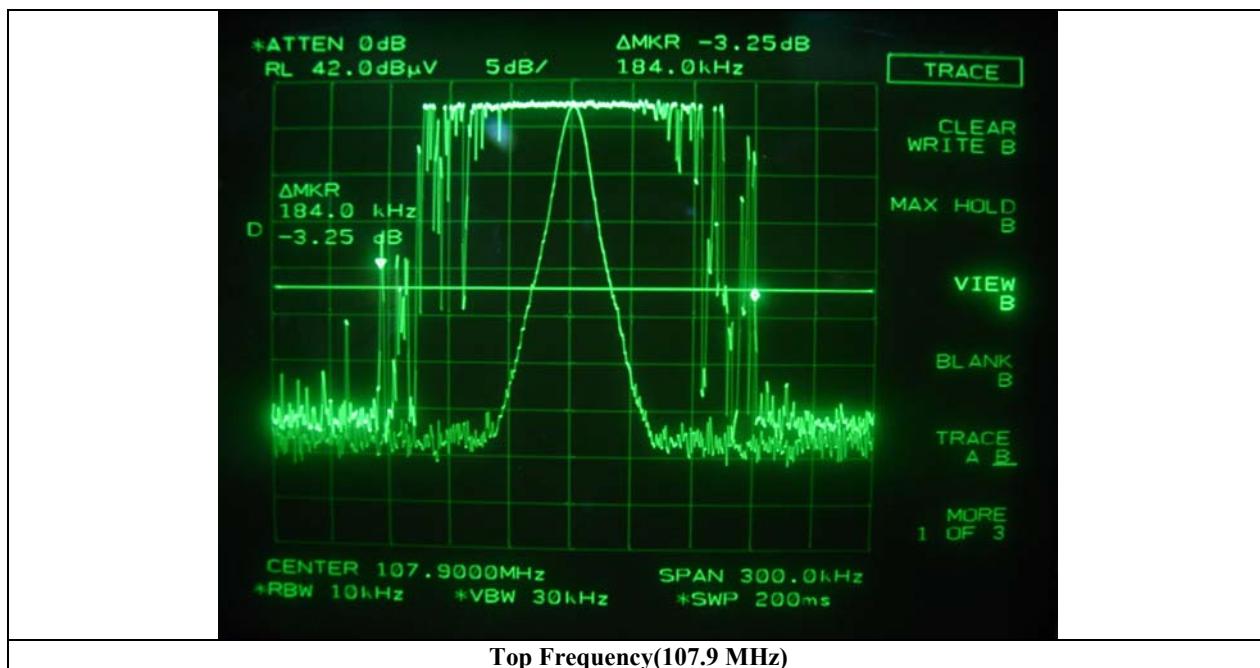


5.4 Tuning Range of the operating frequency

Humidity Level : 51 % Temperature: 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Result : PASSED

EUT : FM TRANSMITTER Date: September 05, 2006
Operating Condition : The lowest and highest frequency was adjusted by manual using up/down button on the EUT and the spectrum was in max hold mode for capturing the spectrum.
Test Result : Met the requirement. Refer to test data in next page.



Tested by: **In-Sub, Youn / Test Engineer**

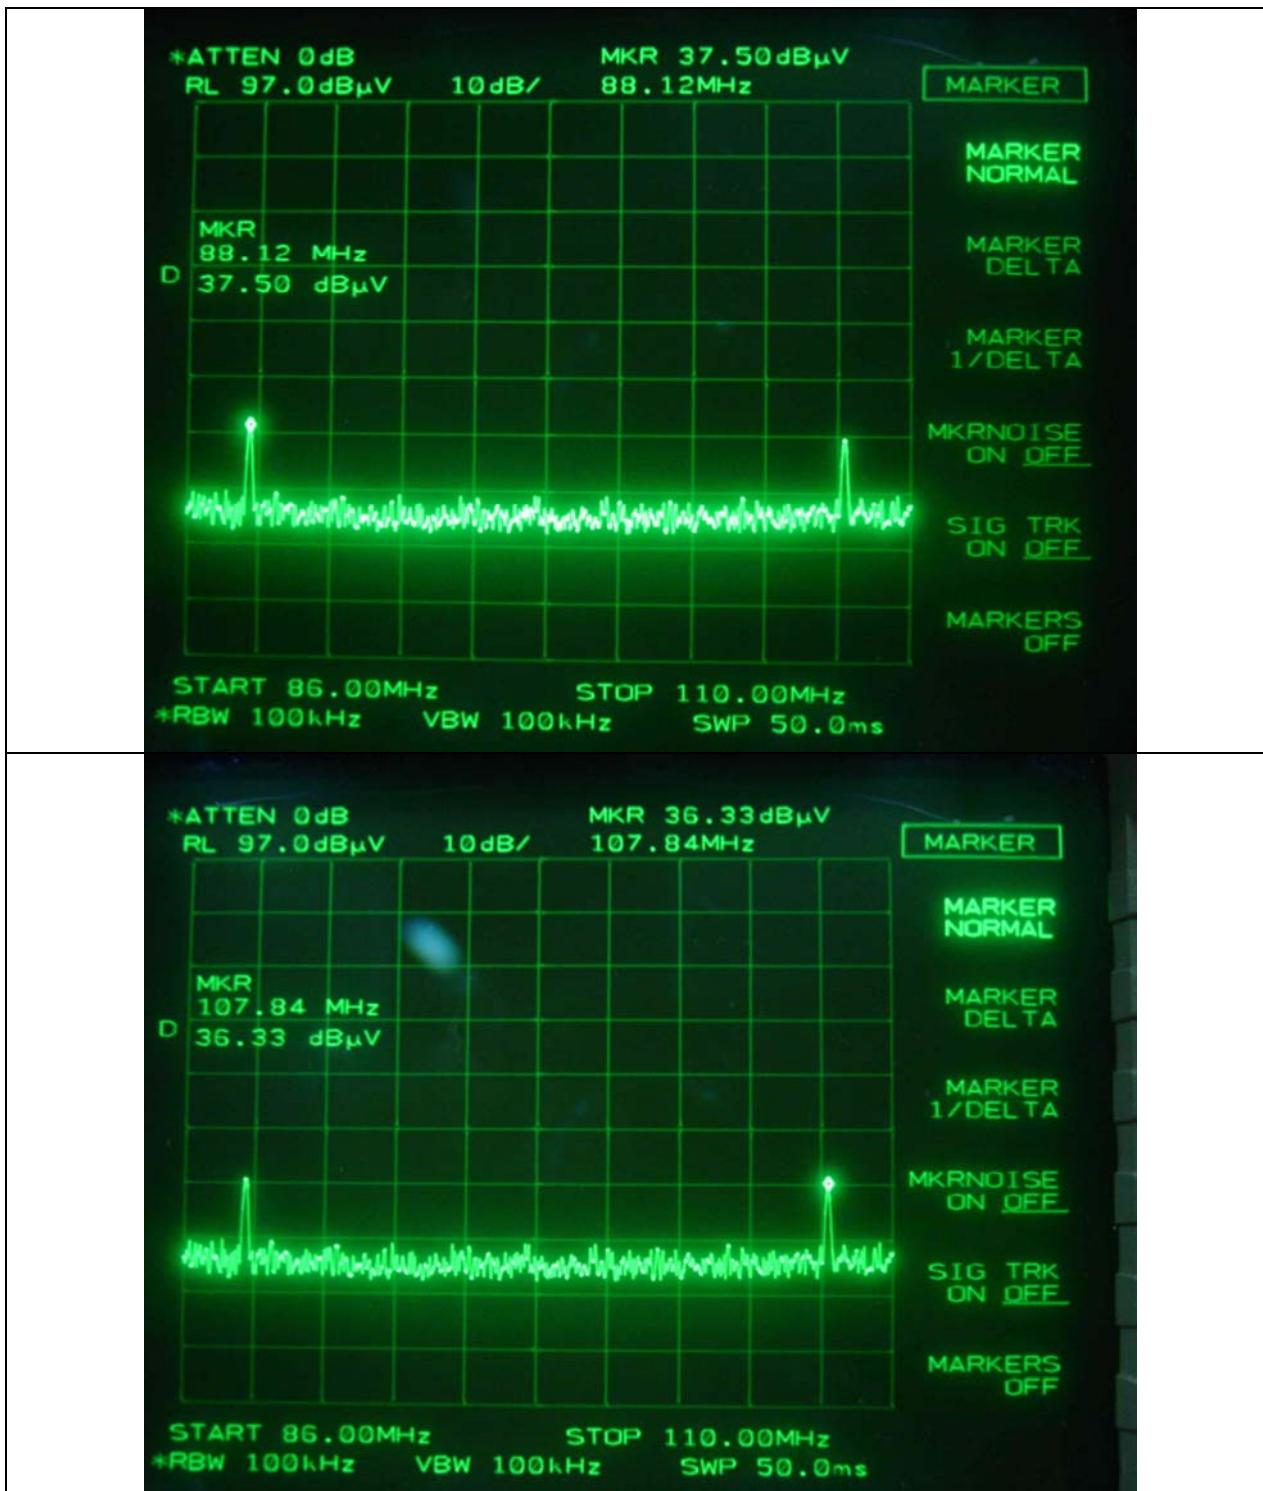

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUe CAL	USE
1.	Test receiver	R/S	ESVS10	827864/005	DEC/05	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/06	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	JUN/06	12MONTH	■
4.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	MAY/06	12MONTH	
5.	Biconical antenna	EMCO	3110	9003-1121	FEB/06	12MONTH	
		Schwarzbeck	VHA9103	91031852	FEB/06		■
6.	Log Periodic antenna	EMCO	3146	9001-2614	FEB/06	12MONTH	
		Schwarzbeck	9108-A(494)	62281001	FEB/06		■
7.	LISN	EMCO	3825/2	9109-1867	JUL/06	12MONTH	■
				9109-1869	JUL/06		
		Schwarzbeck	NSLK 8126	8126-404	JUL/06		■
8.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
9.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
10.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■