

TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: Zinwave DAS3000

To: FCC Part 24 (Subpart E) Technology - PCS

Test Report Serial No: RFI-RPT2-RP74120JD01D

Supersedes Test Report Serial No: RFI-RPT1-RP74120JD01D

This Test Report Is Issued Under The Authority Of Steve Flooks, Service Leader:	
5/100-3	
Checked By: Steve Flooks	Report Copy No: PDF01
5/100-3	
Issue Date: 22 October 2008	Test Dates: 06 October 2008 to 17 October 2008

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may be copied in full. The results in this report apply only to the sample(s) tested.

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001 Email: info@rfi-global.com Website: www.rfi-global.com

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 2 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

This page has been left intentionally blank.

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 3 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

Table of Contents

1. Customer Information	4
2. Equipment Under Test (EUT)	5
3. Test Specification, Methods and Procedures	7
4. Deviations from the Test Specification	8
5. Operation of the EUT during Testing	9
6. Summary of Test Results	10
7. Measurements, Examinations and Derived Results	11
8. Measurement Uncertainty	50
9. Measurement Methods	51
Appendix 1. Test Equipment Used	58

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 4 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

1. Customer Information

Company Name:	Zinwave Ltd
Address:	Harston Mill Harston Cambridge CB2 5GG
Contact Name:	Mr Andy Bell

S.No. RFI-RPT2-RP74120JD01D

Page: 5 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification of Equipment Under Test (EUT)

Brand Name:	Zinwave Ltd
Model Name or Number:	PHUB (Primary Hub)
Serial Number:	Hub06
Revision Number:	HUB-302-0001-3.10
Country of Manufacture:	England
Date of Receipt:	06 October 2008

Brand Name:	Zinwave Ltd	
Model Name or Number:	SHUB (Secondary Hub)	
Serial Number:	Hub07	
Revision Number:	HUB-302-0013-3.10	
Country of Manufacture:	England	
Date of Receipt:	06 October 2008	

Brand Name:	Zinwave Ltd
Model Name or Number:	RU (Remote Unit)
Serial Number:	RU668
Revision Number:	302-006-1.20 + NCR 0037
Country of Manufacture:	England
Date of Receipt:	06 October 2008

2.2. Description of EUT

The 3000 Hub and wideband remote unit is a bi-directional wide-band Repeater Station with a pass band of 136 – 2700 MHz currently.

2.3. Modifications Incorporated in EUT

During the course of testing the EUT was not modified.

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 6 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

2.4. Additional Information Related to Testing

Power Supply Requirement:	120 V ac 60 Hz		
Intended Operating Environment:	Commercial / Light Industrial / Heavy Industrial		
Equipment Category:	Base Station		
Type of Unit:	DAS (Distributed A	Antenna System)	
Transmit Frequency Range:	1930 MHz to 1995	MHz	
Transmit Channels Tested:	Modulation	Bandwidth	Channel Frequency (MHz)
	GMSK (GSM)	200 kHz	1930.2
	8PSK (EDGE)	200 kHz	1930.2
	QPSK (UMTS)	5 MHz	1935.0
	16-QAM (HSPA)	5 MHz	1935.0
	QPSK (CDMA)	1.25 MHz	1931.25
	8PSK (Ev-Do)	1.25 MHz	1931.25
	16-QAM (Ev-Do)	1.25 MHz	1931.25
Maximum Power Output (EIRP)	+28.0 dBm		

2.5. Port Identification

Port	Description	Type/Length	Applicable
1	Alarm Port	9 Pin D-Connector	N
2	RS232 Port	9 Pin D-Connector	N
3	Ethernet Port	CAT5	N
4	2 x USB Ports	USB	N
5	4 x Service Ports (I/O)	N-Type	N
6	8 x Optical Module Ports (I/O)	Fibre Optic Connectors	N

S.No. RFI-RPT2-RP74120JD01D

Page: 7 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

3. Test Specification, Methods and Procedures

Reference:	FCC Part 24 Subpart E: 2004 (Broadband PCS)	
Title:	Code of Federal Regulations, Part 24 (47CFR24) Personal Communication Services.	

3.1. Methods and Procedures

The methods and procedures used were as detailed in:

ANSI/TIA-603-B-2003

Land Mobile Communications Equipment, Measurements and performance Standards

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2003)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1: (1999)

Title: Specification For Radio Disturbance and Immunity Measuring Apparatus and Methods. Part 1: Radio Disturbance and Immunity Measuring Apparatus.

3.2. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 8 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

4. Deviations from the Test Specification

The testing has been performed in accordance with the following Project Plan:

Project Plan for DheaniSulis - End Customer Zinwave Ltd

AmericanTCB Project Number: ATCB006596

Date of Issue: 01 October 2008

S.No. RFI-RPT2-RP74120JD01D

Page: 9 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

5. Operation of the EUT during Testing

5.1. Operating Modes

The EUT was tested in the following operating modes, unless otherwise stated.

Transmit mode, (maximum output power/gain)

5.2. Configuration and Peripherals

The EUT was tested in the following configuration unless otherwise stated:

The EUT comprises of 3 separate units. Primary Hub, Secondary Hub and the Remote Unit. The primary hub was connected to the secondary hub via fibre optic cables. The secondary hub was connected to the remote hub via fibre optic cables. An input signal was fed into the primary hub and was measured from the output of the remote unit. The remote unit was operating at maximum output power with the maximum gain settings allowed.

For radiated emissions testing, the EUT was connected to 4 input signals into the separate input ports. The levels were adjusted to give a composite signal output level of +20.0 dBm. The antenna port on the remote unit was terminated for this testing.

For conducted testing, the EUT was connected to between 1-4 input signals. Depending on the test case, either a CW or a modulated signal was fed into the unit with the antenna port on the remote unit used as the measurement point.

S.No. RFI-RPT2-RP74120JD01D

Page: 10 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

6. Summary of Test Results

Range of Measurements	Specification Reference	Port Type	Result
Transmitter AC Conducted Spurious Emissions (150 kHz to 30 MHz)	C.F.R. 47 FCC Part 15: 2004 Section 15.207	AC Mains Input	Complied
Transmitter Carrier Output Power	C.F.R. 47 FCC Part 2: 2004 Section 2.1046(a)	Antenna Terminals	Complied
Transmitter Frequency Stability (Temperature Variation)	C.F.R. 47 FCC Part 24: 2004 Section 24.235	Antenna Terminals	Complied
Transmitter Frequency Stability (Voltage Variation)	C.F.R. 47 FCC Part 24: 2004 Section 24.235	Antenna Terminals	Complied
Transmitter Occupied Bandwidth	C.F.R. 47 FCC Part 24: 2004 Section 24.238	Antenna Terminals	Complied
Gain Flatness and Out of Band Rejection	Project Plan: ATCB006596	Antenna Terminals	Complied (note 1)
Inter-Modulation Attenuation	Project Plan: ATCB006596	Antenna Terminals	Complied (note 1)
Transmitter Out of Band Conducted Emissions	C.F.R. 47 FCC Part 24: 2004 Section 2.1051/24.238	Antenna Terminals	Complied
Transmitter Out of Band Radiated Emissions	C.F.R. 47 FCC Part 24: 2004 Section 2.1053/24.238	Antenna	Complied

Note 1: These tests are not required within the Part 24 regulations. These tests were defined within the referenced project plan.

6.1. Location of Tests

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.

6.2. Site Registration Number

FCC: 209735

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 11 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7. Measurements, Examinations and Derived Results

7.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

S.No. RFI-RPT2-RP74120JD01D

Page: 12 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7.2. Test Results

7.2.1. Transmitter AC Conducted Spurious Emissions: Section 15.207

The EUT was configured as for AC conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum emission levels present on the ac mains line of the EUT.

Results:

Quasi-Peak Detector Measurements on Live and Neutral Lines

Frequency (MHz)	Line	Level (dBµV)	Limit (dBµV)	Margin (dB)	Result
0.181500	Live 1	45.8	64.4	18.6	Complied
0.487500	Neutral	33.2	56.2	23.0	Complied
0.501000	Neutral	33.3	56.0	22.7	Complied
23.739000	Live 1	38.2	60.0	21.8	Complied
25.242000	Neutral	34.9	60.0	25.1	Complied
27.915000	Neutral	37.4	60.0	22.6	Complied

Average Detector Measurements on Live and Neutral Lines

Frequency (MHz)	Line	Level (dB _µ V)	Limit (dB _µ V)	Margin (dB)	Result
0.186000	Live 1	34.6	54.2	19.6	Complied
18.816000	Live 1	29.1	50.0	20.9	Complied
23.491500	Neutral	31.4	50.0	18.6	Complied
25.530000	Live 1	28.1	50.0	21.9	Complied
28.005000	Live 1	31.5	50.0	18.5	Complied

S.No. RFI-RPT2-RP74120JD01D


Page: 13 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

Transmitter Mode AC Conducted Spurious Emissions: Section 15.207 (Continued)



TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 14 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7.2.2. Transmitter Carrier Output Power: Section 2.1046(a)

The EUT was configured as for conducted RF output power as described in section 9 of this report.

Tests were performed to identify the EUT's maximum conducted transmit power.

Results:

Technology	Frequency (MHz)	Conducted RF O/P Power (dBm)	Declared Antenna Gain (dB)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)	Result
GMSK (GSM)	1930.2	20.0	8.0	28.0	33.0	5.0	Complied
8PSK (EDGE)	1930.2	20.0	8.0	28.0	33.0	5.0	Complied
QPSK (UMTS)	1935.0	20.0	8.0	28.0	33.0	5.0	Complied
16-QAM (HSPA)	1935.0	20.0	8.0	28.0	33.0	5.0	Complied
QPSK (CDMA)	1931.25	20.0	8.0	28.0	33.0	5.0	Complied
8PSK (Ev-Do)	1931.25	20.0	8.0	28.0	33.0	5.0	Complied
16-QAM (Ev-Do)	1931.25	20.0	8.0	28.0	33.0	5.0	Complied

Note(s):

1. Measurements were performed with a power sensor and power meter.

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 15 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7.2.3. Transmitter Frequency Stability (Temperature Variation): Section 24.235

The EUT was configured as for frequency stability measurements as described in section 9 of this report.

Tests were performed to identify the maximum frequency error of the EUT with variations in ambient temperature.

Results:

1935 MHz - CW

Temperature (°C)	Frequency Error (Hz)	Measured Frequency (MHz)	Lower Band Edge Limit (MHz)	Margin (MHz)	Result
-30	0	1935.000000	1930.000	5.000000	Complied
-20	1	1935.000001	1930.000	5.000000	Complied
-10	0	1935.000000	1930.000	5.000000	Complied
0	0	1935.000000	1930.000	5.000000	Complied
10	0	1935.000000	1930.000	5.000000	Complied
20	1	1935.000001	1930.000	5.000000	Complied
30	1	1935.000001	1930.000	5.000000	Complied
40	1	1935.000001	1930.000	5.000000	Complied
50	0	1935.000000	1930.000	5.000000	Complied

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 16 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7.2.4. Transmitter Frequency Stability (Voltage Variation): Section 24.235

The EUT was configured as for frequency stability measurements as described in section 9 of this report.

Tests were performed to identify the maximum frequency error of the EUT with variations in nominal operating voltage.

Results:

1935 MHz - CW

Supply Voltage (V)	Frequency Error (Hz)	Measured Frequency (MHz)	Lower Band Edge Limit (MHz)	Margin (MHz)	Result
102.0	0	1935.000000	1930.000	5.000000	Complied
138.0	0	1935.000000	1930.000	5.000000	Complied

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 17 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7.2.5. Transmitter Occupied Bandwidth: Section 24.238

The EUT was configured as for occupied bandwidth measurements as described in section 9 of this report.

Tests were performed to identify the maximum bandwidth occupied by the fundamental frequency of the EUT.

Results: - Input Signal

Technology	Frequency (MHz)	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (kHz)
GMSK (GSM)	1930.2	10.0	100.0	247.495
8PSK (EDGE)	1930.2	10.0	100.0	243.487
QPSK (UMTS)	1935.0	200.0	2000.0	4228.457
16-QAM (HSPA)	1935.0	200.0	2000.0	4208.417
QPSK (CDMA)	1931.25	100.0	1000.0	1040.080
8PSK (Ev-Do)	1931.25	100.0	1000.0	1028.056
16-QAM (Ev-Do)	1931.25	100.0	1000.0	1028.056

S.No. RFI-RPT2-RP74120JD01D

Page: 18 of 59


Issue Date: 22 October 2008

Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)

Technology - PCS

Transmitter Occupied Bandwidth: Section 2.1049 (Continued)








QPSK (UMTS)



8PSK (EDGE)



16-QAM (HSPA)

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D


Page: 19 of 59

Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS


Transmitter Occupied Bandwidth: Section 2.1049 (Continued)



QPSK (CDMA)



16-QAM (Ev-Do)



8PSK (Ev-Do)

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 20 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

Transmitter Occupied Bandwidth: Section 2.1049 (Continued)

Results: - Output Signal

Technology	Frequency (MHz)	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (kHz)
GMSK (GSM)	1930.2	10.0	100.0	247.495
8PSK (EDGE)	1930.2	10.0	100.0	243.487
QPSK (UMTS)	1935.0	200.0	2000.0	4248.500
16-QAM (HSPA)	1935.0	200.0	2000.0	4208.417
QPSK (CDMA)	1931.25	100.0	1000.0	1040.080
8PSK (Ev-Do)	1931.25	100.0	1000.0	1028.056
16-QAM (Ev-Do)	1931.25	100.0	1000.0	1028.056

S.No. RFI-RPT2-RP74120JD01D


Page: 21 of 59

Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS


Transmitter Occupied Bandwidth: Section 2.1049 (Continued)








QPSK (UMTS)



8PSK (EDGE)



16-QAM (HSPA)

S.No. RFI-RPT2-RP74120JD01D


Page: 22 of 59

Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS


Transmitter Occupied Bandwidth: Section 2.1049 (Continued)



QPSK (CDMA)



16-QAM (Ev-Do)



8PSK (Ev-Do)

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 23 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7.2.6. Gain Flatness and Out of Band Rejection

The EUT was configured as for transmitter conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum transmitter conducted emission levels.

Results:

Maximum Gain Error	Limit	Margin	Result
(dB)	(dB)	(dB)	
7.2	10.0	2.8	Complied

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D


Page: 24 of 59


Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

Gain Flatness and Out of Band Rejection (Continued)

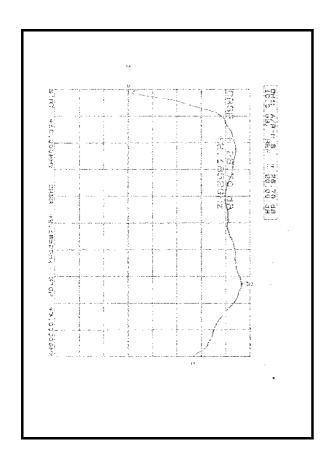

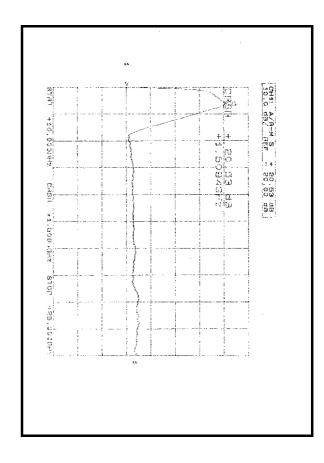

TEST REPORT


S.No. RFI-RPT2-RP74120JD01D

Page: 25 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

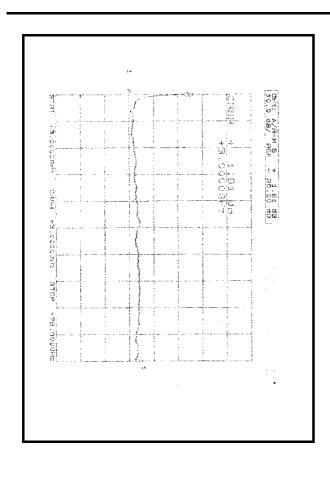

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 26 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7.2.7. Inter-modulation Attenuation

The EUT was configured as for transmitter conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum transmitter conducted emission levels.

Results:

F1 = 180 MHz F2 = 2500 MHz

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
360.000	-17.1	-13.0	4.1	Complied
540.000	-28.6	-13.0	15.6	Complied
1960.000	-23.4	-13.0	10.4	Complied
2140.000	-17.8	-13.0	4.8	Complied
2680.000	-21.3	-13.0	8.3	Complied
2860.000	-25.7	-13.0	12.7	Complied

F1 = 406 MHz

F2 = 406.0125 MHz

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
812.0167	-18.3	-13.0	5.3	Complied
1218.000	-25.7	-13.0	12.7	Complied

F1 = 2467 MHz

F2 = 2472 MHz

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1777.930	-20.0	-13.0	7.0	Complied
2462.000	-28.1	-13.0	15.1	Complied
2472.000	-27.9	-13.0	14.9	Complied

S.No. RFI-RPT2-RP74120JD01D

Page: 27 of 59

Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS


Inter-modulation Attenuation (Continued)

F1 = 180 MHz F2 = 2500 MHz









S.No. RFI-RPT2-RP74120JD01D

Page: 28 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)


Technology - PCS


Inter-modulation Attenuation (Continued)

F1 = 180 MHz F2 = 2500 MHz









S.No. RFI-RPT2-RP74120JD01D

Page: 29 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS


Inter-modulation Attenuation (Continued)


F1 = 406 MHz

F2 = 406.0125 MHz









TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 30 of 59

Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)


Technology - PCS


Inter-modulation Attenuation (Continued)

F1 = 406 MHz

F2 = 406.0125 MHz







S.No. RFI-RPT2-RP74120JD01D

Page: 31 of 59

Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS


Inter-modulation Attenuation (Continued)

F1 = 2467 MHz F2 = 2472 MHz









S.No. RFI-RPT2-RP74120JD01D

Page: 32 of 59

Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS


Inter-modulation Attenuation (Continued)

F1 = 2467 MHz F2 = 2472 MHz









TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 33 of 59


Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

Inter-modulation Attenuation (Continued)

F1 = 2467 MHz F2 = 2472 MHz



TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 34 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7.2.8. Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238

The EUT was configured as for transmitter conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum transmitter conducted emission levels.

Results:

GMSK (GSM)

Frequency (GHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
24.117	-31.5	-13.0	18.5	Complied

8PSK (EDGE)

Frequency (GHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
24.050	-31.8	-13.0	18.8	Complied

QPSK (UMTS)

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
24.008	-31.5	-13.0	18.5	Complied

16-QAM (HSPA)

Frequency	Peak Emission Level	Limit	Margin	Result
(MHz)	(dBm)	(dBm)	(dB)	
24.742	-31.8	-13.0	18.8	Complied

Note(s):

1. All other emissions are least 20 dB below the limit

S.No. RFI-RPT2-RP74120JD01D

Page: 35 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) - GMSK (GSM)









TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 36 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) – GMSK (GSM)









S.No. RFI-RPT2-RP74120JD01D

Page: 37 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) – GMSK (GSM)









S.No. RFI-RPT2-RP74120JD01D


Page: 38 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)


Technology - PCS

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) – 8PSK (EDGE)











S.No. RFI-RPT2-RP74120JD01D


Page: 39 of 59


Issue Date: 22 October 2008

Zinwave DAS3000 Test of: FCC Part 24 (Subpart E) To: **Technology - PCS**



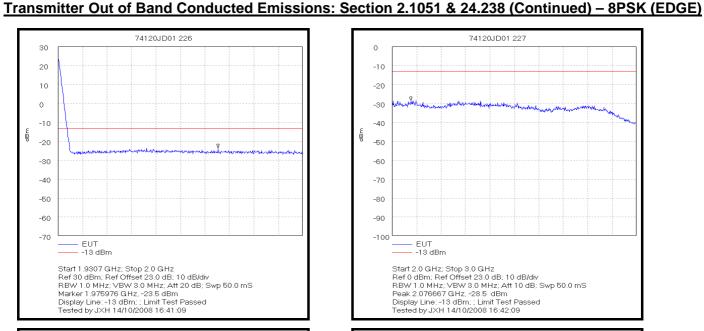





S.No. RFI-RPT2-RP74120JD01D


Page: 40 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)


Technology - PCS

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) – 8PSK (EDGE)









S.No. RFI-RPT2-RP74120JD01D

Page: 41 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) – QPSK (UMTS)









S.No. RFI-RPT2-RP74120JD01D

Page: 42 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) – QPSK (UMTS)









S.No. RFI-RPT2-RP74120JD01D


Page: 43 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)


Technology - PCS

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) – QPSK (UMTS)









S.No. RFI-RPT2-RP74120JD01D

Page: 44 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS

<u>Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) – 16-QAM (HSPA)</u>









TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 45 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000


To: FCC Part 24 (Subpart E)


Technology - PCS

<u>Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) – 16-QAM (HSPA)</u>









TEST REPORT

S.No. RFI-RPT2-RP74120JD01D


Page: 46 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)


Technology - PCS

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 24.238 (Continued) - 16-QAM (HSPA)









TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 47 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

7.2.9. Transmitter Out of Band Radiated Emissions: Section 2.1053 & 24.238

The EUT was configured as for transmitter radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results:

Frequency (GHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
25.546	-35.9	-13.0	22.9	Complied

Note(s):

 Measurements were performed with the CW signals in the following bands: PCS 1930 to 1995 MHz AWS 2110 to 2155 MHz

S.No. RFI-RPT2-RP74120JD01D


Page: 48 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

Transmitter Out of Band Radiated Emissions: Section 2.1053 & 24.238 (Continued)

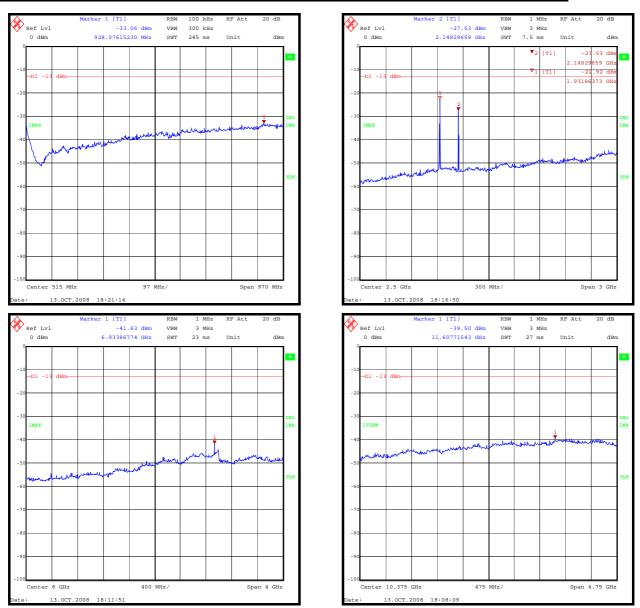

S.No. RFI-RPT2-RP74120JD01D


Page: 49 of 59


Issue Date: 22 October 2008


Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

Transmitter Out of Band Radiated Emissions: Section 2.1053 & 24.238 (Continued)







TEST REPORT S.No. RFI-RPT2-RP74120JD01D

Page: 50 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

8. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty	
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.72 dB	
Carrier Output Power	Not applicable	95%	±0.28 dB	
Conducted Emissions	9 kHz to 26 GHz	95%	±0.46 dB	
Conducted Emissions Antenna Port	30 MHz to 40 GHz	95%	±0.28 dB	
Frequency Stability	Not applicable	95%	±11.4 ppm	
Occupied Bandwidth	824 to 849 MHz	95%	±11.4 ppm	
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±4.64 dB	
Radiated Spurious Emissions	1 GHz to 26 GHz	95%	±2.94 dB	

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

S.No. RFI-RPT2-RP74120JD01D

Page: 51 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

9. Measurement Methods

9.1. Conducted Output Power

The EUT was connected to a spectrum analyser and to a test set via suitable cables, RF attenuators and combiners.

The connection was made to the EUT either via an antenna port or by antenna terminals made available by the client.

The total loss of the cables, attenuators and combiner were measured and entered as a reference level offset into the measuring receiver to correct for the losses.

The EUT was set to the required channel and the transmitter set to operate at full power.

A marker was set to the maximum indicated peak and the conducted power was recorded.

This test was performed on the bottom, middle and top channels.

The test equipment settings for conducted antenna port measurements were as follows:

Receiver Function	Setting		
Detector Type:	Peak		
Mode:	Max Hold		
Bandwidth:	1 MHz		
Amplitude Range:	100 dB		
Step Size:	Continuous sweep		
Sweep Time:	Coupled		

TEST REPORT S.No. RFI-RPT2-RP74120JD01D

Page: 52 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

9.2. Frequency Stability

The EUT was situated within an environmental test chamber and connected directly to the test set via an access port.

Measurements were performed with the EUT operating under extremes of temperature in 10 degree increments within the range -30 to 50 °C.

Measurements were also performed at voltage extremes between the declared nominal supply voltage and at the declared endpoint voltage (for hand carried battery operated equipment) or by varying the primary supply voltage from 85% to 115% of the nominal value for all other equipment types.

The requirement was to determine the frequency stability of the device under specified environmental operating conditions and ensure they remained within specified operating parameters.

Measurements were made on the top and bottom channels.

The EUT was switched off for a minimum of 30 minutes between each stage of testing while the environmental chamber stabilised at the next temperature within the stated temperature range.

Once the environmental chamber had reached thermal equilibrium, the nominal frequency of the EUT was measured and recorded. The recorded frequency was compared to the applicants declared operating frequency band edges.

In order to show compliance, the measured frequency must remain within the declared frequency band.

The reported data shows the nominal frequency drift and its margin from the band edge. If this margin is positive, the result is compliant. If it goes negative, the result is a non-compliance. There is also a frequency graph presented offering the frequency variation around nominal frequency.

TEST REPORT S.No. RFI-RPT2-RP74120JD01D

Page: 53 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

9.3. Occupied Bandwidth

The EUT was connected to a spectrum analyser enabled with an occupied bandwidth function and a test set via a bi-directional coupler to its antenna port.

Measurements were performed to determine the occupied bandwidth in accordance with FCC Part 2.1049. The occupied bandwidth was measured from the fundamental emission at the bottom, middle and top channels.

The occupied bandwidth was measured using the built in occupied bandwidth function of the Rohde and Schwarz FSEB or ESIB spectrum analyser. It was set to measure the bandwidth where 99% of the signal power was contained. The analyser settings were set as per those outlined in the spectrum analyser user manual for this measurement, i.e., RBW \geq 1% of occupied bandwidth. A value of 3 kHz was used.

S.No. RFI-RPT2-RP74120JD01D

Page: 54 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

9.4. Transmitter Conducted Emissions Measurements

The test was performed in a laboratory environment.

Spurious emission measurements at the antenna port were performed from the lowest declared frequency to 10 times the highest EUT fundamental frequency.

A measuring receiver was connected to the antenna port of the EUT via a suitable cable and RF Attenuator. The total loss of both the cable and the attenuator were measured and entered as a reference level offset into the measuring receiver to correct for the losses.

The limit in the standard states that emissions shall be attenuated by at least 43+10 log (P) dB below the transmitter power (P), where (P) is the maximum measured fundamental power for the channel under test. This limit always reduces to -13 dBm therefore, the limit line presented on the accompanying plots is set to -13 dBm.

The frequency band described above was investigated with the transmitter operating at full power on the top, bottom and middle channels. Any spurious observed were then recorded and compared to the -13 dBm limit. The requirement is for the emission to be less than -13 dBm. The margin between emission and limit is recorded and should always be positive to indicate compliance.

It should be noted that FCC Part 24.238 states that the 1st MHz band immediately adjacent to the applicants declared frequency block may be measured using a resolution bandwidth of at least 1% of the emission bandwidth. This bandwidth was found to be 3 kHz

The measurements in the 2nd and 3rd 1 MHz blocks away from the adjacent 1 MHz block from 1911 MHz to 1912 MHz and 1912 MHz to 1913 MHz were carried out using an analyser span of 1 MHz and a 100 kHz receiver resolution bandwidth (RBW). 10 linear readings were taken for each 100 kHz strip across the 1 MHz band. These readings were integrated to give the emission level in an equivalent 1 MHz bandwidth.

The test equipment settings for conducted antenna port measurements were as follows:

Receiver Function	Settings		
Detector Type:	Peak		
Mode:	Max Hold		
Bandwidth:	1 MHz >1 GHz		
Bandwidth:	10 kHz <1 GHz		
Amplitude Range:	100 dB		
Step Size:	Continuous sweep		
Sweep Time:	Coupled		

The resolution bandwidth used for measurements in the 1 MHz blocks either side of the declared operating frequency block were set as described in the procedure above.

TEST REPORT S.No. RFI-RPT2-RP74120JD01D

Page: 55 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000
To: FCC Part 24 (Subpart E)

Technology - PCS

9.5. AC Mains Conducted Emissions

AC mains conducted emission measurements were performed in accordance with the standard, against appropriate limits for each detector function.

The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane. The EUT was powered with 115V 60 Hz AC mains supplied via a line impedance stabilisation network (LISN).

Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)/Average
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

S.No. RFI-RPT2-RP74120JD01D Page: 56 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

9.6. Transmitter Radiated Emissions

Radiated emission measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial pre-scans covering the entire measurement band from the lowest generated frequency declared up to 10 times the highest fundamental frequency. The scans were performed within a screened chamber in order to identify frequencies on which the EUT was generating spurious. This procedure identified the frequencies from the EUT, which required further examination. Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. A limit line was set to the specification limit by characterising the screen room using a known signal source set at exactly the same location as the EUT. The signal source was derived from either a horn antenna or a dipole dependant on the frequency band under investigation. Any levels within 20 dB of this limit were measured where possible, on occasion; the receiver noise floor came within the 20 dB boundary. On these occasions, the system noise floor may have been recorded.

An open area test site using the appropriate test distance and measuring receiver with a peak detector was used for final measurements at each frequency recorded in the screen room.

The levels were maximised by initially rotating the turntable through 360° and then varying the antenna height between 1 m and 4 m in the vertical polarisation. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT. The procedure was repeated for the horizontal polarisation.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a substitution antenna. For EIRP measurements a Horn antenna whose gain was based on an isotropic antenna was used, ERP measurements were done using a dipole. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The EIRP was calculated as:-

EIRP = Signal Generator Level - Cable Loss + Antenna Gain

The limit in the standard states that emissions shall be attenuated by at least 43+10 log (P) dB below the transmitter power (P), where (P) is the maximum measured fundamental power for the channel under test. This limit always reduces to -13 dBm therefore, the limit line presented on the accompanying plots is set to -13 dBm.

Any spurious measured were then compared to the -13 dBm limit. The requirement is for the emission to be less than -13 dBm. The margin between emission and limit is recorded and should always be positive to indicate compliance.

All measurements were performed using broadband horn antennas.

TEST REPORT S.No. RFI-RPT2-RP74120JD01D

Page: 57 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000 To: FCC Part 24 (Subpart E)

Technology - PCS

Transmitter Radiated Emissions (Continued)

It should be noted that FCC Part 24.238 states that the 1st MHz band immediately adjacent to the applicants declared frequency block may be measured using a resolution bandwidth of at least 1% of the emission bandwidth. This bandwidth was found by calculating 1% of the bandwidth measured in the transmitter occupied bandwidth section of this report. The next largest available bandwidth above this calculated figure was, therefore, used i.e. 3 kHz.

The measurements in the 2nd and 3rd 1 MHz blocks away from the adjacent 1 MHz block from 1911 MHz to 1912 MHz and 1912 MHz to 1913 MHz were carried out using an analyser span of 1 MHz and a 100 kHz receiver resolution bandwidth (RBW). 10 linear readings were taken for each 100 kHz strip across the 1 MHz band. These readings were integrated to give the emission level in an equivalent 1 MHz bandwidth.

TEST REPORT

S.No. RFI-RPT2-RP74120JD01D

Page: 58 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000
To: FCC Part 24 (Subpart E)

Technology - PCS

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A004	Line Impedance Stabilization Network	Rohde & Schwarz	ESH3-Z5	890 604/027	19 May 2008	12
A1299	Antenna	Schaffner	CBL6143	5094	28 July 2008	12
A1738	Attenuator	Atlantic Microwave	BBS40-10	R1379	Calibrated before use	-
A1793	Pre Amplifier	A.H.Systems Inc.	PAM-0118	183	03 July 2008	12
A1818	Antenna	EMCO	3115	00075692	30 Aug 2008	12
A1830	Pulse Limiter	Rhode & Schwarz	ESH3-Z2	100668	16 Jan 2008	12
A259	Antenna	Chase	CBL6111	1513	25 July 2008	12
A435	Antenna	Flann	22240-20	400	21 July 2006	36
A436	Antenna	Flann	20240-20	330	24 April 2006	36
C1111	Cable	Semflex Inc.	X116BFSX10080	0337	Calibrated before use	-
C1142	Cable	HP	65474	1187396	Calibrated before use	-
C1164	Cable	Rosenberger Micro- Coax	FA210A10150070 70	43188-1	20 April 2008	12
C1169	Cable	Microcoax	n/a	n/a	Calibrated before use	-
C1296	3m Cable	Rosenberger	FA210A00300050 50	58940-02	10 July 2008	12
C1297	10m Cable	Rosenberger	FA210A01000050 50	58941-01	10 July 2008	12
C1298	10m Cable	Rosenberger	FA210A01000050 50	58941-02	10 July 2008	12
C1302	3m Cable	Rosenberger	FA210A10300050 50	59153-01	04 Aug 2008	12
C1306	15m Cable	Rosenberger	FA210A00150050 50	59152-01	01 Aug 2008	12
C363	Cable	Rosenberger	RG142	None	20 Apr 2008	12
E0518	Environmental Chamber	TAS	LTCL 1200	24000107	Calibration not required	-

TEST REPORT S.No. RFI-RPT2-RP74120JD01D

Page: 59 of 59

Issue Date: 22 October 2008

Test of: Zinwave DAS3000
To: FCC Part 24 (Subpart E)
Technology - PCS

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
G085	Continuous Wave Generator	Hewlett Packard	83650L	3614A00104	03 Nov 2006	24
M1124	Spectrum Analyser	Rohde & Schwarz	ESIB26	100046K	19 Feb 2008	12
M1242	Spectrum Analyser	Rohde & Schwarz, Inc.	FSEM30	845986/022	29 Nov 2007	12
M1249	Thermometer	Fluke	5211	88800049	09 July 2008	12
M1251	Digital Multimeter	Fluke	175	89170179	21 Dec 2007	12
M1263	Test Receiver	Rohde & Schwarz	ESIB7	100265	06 Feb 2008	12
M1273	Test Receiver	Rhode & Schwarz	ESIB 26	100275	26 Feb 2008	12
M1348	Network Analyser Display	Agilent	8757E	3025A00346	26 June 2008	12
M1349	Network Analyser Detector	Agilent	85025D	01447	06 June 2008	12
M1391	Thermometer/Hygr ometer	Oergon Scientific	BAR629HGU	N/A	18 June 2008	12
M1449	SMIQ03B	Rohde and Schwarz	SMIQ03B	100176	23 Jan 2008	12
M1501	Network Analyser 50GHz Sensor	Hewlett Packard	85025D	US38012297	28 June 2008	12
M166	Thermometer/Baro meter/Hygrometer	EuroCom	None	None	18 June 2008	12
M259	SME03 Signal Generator	Rohde & Schwarz	1038.6002.03	827758/021	Calibrated before use	-
M260	SMP02 Signal Generator	Rohde & Schwarz	1035.5005.02	829076/008	N/A	12
M295	Spectrum Analyser	Hewlett Packard	8564E	3846A01561	13 Nov 2007	12

NB In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule.