

TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: 3000 DAS

To: FCC Part 74: 2008 Subpart H

Test Report Serial No: RFI/RPT1/RP76527JD03A

This Test Report Is Issued Under The Authority Of Brian Watson, Operations Director:	dill
Checked By:	Tony Henriques
Signature:	dill
Date of Issue:	16 December 2009

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001 Email: info@rfi-global.com Website: www.rfi-global.com

ISSUE DATE: 16 DECEMBER 2009

This page has been left intentionally blank.

Page 2 of 23 RFI Global Services Ltd

Table of Contents

1. Customer Information	2
2. Summary of Testing	5
3. Equipment Under Test (EUT)	6
4. Operation and Monitoring of the EUT during Testing	8
5. Measurements, Examinations and Derived Results	
6. Measurement Uncertainty	22
Annendix 1 Test Equipment Used	23

ISSUE DATE: 16 DECEMBER 2009

1. Customer Information

Company Name:	Zinwave Ltd
Address:	Harston Mill Harston Cambridge CB22 7GG

Page 4 of 23 RFI Global Services Ltd

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR90
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2008: Part 74 Subpart H
Site Registration:	FCC: 209735
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	07 December 2009


2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Port Type	Result
Parts 74.861(e)(1) & 2.1046	Transmitter Carrier Output Power	Antenna Port	②
Parts 74.861(e)(5) & 2.1049	Transmitter Occupied Bandwidth	Antenna Port	②
Parts 74.861(e)(6) & 2.1051	Transmitter Conducted Emissions (Out of Band)	Antenna Port	②
Parts 74.861(e)(6) & 2.1053	Transmitter Radiated Emissions (Out of Band)	Enclosure	Ø

Key to Results



= Complied



2.3. Methods and Procedures

Reference:	ANSI/TIA-603-C-2004
Title:	Land Mobile Communications Equipment, Measurements and performance Standards
Reference:	ANSI C63.4 (2003)
Title:	American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.4. Deviations from the Test Specification

The testing has been performed in accordance with the following test plan produced by DheaniSulis for Zinwave:

3000 DAS: FCC test plan to parts 74 part H and 90 part I

Document Number: DS09_ZIN_TP01_C; Issue Date: 11 November 2009

RFI Global Services Ltd Page 5 of 23

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Description:	Distributed Antenna System – Primary Hub
Brand Name:	Zinwave
Model Name or Number:	3000 DAS
Part Number:	302-0001
Serial Number:	000006
Hardware Version Number:	3.13
FCC ID Number:	UPO302-0007 or UPO302-0006*

Description:	Distributed Antenna System – Remote Unit - Fibre
Brand Name:	Zinwave
Model Name or Number:	Fibre RU
Part Number:	302-0007
Serial Number:	310230001218
FCC ID Number:	UPO302-0007

Description:	Distributed Antenna System – Remote Unit - Coaxial
Brand Name:	Zinwave
Model Name or Number:	Coaxial RU
Part Number:	302-0006
Serial Number:	140130000126
FCC ID Number:	UPO302-0006

^{*}The FCC ID for the Primary Hub when matched with the Fibre Remote Unit as a system is UPO302-0007 and when matched as a system with the Coaxial Remote Unit the FCC ID is UPO302-0006

3.2. Description of EUT

The 3000 Hub and wideband remote unit is a bi-directional wide-band repeater station with a pass band of 136 – 2700 MHz.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

Page 6 of 23 RFI Global Services Ltd

3.4. Additional Information Related to Testing

Power Supply Requirement:	120 V AC, 60 Hz		
Equipment Category:	Base Station		
Type of Unit:	DAS (Distributed Antenna System)		
Transmit Frequency Range:	470 MHz to 608 MHz and 614 MHz to 698 MHz		
Transmit Channels Tested:	Modulation	Bandwidth	Channel Frequency (MHz)
	±75 kHz FM	200 kHz	470 MHz & 697.9 MHz
Maximum Power Output (EIRP)	+28.0 dBm		

RFI Global Services Ltd Page 7 of 23

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

• . Transmit mode, (maximum output power/gain)

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The EUT comprises of three separate units. One Primary Hub and two Remote Units [1x Fibre Optic, 1x Coaxial Unit]. The primary hub was connected to the remote unit via fibre optic cables and coaxial cables depending on the unit connected to. An input signal was fed into the primary hub and was measured from the output of the remote unit. The remote unit was operating at maximum output power with the maximum gain settings allowed.
- For radiated emissions testing, the EUT was connected to three input signals into the separate input ports. The levels were adjusted to give a composite signal output level of +20.0 dBm. Testing was performed on both the fibre unit and coaxial units with the antenna ports on the remote units terminated.
- For conducted testing, the EUT was connected with one input signal which was fed into the
 unit with the antenna port on the remote unit used as the measurement point.
 Measurements were performed on the coaxial unit only. The fibre unit remained terminated
 throughout the testing

Page 8 of 23 RFI Global Services Ltd

ISSUE DATE: 16 DECEMBER 2009

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6. Measurement Uncertainty for details.

RFI Global Services Ltd Page 9 of 23

5.2. Test Results

5.2.1. Transmitter Carrier Output Power (EIRP)

Test Summary:

FCC Part:	74.861(e)(1) & 2.1046
Test Method:	As detailed in TIA-603-C Section 2.2.1

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	35

Results:

Frequency (MHz)	Conducted RF O/P Power (dBm)	Limit (dBm)	Margin (dB)	Result
470.0	20.0	27.0	7.0	Complied
697.9	20.0	27.0	7.0	Complied

Page 10 of 23 RFI Global Services Ltd

5.2.2. Transmitter Occupied Bandwidth (Bandwidth Limitations)

Test Summary:

FCC Part:	74.861(e)(5) & 2.1049
Test Method:	As detailed in ANSI C63.4 Section 13.1.7 and relevant annexes (see note below)

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	36

Results: Input Signal

Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)
470.0	160.521	200
697.9	159.319	200

Results: Output Signal


Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)
470.0	160.521	200
697.9	159.319	200


Note(s):

1. In lieu of the test method detailed in ANSI C63.4 Section 13.1.7 the occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyser.


RFI Global Services Ltd Page 11 of 23

Transmitter Occupied Bandwidth (Bandwidth Limitations) (continued)










Output Signal



Input Signal

Output Signal

Page 12 of 23 RFI Global Services Ltd

5.2.3. Transmitter Conducted Emissions (Out of Band)

Test Summary:

FCC Part:	74.861(e)(6) & 2.1051
Test Method:	As detailed in TIA-603-C Section 2.2.13
Test Frequency:	470.0 MHz

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	36

Results: - 470 MHz


Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1410.000	-29.6	-13.0	16.6	Complied
2350.000	-26.0	-13.0	13.0	Complied

Note(s):

- 1. All other emissions were at least 20 dB below the limit
- 2. The emission shown exceeding the limit in the 30 MHz to 1 GHz plot is the 470 MHz fundamental.

RFI Global Services Ltd Page 13 of 23


Transmitter Conducted Emissions (Out of Band) (continued)

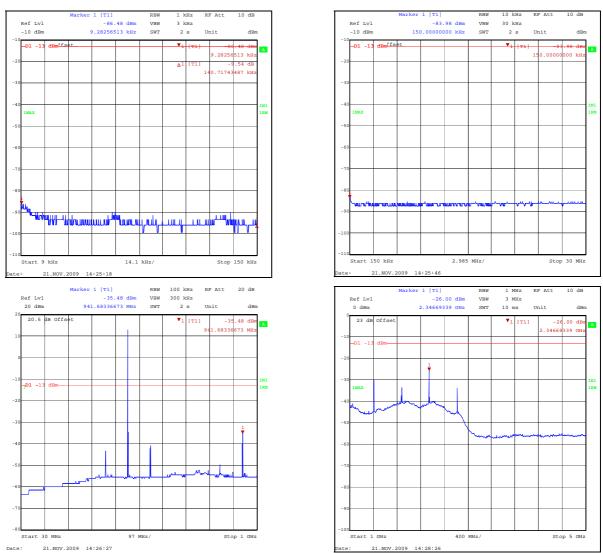

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Page 14 of 23 RFI Global Services Ltd

Transmitter Conducted Emissions (Out of Band) (continued)

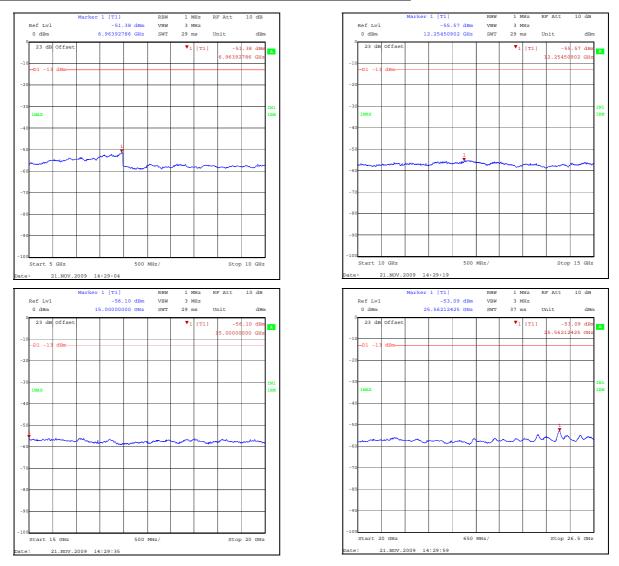

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

RFI Global Services Ltd Page 15 of 23

5.2.4. Transmitter Conducted Emissions (Out of Band)

Test Summary:

FCC Part:	74.861(e)(6) & 2.1051
Test Method:	As detailed in TIA-603-C Section 2.2.13
Test Frequency:	697.9 MHz

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	36

Results: - 470 MHz


Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
See note 1				

Note(s):

- 1. All emissions were at least 20 dB below the limit
- 2. The emission shown exceeding the limit in the 30 MHz to 1 GHz plot is the 697.9 MHz fundamental.

Page 16 of 23 RFI Global Services Ltd


Transmitter Conducted Emissions (Out of Band) (continued)

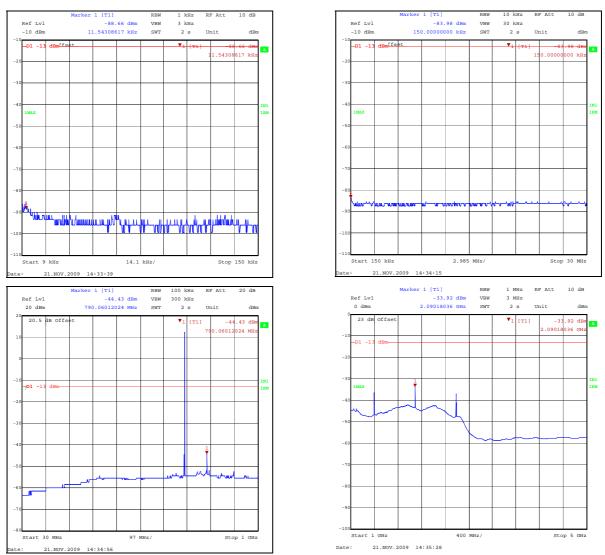

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

RFI Global Services Ltd Page 17 of 23

Transmitter Conducted Emissions (Out of Band) (continued)

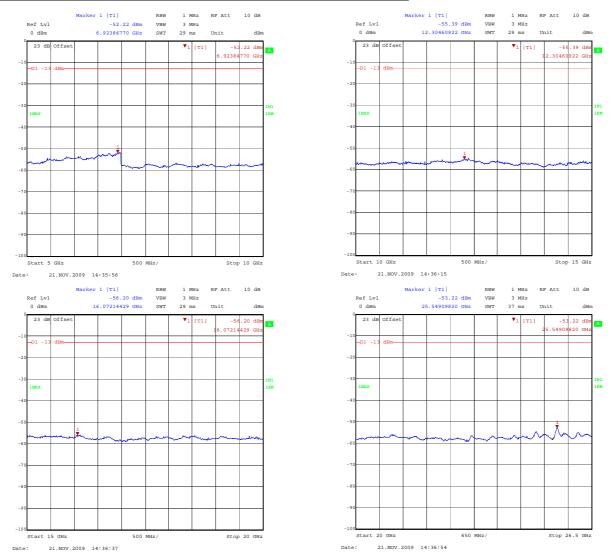

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Page 18 of 23 RFI Global Services Ltd

5.2.5. Transmitter Radiated Emissions (Out of Band)

Test Summary:

FCC Part:	74.861(e)(6) & 2.1053
Test Method:	As detailed in TIA-603-C Section 2.2.12.2

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	39

Results:


Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result	
See note 1					

Note(s):

1. All emissions were at least 20 dB below the limit

RFI Global Services Ltd Page 19 of 23


Transmitter Radiated Emissions (Out of Band) (continued)

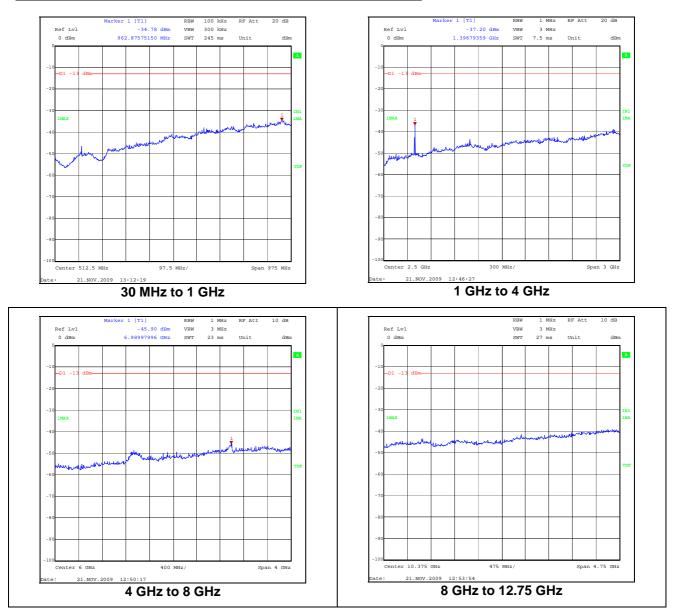


Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Page 20 of 23 RFI Global Services Ltd

Transmitter Radiated Emissions (Out of Band) (continued)





12.75 GHz to 18 GHz

18 GHz to 26.5 GHz

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

RFI Global Services Ltd Page 21 of 23

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±4.64 dB
Radiated Spurious Emissions	1 GHz to 40 GHz	95%	±2.94 dB
Carrier Output Power	30 MHz to 2 GHz	95%	±0.28 dB
Occupied Bandwidth	Not applicable	95%	±0.92 ppm

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Page 22 of 23 RFI Global Services Ltd

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A1391	Attenuator	Huber + Suhner	757987	6810.17.B	Calibrated before use	-
A1534	Pre Amplifier	Hewlett Packard	8449B OPT H02	3008A00405	Calibrated before use	-
A1737	Attenuator	Atlantic Microwave	BBS40-20	R4722	Calibrated before use	-
A436	Antenna	Flann	20240-20	330	24 Apr 2009	36
A288	Antenna	Chase	CBL6111A	1589	13 Mar 2009	12
A1818	Antenna	EMCO	3115	00075692	27 Nov 2009	12
G085	Signal Generator	Hewlett Packard	83650L	3614A00104	27 Oct 2008	24
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	01 Sep 2009	12
M1124	Spectrum Analyser	Rohde & Schwarz	ESIB26	100046K	09 Mar 2009	12
M1242	Spectrum Analyser	Rohde & Schwarz	FSEM30	845986/022	19 Dec 2008	12
M166	Thermometer	EuroCom	None	None	30 Apr 2009	12

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.

RFI Global Services Ltd Page 23 of 23