# FCC Part 15C Measurement and Test Report

## For

# TECHCITY TECHNOLOGY CO., LTD.

4F, No. 4, Alley 1, Szu Wei Lane, Chung Cheng Rd, Hsin Tien Taipei Hsien, Taiwan, R.O.C.

FCC ID: UQORP-20F

FCC Rule(s): FCC Part 15.231

Product Description: Controller

Tested Model: RP-20F

**Report No.:** <u>STR15078229I-1</u>

**Tested Date:** 2015-07-18 to 2015-08-04

**Issued Date:** <u>2015-08-04</u>

**Tested By:** Jong Wang / Engineer

Reviewed By: <u>Lahm Peng / EMC Manager</u>

Approved & Authorized By: Jandy so / PSQ Manager

Prepared By:

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Jory Wang Lahm peny

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

# TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	
1.3 TEST METHODOLOGY	
1.4 TEST FACILITY	
1.5 EUT SETUP AND TEST MODE	5
1.6 TEST EQUIPMENT LIST AND DETAILS	
2. SUMMARY OF TEST RESULTS	6
3. ANTENNA REQUIREMENT	7
3.1 STANDARD APPLICABLE.	7
3.2 TEST RESULT	
4. CONDUCTED EMISSIONS	8
4.1 Measurement Uncertainty	8
4.2 TEST PROCEDURE	
4.3 BASIC TEST SETUP BLOCK DIAGRAM	
4.4 Environmental Conditions	
4.5 TEST RECEIVER SETUP	
4.6 SUMMARY OF TEST RESULTS/PLOTS	
5. RADIATED EMISSIONS	
5.1 MEASUREMENT UNCERTAINTY	
5.2 STANDARD APPLICABLE	
5.3 TEST PROCEDURE	13
5.5 ENVIRONMENTAL CONDITIONS	
5.6 SUMMARY OF TEST RESULTS/PLOTS	
6. 20DB BANDWIDTH	
6.1 Standard Applicable	
6.1 Test Procedure.	
6.2 ENVIRONMENTAL CONDITIONS	
6.3 SUMMARY OF TEST RESULTS/PLOTS	
7. TRANSMISSION TIME	19
7.1 STANDARD APPLICABLE	19
7.2 TEST PROCEDURE.	
7.3 Environmental Conditions	19
7.4 SUMMARY OF TEST RESULTS/PLOTS	19
8. DUTY CYCLE	21
8.1 STANDARD APPLICABLE	21
8.2 Test Procedure	
8.3 Environmental Conditions	
8 4 SUMMARY OF TEST RESULTS/PLOTS	21

## 1. GENERAL INFORMATION

# 1.1 Product Description for Equipment Under Test (EUT)

**Client Information** 

Applicant: TECHCITY TECHNOLOGY CO., LTD.

Address of applicant: 4F, No. 4, Alley 1, Szu Wei Lane, Chung Cheng Rd,

Hsin Tien Taipei Hsien, Taiwan, R.O.C

Manufacturer: TECHCITY TECHNOLOGY CO., LTD.

Address of manufacturer: 4F, No. 4, Alley 1, Szu Wei Lane, Chung Cheng Rd,

Hsin Tien Taipei Hsien, Taiwan, R.O.C

General Description of EUT					
Product Name:	Controller				
Trade Name:	e-live				
Model No.:	RP-20F				
Adding Model(s):	1				
Rated Voltage:	Adapter DC 5V				
Dower Adenter Medel:	CF0605-B				
Power Adapter Model: I/P: AC 100-240V; O/P: DC5V					
Note: The test data is gathered from a production sample, provided by the manufacturer.					

Technical Characteristics of EUT	
Frequency Range:	433.92 MHz
Max. Field Strength:	66.47 dBuV/m (at 3m distance)
Data Rate:	1
Modulation:	ASK
Antenna Type:	Integral Antenna
Antenna Gain:	0 dBi
Lowest Internal Frequency of EUT:	16MHz

#### 1.2 Test Standards

The following report is prepared on behalf of the TECHCITY TECHNOLOGY CO., LTD. in accordance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

*Maintenance of compliance* is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 1.4 Test Facility

#### FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

## Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM. Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## **CNAS Registration No.: L4062**

Shenzhen SEM. Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode L	ist	
Test Mode	Description	Remark
TM1	Working	
TM2	Transmitting	With modulation

Special Cable List and Details						
Cable Description Length (m) Shielded/Unshielded With / Without Ferrite						
/	/ /		/			

Auxiliary Equipment List and Details						
Description Manufacturer Model Serial Number						
/	/	/	/			

# 1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	<b>Due Date</b>
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

# 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209	Radiated Spurious Emissions	Compliant
§15.231(a)	Deactivation Testing	Compliant
§15.231(b)	Radiated Emissions	Compliant
§15.231(c)	20dB Bandwidth Testing	Compliant

# 3. Antenna Requirement

## 3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

## 3.2 Test Result

This product has a permanent antenna, fulfill the requirement of this section.

## 4. Conducted Emissions

## 4.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

## **4.2 Test Procedure**

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

## 4.3 Basic Test Setup Block Diagram

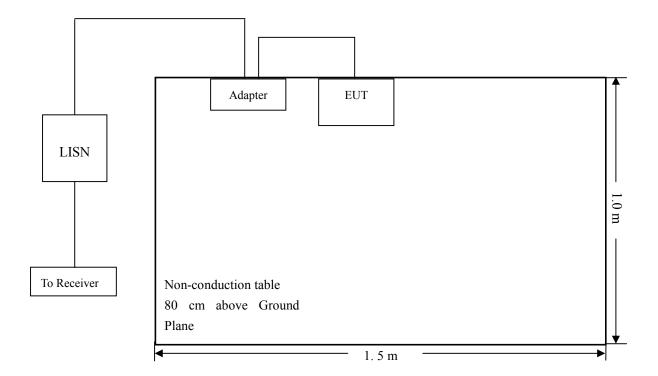

## **4.4 Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 4.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	
Sweep Speed	Auto
IF Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

# 4.6 Summary of Test Results/Plots

According to the data in section 4.7, the EUT <u>complied with the FCC Part 15.207</u> Conducted margin for a Class B device, with the *worst* margin reading of:

-15.44 dB at 0.3860 MHz in the Line mode, Average detector, 0.15-30MHz


## 4.7 Conducted Emissions Test Data

## **Plot of Conducted Emissions Test Data**

EUT: Controller
Tested Model: RP-20F
Operating Condition: TM1


Comment: AC 120V/50Hz; Adapter DC 5V

Test Specification: Neutral

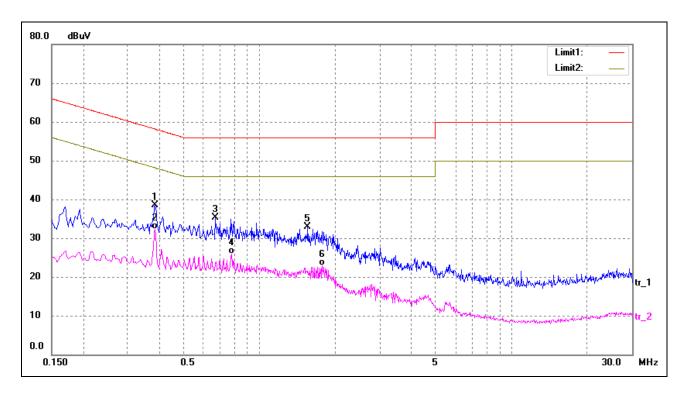

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.3860	26.10	12.50	38.60	58.15	-19.55	peak
2*	0.3860	19.71	12.50	32.21	48.15	-15.94	AVG
3	0.6700	22.68	12.67	35.35	56.00	-20.65	peak
4	0.7780	13.17	12.78	25.95	46.00	-20.05	AVG
5	1.5580	19.87	13.00	32.87	56.00	-23.13	peak
6	1.7780	9.95	13.00	22.95	46.00	-23.05	AVG

Test Specification: Line

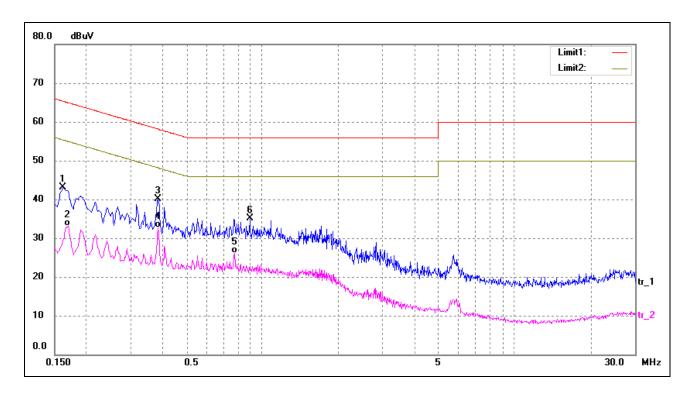

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.1620	30.56	12.50	43.06	65.36	-22.30	peak
2	0.1700	20.57	12.50	33.07	54.96	-21.89	AVG
3	0.3860	27.51	12.50	40.01	58.15	-18.14	peak
4	0.3860	20.21	12.50	32.71	48.15	-15.44	AVG
5	0.7780	13.29	12.78	26.07	46.00	-19.93	AVG
6	0.8940	22.12	12.89	35.01	56.00	-20.99	peak

#### 5. Radiated Emissions

## **5.1 Measurement Uncertainty**

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is +5.10 dB.

## **5.2 Standard Applicable**

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)	
40.66 - 40.70	2,250	225	
70 - 130	1,250	125	
130 - 174	1,250 to 3,750 **	125 to 375 **	
174 - 260	3,750	375	
260 - 470	3,750 to 12,500 **	375 to 1,250 **	
Above 470	12,500	1,250	

<sup>\*\*</sup> linear interpolations


The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

## **5.3 Test Procedure**

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.205 15.231(b) and FCC Part 15.209 Limit.

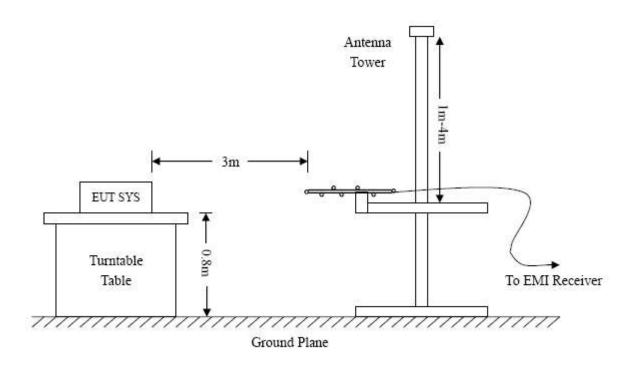

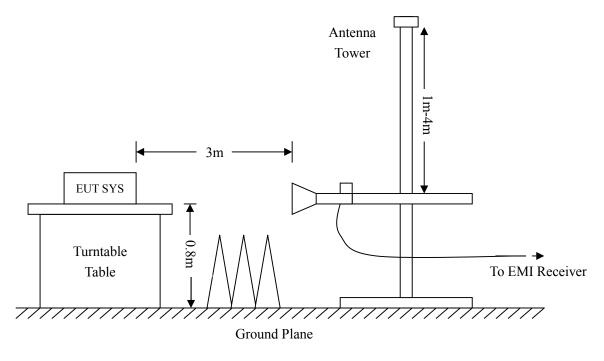

## 5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading +Ant.Loss +Cab. Loss - Ampl.Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6dB\mu V$  means the emission is  $6dB\mu V$  below the maximum limit. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – FCC Part 15C Limit

#### **5.5 Environmental Conditions**

Temperature:	21° C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

## 5.6 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.231 standards, and had the worst margin of:

-2.29 dB at 360.4477 MHz in the Horizontal polarization, Peak Detector, 9kHz to 5 GHz, 3 Meters


Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

## **Plot of Radiated Emissions Test Data**

EUT: Controller
Tested Model: RP-20F
Operating Condition: TM1

Comment: AC 120V/50Hz; Adapter DC 5V

Test Specification: Horizontal

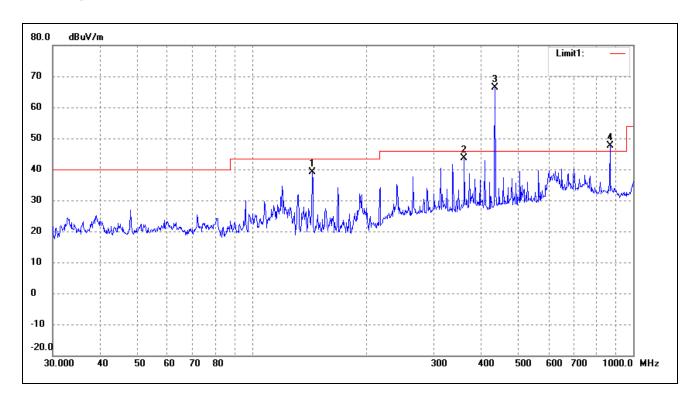


No.	Frequency	Reading	Corr.	Dutycycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor(	Factor	dBuV/m	dBuV/m	(dB)	( ° )	(cm)	
			dB)	(dB)						
1	143.8295	35.93	3.26	N/A	39.19	43.50	-4.31	102	100	peak
2	360.4477	31.47	12.24	N/A	43.71	46.00	-2.29	59	100	peak
3	433.9200	53.64	12.83	N/A	66.47	100.83	-34.36	180	100	peak
	433.9200	/	/	-9.73	56.74	80.83	-24.09	180	100	Ave
4	869.1302	30.19	17.54	N/A	47.73	80.83	-33.10	180	100	peak
	867.8400	/	/	-9.73	38.00	60.83	-22.83	180	100	Ave

## Above 1GHz

No.	Frequency	Reading	Corr.	Dutycycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor	Factor	dBuV/m	dBuV/m	dB	(°)	(cm)	
			(dB)	(dB)						
1	1302.30	50.79	-8.36	N/A	42.43	74.00	-31.57	90	100	Peak
2	1736.40	48.28	-7.00	N/A	41.28	74.00	-32.72	210	100	Peak
	1302.30	/	/	-9.73	32.70	54.00	-21.30	90	100	Ave
	1736.40	/	/	-9.73	31.55	54.00	-22.45	210	100	Ave

Test Specification: Vertical

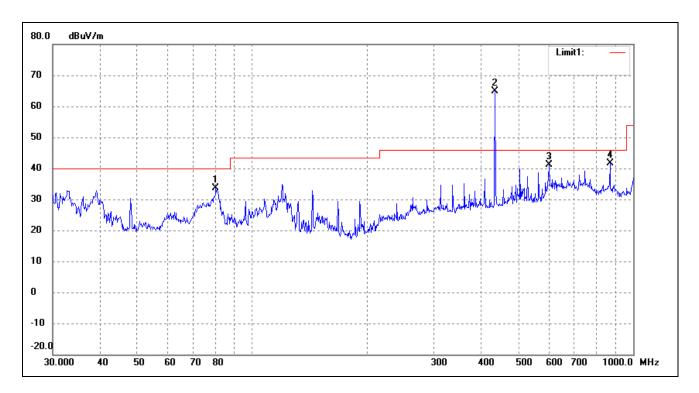

No.	Frequency	Reading	Corr.	Dutycycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor(	Factor	dBuV/m	dBuV/m	(dB)	( ° )	(cm)	
			dB)	(dB)						
1	80.3619	31.57	2.06	N/A	33.63	40.00	-6.37	56	100	peak
2	433.9200	52.15	12.83	N/A	64.98	100.83	-35.85	90	100	peak
	433.9200	/	/	-9.73	55.21	80.83	-25.62	90	100	Ave
3	601.4265	21.79	19.22	N/A	41.01	46.00	-4.99	135	100	peak
4	867.8400	24.00	17.54	N/A	41.54	80.83	-39.29	90	100	peak
	867.8400	/	/	-9.73	31.81	60.83	-29.02	90	100	Ave

## Above 1GHz

No.	Frequency	Reading	Corr.	Dutycycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor	Factor	dBuV/m	dBuV/m	dB	(°)	(cm)	
			(dB)	(dB)						
1	1302.30	46.62	-8.30	N/A	38.32	74.00	-31.68	47	100	Peak
2	1736.40	43.36	-7.00	N/A	36.36	74.00	-37.64	136	100	Peak
	1302.30	/	/	-9.73	28.59	54.00	-25.41	47	100	Ave
	1736.40	/	/	-9.73	26.63	54.00	-27.37	136	100	Ave

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the operating frequency 433.92MHz. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

## 6. 20dB Bandwidth

## **6.1 Standard Applicable**

According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

## **6.1 Test Procedure**

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

## **6.2 Environmental Conditions**

Temperature:	21° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar


## 6.3 Summary of Test Results/Plots

Test Frequency MHz	•		Result	
433.92	82.672	1084	Pass	

Limit = Fundamental Frequency X 0.25% = 433.92 MHz X 0.25% = 1084 kHz

Please refer to the attached plots.

#### 20dB Bandwidth Test Plot

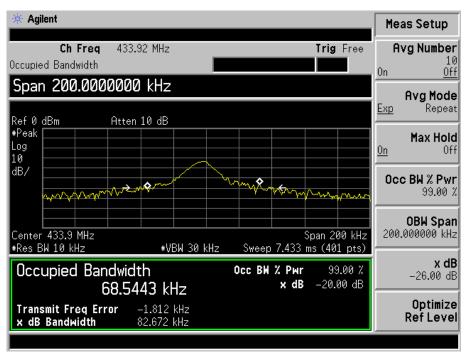

## 7. Transmission Time

## 7.1 Standard Applicable

According to FCC Part 15.231 (a), the transmitter shall be complied the following requirements:

- 1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

#### 7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

#### 7.3 Environmental Conditions


Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

## 7.4 Summary of Test Results/Plots

Transmission Type	Test Frequency MHz	Transmission Time seconds	Limit s	Result
Manually	433.92	0.5125	5	Pass

Please refer to the attached plots.

#### **Transmission Time**

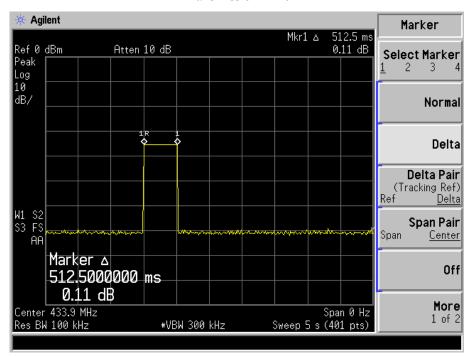

# 8. Duty Cycle

## 8.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

## **8.2 Test Procedure**

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

## 8.3 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

## 8.4 Summary of Test Results/Plots


Type of Pulse	Width of Pulse	Quantity of Pulse	<b>Transmission Time</b>	<b>Total Time (Ton)</b>
	ms		ms	ms
Pulse 1	4.1	1	4.1	
Pulse 2	0.2	21	4.2	21.28
Pulse 3	1.18	11	12.98	


	Test Period (T <sub>p</sub> )	<b>Total Time (Ton)</b>	Duty Cycle	<b>Duty Cycle Factor</b>
	ms	ms	%	dB
I	65.25	21.28	32.61	-9.73

Remark: Duty Cycle Factor=20\*log(Duty Cycle)


Please refer to the attached test plots

## Quantity of Pulse

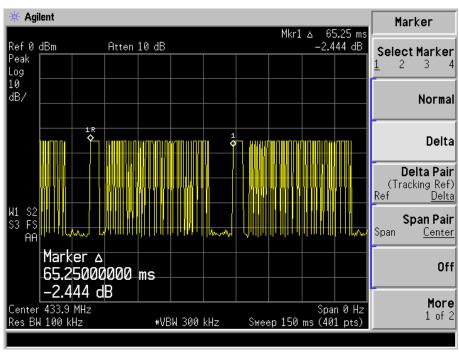


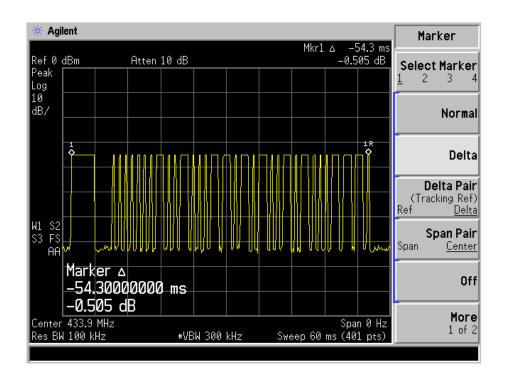

#### Width of Pulse 1 and Pulse 2

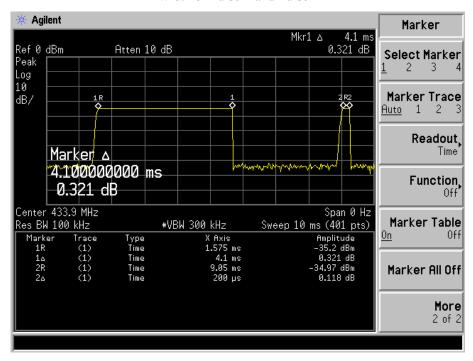

#### Width of Pulse 2 and Pulse 3

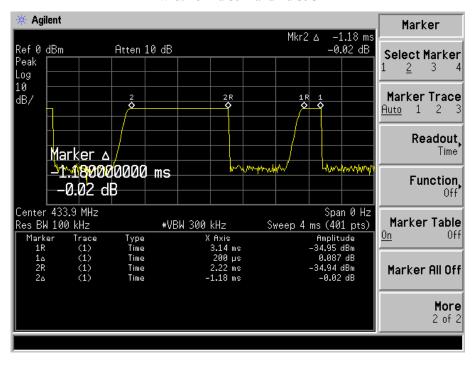

#### \*\*\*\*\* END OF REPORT \*\*\*\*\*