



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	DictaNet Software AG
Applicant Address	Am Borsigturm 56, 13507 Berlin, Germany
FCC ID	US6DM24
Manufacturer's company	DictaNet Software AG
Manufacturer Address	Am Borsigturm 56, 13507 Berlin, Germany

Product Name	Wireless Microphone
Brand Name	DictaNet
Model Name	DictaMike
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.249
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 12, 2006
Final Test Date	Nov. 28, 2006
Submission Type	Original Equipment



### Statement

**Test result included in this report is only for the transmitter portion of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

NVLAP®

Lab Code: 200079-0

## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION.....</b>	<b>3</b>
3.1. Product Details .....	3
3.2. Accessories .....	3
3.3. Table for Carrier Frequencies .....	3
3.4. Table for Test Modes .....	4
3.5. Table for Testing Locations.....	4
3.6. Table for Supporting Units .....	4
3.7. Test Configurations.....	5
<b>4. TEST RESULT.....</b>	<b>7</b>
4.1. AC Power Line Conducted Emissions Measurement .....	7
4.2. Field Strength of Fundamental Emissions Measurement.....	11
4.3. 20dB Spectrum Bandwidth Measurement .....	14
4.4. Radiated Emissions Measurement.....	17
4.5. Band Edge Emissions Measurement.....	31
4.6. Antenna Requirements .....	34
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>35</b>
<b>6. TEST LOCATION.....</b>	<b>37</b>
<b>7. NVLAP CERTIFICATE OF ACCREDITATION .....</b>	<b>38</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A10</b>
<b>APPENDIX B. TEST PHOTOS .....</b>	<b>B1 ~ B4</b>



## History of This Test Report

Original Issue Date: Dec. 01, 2006

Report No.: FR6O1209

- No additional attachment.
- Additional attachment were issued as following record:



## 1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless Microphone  
Brand Name : DictaNet  
Model Name : DictaMike  
Applicant : DictaNet Software AG  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.249

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 12, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jean Huang Dec. 08, 2006

Prepared By:

Jean Huang / Specialist

Sam Lee 12.8.06

Tested By:

Sam Lee / Engineer

Roger Sheng Dec. 8, 2006

Reviewed By:

Roger Sheng / Manager

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	9.99 dB
4.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	8.17 dB
4.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
4.4	15.249(a)/(d)	Radiated Emissions	Complies	3.22 dB
4.5	15.249(d)	Band Edge Emissions	Complies	9.58 dB
4.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

The EUT is a transmitter of a pair of TX/RX. Only test data of TX were recorded in this report.

Items	Description
Power Type	From Battery / 3.0 Vdc
Modulation	FSK
Frequency Range	2400 ~ 2483.5MHz
Channel Number	36
Channel Band Width (99%)	1.73 MHz
Max. Field Strength	43.38 dBuV/m at 3m (Average)
Antenna	PIFA Antenna / 1.50 dBi

#### 3.2. Accessories

Others
USB Cable / Battery (3.7V)

#### 3.3. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2400 ~ 2483.5MHz	1	2407 MHz
	2	2409 MHz
	:	:
	18	2441 MHz
	19	2443 MHz
	20	2445 MHz
	:	:
	35	2475 MHz
	36	2477 MHz

### 3.4. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	Normal Link	19
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	1/19/36
Radiated Emissions 9kHz~1GHz	CTX	19
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	1/19/36
Band Edge Emissions	CTX	1/36

Note: CTX=continuously transmitting

### 3.5. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.


### 3.6. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D525	DoC
Modem	ACEEX	DM-1414	IFAXDM1414
USB Mouse	Microsoft	1004	DoC

### 3.7. Test Configurations

#### 3.7.1. Radiation Emissions Test Configuration


##### For spurious emission below 1GHz

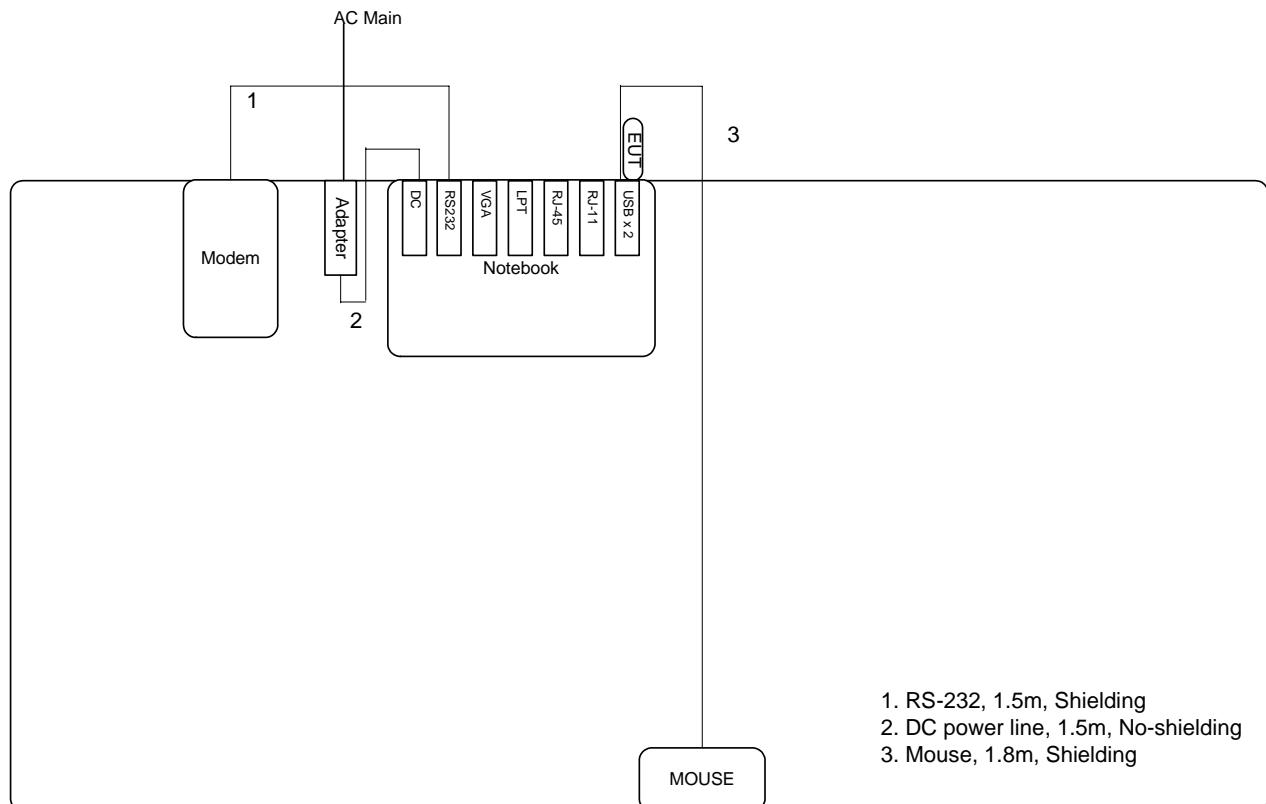

##### For spurious emission above 1GHz



### Charge Mode

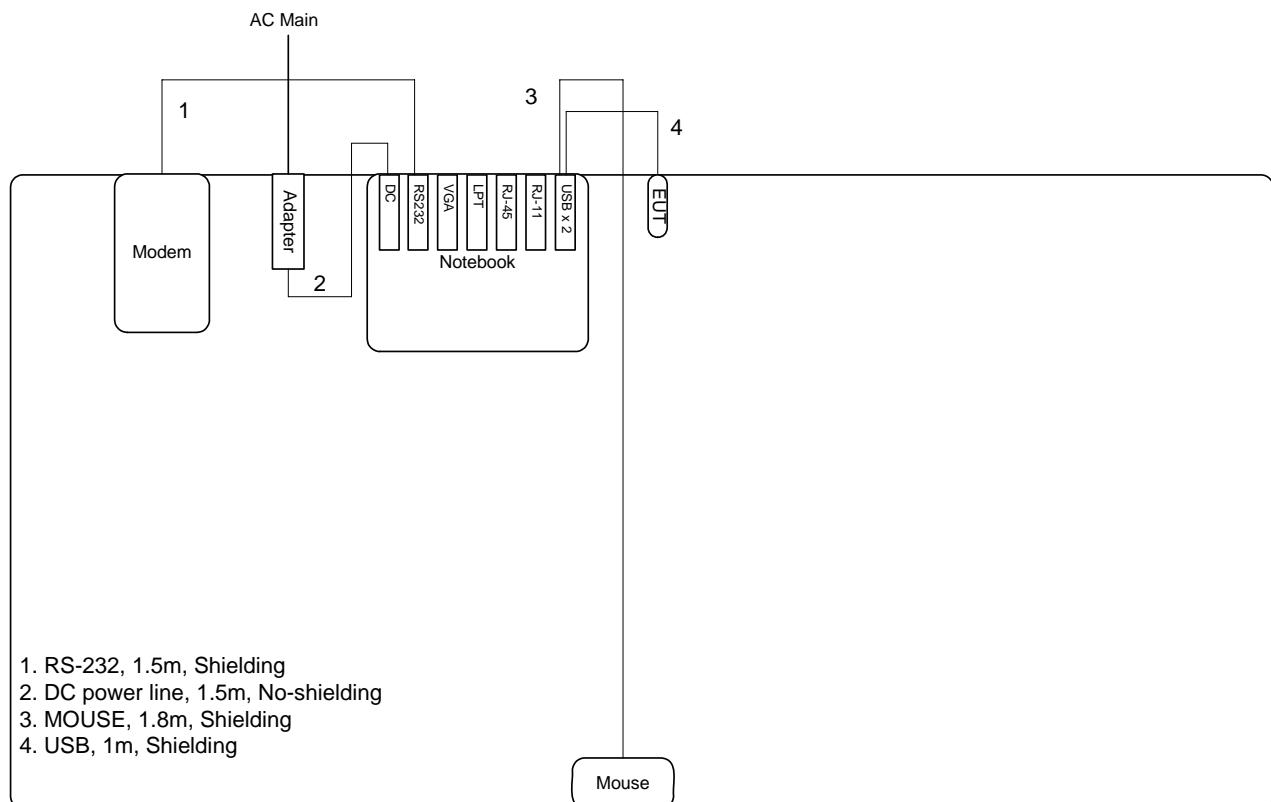

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

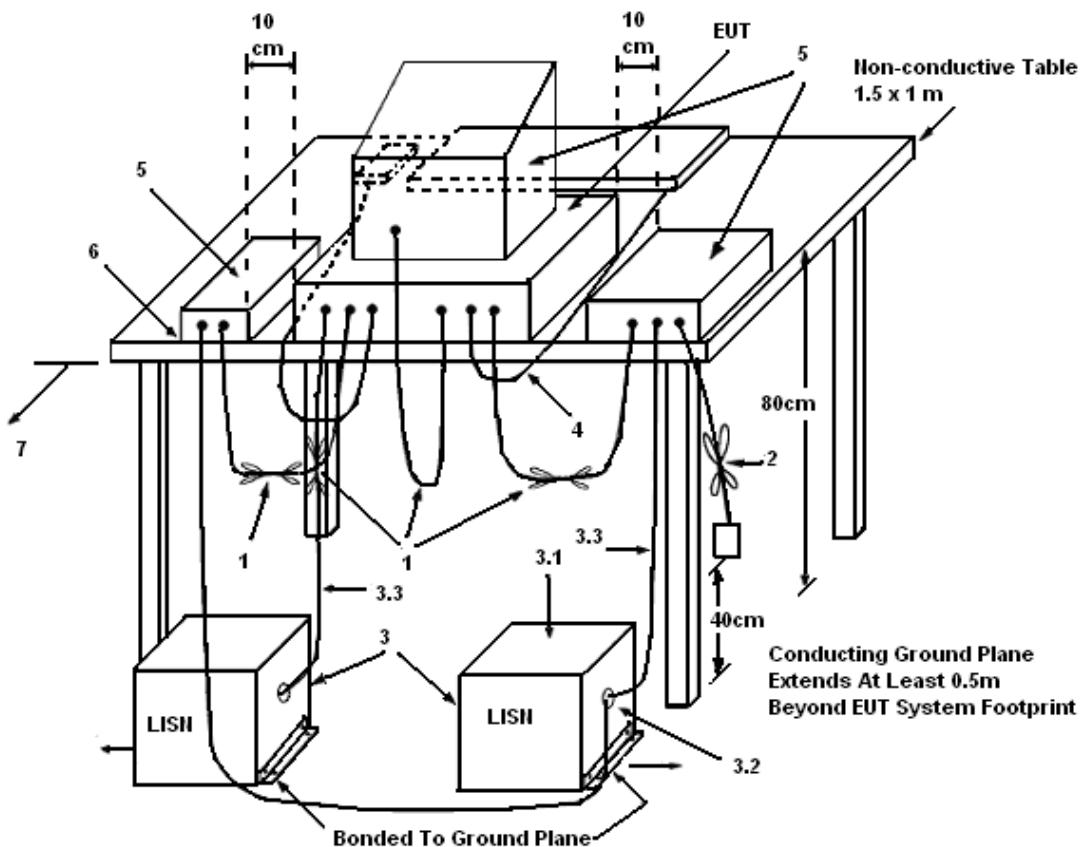

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50\ \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	27.1	Humidity	50%
Test Engineer	Eric Chen	Phase	Line
Configuration	Charge Mode		

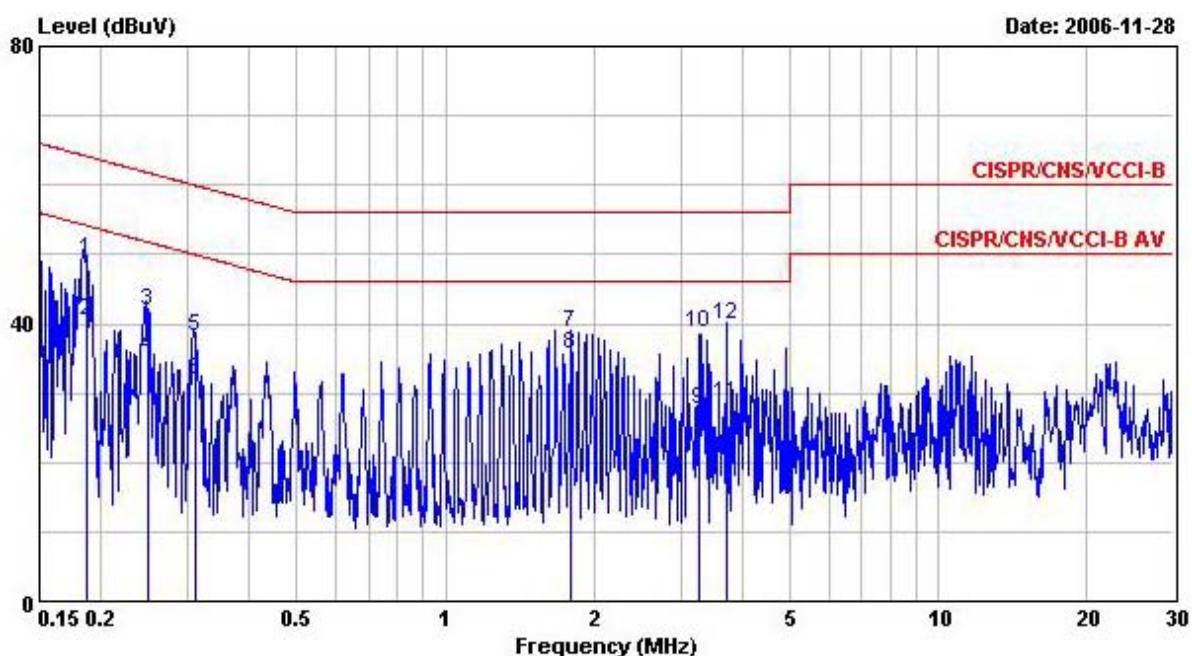

Freq	Level	Over	Limit	Read	LISN	Cable
		Limit	Line	Level	Factor	Loss
0.1866800	49.33	-14.85	64.18	48.99	0.10	0.24 QP
0.1866800	40.55	-13.63	54.18	40.21	0.10	0.24 Average
0.2481040	41.86	-19.96	61.82	41.56	0.10	0.20 QP
0.2481040	35.31	-16.51	51.82	35.01	0.10	0.20 Average
0.3096210	38.19	-21.79	59.98	37.99	0.10	0.10 QP
0.3096210	31.96	-18.02	49.98	31.76	0.10	0.10 Average
1.795	38.78	-17.22	56.00	38.48	0.10	0.20 QP
1.795	35.47	-10.53	46.00	35.17	0.10	0.20 Average
3.281	27.65	-18.35	46.00	27.25	0.10	0.30 Average
3.281	38.61	-17.39	56.00	38.21	0.10	0.30 QP
3.715	28.36	-17.64	46.00	27.96	0.10	0.30 Average
3.715	39.87	-16.13	56.00	39.47	0.10	0.30 QP

Temperature	27.1	Humidity	50%
Test Engineer	Eric Chen	Phase	Neutral
Configuration	Charge Mode		

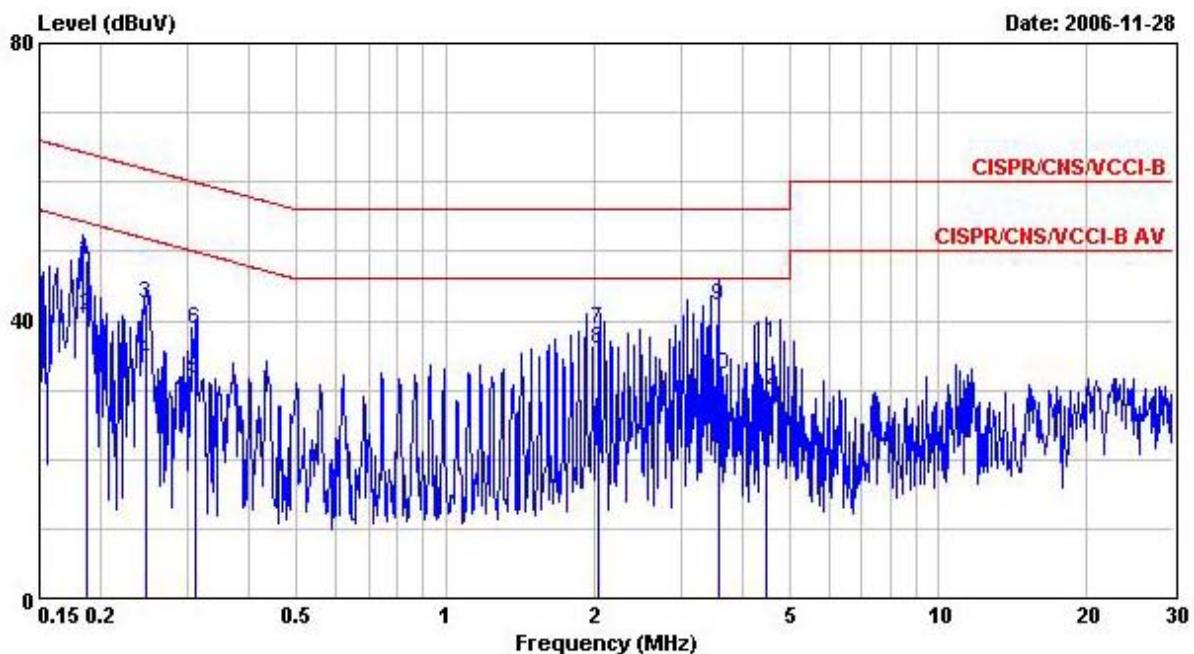

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 0.1869800	48.57	-15.60	64.17	48.23	0.10	0.24	QP
2 @0.1869800	40.72	-13.45	54.17	40.38	0.10	0.24	Average
3 0.2468940	42.50	-19.36	61.86	42.20	0.10	0.20	QP
4 0.2468940	34.08	-17.78	51.86	33.78	0.10	0.20	Average
5 0.3099790	31.73	-18.24	49.97	31.53	0.10	0.10	Average
6 0.3099790	38.75	-21.22	59.97	38.55	0.10	0.10	QP
7 2.045	38.69	-17.31	56.00	38.38	0.10	0.21	QP
8 @ 2.045	36.01	-9.99	46.00	35.70	0.10	0.21	Average
9 @ 3.600	42.21	-13.79	56.00	41.73	0.18	0.30	QP
10 @ 3.600	32.23	-13.77	46.00	31.75	0.18	0.30	Average
11 4.461	36.73	-19.27	56.00	36.22	0.21	0.30	QP
12 4.461	30.00	-16.00	46.00	29.49	0.21	0.30	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Field Strength of Fundamental Emissions Measurement

### 4.2.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94
5725-5875	94

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

#### 4.2.4. Test Setup Layout

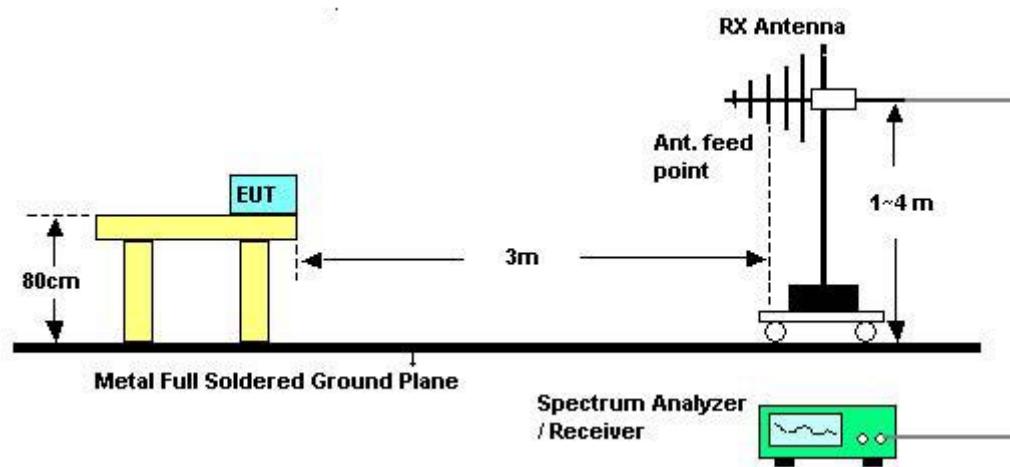

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.2.7. Test Result of Field Strength of Fundamental Emissions

Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao	Configurations	Channel 1/19/36

Channel 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
3	2407.000	83.02	-10.98	94.00	52.81	28.33	1.88	0.00	Average
3	2407.090	91.71	-22.29	114.00	61.50	28.33	1.88	0.00	Peak

Channel 19

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2441.290	83.55	-10.45	94.00	53.24	28.40	1.91	0.00	Average
1	2441.290	92.73	-21.27	114.00	62.42	28.40	1.91	0.00	Peak

Channel 36

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2477.010	85.83	-8.17	94.00	55.43	28.47	1.94	0.00	Average
1	2477.010	94.71	-19.29	114.00	64.31	28.47	1.94	0.00	Peak

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### 4.3. 20dB Spectrum Bandwidth Measurement

#### 4.3.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2400 ~ 2483.5MHz).

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

#### 4.3.4. Test Setup Layout

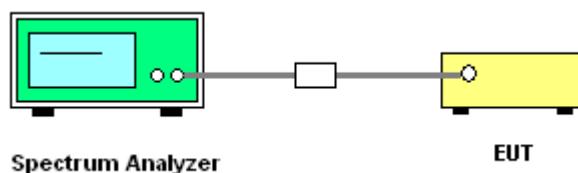

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

## 4.3.7. Test Result of 20dB Spectrum Bandwidth

Temperature	28	Humidity	58%
Test Engineer	Sam Lee	Configurations	Channel 1/19/36


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2407 MHz	1.83	1.71	2405.9100	-	Complies
2443 MHz	1.82	1.71	-	-	Complies
2477 MHz	1.85	1.73	-	2477.7700	Complies

20 dB/99% Bandwidth Plot on 2407 MHz

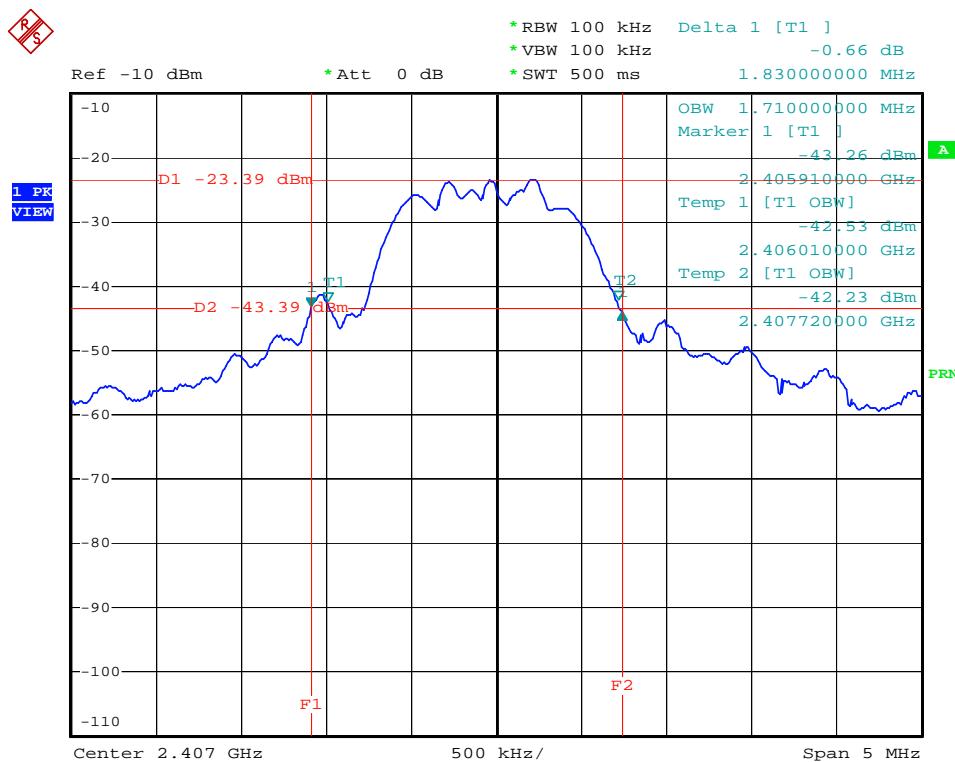


Date: 28.NOV.2006 08:51:41

### 20 dB/99% Bandwidth Plot on 2443 MHz

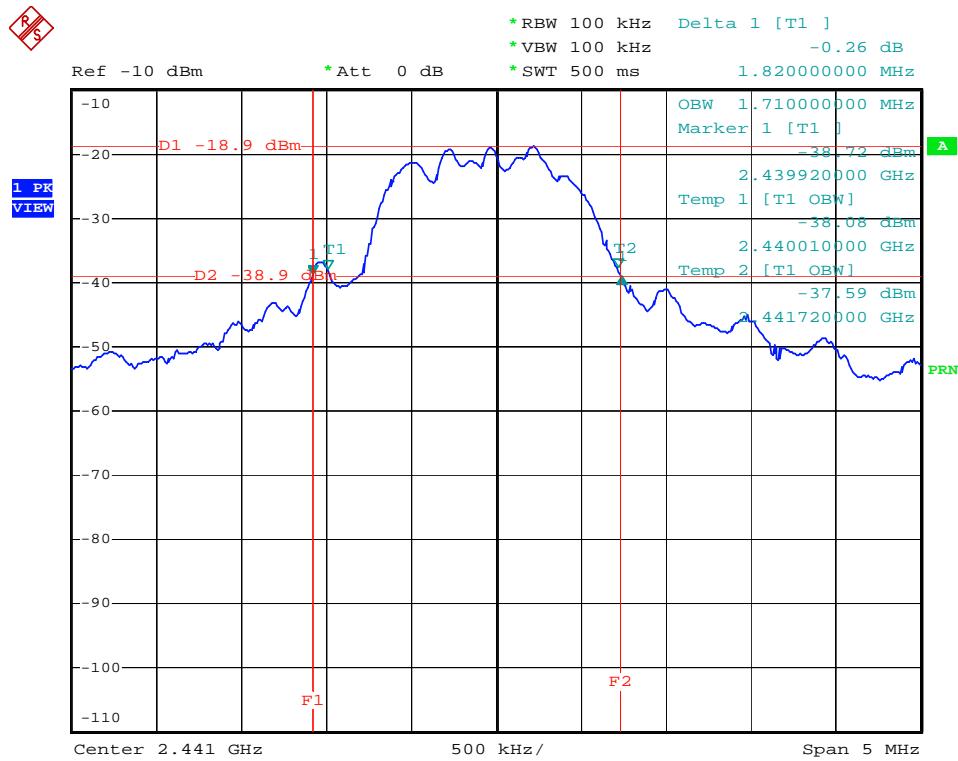

Date: 28.NOV.2006 08:57:49

### 20 dB/99% Bandwidth Plot on 2477 MHz

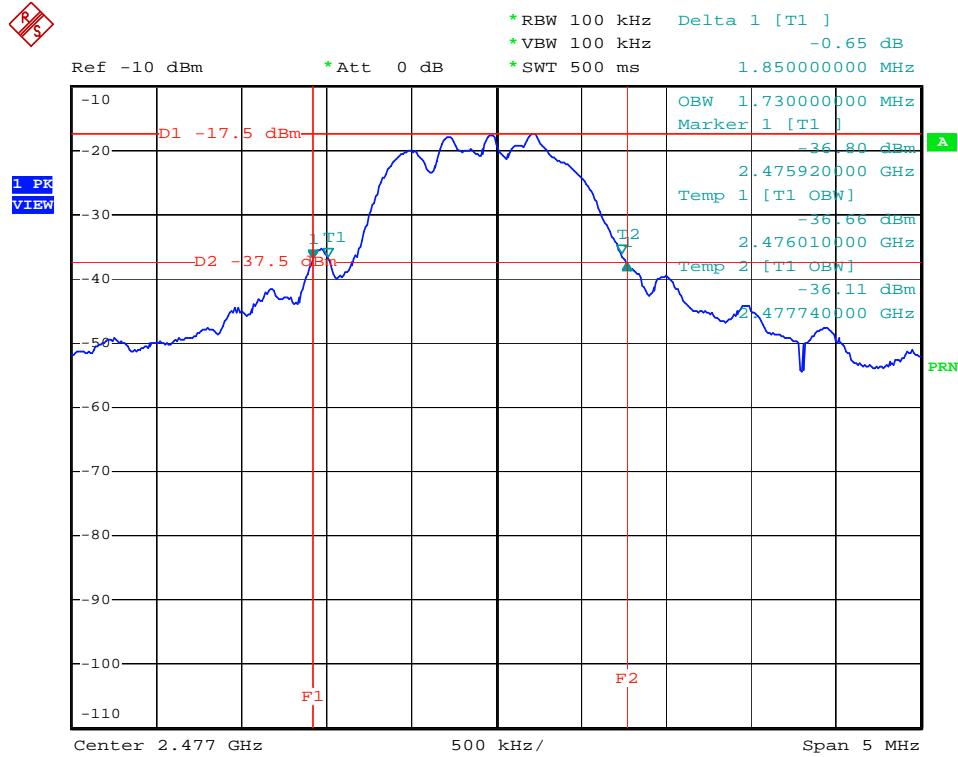

Date: 28.NOV.2006 08:54:41

## 4.4. Radiated Emissions Measurement

### 4.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.4.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.4.4. Test Setup Layout

For radiated emissions below 30MHz

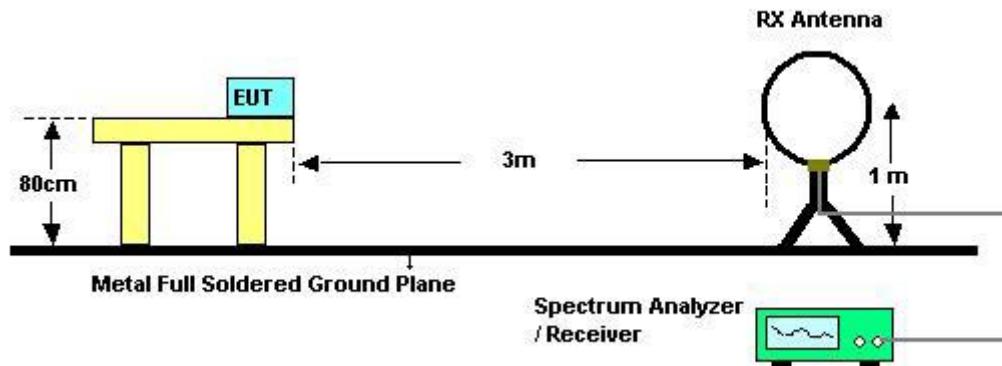

For radiated emissions above 30MHz

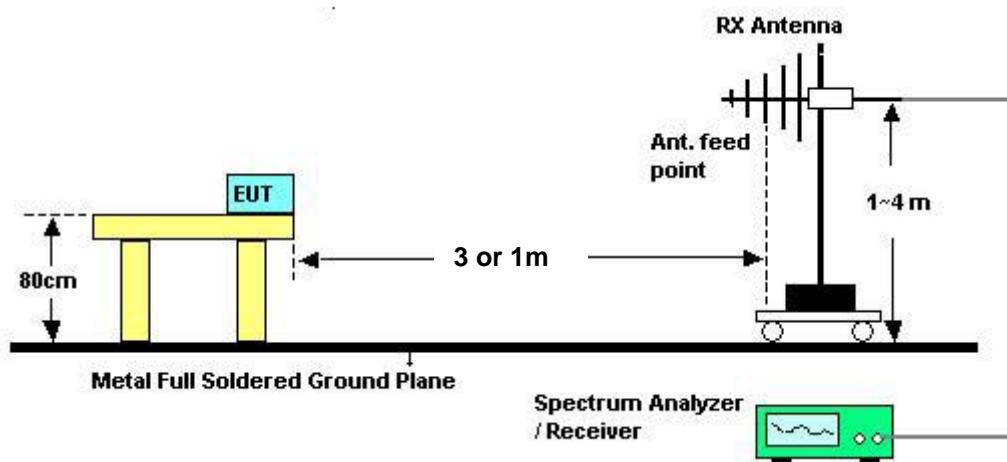

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 4.4.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao	Configurations	Channel 19

Horizontal

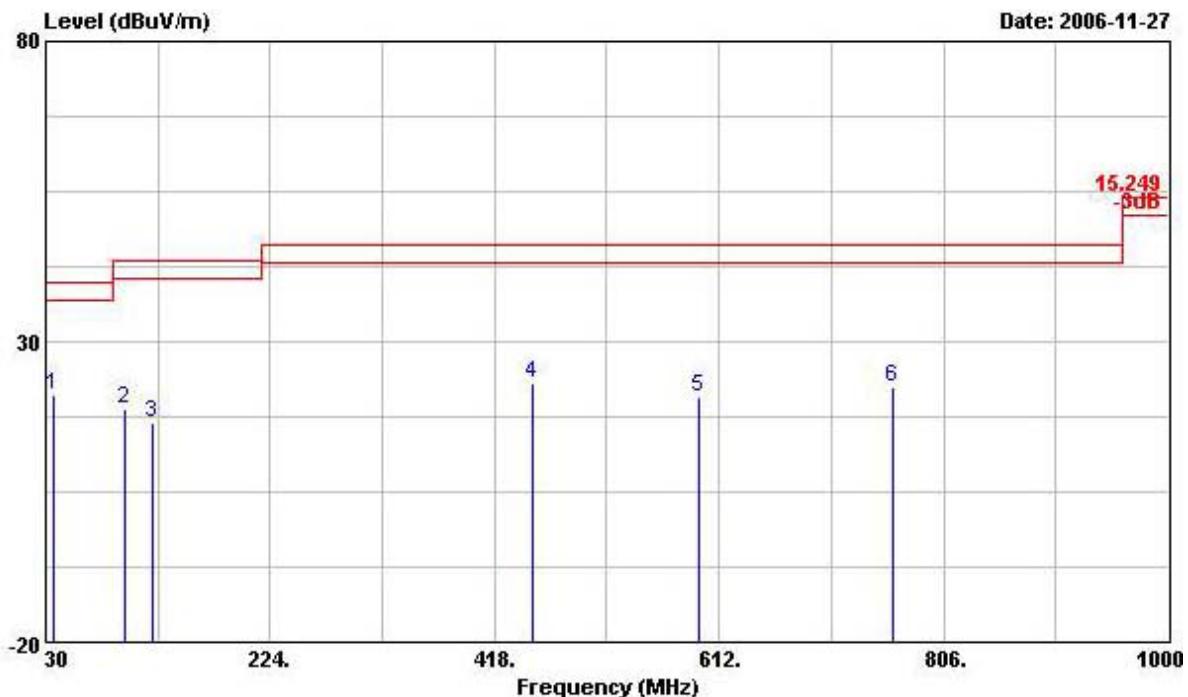

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	dB	dB	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	36.790	21.22	-18.78	40.00	34.16	14.35	0.53	27.81 Peak
2	97.900	18.88	-24.62	43.50	34.55	10.86	1.32	27.85 Peak
3	122.150	16.57	-26.93	43.50	30.35	12.56	1.69	28.03 Peak
4	450.980	23.02	-22.98	46.00	31.51	17.13	3.66	29.28 Peak
5	594.540	20.81	-25.19	46.00	26.82	19.30	4.37	29.68 Peak
6	762.350	22.31	-23.69	46.00	26.42	20.73	4.92	29.76 Peak

## Vertical

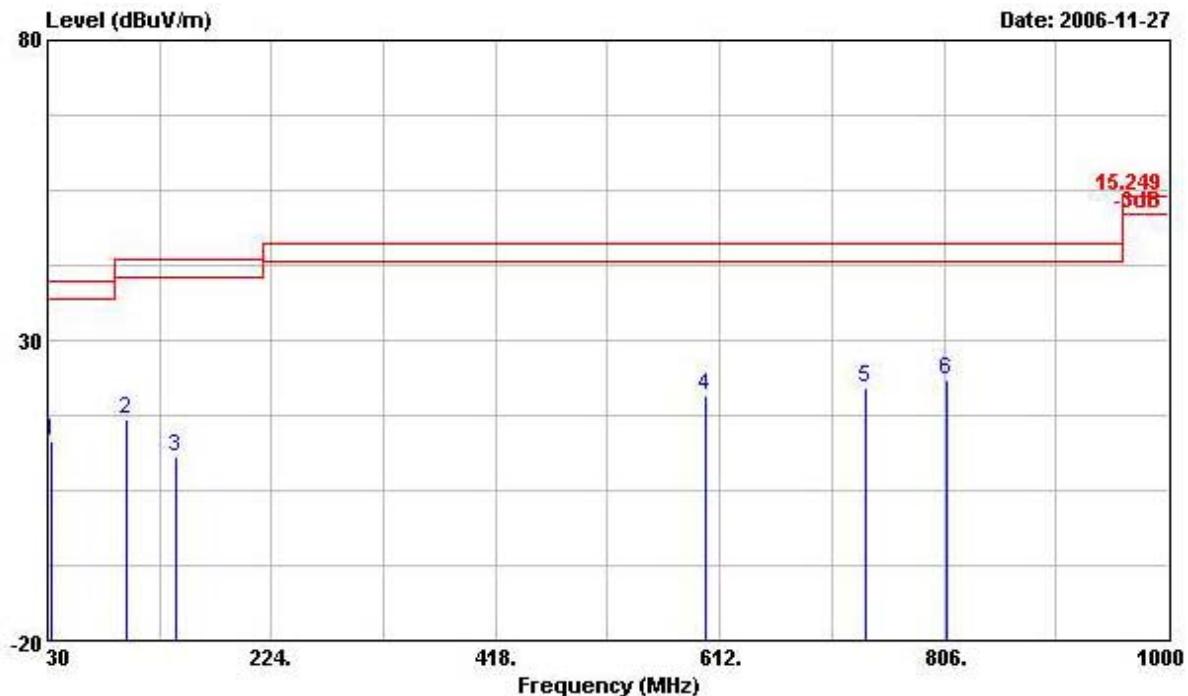

Freq	Level	Over Limit	Limit Line	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark
				dB	dBuV/m				
1	32.910	13.19	-26.81	40.00	23.88	16.71	0.38	27.78	Peak
2	97.900	16.81	-26.69	43.50	32.48	10.86	1.32	27.85	Peak
3	141.550	10.65	-32.85	43.50	25.62	11.26	1.86	28.09	Peak
4	599.390	20.94	-25.06	46.00	26.85	19.30	4.47	29.68	Peak
5	739.070	21.97	-24.03	46.00	26.39	20.54	4.79	29.75	Peak
6	808.910	23.53	-22.47	46.00	27.29	20.77	5.36	29.88	Peak

## Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao	Configurations	Charge Mode

## Horizontal

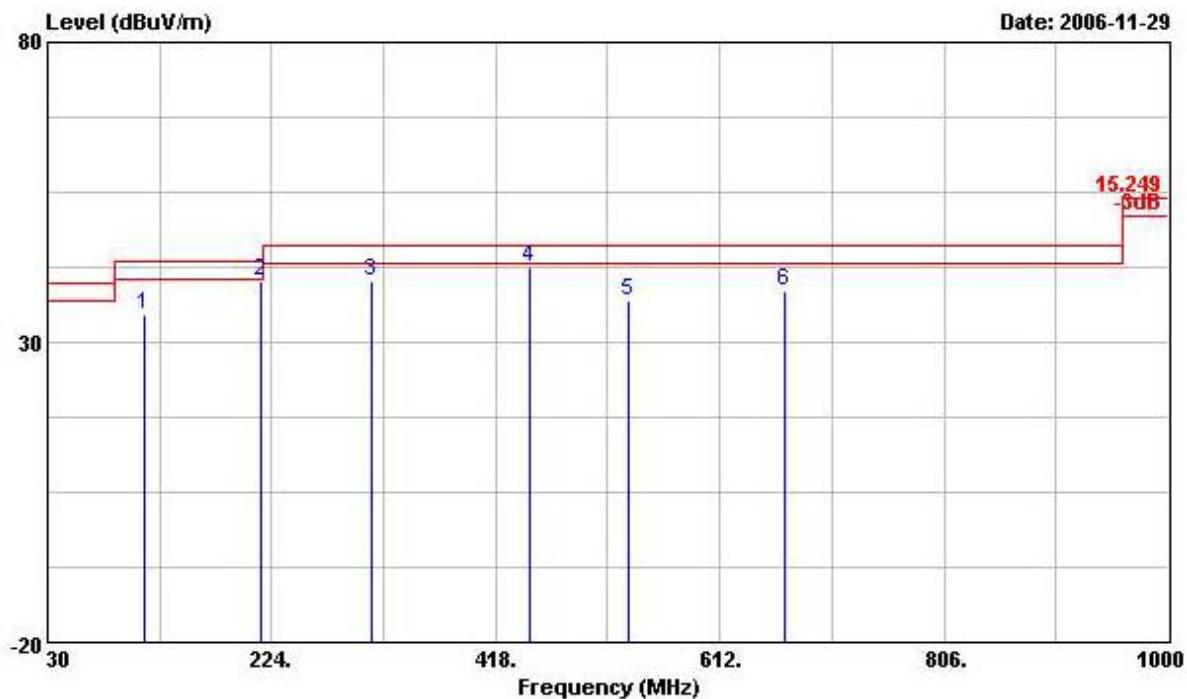

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	114.390	34.61	-8.89	43.50	48.49	12.52	1.58	27.97 Peak
2	214.300	40.28	-3.22	43.50	57.00	9.29	2.26	28.27 Peak
3	311.300	40.31	-5.69	46.00	51.96	14.02	2.98	28.64 Peak
4	448.070	42.40	-3.60	46.00	50.90	17.08	3.64	29.23 Peak
5	532.460	37.05	-8.95	46.00	43.91	18.88	3.95	29.69 Peak
6	668.260	38.58	-7.42	46.00	44.31	19.75	4.54	30.02 Peak

## Vertical

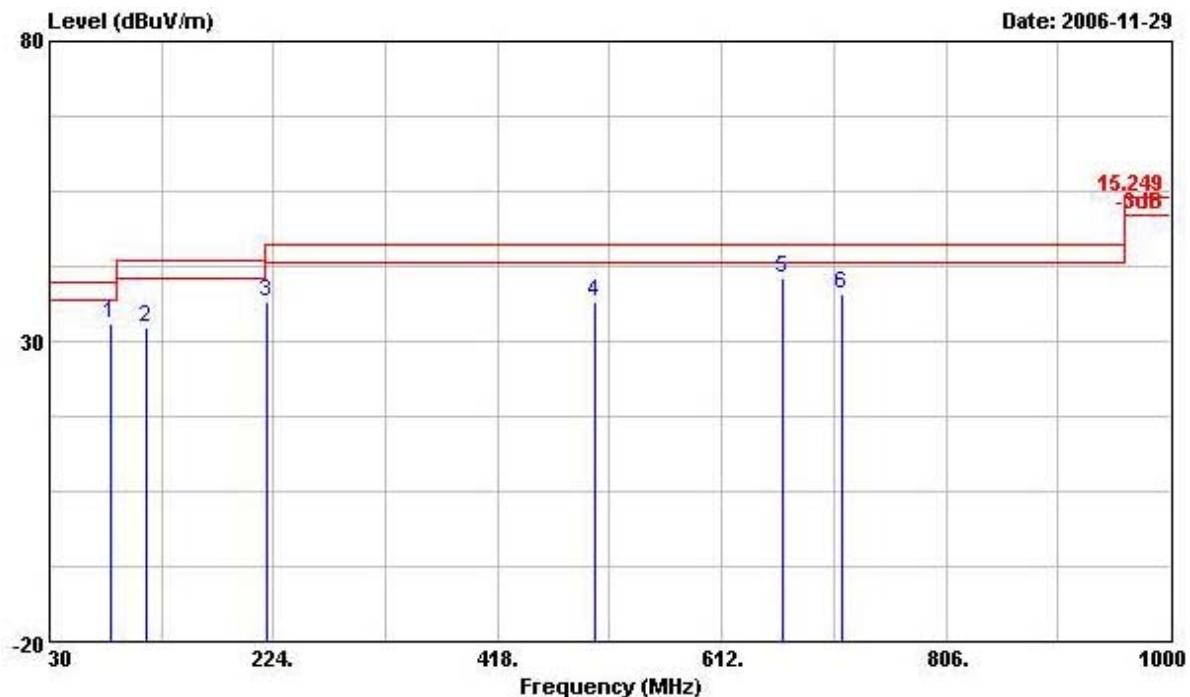

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	83.350	32.85	-7.15	40.00	51.32	8.00	1.33	27.80 Peak
2	113.420	32.37	-11.13	43.50	46.28	12.49	1.56	27.96 Peak
3	218.180	36.63	-9.37	46.00	53.48	9.20	2.24	28.29 Peak
4	501.420	36.51	-9.49	46.00	44.23	18.15	3.82	29.69 Peak
5	664.380	40.47	-5.53	46.00	46.29	19.73	4.48	30.03 Peak
6	715.790	38.05	-7.95	46.00	42.99	20.21	4.69	29.84 Peak

## Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.4.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao	Configurations	Channel 1

Horizontal

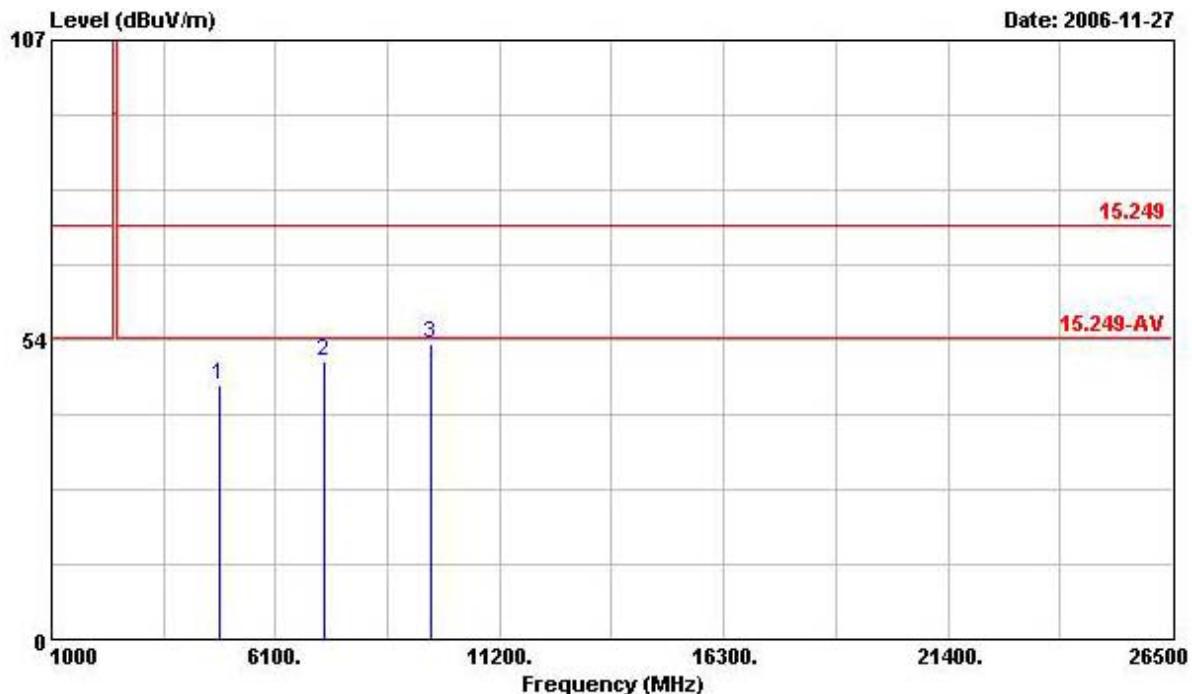

Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Remark
		MHz	dBuV/m	dB	Line	Level Factor	dB/m	
1	4814.000	45.23	-28.77	74.00	41.35	33.06	3.15	32.32 Peak
2	7221.000	49.49	-24.51	74.00	41.95	35.94	4.15	32.55 PEAK
3	9624.000	52.90	-21.10	74.00	42.77	38.52	4.40	32.80 PEAK


## Vertical

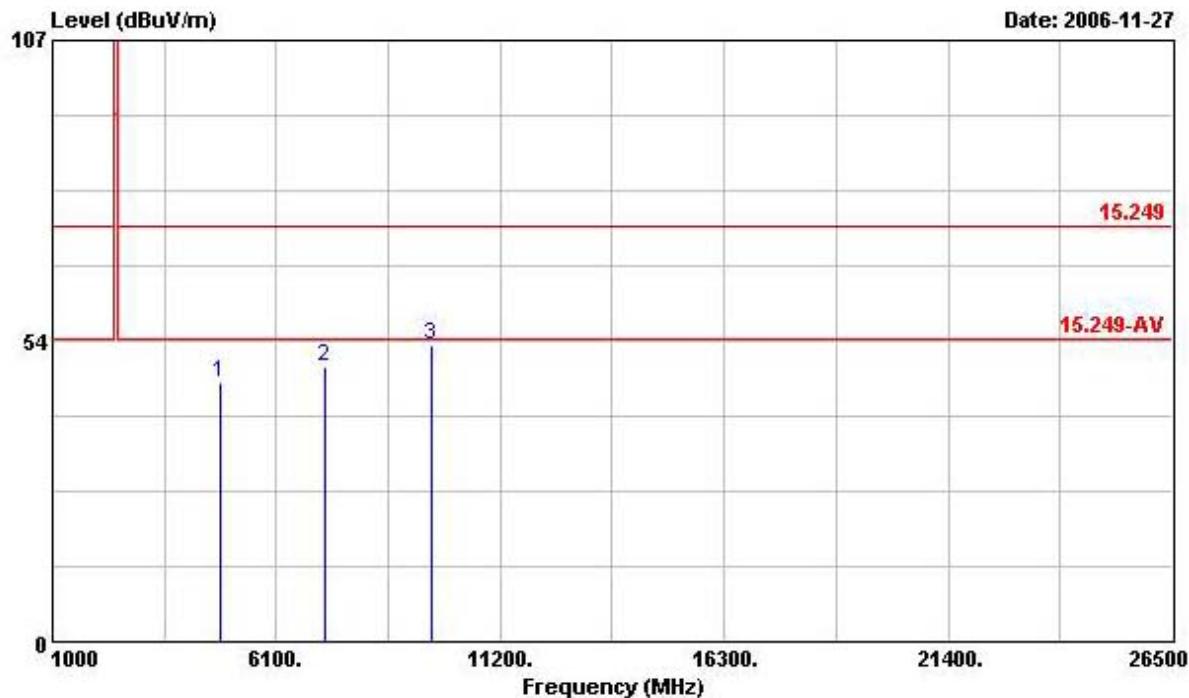

Freq	Level	Over Limit		Read		Antenna Factor	Cable Preamp		Remark
		MHz	dBuV/m	dB	dBuV/m		dBuV	dB/m	
1	4814.000	46.02	-27.98	74.00	42.13	33.06	3.15	32.32	PEAK
2	7221.000	49.03	-24.97	74.00	41.49	35.94	4.15	32.55	PEAK
3	9624.000	52.88	-21.12	74.00	42.76	38.52	4.40	32.80	PEAK


Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao	Configurations	Channel 19

## Horizontal

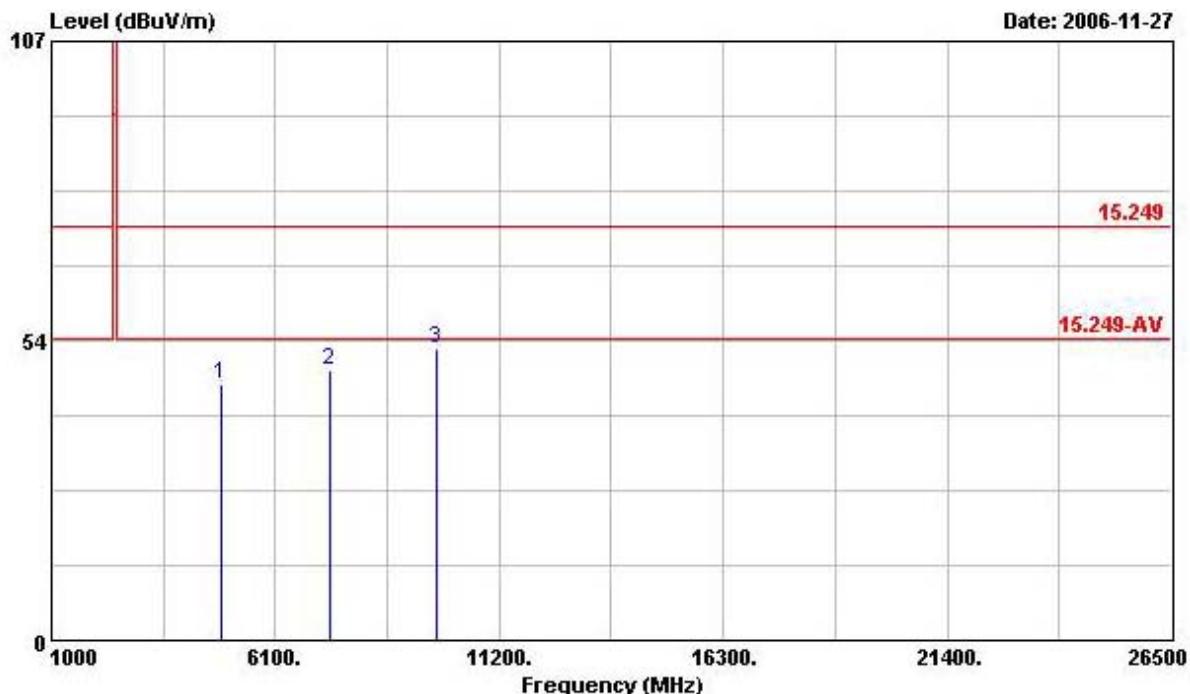

Freq	Level	Over Limit	Line	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark
				MHz	dBuV/m				
1	4884.000	45.90	-28.10	74.00	41.84	33.18	3.17	32.30	PEAK
2	7323.000	48.18	-25.82	74.00	40.42	36.19	4.18	32.61	PEAK
3	9764.000	51.95	-22.05	74.00	41.49	38.80	4.46	32.79	PEAK


## Vertical

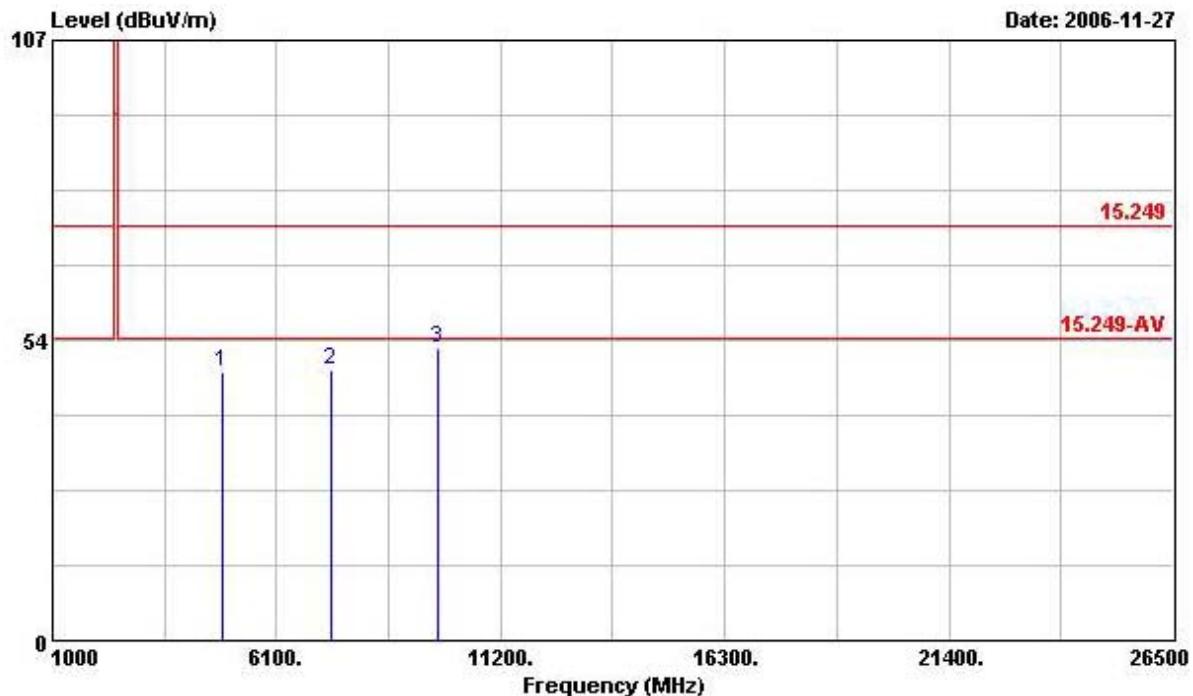

Freq	Level	Over Limit		Read		Antenna Factor	Cable Loss		Preamp Factor	Remark
		MHz	dBuV/m	dB	dBuV/m		dBuV	dB/m	dB	
1	4884.000	47.90	-26.10	74.00	43.84	33.18	3.17	32.30	PEAK	
2	7323.000	48.35	-25.65	74.00	40.59	36.19	4.18	32.61	PEAK	
3	9764.000	52.22	-21.78	74.00	41.76	38.80	4.46	32.79	PEAK	


Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao	Configurations	Channel 36

## Horizontal

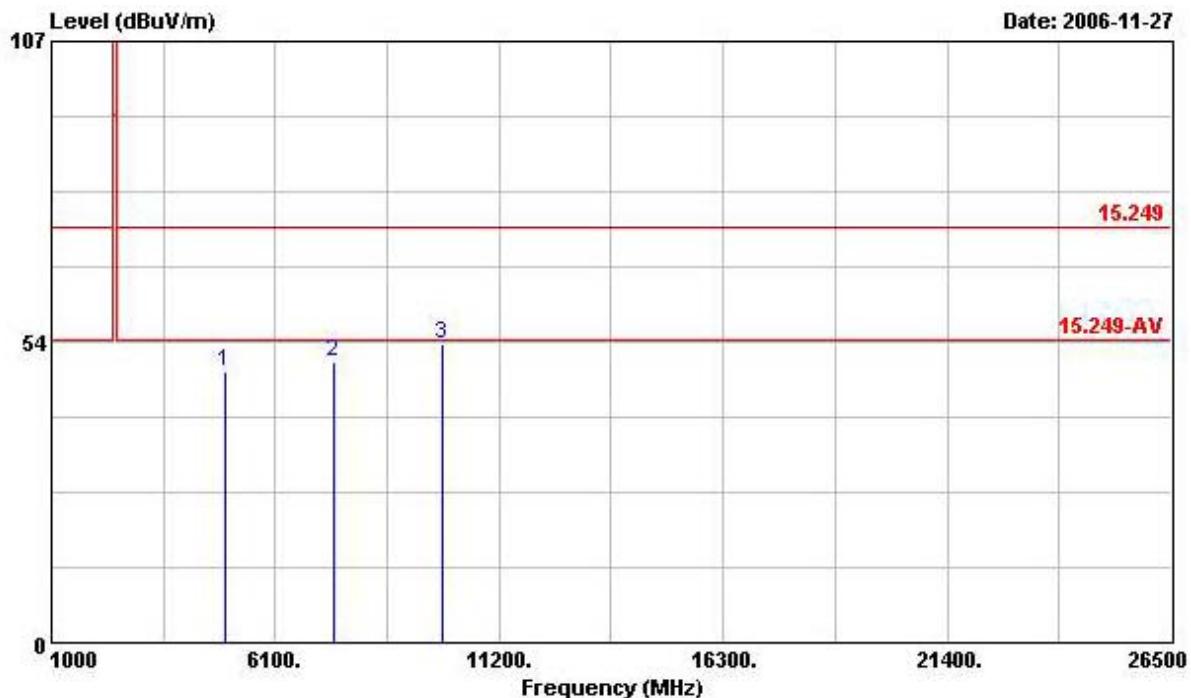

Freq	Level	Over Limit		Read	Antenna	Cable	Preamp	Remark
		Line	Factor					
1	4954.000	48.25	-25.75	74.00	43.99	33.34	3.19	32.26 PEAK
2	7431.000	49.94	-24.06	74.00	41.94	36.43	4.23	32.66 PEAK
3	9904.000	53.08	-20.92	74.00	42.33	39.04	4.50	32.79 PEAK

## Vertical

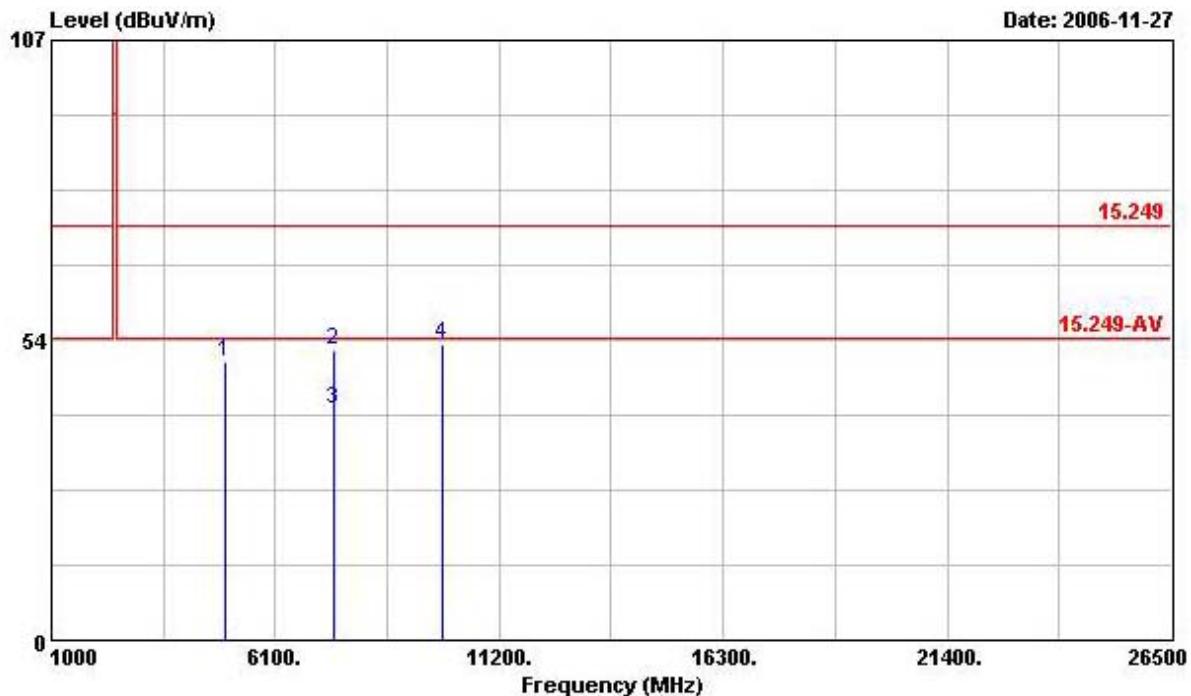

Freq	Level	Over Limit		Read		Antenna Factor	Cable Loss		Preamp Factor	Remark
		MHz	dBuV/m	dB	dBuV/m		dBuV	dB/m	dB	
1	4956.000	49.79	-24.21	74.00	45.53	33.34	3.19	32.26	PEAK	
2	7431.000	51.73	-22.27	74.00	43.72	36.43	4.23	32.66	PEAK	
3	7431.000	41.14	-12.86	54.00	33.14	36.43	4.23	32.66	Average	
4	9908.000	52.96	-21.04	74.00	42.21	39.04	4.50	32.79	PEAK	

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.5. Band Edge Emissions Measurement

### 4.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

### 4.5.3. Test Procedures

1. The test procedure is the same as section 4.2.3, only the frequency range investigated is limited to 2MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, the

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.2.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao	Configurations	Channel 1, 36

##### Channel 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2388.660	42.95	-11.05	54.00	12.77	28.29	1.88	0.00	Average
1	2388.660	57.20	-16.80	74.00	27.02	28.29	1.88	0.00	Peak

Item 1 is Band Edge.

##### Channel 36

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
2	2483.500	43.38	-10.62	54.00	12.98	28.47	1.94	0.00	Average
2	2483.500	64.42	-9.58	74.00	34.02	28.47	1.94	0.00	Peak


Item 2 is Band Edge.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### Low Band Edge Plot on 2407 MHz

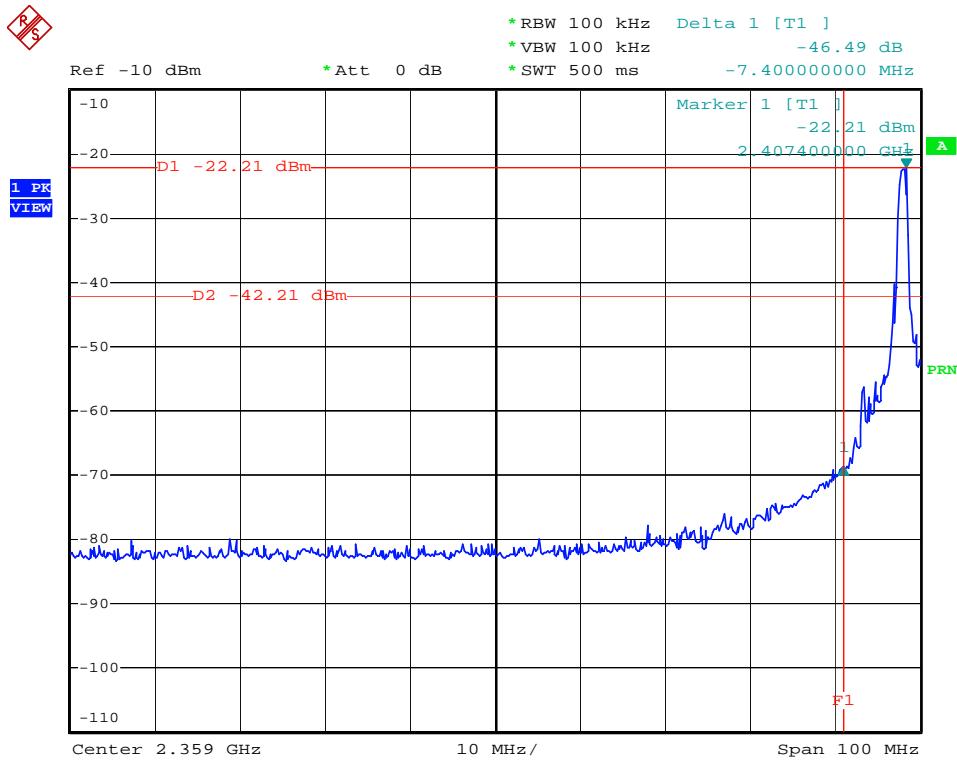

Date: 28.NOV.2006 08:52:54

### High Band Edge Plot on 2477 MHz

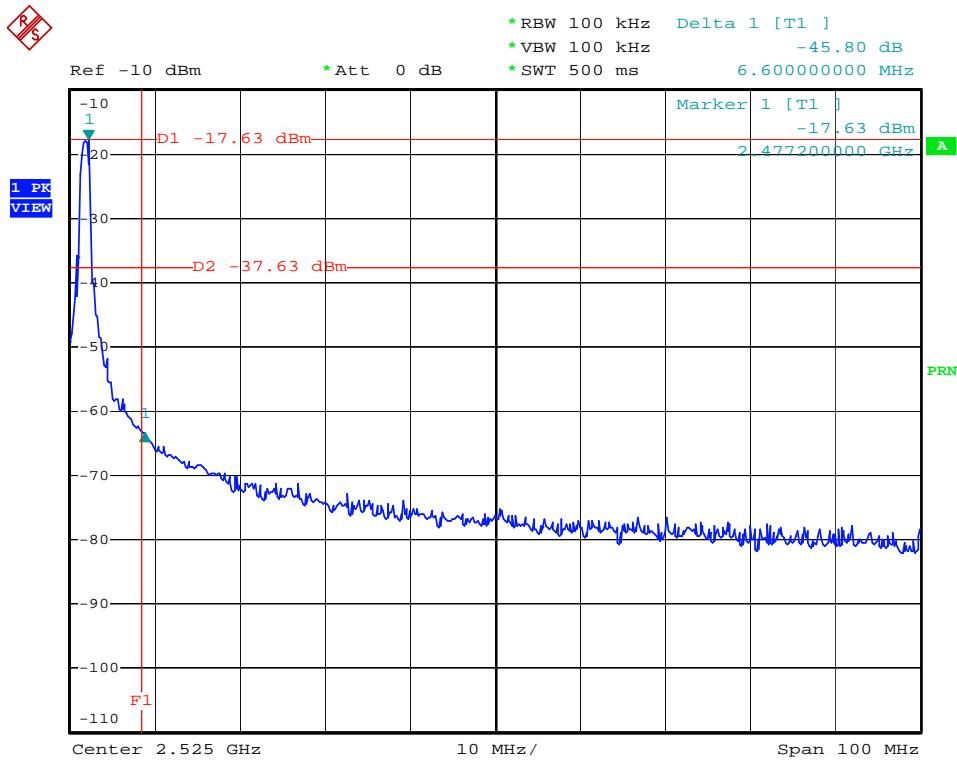

Date: 28.NOV.2006 08:56:02

## 4.6. Antenna Requirements

### 4.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.6.2. Antenna Connector Construction

Please refer to section 3.1 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	18667	9 kHz - 2 GHz	Jan. 18, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 21, 2006	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz - 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6903	1GHz ~ 18GHz	Mar. 15, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec.02, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.02, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 25, 2006	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100764	DC ~ 40GHz	Jul, 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun, 10, 2006	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 28, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2006	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 30, 2006	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 30, 2006	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Jun. 20, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 30, 2005	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.



## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce  
National Institute of Standards and Technology



### Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 200079-0

**Sportun International, Inc. Hwa Ya EMC Laboratory**

Tao Yuan Hsien 333  
TAIWAN

*is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.*  
*Accreditation is granted for specific services, listed on the Scope of Accreditation, for:*


**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

2006-01-01 through 2006-12-31

*Effective dates*



*For the National Institute of Standards and Technology*



NVLAP-01C (REV. 2005-05-19)