



47 CFR PART 15 SUBPART C - BLUETOOTH

TEST REPORT

of

850/1800/1900 Tri-band Handset

Model Name: D263
Trade Name: KONKA
Report No.: SZ06110009E04
FCC ID: UT3KK263

prepared for

Shenzhen KONKA Telecommunications Technology Co., Ltd.
9008 ShenNan Road, Overseas Chinese Town,
Shenzhen, Guangdong, China

Shenzhen Electronic Product Quality Testing Center

Morlab Laboratory
3/F, Electronic Testing Building, Shanty Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China
Tel: +86 755 86130398
Fax: +86 755 86130218



NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

TABLE OF CONTENTS

1. TEST CERTIFICATION	4
2. GENERAL INFORMATION	5
2.1 EUT Description	5
2.2 Test Standards and Results	6
2.3 Facilities and Accreditations	7
2.3.1 Facilities	7
2.3.2 Test Environment Conditions.....	7
3. 47 CFR PART 15C REQUIREMENTS	8
3.1 Number of Hopping Frequency	8
3.1.1 Requirement	8
3.1.2 Test Description	8
3.1.3 Test Result.....	8
3.2 Peak Output Power	11
3.2.1 Requirement	11
3.2.2 Test Description	11
3.2.3 Test Result.....	11
3.3 20dB Bandwidth	14
3.3.1 Definition	14
3.3.2 Test Description	14
3.3.3 Test Result.....	14
3.4 Carried Frequency Separation.....	17
3.4.1 Definition	17
3.4.2 Test Description	17
3.4.3 Test Result.....	17
3.5 Time of Occupancy (Dwell time).....	18
3.5.1 Requirement	18
3.5.2 Test Description	18
3.5.3 Test Result.....	18
3.6 Conducted Spurious Emissions	21
3.6.1 Requirement	21

3.6.2	Test Description	21
3.6.3	Test Result	21
3.7	Band Edge	25
3.7.1	Requirement	25
3.7.2	Test Description	25
3.7.3	Test Result	25
3.8	Conducted Emission	27
3.8.1	Requirement	27
3.8.2	Test Description	27
3.8.3	Test Result	28
3.9	Radiated Emission	30
3.9.1	Requirement	30
3.9.2	Test Description	30
3.9.3	Test Result	32

1. TEST CERTIFICATION

Equipment under Test: 850/1800/1900 Tri-band Handset

Trade Name: KONKA

Model Name: D263

FCC ID: UT3KK263

Applicant: Shenzhen KONKA Telecommunications Technology Co., Ltd.
9008 ShenNan Road, Overseas Chinese Town, Shenzhen,
Guangdong, China

Manufacturer: Shenzhen KONKA Telecommunications Technology Co., Ltd.
9008 ShenNan Road, Overseas Chinese Town, Shenzhen,
Guangdong, China

Test Standards: 47 CFR Part 15 Subpart C

EUT Received Date: December 26, 2006

Test Date(s): December 29, 2006 - January 19, 2007

Test Result: PASS

* We Hereby Certify That:

The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by:



..... 2007.1.22

Reviewed by:

..... 2007.1.22

Approved by:

..... 2007.1.22

Shu Luan

2. GENERAL INFORMATION

2.1 EUT Description

EUT Type.....: 850/1800/1900 Tri-band Handset
(Bluetooth Module embedded)

Model Name: D263

Serial No.....: 352610010941383

OUI: 00025BFDB028

Modulation Type.....: Frequency Hopping Spread Spectrum (FHSS)

Frequency: The frequency range used is 2402MHz - 2480MHz (79 channels, at intervals of 1MHz);
The frequency block is 2400MHz to 2483.5MHz.

Rated Power.....: <=4dBm

Bluetooth Antenna: Permanent Attached, Gain = 4dBi

Power Supply.....: Lithium-ion Battery
Trade Name: KONKA
Model Name: KLB70P73
Manufacturer: Shenzhen KONKA Telecommunications Technology Co., Ltd.
Serial No.: AD06F3PS00274
Capacitance: 700mAh
Rated Voltage: 3.7VDC

Ancillary Equipments.....: AC Adapter Charger for the Lithium-ion Battery
Trade Name: KONKA
Model Name: KTC-08BIM8G
Manufacturer: Shenzhen KONKA Telecommunications Technology Co., Ltd.
Serial No.: AD06H3C00027
Rated Input: ~ 100-240V, 50/60Hz, 150mA
Rated Output: = 5V, 500mA
Wire Length: 150cm

Note 1: The EUT is a Mobile Phone, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-05 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result	Date of Test
1	15.247(a)	Number of Hopping Frequency	PASS	2007-01-15
2	15.247(b)	Peak Output Power	PASS	2007-01-15
3	15.247(a)	20dB Bandwidth	(n.a.)	2007-01-15
4	15.247(a)	Carrier Frequency Separation	PASS	2007-01-15
5	15.247(a)	Time of Occupancy (Dwell time)	PASS	2007-01-15
6	15.247(c)	Conducted Spurious Emission	PASS	2007-01-15
7	15.247(c)	Band Edge	PASS	2007-01-15
8	15.207	Conducted Emission	PASS	2007-01-17
9	15.209 15.247(c)	Radiated Emission	PASS	2007-01-18

2.3 Facilities and Accreditations

2.3.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Board for Laboratories (CNAL) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	960

3. 47 CFR PART 15C REQUIREMENTS


3.1 Number of Hopping Frequency

3.1.1 Requirement

According to FCC section 15.247(a)(1)(ii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 75 hopping frequencies.

3.1.2 Test Description

A. Test Setup:

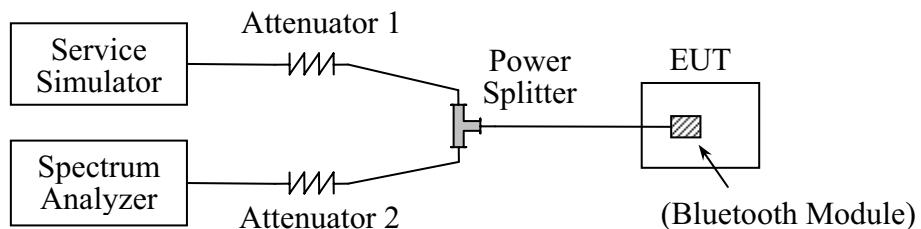

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Service Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)

3.1.3 Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:

Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
2400 - 2483.5	79	75	Plot A.1/A.2	PASS

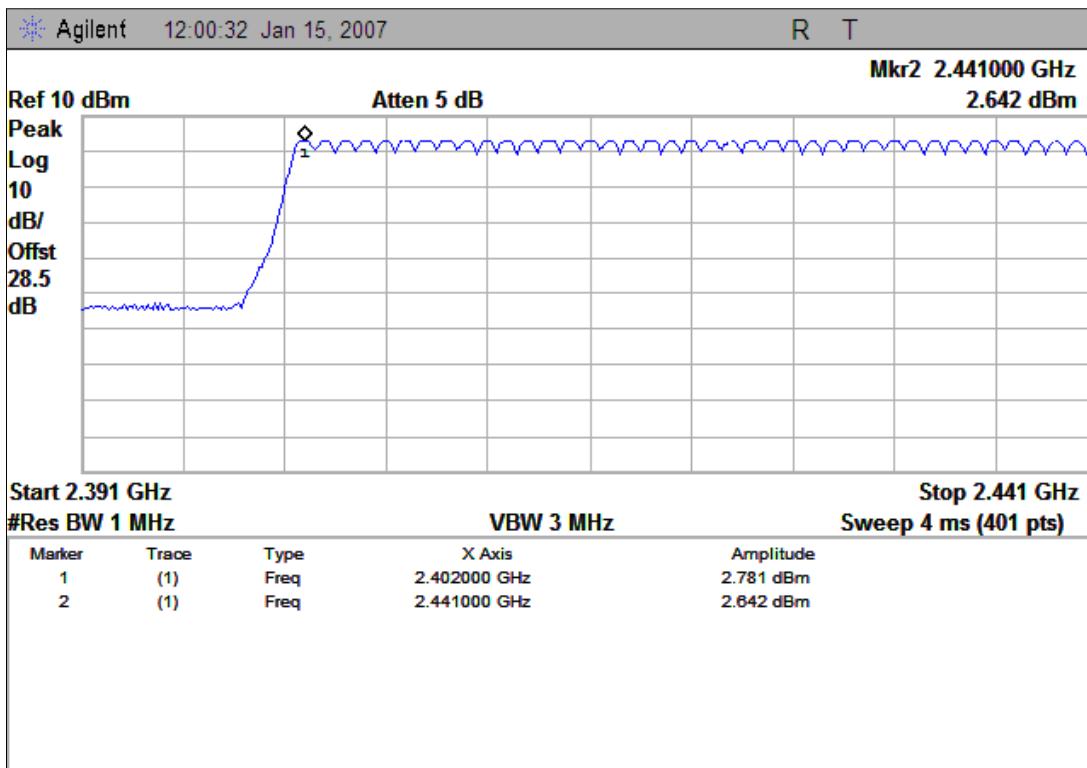B. Test Plot:


(Plot A.1: 2402MHz to 2441MHz)

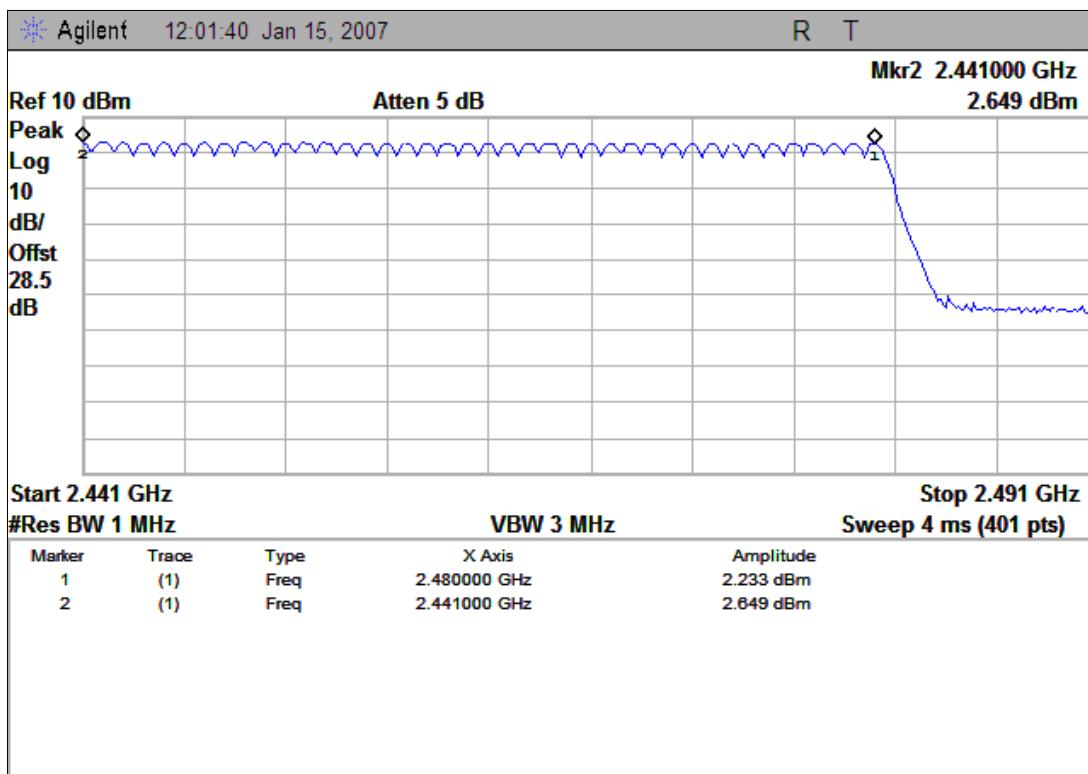

(Plot A.2: 2441MHz to 2480MHz)

3.2 Peak Output Power

3.2.1 Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.2.2 Test Description

See section 3.1.2 of this report.


3.2.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	2.510	1.78E-3	Plot A	30	1	PASS
39	2441	2.691	1.86E-3	Plot B			PASS
78	2480	2.217	1.67E-3	Plot C			PASS


B. Test Plot:

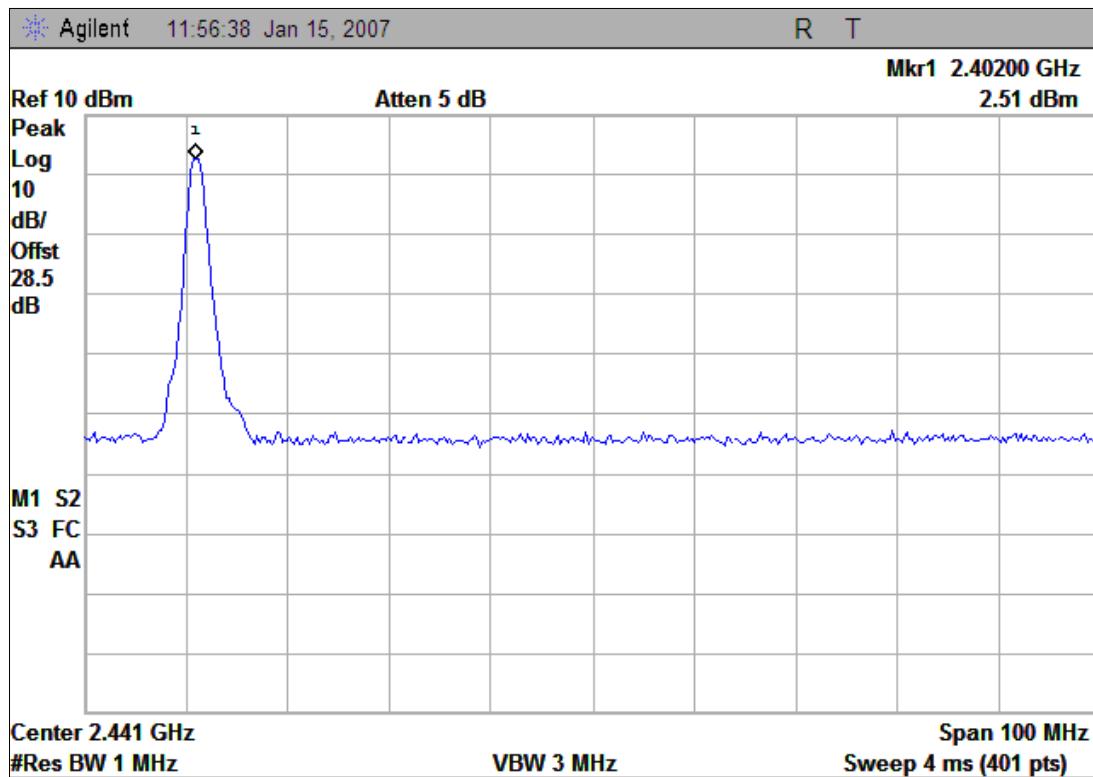

(Plot A: Channel = 2402)

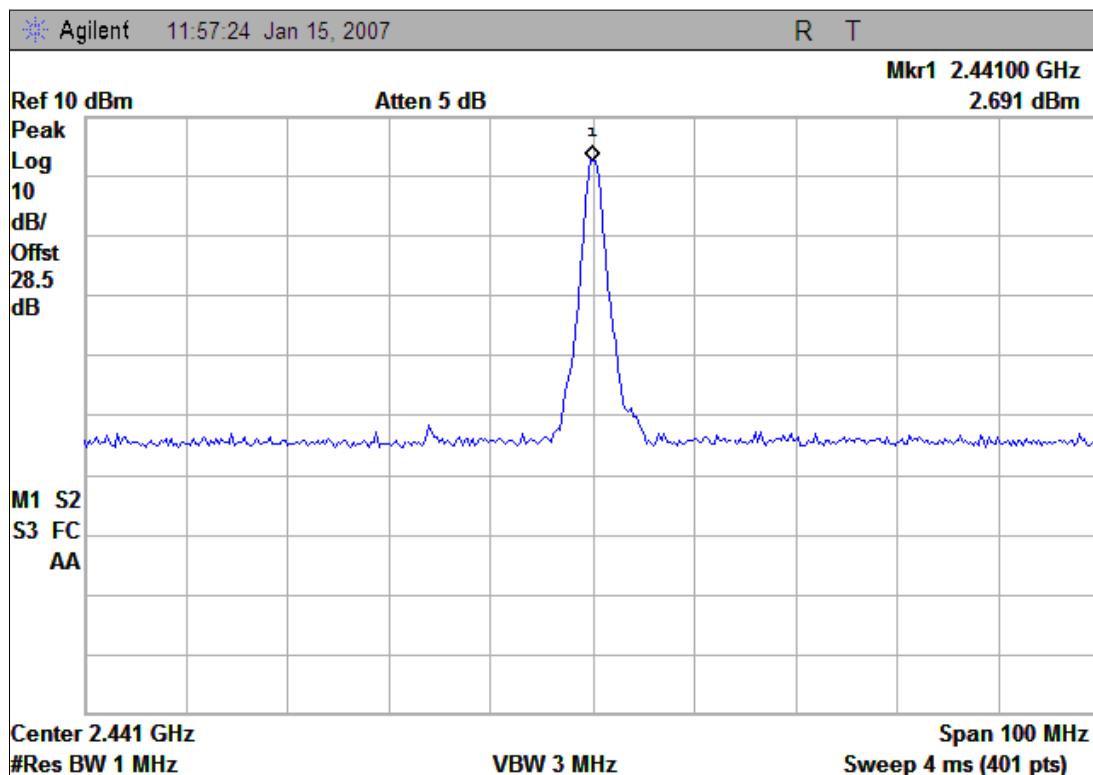

(Plot B: Channel = 2441)

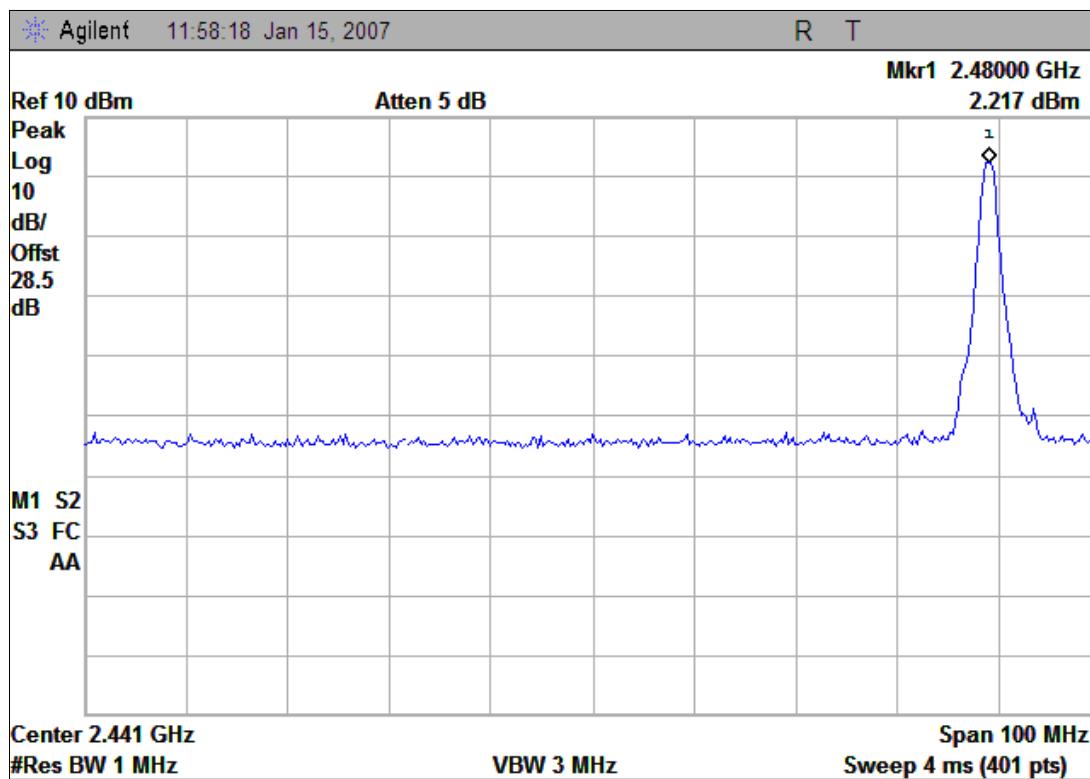

(Plot C: Channel = 2480)

3.3 20dB Bandwidth

3.3.1 Definition

The 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \times \log 1\% = 20\text{dB}$) taking the total RF output power.

3.3.2 Test Description

See section 3.1.2 of this report.

3.3.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.025MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.025	Plot A
39	2441	1.025	Plot B
78	2480	1.025	Plot C


B. Test Plot:

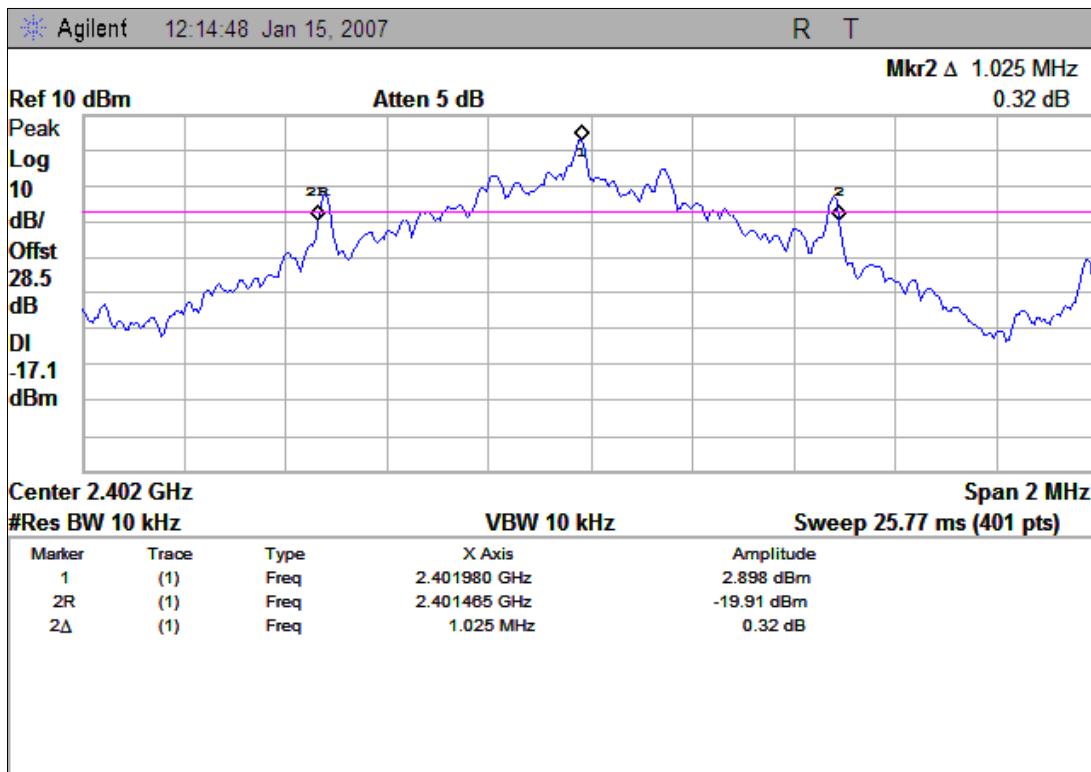

(Plot A: Channel = 2402)

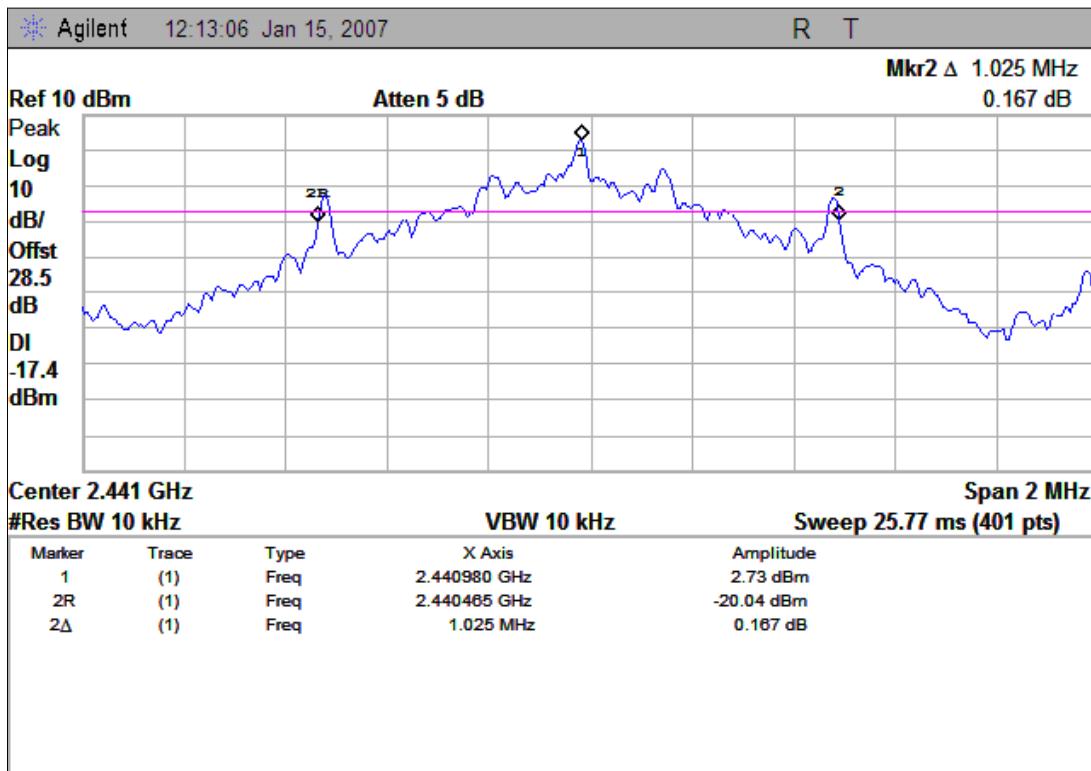

(Plot B: Channel = 2441)

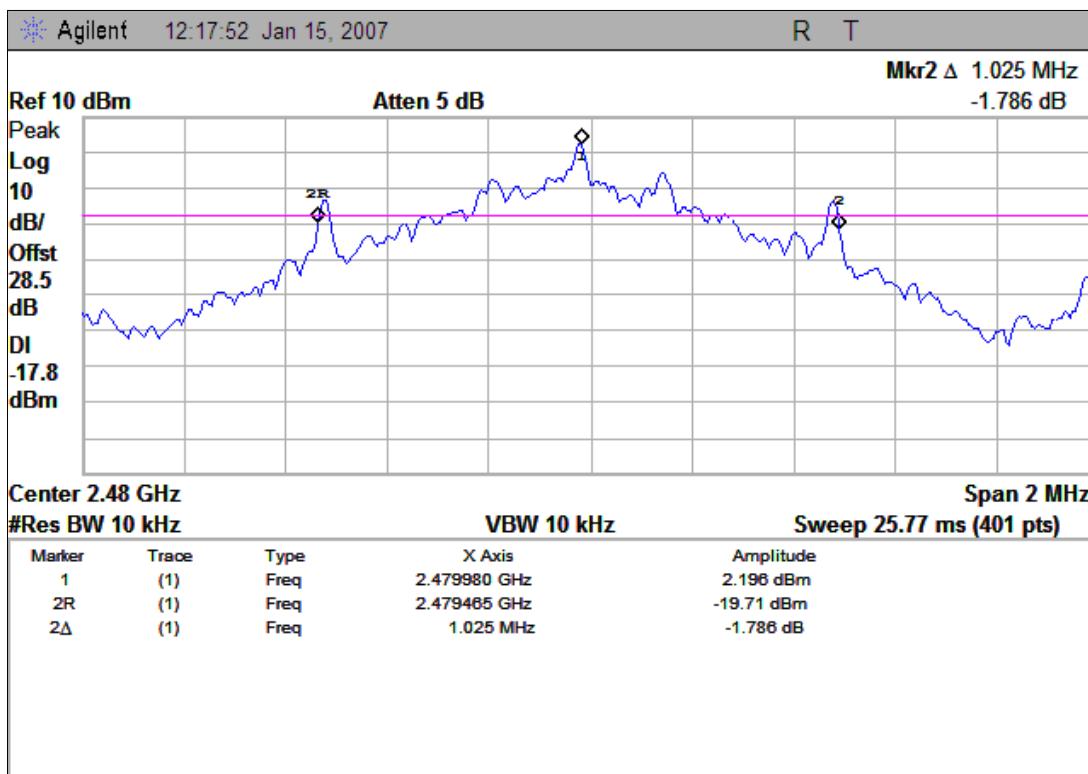

(Plot C: Channel = 2480)

3.4 Carried Frequency Separation

3.4.1 Definition

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.


3.4.2 Test Description

See section 3.1.2 of this report.

3.4.3 Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel (1.025MHz, refer to section 3.3.3), whichever is greater. So, the verdict is PASS.

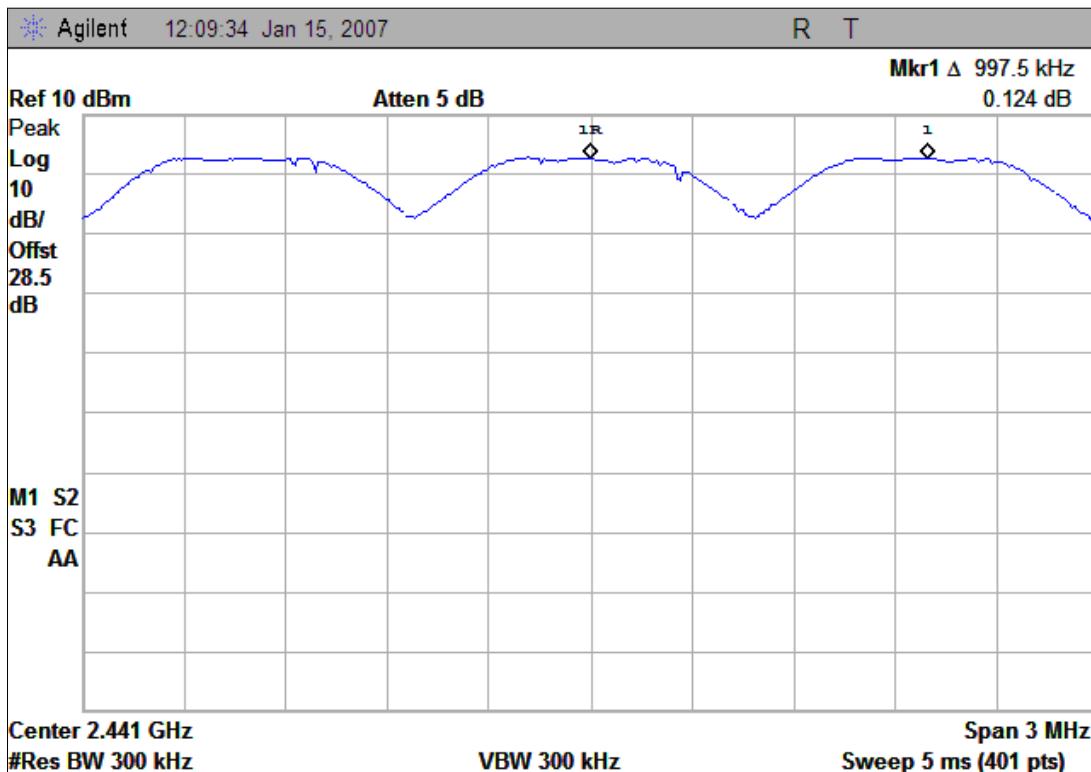

(Plot A: Carried Frequency Separation)

3.5 Time of Occupancy (Dwell time)

3.5.1 Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.5.2 Test Description

See section 3.1.2 of this report.

3.5.3 Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4s * \{\text{Number of Hopping Frequency}\}\end{aligned}$$


The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

A. Test Verdict:


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.875	Plot A	306.7	400	PASS
39	2441	2.900	Plot B	309.3		PASS
78	2480	2.900	Plot C	309.3		PASS

B. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

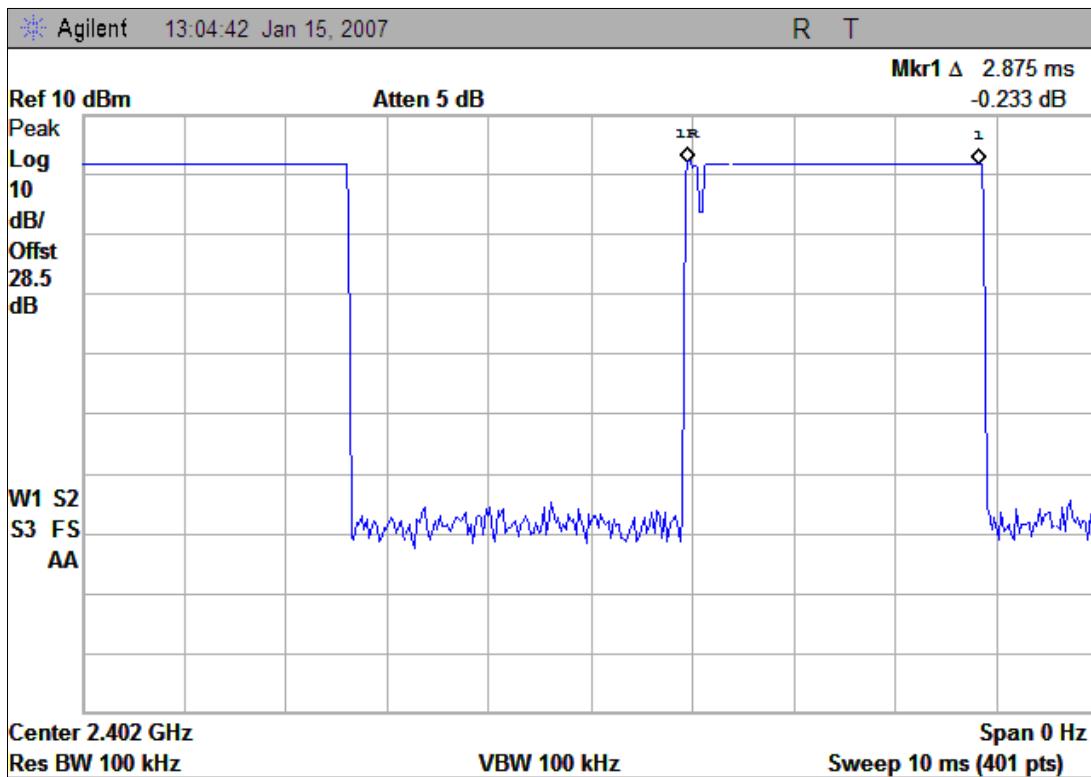

(Plot A: Channel = 2402)

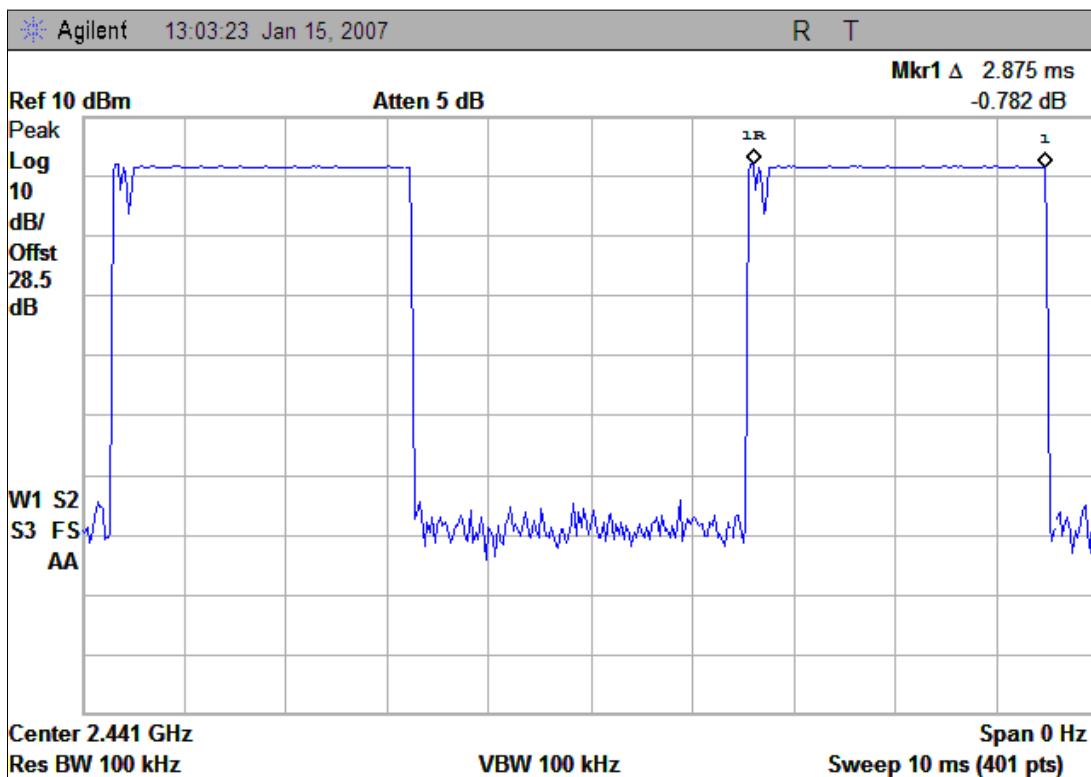

(Plot B: Channel = 2441)

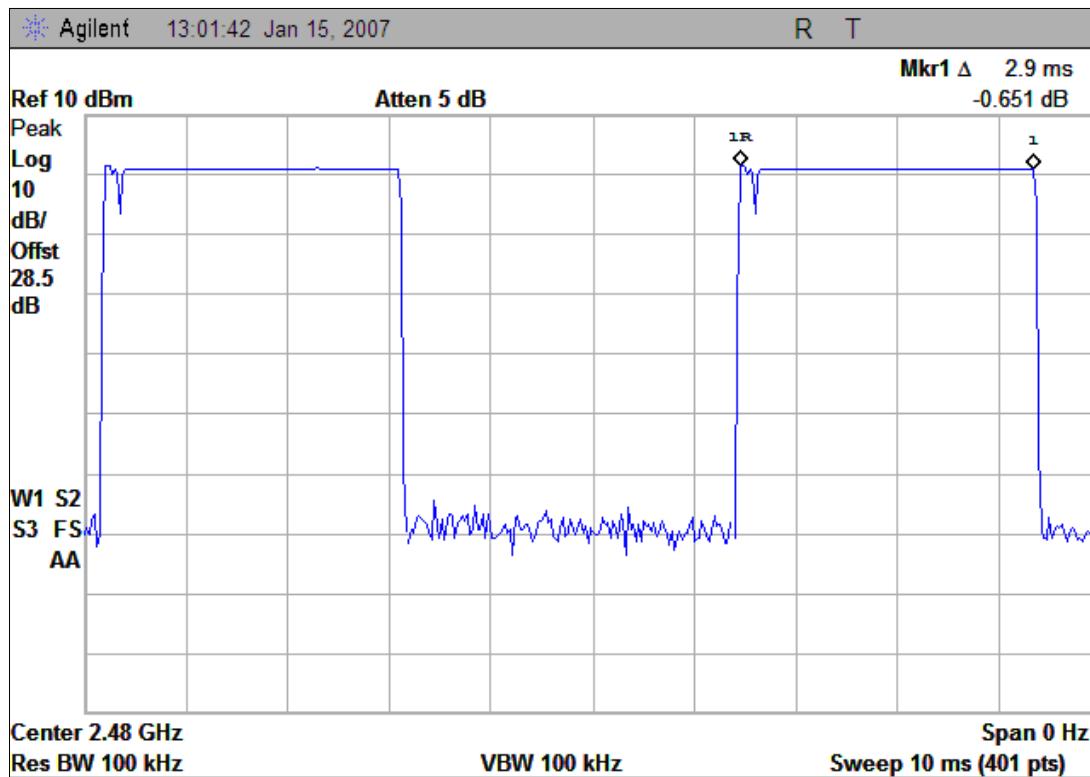

(Plot C: Channel = 2480)

3.6 Conducted Spurious Emissions

3.6.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2 Test Description

See section 3.1.2 of this report.

3.6.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-44.96	Plot A.1/A.2	2.710	-17.3	PASS
39	2441	-43.98	Plot B.1/B.2	2.677	-17.3	PASS
78	2480	-43.07	Plot C.1/C.2	1.974	-18.2	PASS

B. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

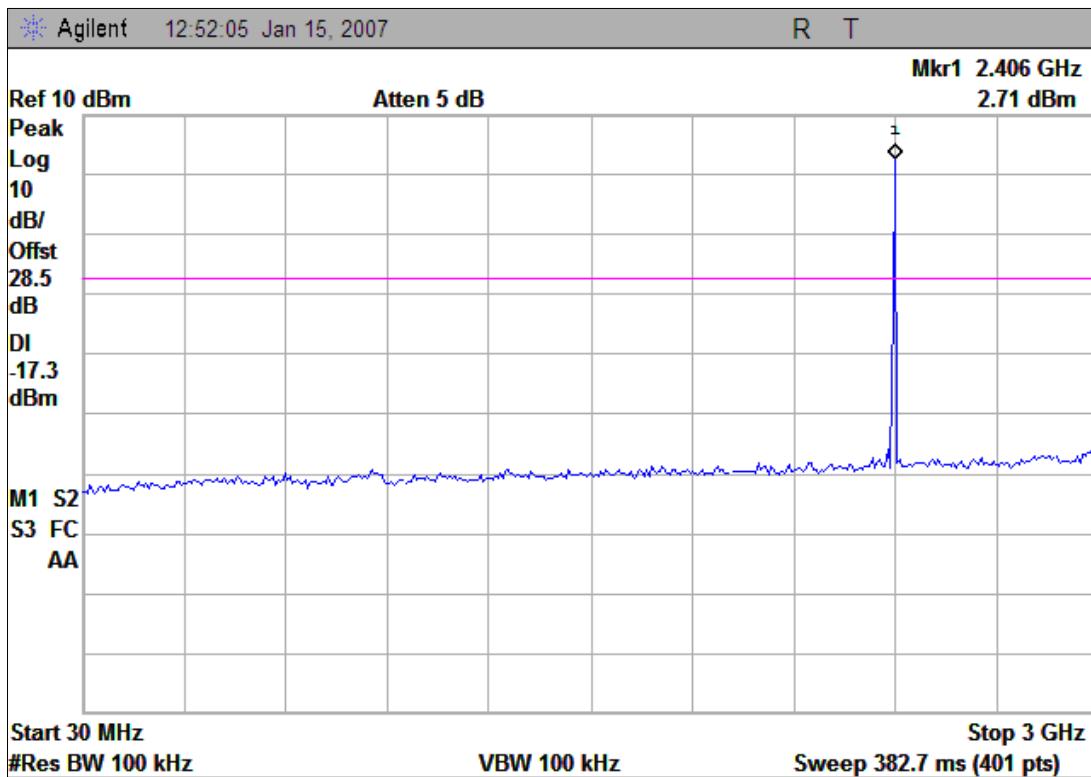


(Plot A.1: Channel = 0, 30MHz to 3GHz)

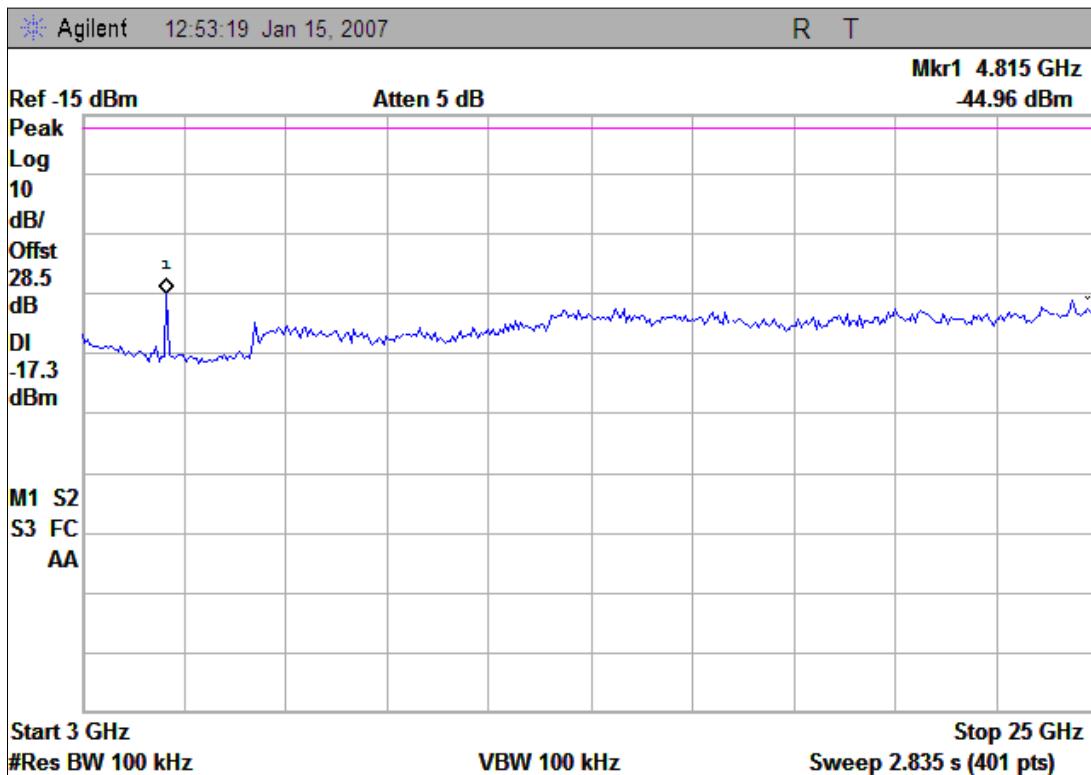


(Plot A.2: Channel = 0, 3GHz to 25GHz)

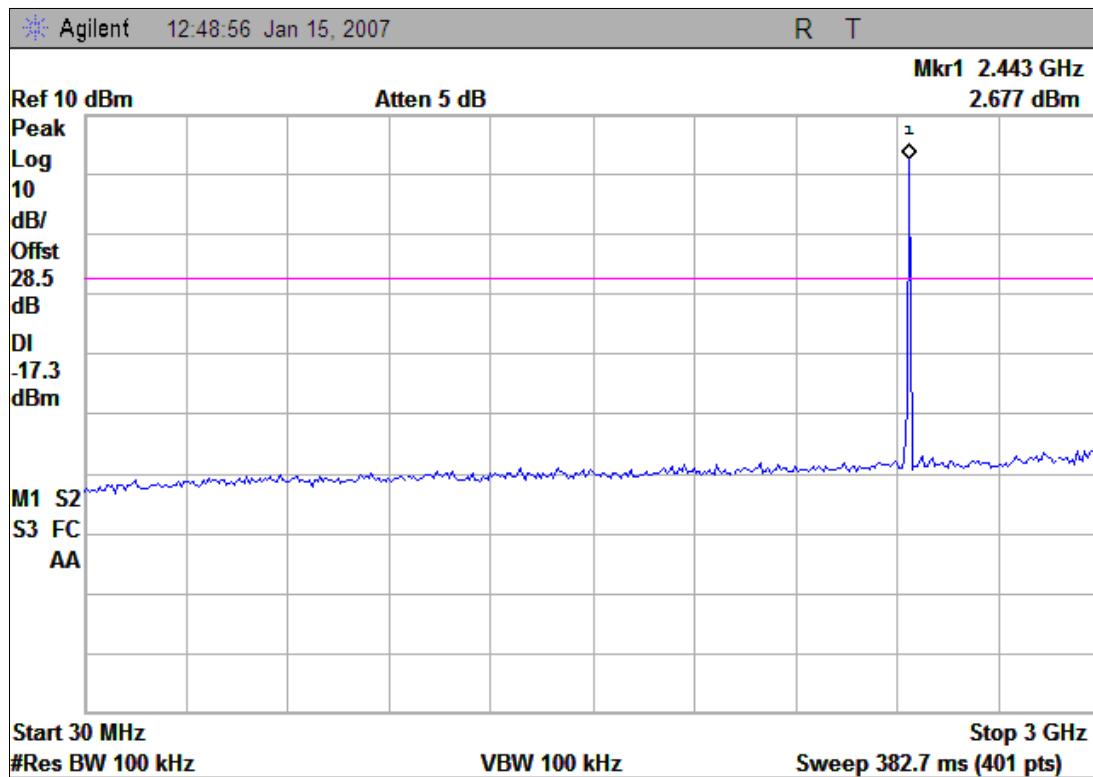


(Plot B.1: Channel = 39, 30MHz to 3GHz)

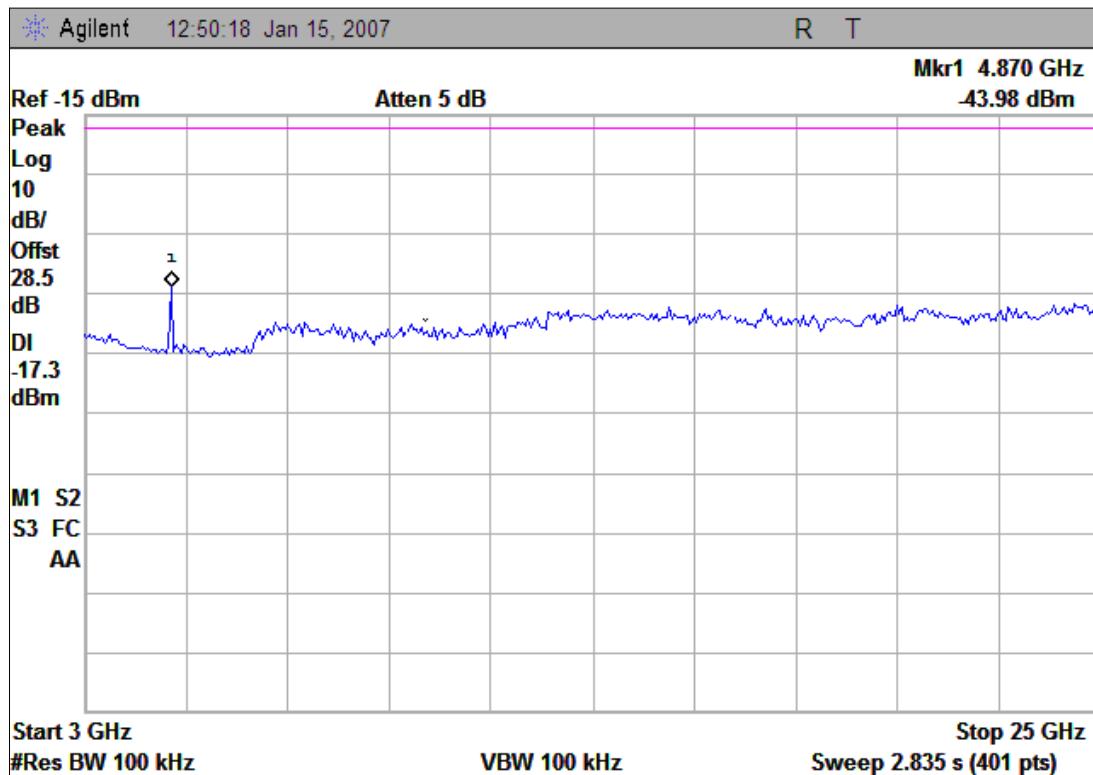

(Plot B.2: Channel = 39, 3GHz to 25GHz)

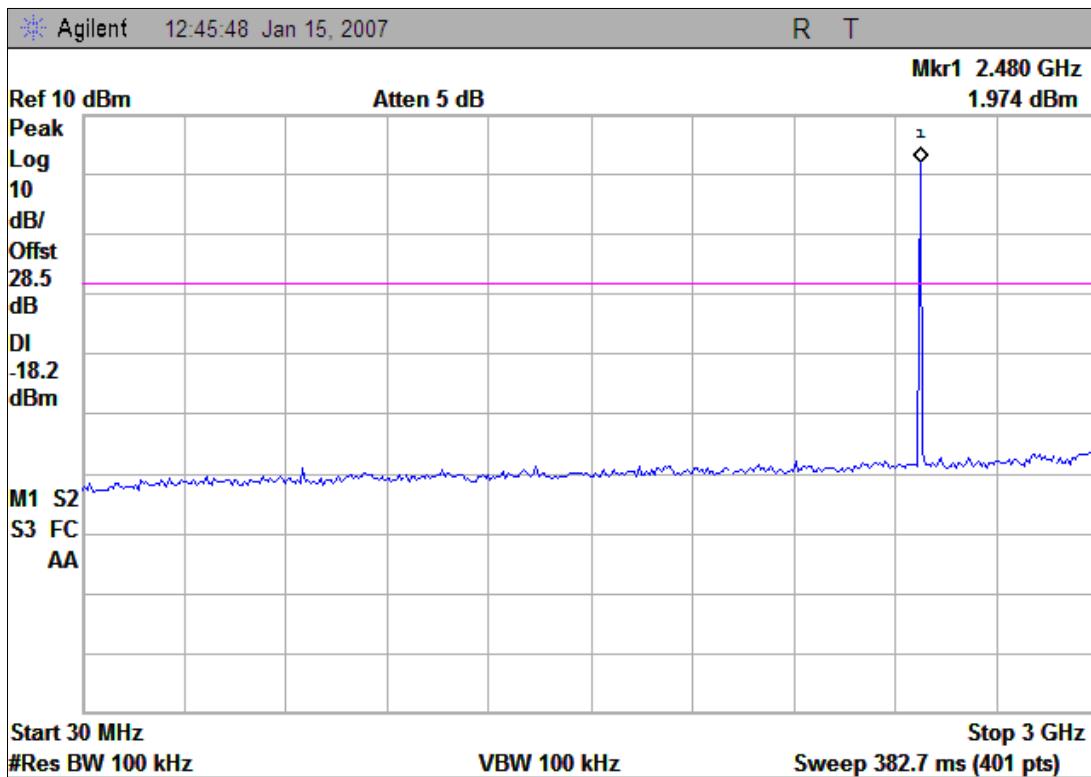

(Plot C.1: Channel = 78, 30MHz to 3GHz)

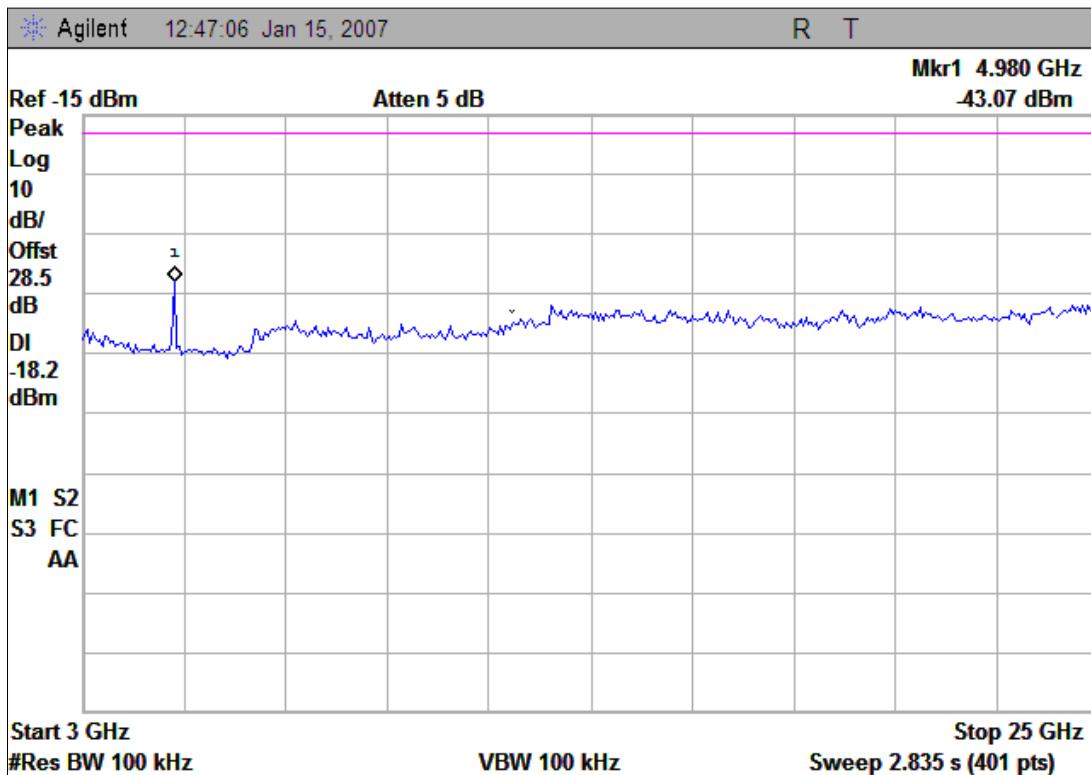

(Plot C.2: Channel = 78, 3GHz to 25GHz)

3.7 Band Edge

3.7.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.7.2 Test Description

See section 3.1.2 of this report.

3.7.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:


Note: {Marker Delta} = {Carrier Level} - {Max. Band Edge Power}.

Channel	Frequency (MHz)	Max. Band Edge		Carrier Level (dBm)	-20dBc Limit (dBm)	Marker Delta (dB)	Refer to Plot	Verdict
		Power (dBm)	@Frequency (MHz)					
0	2402	-37.38	2400.00	2.694	-17.6	40.07	Plot A	PASS
78	2480	-45.75	2484.00	1.991	-18	47.74	Plot B	PASS

B. Test Plot:

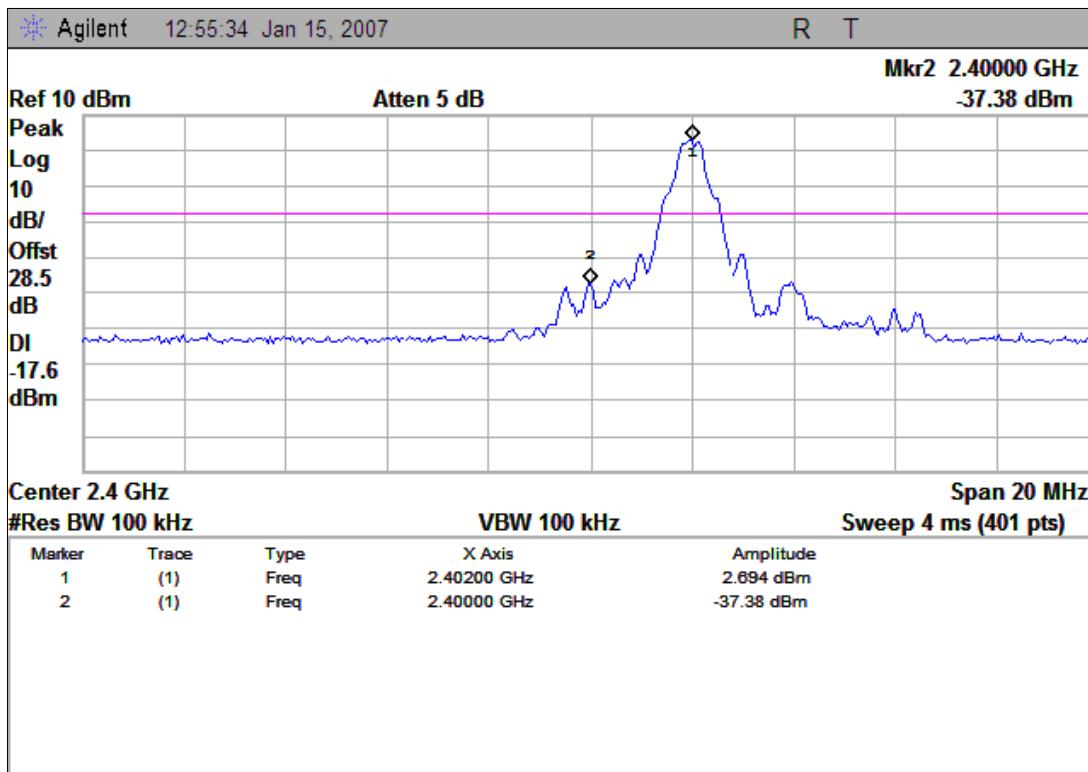

(Plot A: Channel = 0)

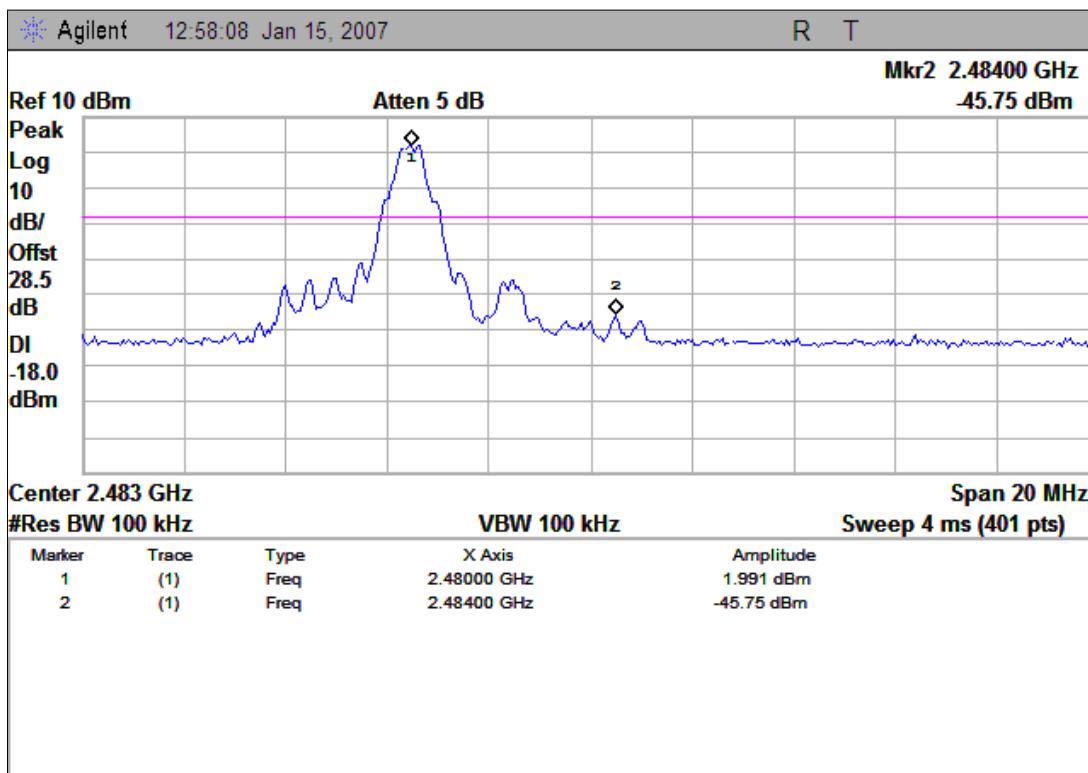

(Plot B: Channel = 78)

3.8 Conducted Emission

3.8.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2 Test Description

A. Test Setup:

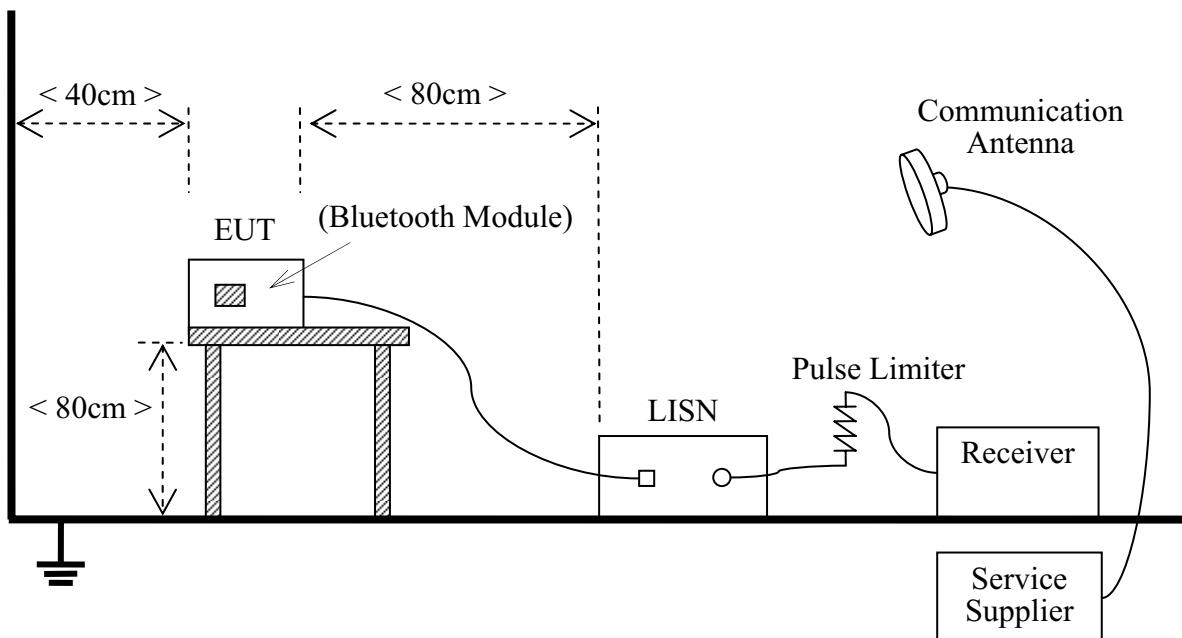

The Bluetooth Module of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service

Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2006.07	1year
LISN	Schwarzbeck	NSLK 8127	812744	2006.08	1year
Service Supplier	R&S	CMU200	100448	2006.10	1year
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)	(n.a.)


3.8.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


A. Test Verdict Recorded for Suspicious Points:

No.	@Frequency (MHz)	Measured Emission Level (dB μ V)				Limit (dB μ V)	Verdict	
		PK	QP	AV	Phase			
1	0.1592	57.33	44.49	28.04	N	65.51	55.51	PASS
2	0.3417	49.54	37.07	25.43	N	59.16	49.16	PASS
3	0.3909	50.21	42.43	26.24	N	58.04	48.04	PASS
4	0.5767	52.46	41.65	25.68	N	56.00	46.00	PASS
5	0.7729	48.24	40.33	25.30	N	56.00	46.00	PASS
6	2.9160	40.64	33.36	22.98	N	56.00	46.00	PASS
7	0.1548	57.73	54.21	30.95	L	65.74	55.74	PASS
8	0.2287	51.58	45.01	26.98	L	62.50	52.50	PASS
9	0.3851	48.71	42.45	30.04	L	58.17	48.17	PASS
10	0.5856	49.89	45.80	34.96	L	56.00	46.00	PASS
11	0.8027	49.44	43.60	29.78	L	56.00	46.00	PASS
12	2.0000	50.02	38.31	23.64	L	56.00	46.00	PASS

B. Test Plot:

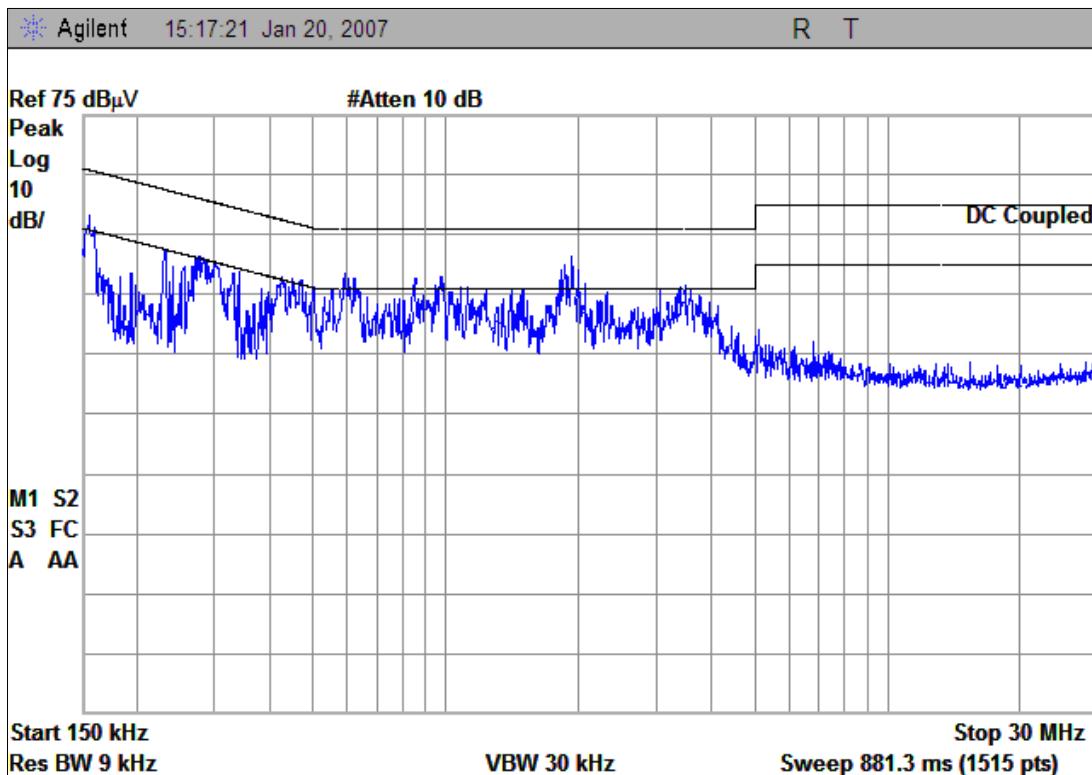

(Plot A: L Phase)

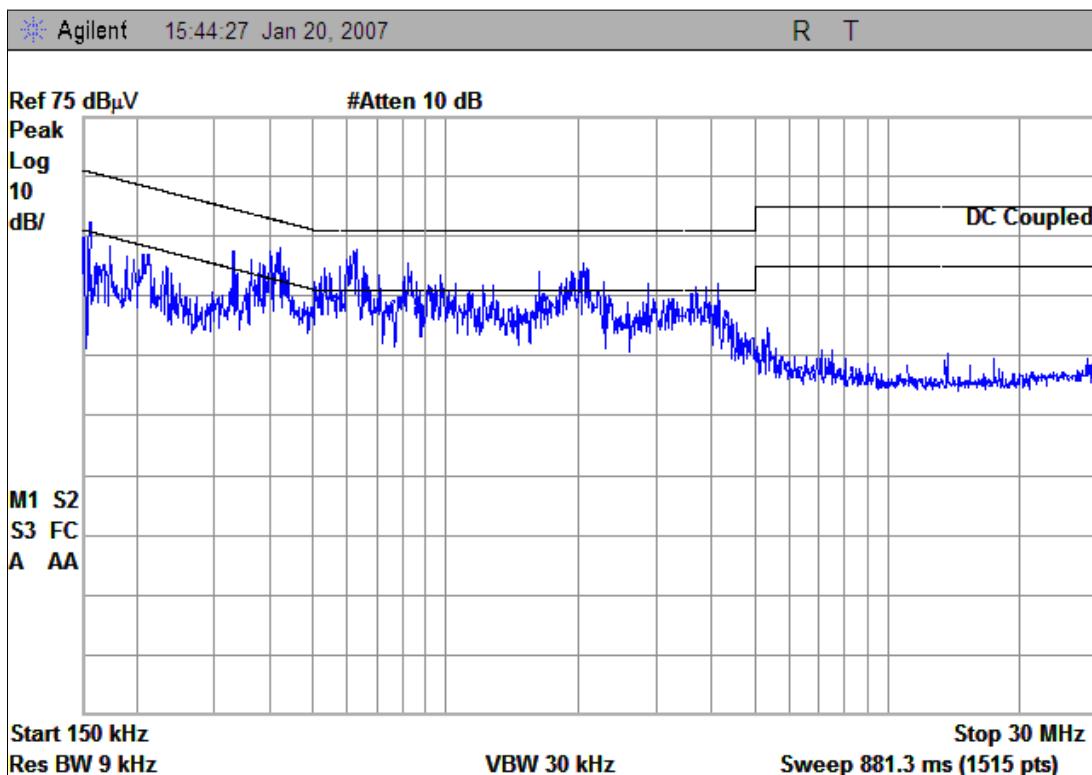

(Plot B: N Phase)

3.9 Radiated Emission

3.9.1 Requirement

According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

3.9.2 Test Description

A. Test Setup:

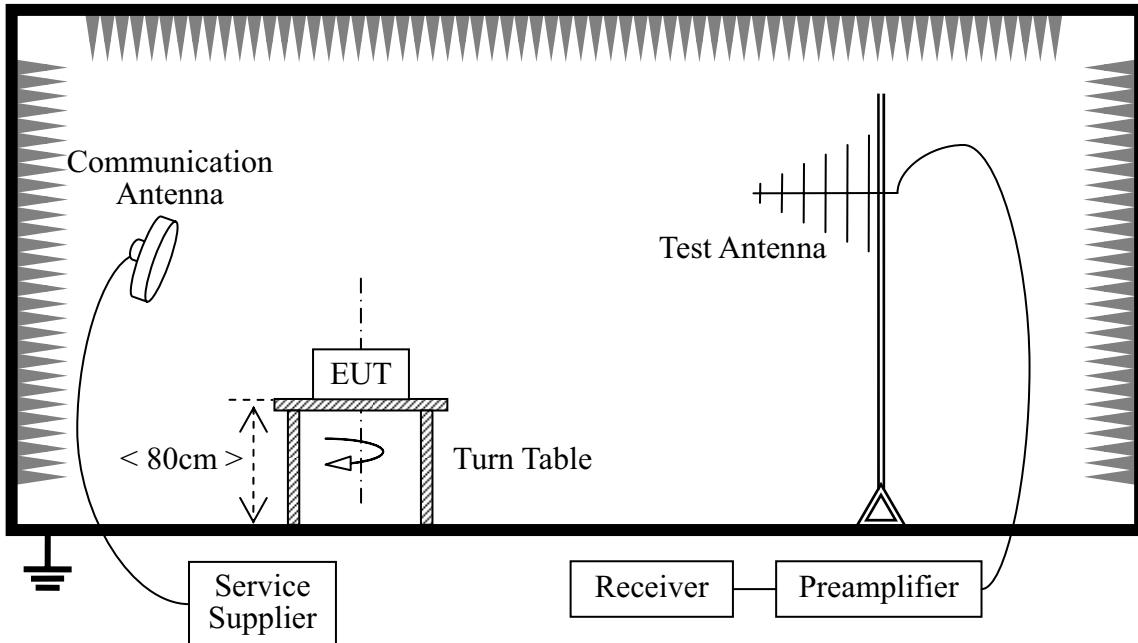

The Bluetooth Module of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2006.10	1year
Receiver	Agilent	E7405A	US44210471	2006.07	1year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2006.08	2year
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2006.07	1year
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2006.07	1year

3.9.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors.

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	84.03	68.87	Horizontal	Plot A.3
		87.97	72.41	Vertical	Plot A.7
39	2441	83.49	67.60	Horizontal	Plot B.3
		88.11	72.86	Vertical	Plot B.7
78	2480	83.69	67.67	Horizontal	Plot C.3
		88.52	72.32	Vertical	Plot C.7

Band Edge Emissions Fall in the Restricted Bands

The field strength of band edge emission falling in adjacent restricted bands (2310MHz - 2390MHz, and 2483.5MHz - 2500MHz) per FCC section 15.205(a) is calculated via the "Marker-Delta" method:

$$\{\text{Max. Band Edge Emission}\} = \{\text{Fundamental Emission}\} - \{\text{Marker Delta}\}$$

In the formula above, refer to section 3.7.3 for the {Marker Delta}. The calculation results in the table below show the compliance with the radiated emission limits specified in FCC section 15.209(a).

CH	Freq. (MHz)	Fundamental Emission		Max. Band Edge			Limit (dB μ V/m)	Verdict
		dB μ V/m	Detector	@Freq. (MHz)	Marker Delta (dB)	Emission (dB μ V/m)		
0	2402	87.97	PK	2400.00	40.07	47.90	74	PASS
		72.41	AV			32.34	54	PASS
78	2480	88.52	PK	2484.00	47.74	40.78	74	PASS
		72.32	AV			24.58	54	PASS

The Radiated Emissions Fall in the Restricted Bands


Channel	Frequency (MHz)	Antenna Polarization	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
			PK	AV	PK	AV	
0	2402	Vertical	---	---	74	54	PASS
		Horizontal	---	---	74	54	PASS

Channel	Frequency (MHz)	Antenna Polarization	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
			PK	AV	PK	AV	
39	2441	Vertical	---	---	74	54	PASS
		Horizontal	---	---	74	54	PASS
78	2480	Vertical	---	---	74	54	PASS
		Horizontal	---	---	74	54	PASS


Also refer to following plots for the emissions falling in the restricted bands.

B. Test Plot for the Whole Measurement Frequency Range:


Plots for Channel = 0

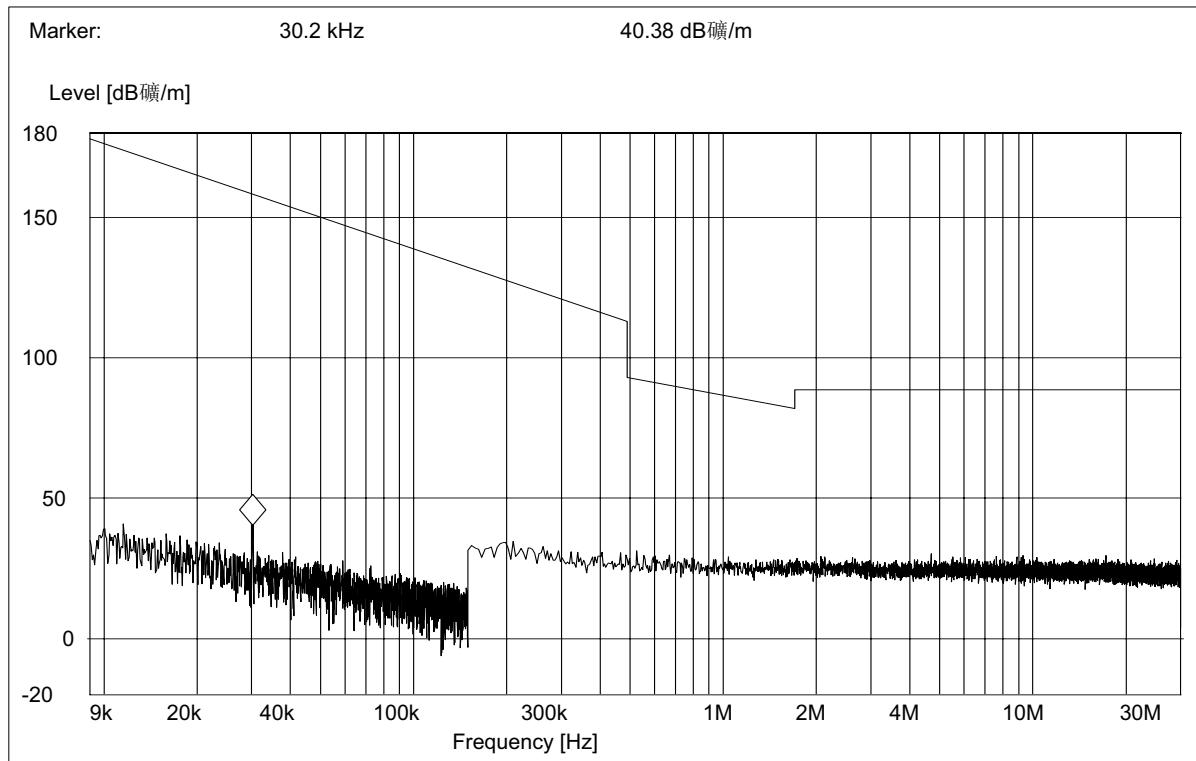


(Plot A.1: 9kHz to 30MHz)

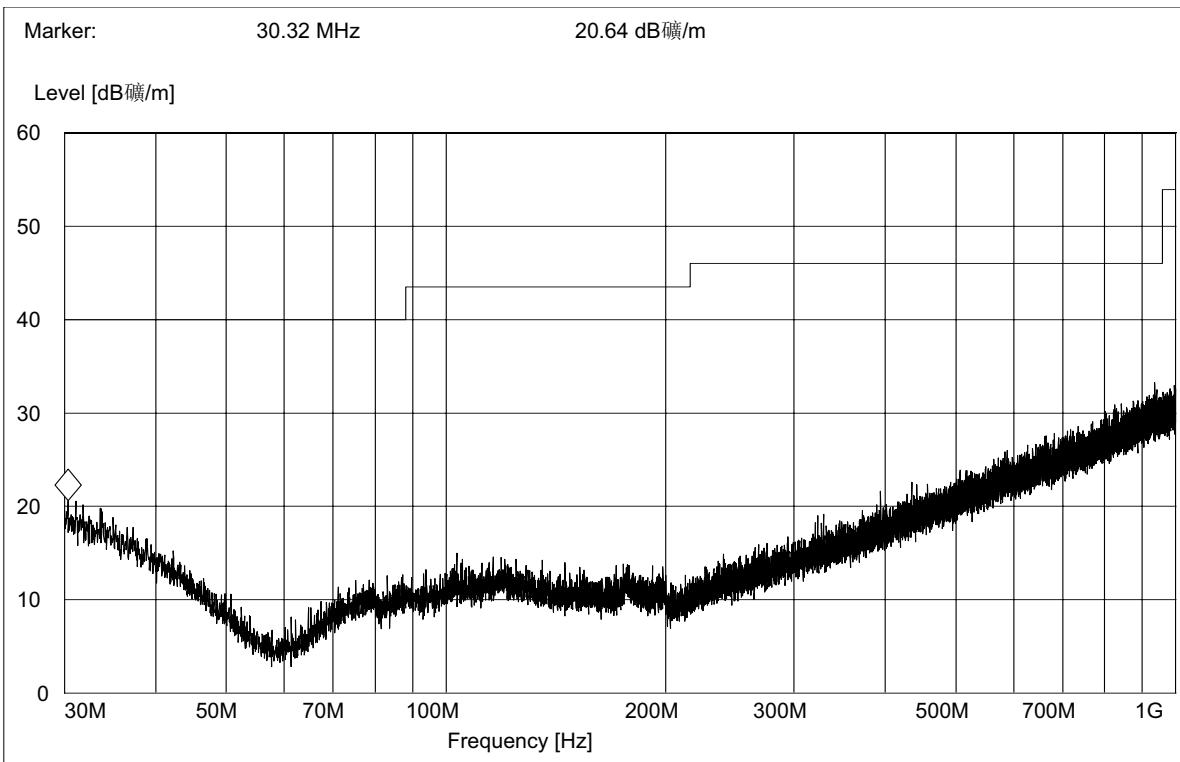


(Plot A.2: Antenna Horizontal, 30MHz to 1GHz)

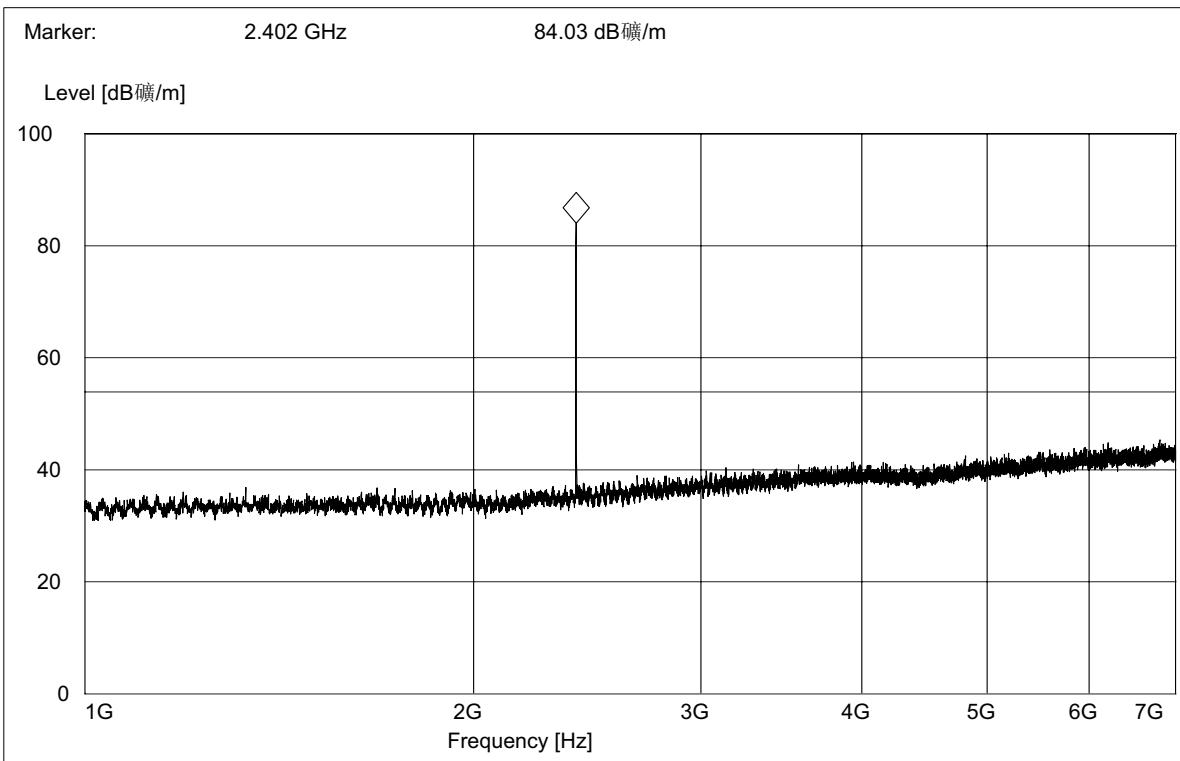


(Plot A.3: Antenna Horizontal, 1GHz to 7GHz)

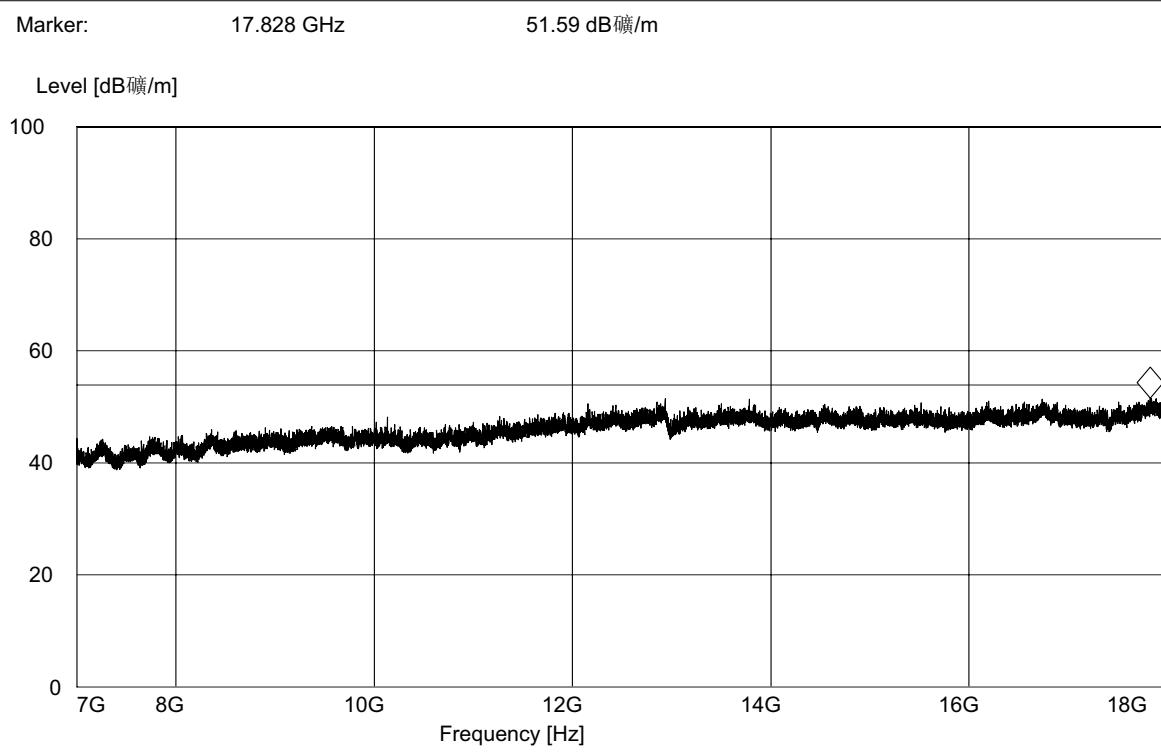


(Plot A.4: Antenna Horizontal, 7GHz to 18GHz)

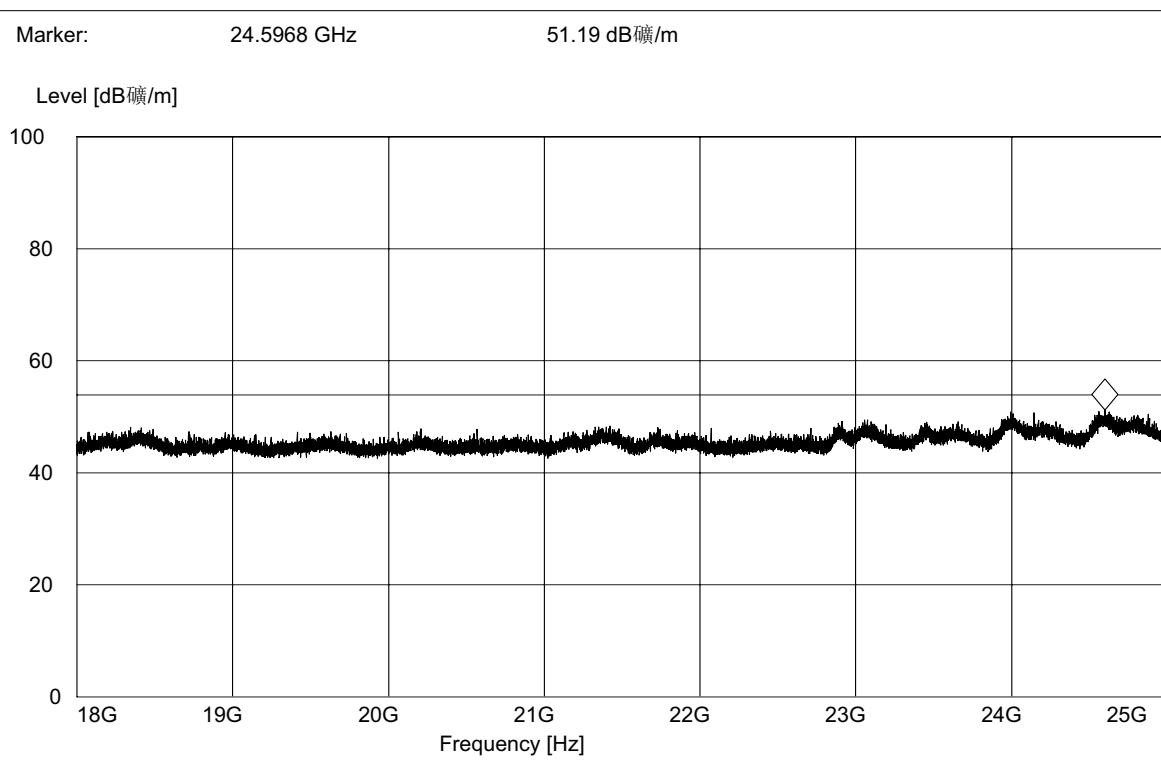


(Plot A.5: Antenna Horizontal, 18GHz to 25GHz)

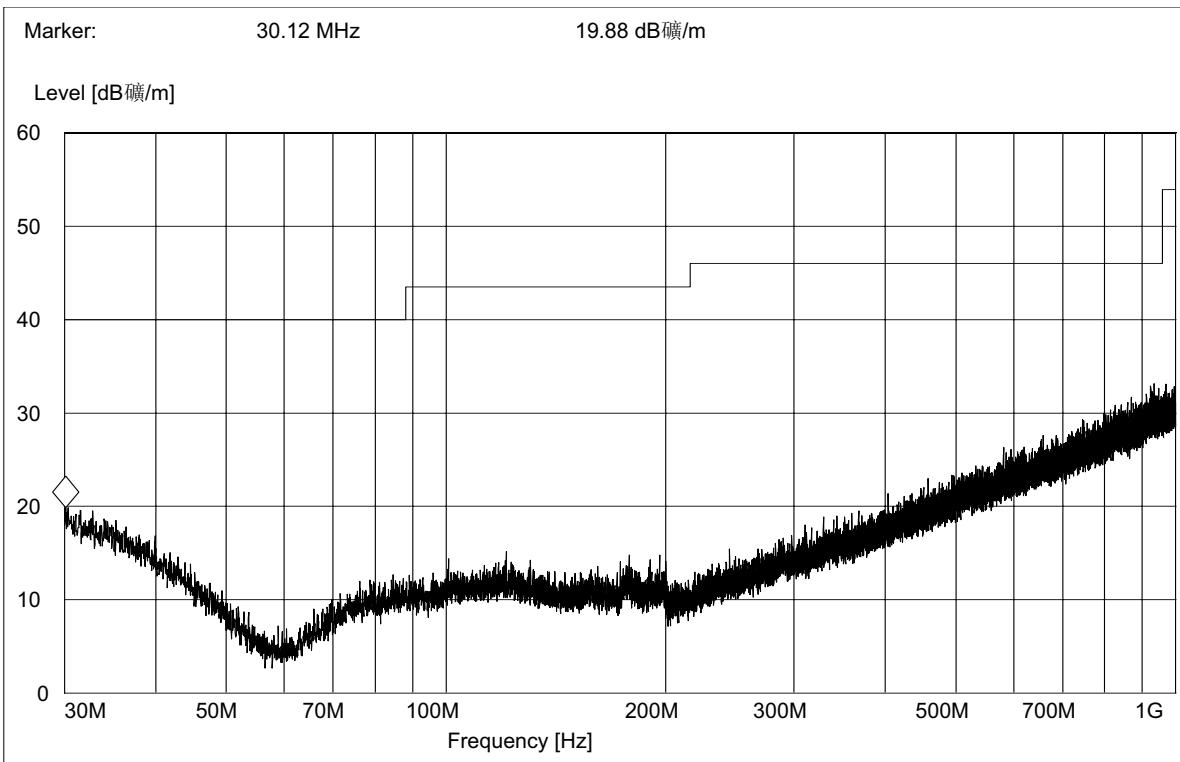


(Plot A.6: Antenna Vertical, 30MHz to 1GHz)

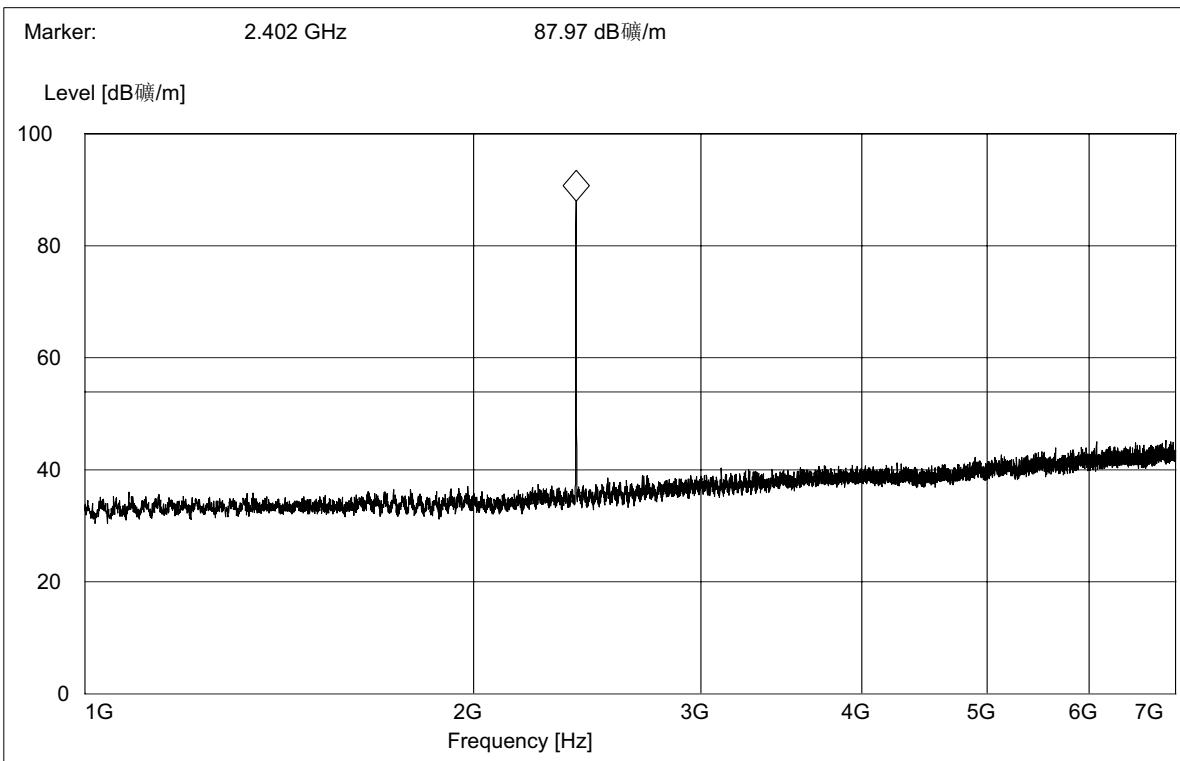

(Plot A.7: Antenna Vertical, 1GHz to 7GHz)

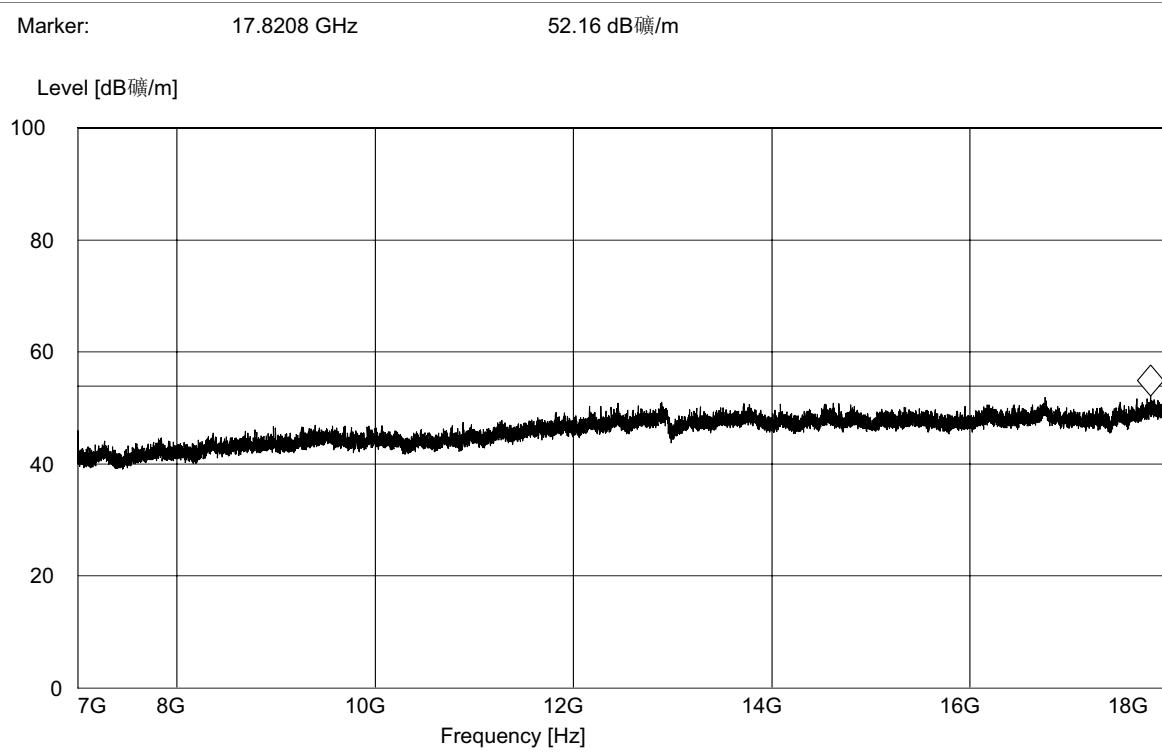


(Plot A.8: Antenna Vertical, 7GHz to 18GHz)

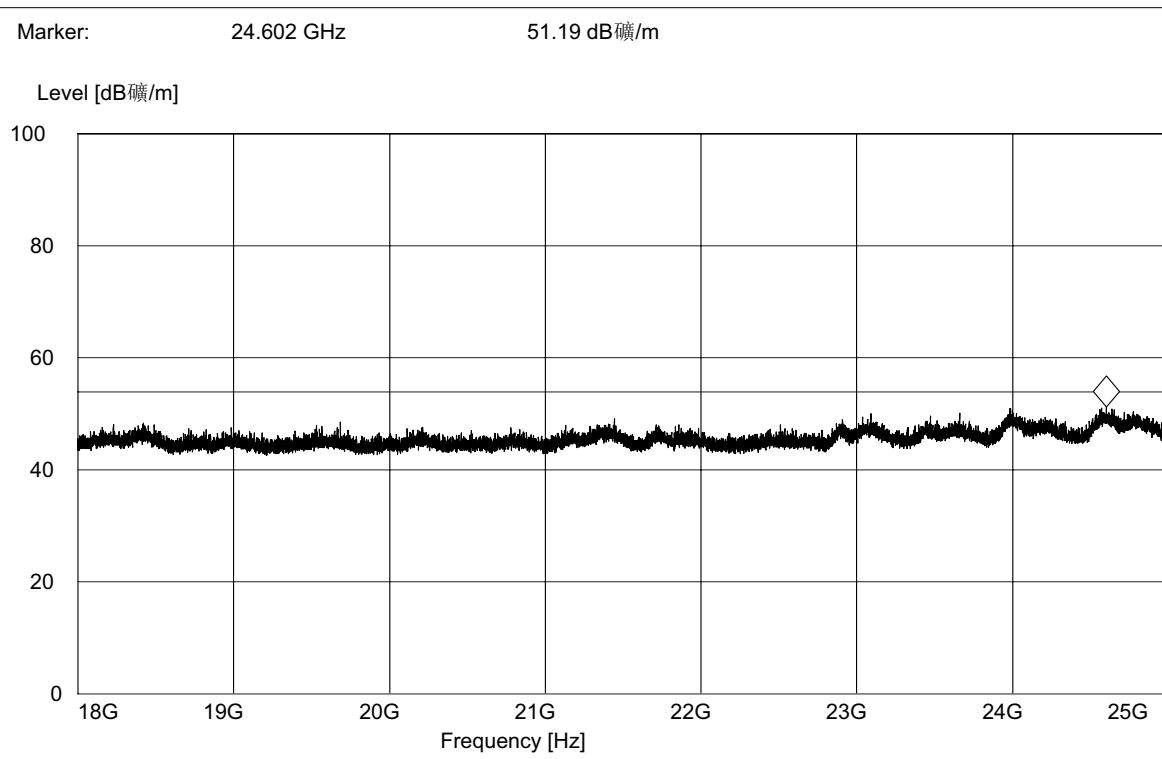


(Plot A.9: Antenna Vertical, 18GHz to 25GHz)


Plot for Channel = 39

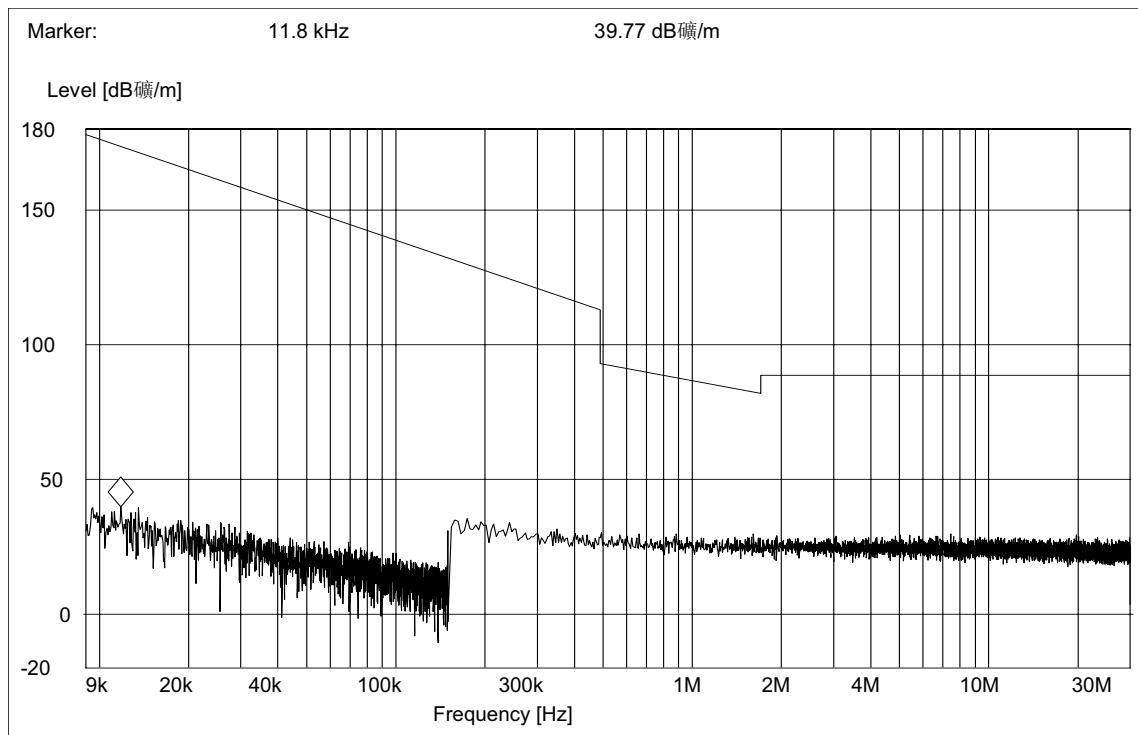


(Plot B.1: 9kHz to 30MHz)

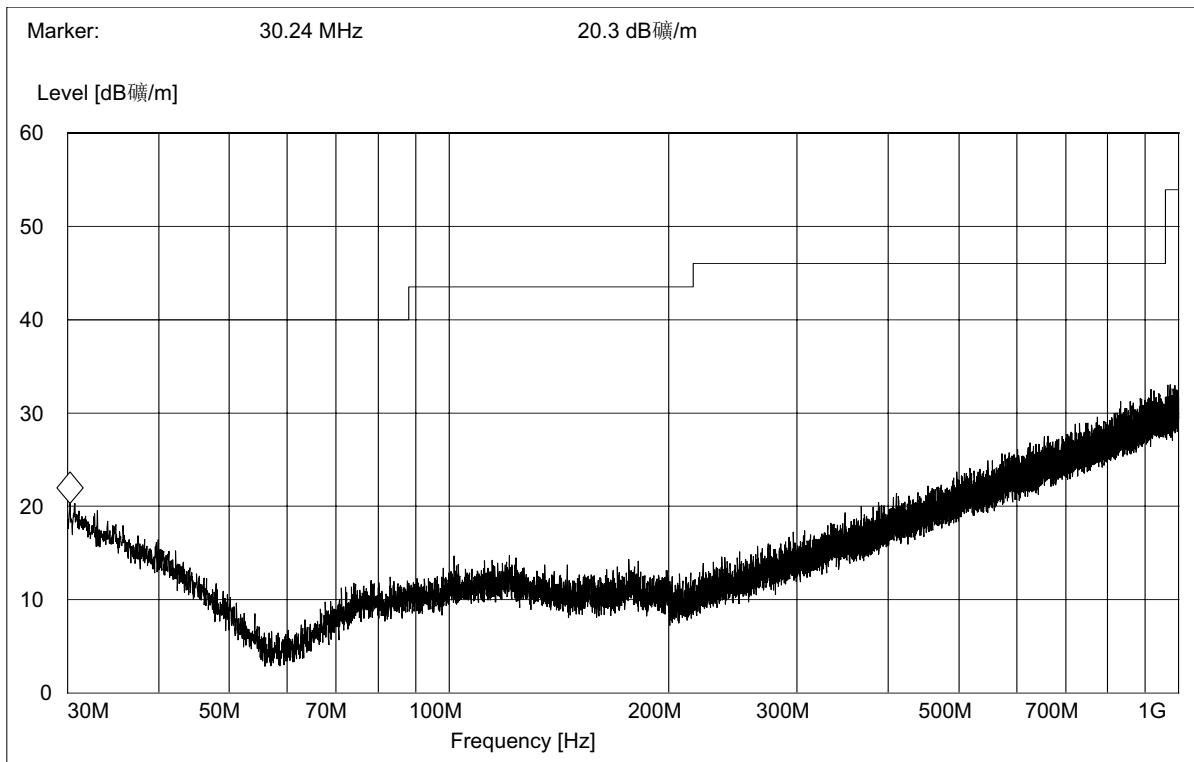


(Plot B.2: Antenna Horizontal, 30MHz to 1GHz)

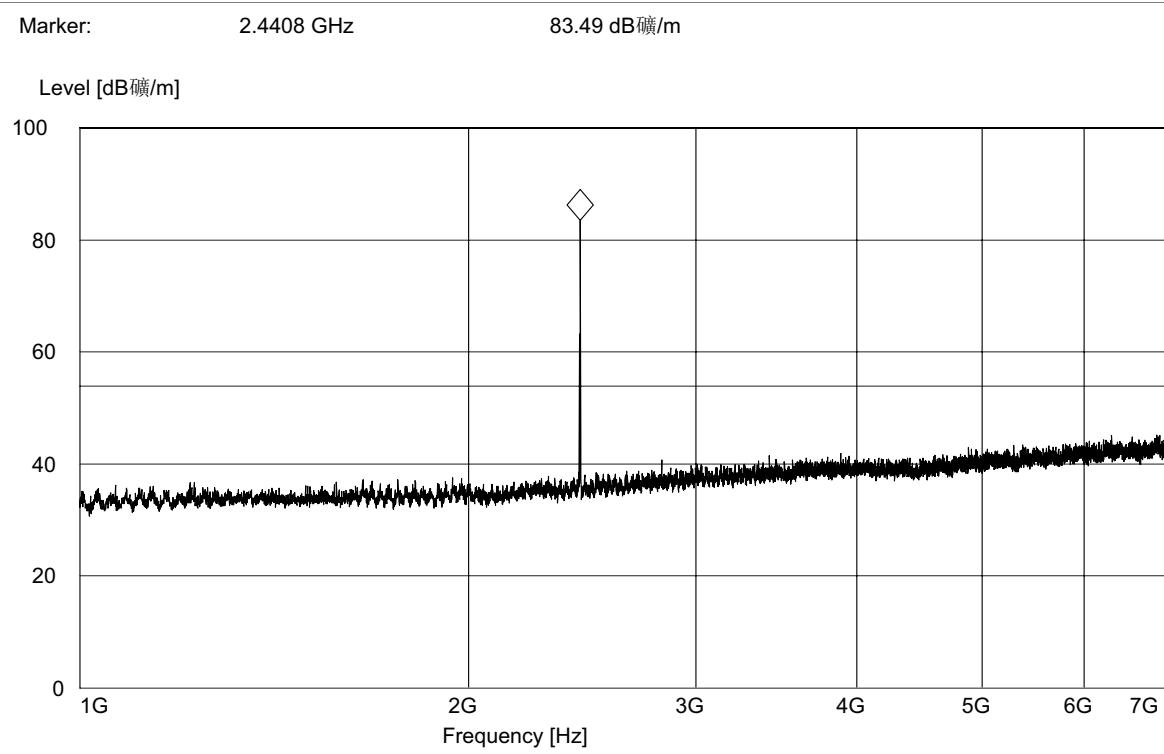


(Plot B.3: Antenna Horizontal, 1GHz to 7GHz)

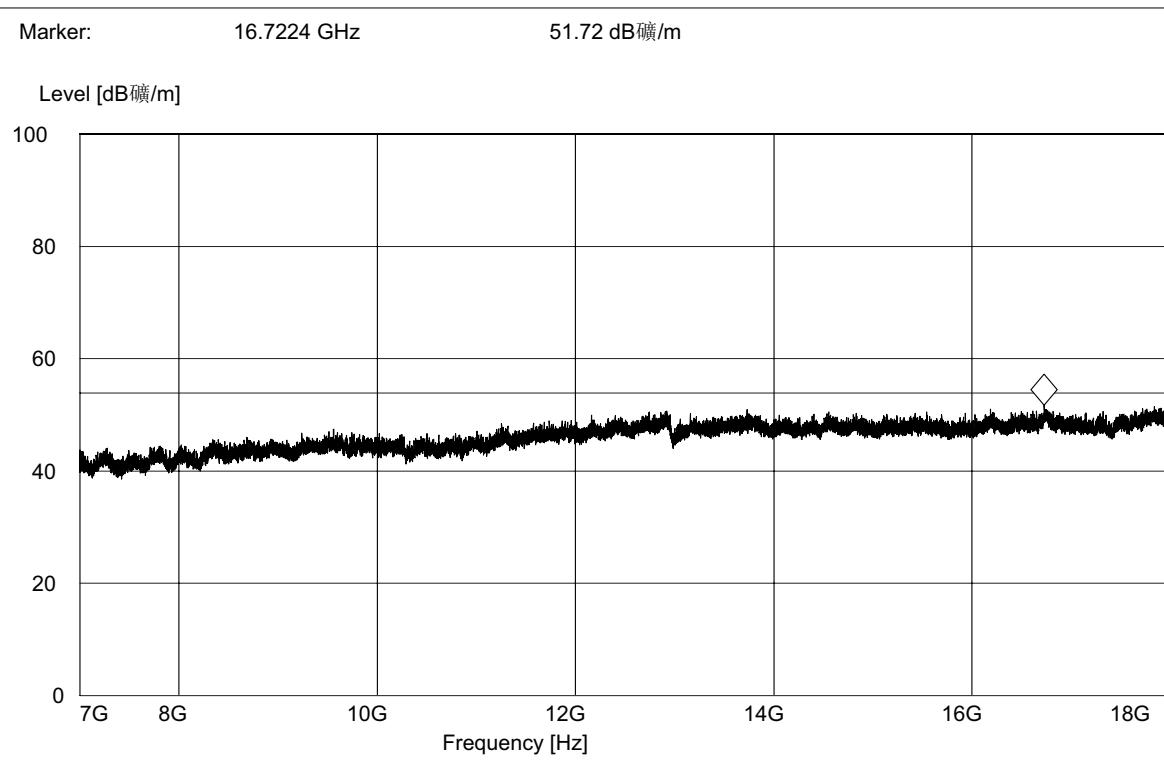


(Plot B.4: Antenna Horizontal, 7GHz to 18GHz)

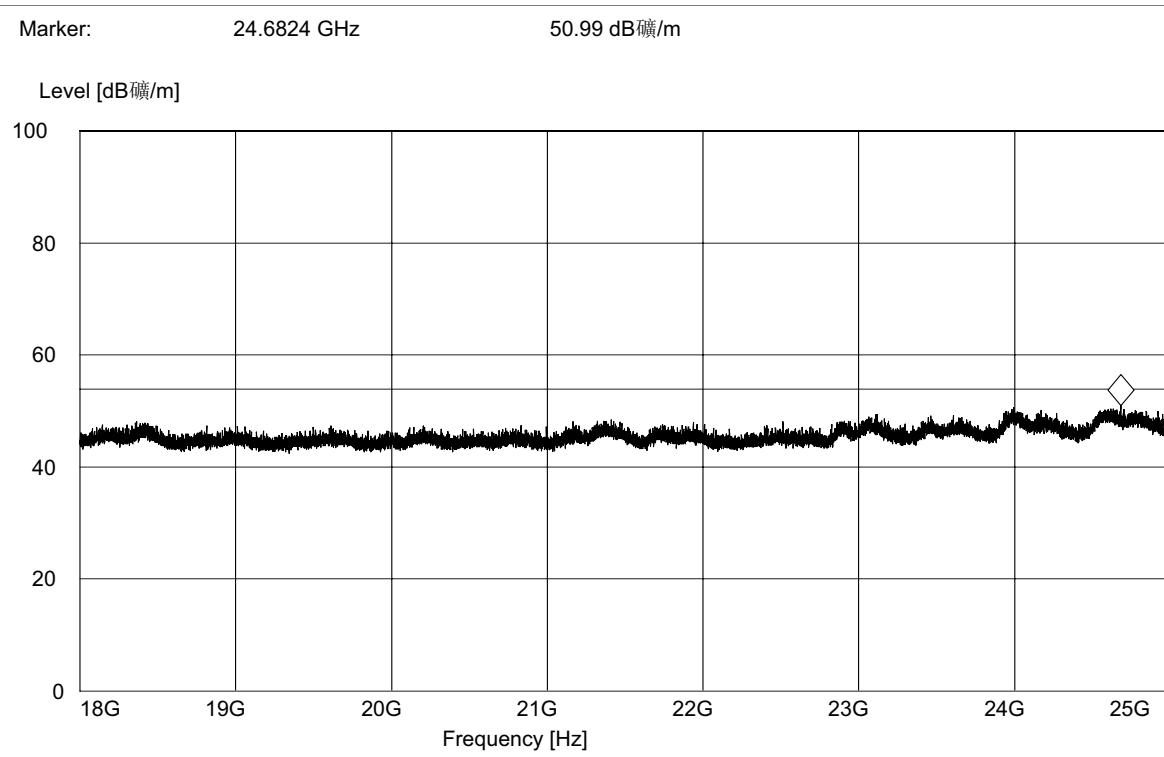


(Plot B.5: Antenna Horizontal, 18GHz to 25GHz)

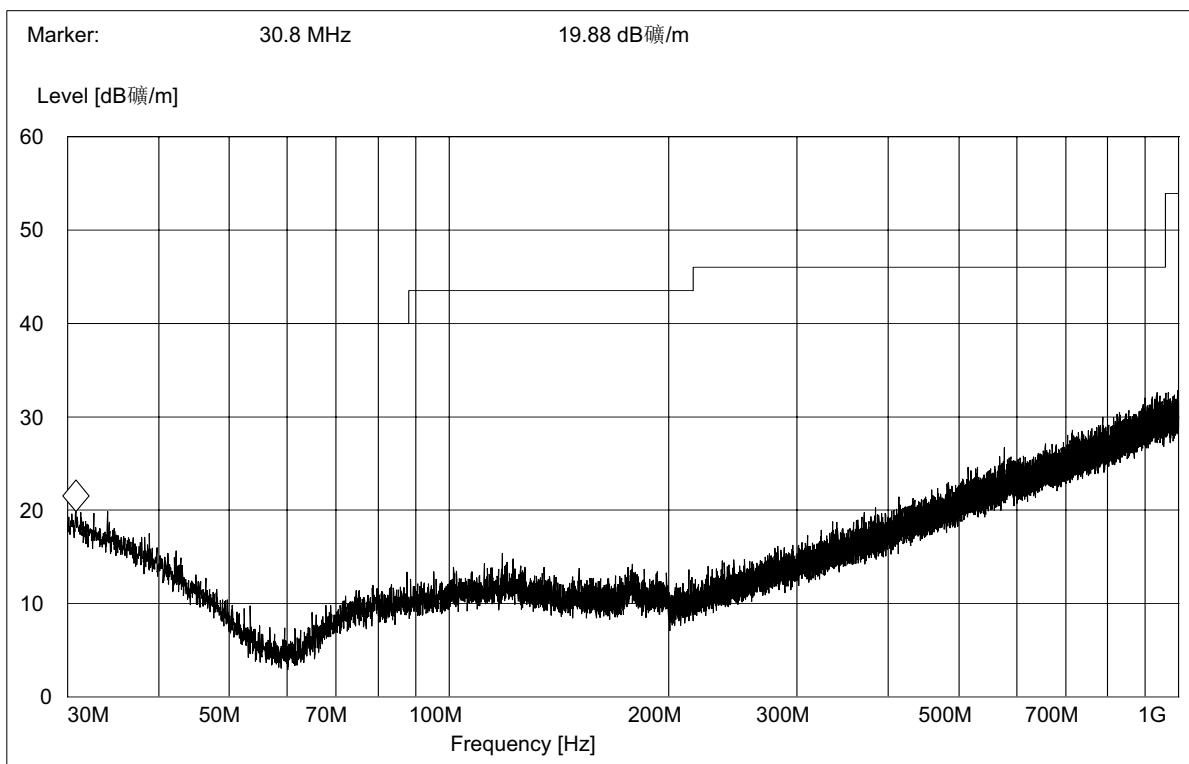


(Plot B.6: Antenna Vertical, 30MHz to 1GHz)

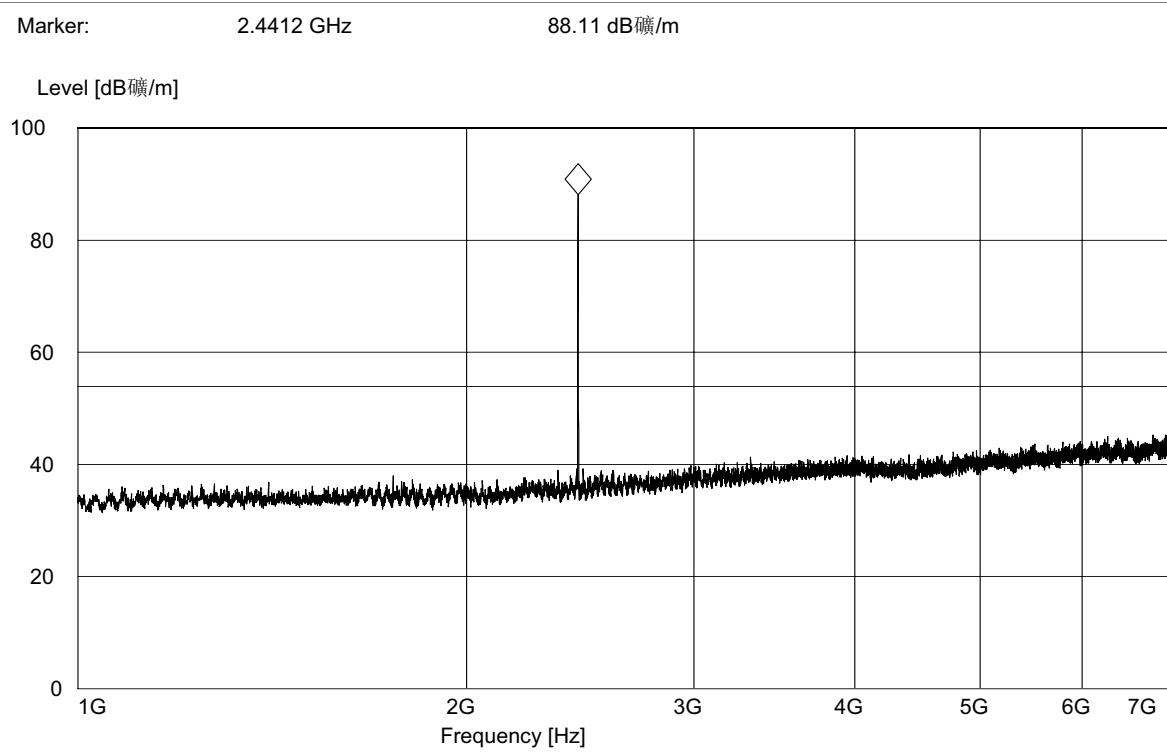

(Plot B.7: Antenna Vertical, 1GHz to 7GHz)

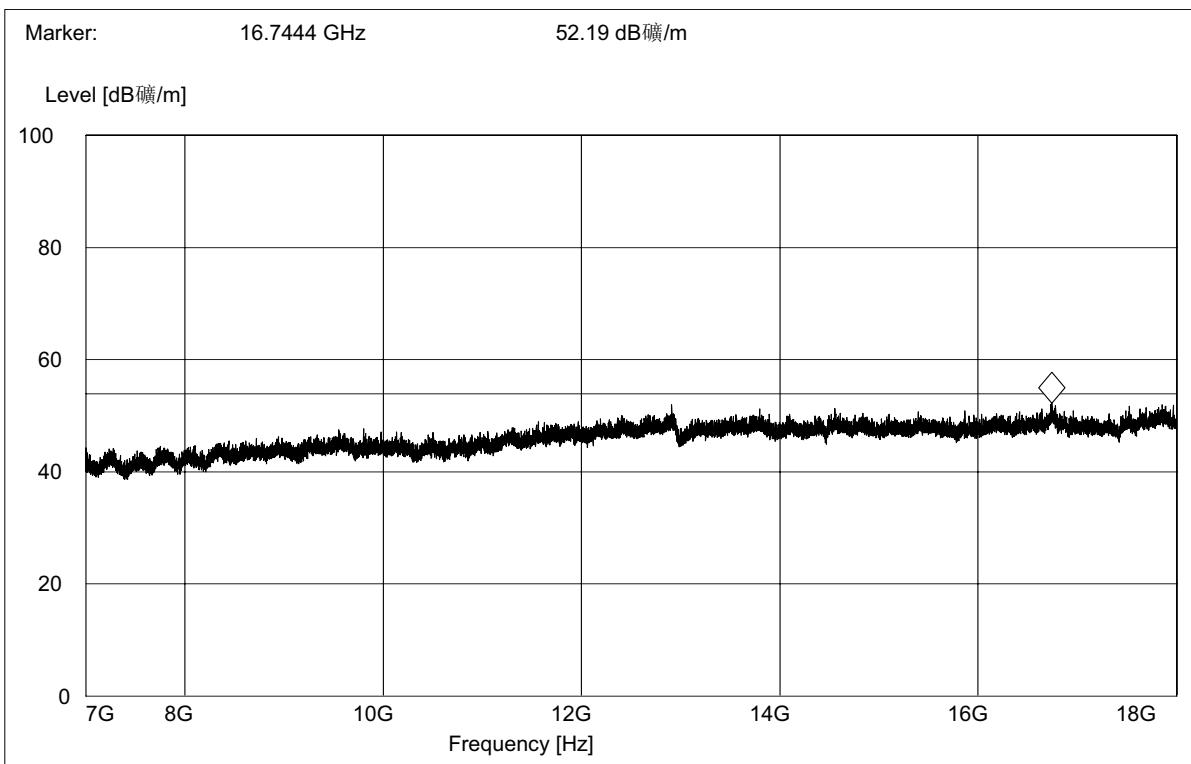


(Plot B.8: Antenna Vertical, 7GHz to 18GHz)

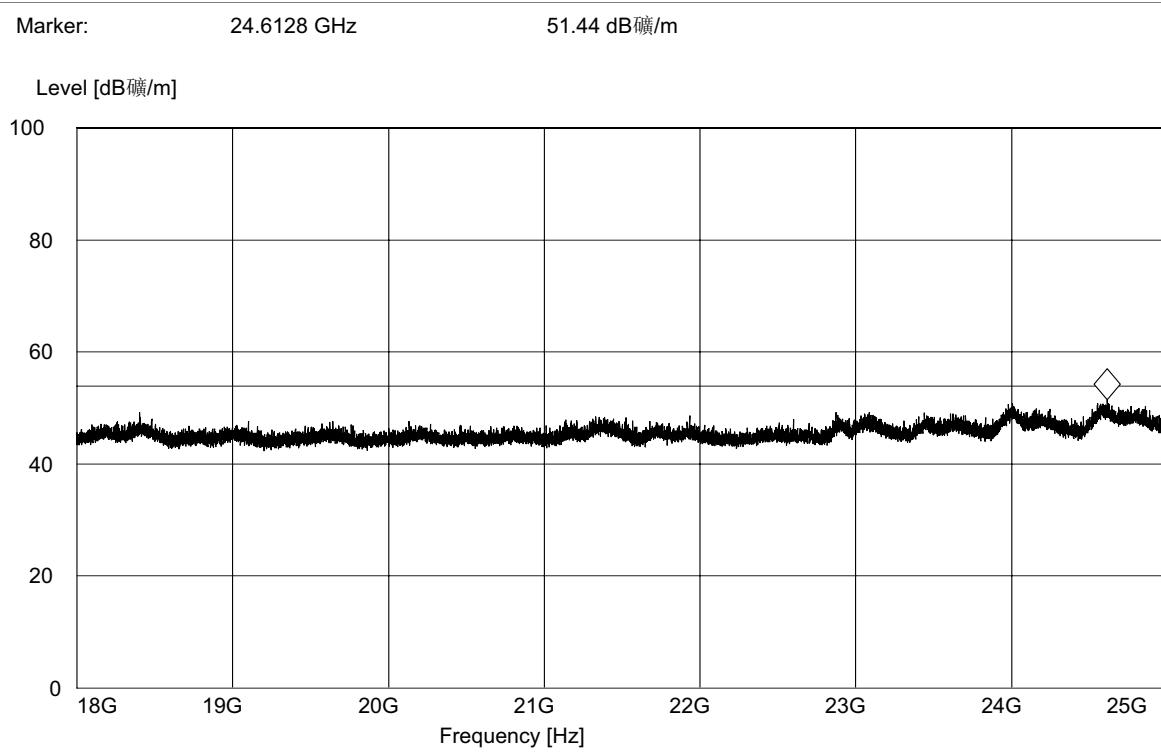


(Plot B.9: Antenna Vertical, 18GHz to 25GHz)


Plot for Channel = 78

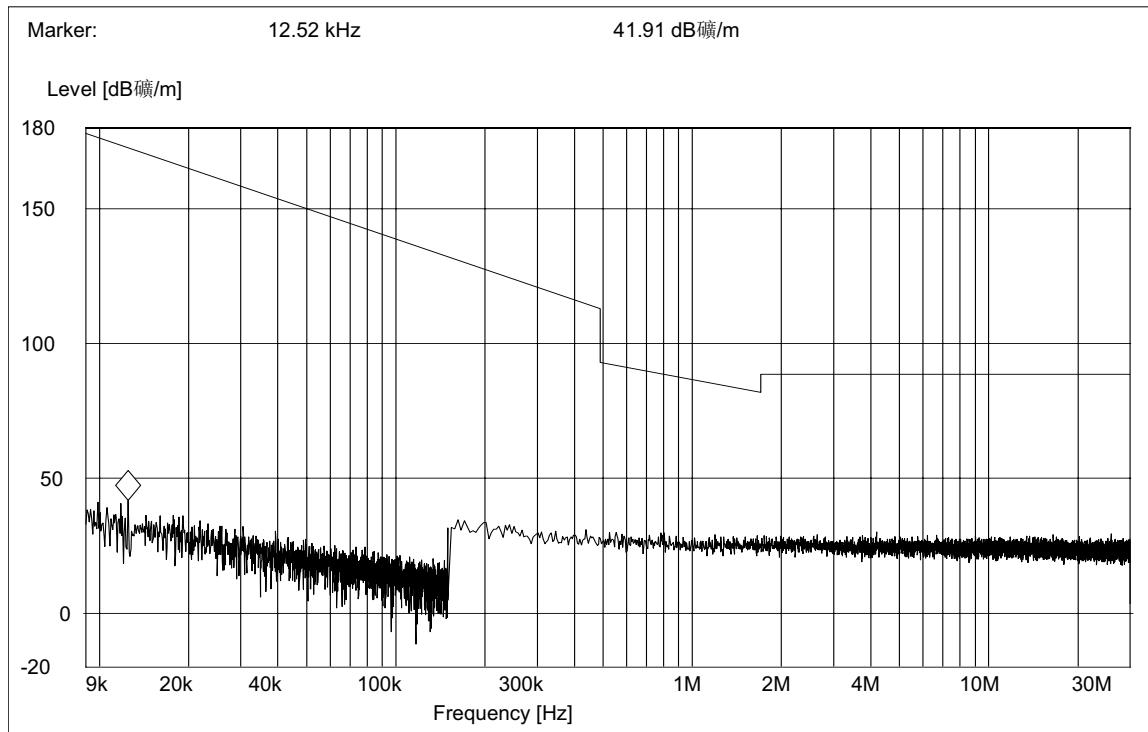


(Plot C.1: 9kHz to 30MHz)

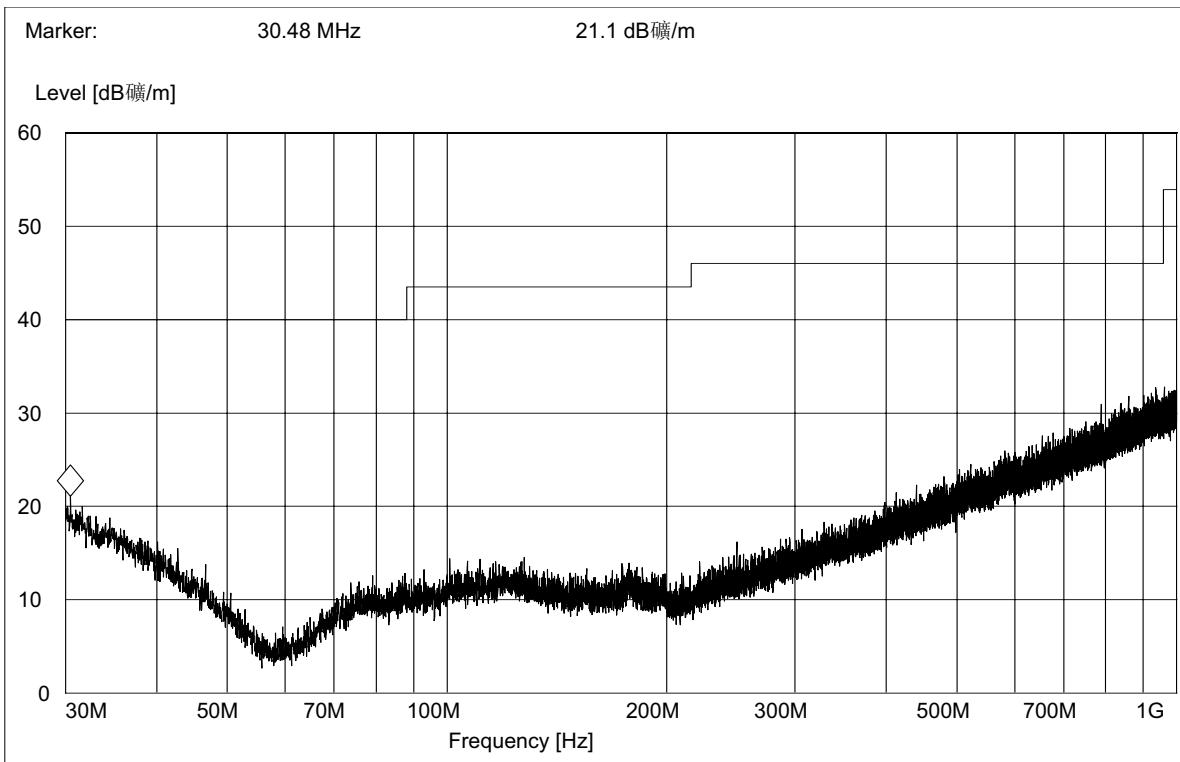


(Plot C.2: Antenna Horizontal, 30MHz to 1GHz)

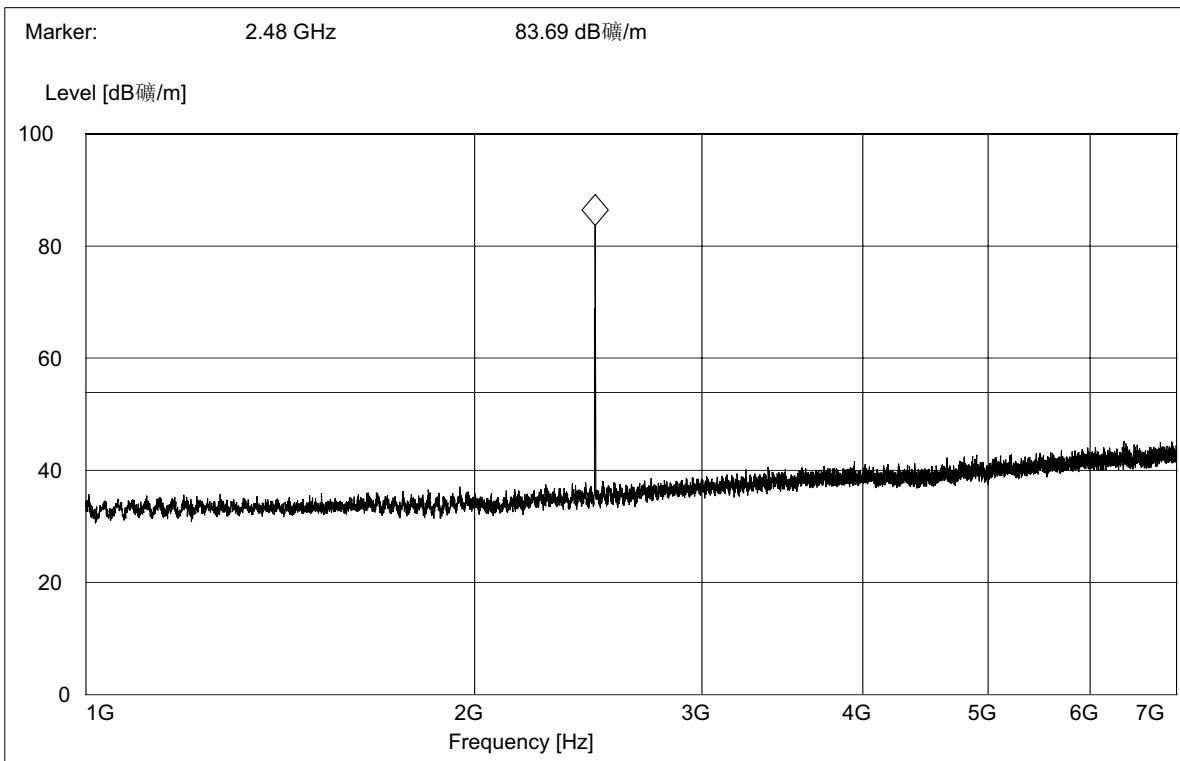


(Plot C.3: Antenna Horizontal, 1GHz to 7GHz)

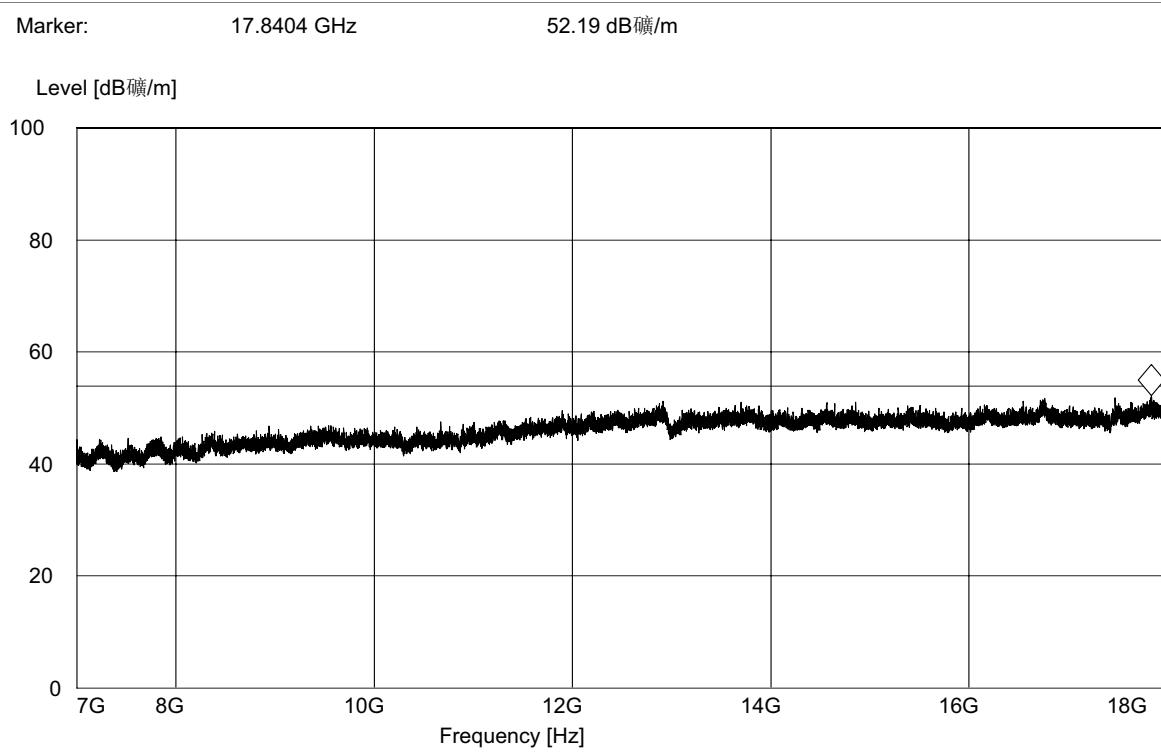


(Plot C.4: Antenna Horizontal, 7GHz to 18GHz)

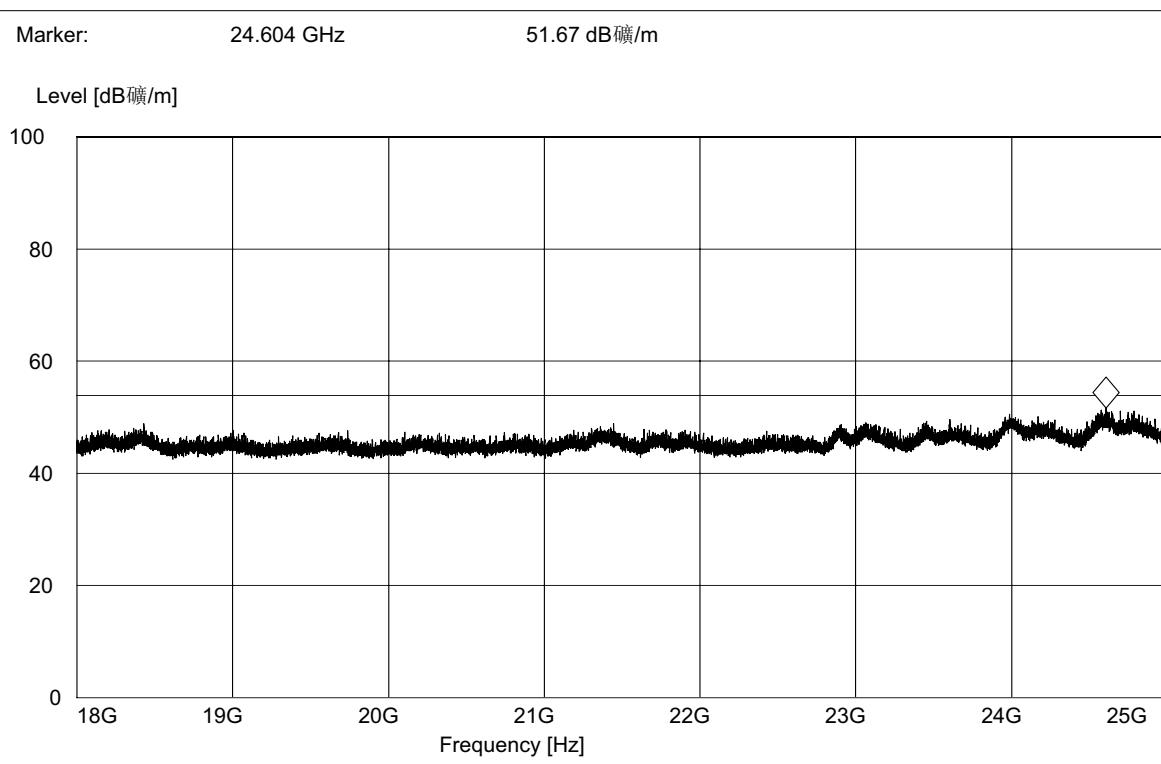


(Plot C.5: Antenna Horizontal, 18GHz to 25GHz)

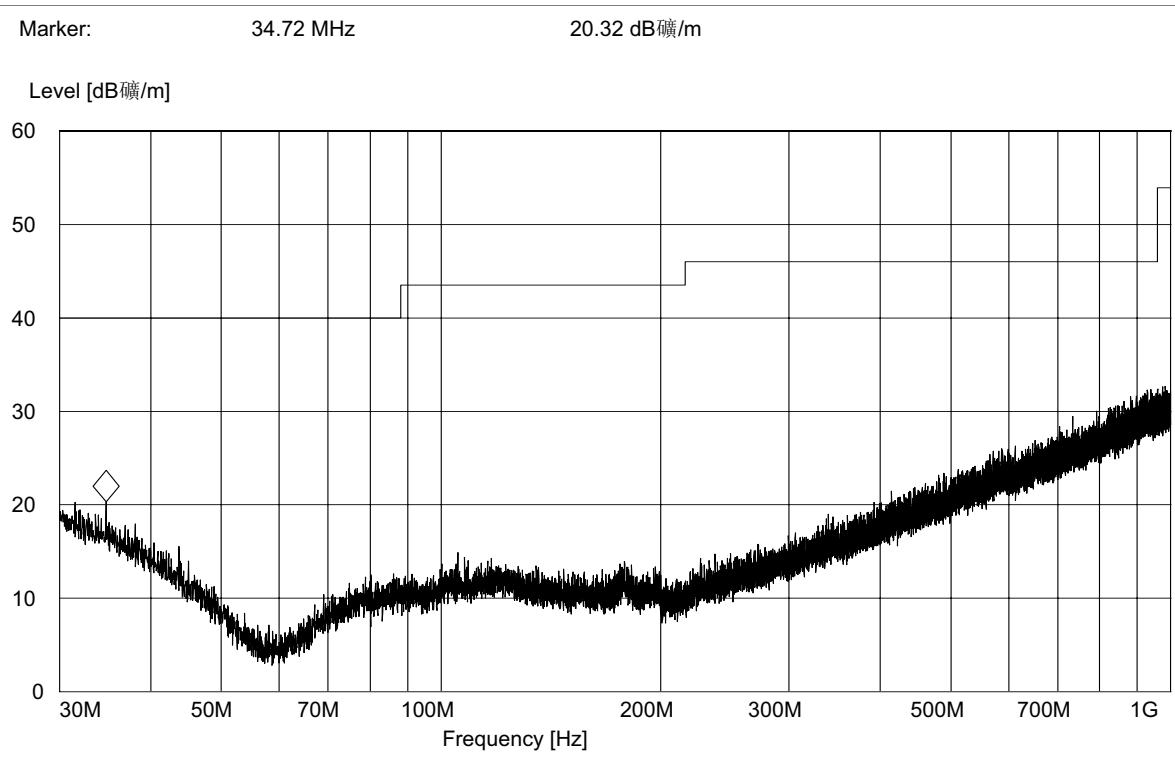


(Plot C.6: Antenna Vertical, 30MHz to 1GHz)

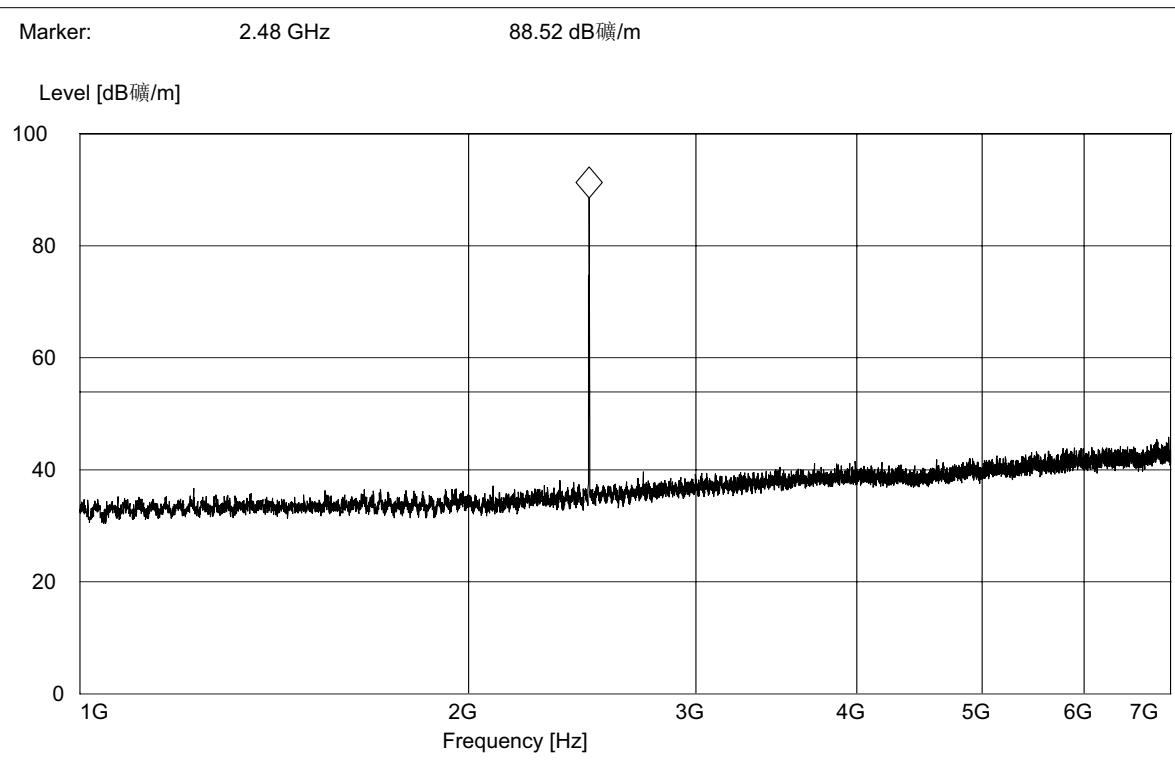

(Plot C.7: Antenna Vertical, 1GHz to 7GHz)

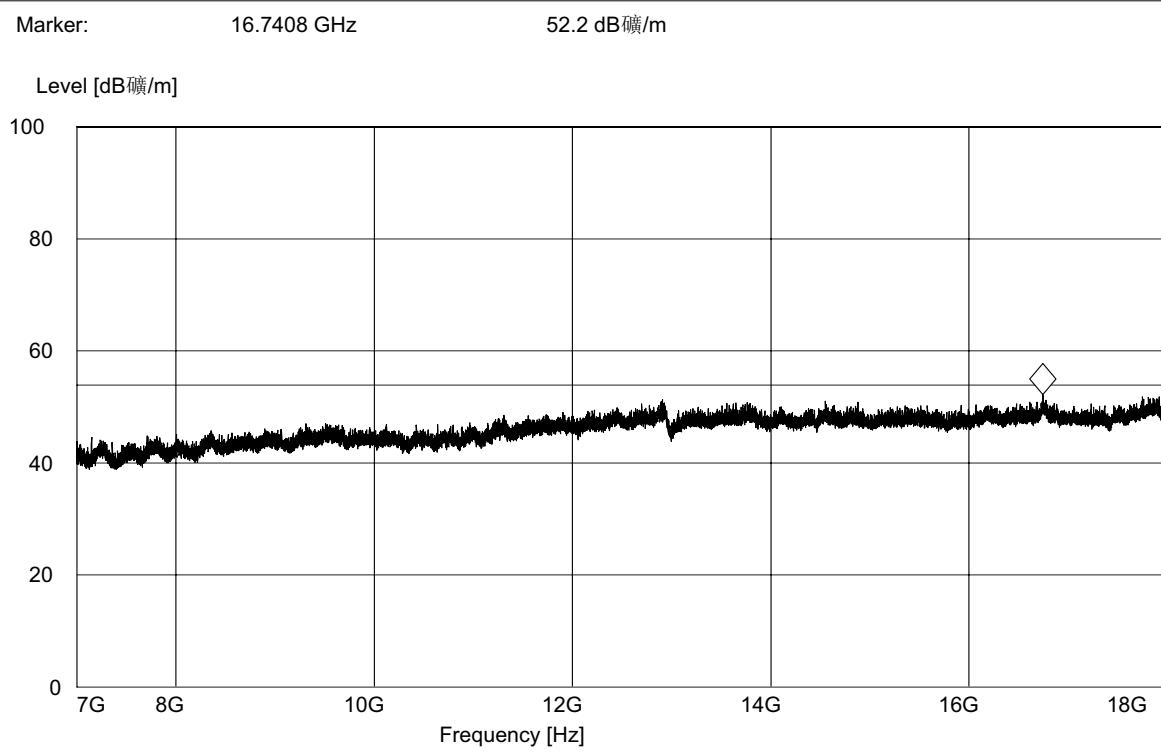

(Plot C.8: Antenna Vertical, 7GHz to 18GHz)

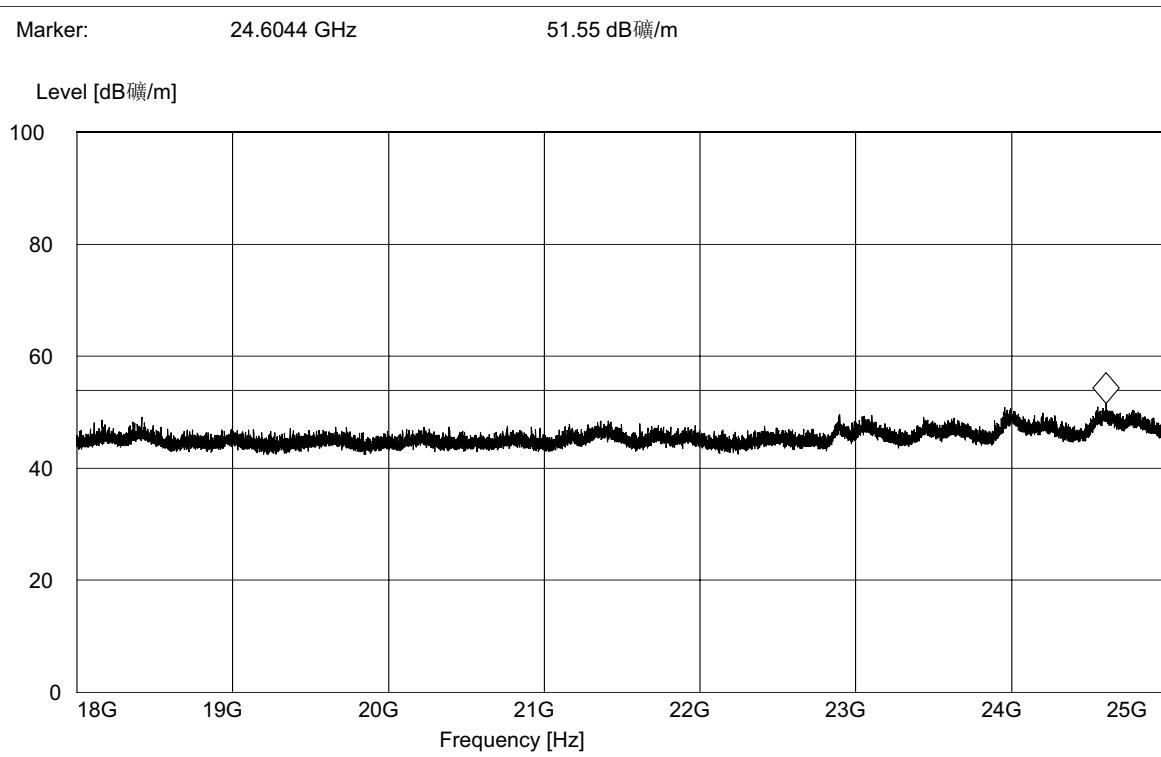

(Plot C.9: Antenna Vertical, 18GHz to 25GHz)



Report No.: SZ06110009E04

** END OF REPORT **