

D

D

C



C

B

B

A

A

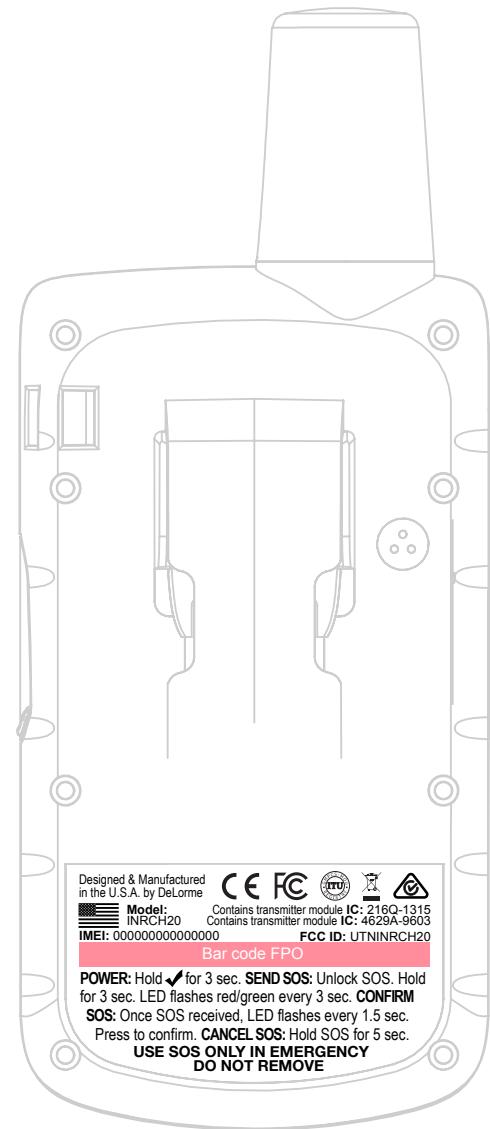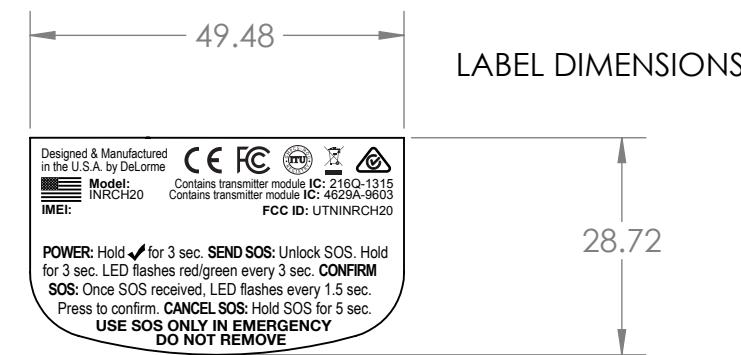

Graphics Details

- Label placement spacing is .1mm from edge to label
- Lexan label with acrylic adhesive 3M467
- Label field PMS 877C (Silver)
- All graphics/text PMS Black C
- Clear lexan protective film overlay .125mm
- Ruggedized application/Outdoor application

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
DeLorme Publishing Co., ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
DeLorme Publishing Co. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN INCHES	DRAWN	MJM 3-22-13
TOLERANCES: FRACTIONAL \pm ANGULAR: MACH \pm BEND \pm	CHECKED	
TWO PLACE DECIMAL \pm THREE PLACE DECIMAL \pm	ENG APPR.	
	MFG APPR.	
	Q.A.	
INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

DeLorme Publishing Co.
TITLE: InReach 2.0
SIZE DWG. NO. REV
B A
SCALE: 1:1 WEIGHT: SHEET 2 OF 2