FCC 47 CFR PART 15 Subpart C

TEST REPORT

For

Wireless Speaker

Model Number: AD-407

Trade Name: N/A

Prepared for

ABBA ELECTRONICS CO., LTD FLAT C, 4TH FLOOR, BLOCK 1, CAMELPAINT BUILDING, 62 HOI YUEN ROAD, KWUN TONG, KOWLOON, HONG KONG

Prepared by

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC. NO. 5, JINAO INDUSTRIAL PARK, NO. 35 JUKENG ROAD, DASHUIKENG VILLAGE, GUANLAN TOWN, BAOAN DISTRICT, SHENZHEN, CHINA

TEL: 86-755-28055000 FAX: 86-755-28055221



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Date of Issue: April 16, 2007

TABLE OF CONTENTS

1.	TEST RESULT CERTIFICATION	3
2.	EUT DESCRIPTION	4
3.	TEST METHODOLOGY	5
3.	.1 EUT CONFIGURATION	5
3.	.2 EUT EXERCISE	5
3.	.3 GENERAL TEST PROCEDURES	5
3.	.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.	.5 DESCRIPTION OF TEST MODES	6
4.	INSTRUMENT CALIBRATION	7
4.	.1 MEASURING INSTRUMENT CALIBRATION	7
4.	.2 MEASUREMENT EQUIPMENT USED	
5.	FACILITIES AND ACCREDITATIONS	8
5.		
5.	.2 EQUIPMENT	8
6.	SETUP OF EQUIPMENT UNDER TEST	9
6.	.1 SETUP CONFIGURATION OF EUT	9
6.		
7.	FCC PART 15.249 REQUIREMENTS	10
7.	.1 BAND EDGES MEASUREMENT	10
7.		
7.		
APP	PENDIX 1 PHOTOGRAPHS OF TEST SETUP	24

1. TEST RESULT CERTIFICATION

Applicant: ABBA ELECTRONICS CO., LTD

FLAT C, 4TH FLOOR, BLOCK 1, CAMELPAINT BUILDING, 62 HOI YUEN ROAD, KWUN TONG, KOWLOON, HONG

Date of Issue: April 16, 2007

KONG

Equipment Under Test: Wireless Speaker

Trade Name: N/A

Model: AD-407

Date of Test: March 19-April 13, 2007

APPLICABLE STANDARDS				
STANDARD	TEST RESULT			
FCC 47 CFR Part 15 Subpart C	No non-compliance noted			

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements emission limits of FCC Rules Part 15.107, 15.109,15.207, 15.209 and 15.249.

The test results of this report relate only to the tested sample identified in this report.

Approved by: Tested By: Maya Ding

Reviewed By:

Clinton Kao/ Manager COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC. Eric Wong / Assistant manager COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

lin

Page 3 Rev. 00

2. EUT DESCRIPTION

Product	Wireless Speaker
Trade Name	N/A
Model Number	AD-407
Model Discrepancy	N/A
Power Supply	TX: DC4.5V supplied by the adaptor (or the battery) Adaptor Manufacturer/Model No. GUAN DE KE JI/KA22D045030024C AC input: AC220V, 50Hz, 25mA, DC output: DC4.5V, 300 mA DC output cable: Un-shielded, 1.80m
Frequency Range	914MHz - 915MHz
Antenna Gain	3 dBi
Antenna Designation	PCB Antenna

Remark: This submittal(s) (test report) is intended for FCC ID: <u>UTTAD-407</u> filing to comply with Section 15.207, 15.209, 15.249 (FCC Part 15, Subpart C Rules.)

Page 4 Rev. 00

Date of Issue: April 16, 2007

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.249.

Date of Issue: April 16, 2007

3.1EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.107 and 15.109 under the FCC Rules Part 15 Subpart B and Section 15.207, 15.209,15.249 under the FCC Rules Part 15 Subpart C.

3.3GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

Page 5 Rev. 00

3.4FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Reference No.:SZ060824B05-RP

Date of Issue: September 28, 2006

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	$\binom{2}{}$
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and powerline conducted emission below 30MHz, which worst case was in normal link mode with charging only.

Channel 1 (914MHz) and Channel 2 (915MHz) were chosen for the final testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Page 6 Rev. 00

² Above 38.6

4. INSTRUMENT CALIBRATION

4.1MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Reference No.:SZ060824B05-RP

Date of Issue: September 28, 2006

4.2MEASUREMENT EQUIPMENT USED

MEASUREMENT EQUIPMENT USED

966 RF CHAMBER 2						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/05/2008		
EMI Test Receiver	R&S	ESCI	1166.5950 03	01/13/2008		
Pre-Amplifier	MITEQ	N/A	AFS42-00102650-42-10P-42	02/14/2008		
Bilog Antenna	SCHWAZBECK	CBL6143	5082	06/09/2007		
Turn Table	EMCO	2081-1.21	N/A	N.C.R		
Antenna Tower	CT	N/A	N/A	N.C.R		
Controller	CT	N/A	N/A	N.C.R		
RF Comm. Test set	НР	8920B	US36142090	N.C.R		
Site NSA	C&C	N/A	N/A	06/09/2007		
Horn Antenna	TRC	N/A	N/A	03/04/2008		

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emission Test Site G							
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due			
ESCI EMI TEST RECEIV.ESCI	ROHDE&SCHWARZ	1166.5950 03	100088	02/05/2008			
LISN	EMCO	3825/2	1371	02/05/2008			
LISN	EMCO	3825/2	8901-1459	02/05/2008			

Remark: Each piece of equipment is scheduled for calibration once a year.

Page 7 Rev. 00

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 5, Jinao industrial park, No.35 Jukeng Road, Dashuikeng Village, Guanlan Town, Baoan District, Shenzhen, China

Reference No.:SZ060824B05-RP

Date of Issue: September 28, 2006

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4: 2003 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Page 8 Rev. 00

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	FCC ID	Series No.	Data Cable	Power Cord
1.	Adapter	Shenzhen Powernen	AD-07DC	N/A	N/A	N/A	Unshielded 1.50m
2.	Wireless Speaker (RX)	N/A	AD-407	N/A	N/A	N/A	N/A

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 9 Rev. 00

Date of Issue: April 16, 2007

7. FCC PART 15.249 REQUIREMENTS

7.1 BAND EDGES MEASUREMENT

LIMIT

1. In the above emission table, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Reference No.:SZ060824B05-RP

Date of Issue: September 28, 2006

2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Test Configuration

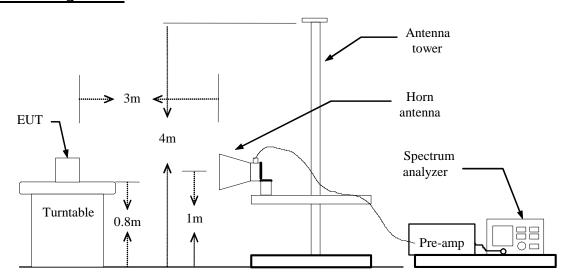

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.

Page 10 Rev. 00

Band Edges (CH Low)

#Res BW 1 MHz

Detector mode: Peak Polarity: Vertical

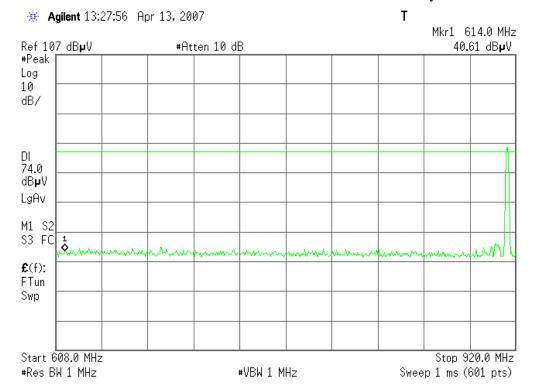

Detector mode: Average


*** Agilent** 13:29:04 Apr 13, 2007 R Τ Mkr1 614.0 MHz Ref 107 dB**µ**V 28.87 dB**µ**V #Atten 10 dB #Peak Log 10 dB/ DI 54.0 ďB**µ**V LgAv W1 S2 S3 FC £(f): 1 ♦ FTun Swp Start 608.0 MHz Stop 920.0 MHz

#VBW 10 Hz

Page 11 Rev. 00


Sweep 24.33 s (601 pts)


Polarity: Vertical

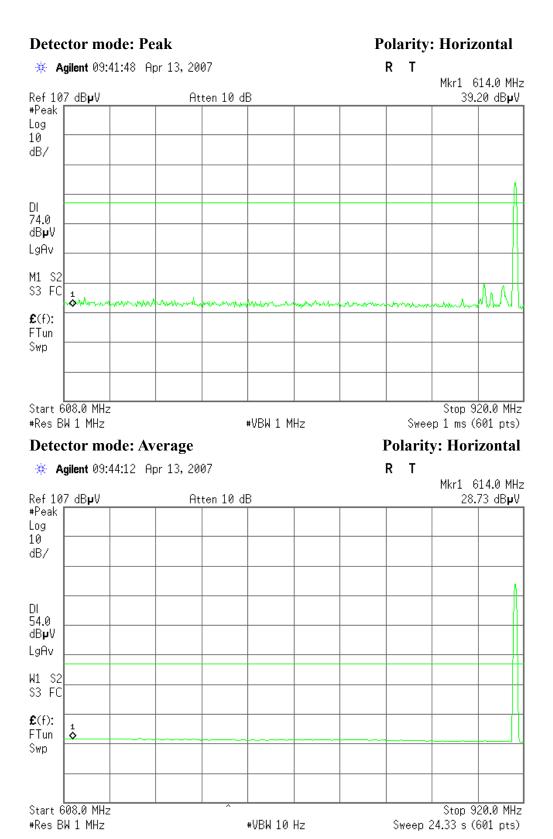


Page 12 Rev. 00

Band Edges (CH High)




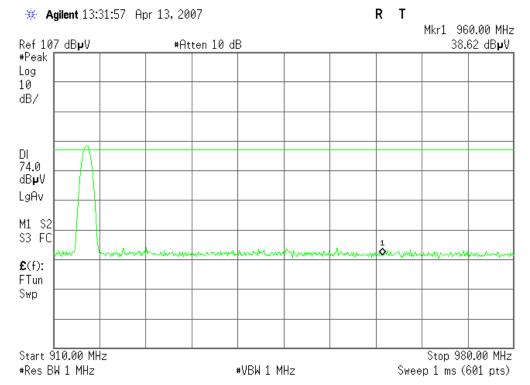

Detector mode: Average

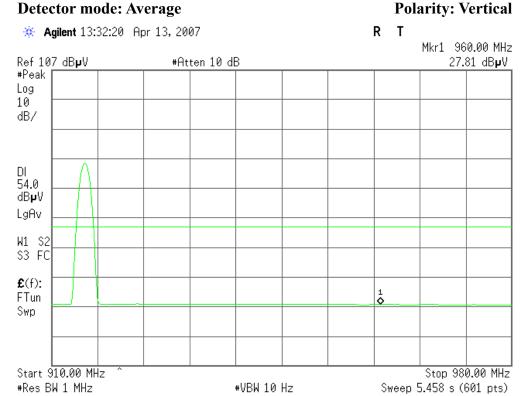

Page 13 Rev. 00

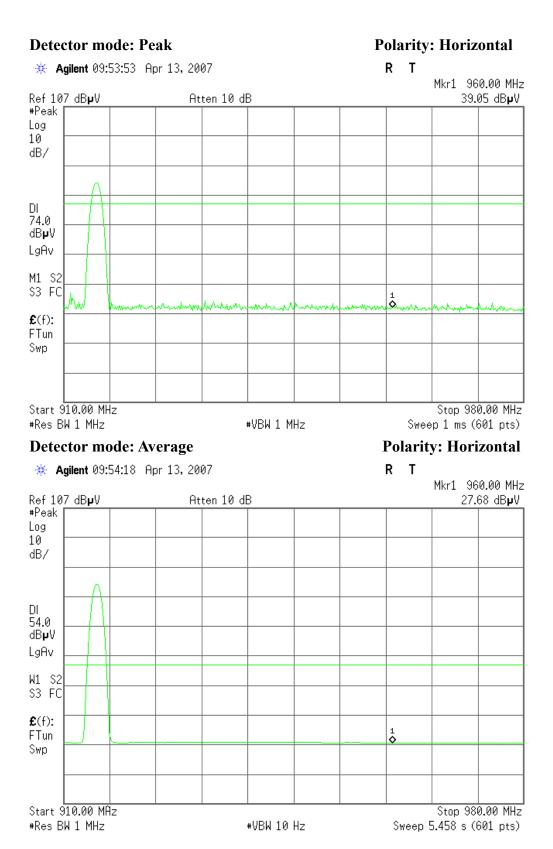

Page 14 Rev. 00

7.2 SPURIOUS EMISSION

LIMIT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Date of Issue: April 16, 2007

Fundamental Frequency (MHz)	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (μV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.


Frequency	Field Strength	Field Strength		
(MHz)	(μV/m at 3-meter)	(dBµV/m at 3-meter)		
30-88	100	40		
88-216	150	43.5		
216-960	200	46		
Above 960	500	54		

Page 15 Rev. 00


Date of Issue: April 16, 2007

Test Configuration

Below 1 GHz

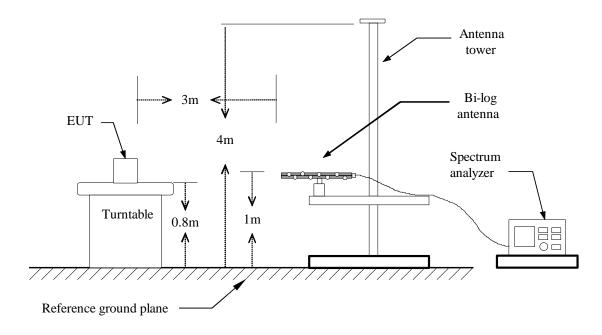

Above 1 GHz

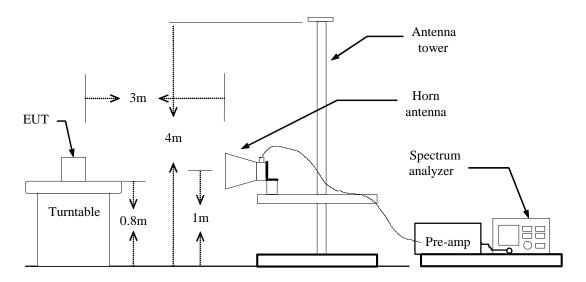

Page 16 Rev. 00

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

Date of Issue: April 16, 2007

- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- 7. Repeat above procedures until the measurements for all frequencies are complete.

Page 17 Rev. 00

TEST RESULTS

Below 1 GHz

Operation Mode: TX/ CH 1 (914MHz) Test Date: March 30, 2007

Reference No.:SZ060824B05-RP

Date of Issue: September 28, 2006

Temperature: 24°C **Tested by:** Maya

Humidity: 51% RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
913.666	V	Peak	72.74	-3.40	69.34	81.93	-12.59
66.000	V	Peak	40.53	-17.51	23.02	40.00	-16.98
77.250	V	Peak	48.52	-16.98	31.54	40.00	-8.46
832.000	V	Peak	32.39	-3.83	28.56	46.00	-17.44
N/A							
913.666	Н	Peak	83.44	-3.40	80.04	81.93	-1.89
76.350	Н	Peak	39.30	-17.05	22.25	40.00	-17.75
548.500	Н	Peak	32.56	-6.53	26.03	46.00	-19.97
666.333	Н	Peak	32.43	-4.70	27.73	46.00	-18.27
N/A							

Remark:

- 1. Measuring frequencies from 30 MHz to the 1GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Margin(dB) = Remark result(dBuV/m) Quasi-peak limit(dBuV/m).

Page 18 Rev. 00

Operation Mode: TX/ CH 2 (915MHz) **Test Date:** March 30, 2007

Temperature: 24°C **Tested by:** Maya

Humidity: 51% RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
914.833	V	Peak	72.93	-3.41	69.52	81.93	-12.41
68.250	V	Peak	52.01	-17.56	34.45	40.00	-5.55
107.850	V	Peak	40.59	-15.92	24.67	43.50	-18.83
755.000	V	Peak	32.26	-4.29	27.97	46.00	-18.03
N/A							
914.833	Н	Peak	83.21	-3.41	79.80	81.93	-2.13
599.833	Н	Peak	34.65	-5.66	28.99	46.00	-17.01
701.333	Н	Peak	32.26	-4.13	28.13	46.00	-17.87
779.500	Н	Peak	31.84	-4.04	27.80	46.00	-18.20
N/A							

Remark:

- 1. Measuring frequencies from 30 MHz to the 1GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Margin(dB) = Remark result(dBuV/m) Quasi-peak limit(dBuV/m).

Page 19 Rev. 00

Above 1 GHz

Operation Mode: Tx / CH 1 (914MHz) **Test Date:** March 30, 2007

Date of Issue: April 16, 2007

Temperature: 23°C **Tested by:** Maya

Humidity: 51% RH **Polarity:** Ver. / Hor.

E			Res	sult	Peak	AV	Manain			
Freq. (MHz)	Pol H/V	Reading (dBuV)	Reading (dBuV)	CF (dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1826.66	V	51.35		-8.14	43.21		74.00	54.00	-10.79	Peak
N/A										
	<u> </u>	<u> </u>								
1826.66	Н	49.85		-8.14	41.71		74.00	54.00	-12.29	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark\ result(dBuV/m) Average\ limit(dBuV/m)$.

Page 20 Rev. 00

Operation Mode: Tx / CH 2 (915MHz) Test Date: August 28, 2006

Date of Issue: April 16, 2007

Temperature: 23°C **Tested by:** Maya

Humidity: 51% RH **Polarity:** Ver. / Hor.

Euros	Ant.	Peak	AV	Ant. / CL	Res	sult	Peak	AV Limit (dBuV/m)		Remark
Freq. (MHz)	Pol H/V	Reading (dBuV)	Reading (dBuV)	CF (dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)			
1830.00	V	50.68		-8.13	42.55		74.00	54.00	-11.45-	Peak
2746.66	V	48.44		-4.79	43.65		74.00	54.00	-10.35	Peak
N/A										
	I	1				l				
1830.00	Н	53.01		-8.13	44.88		74.00	54.00	-9.12	Peak
2746.66	Н	49.09		-4.79	44.30		74.00	54.00	-9.70	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark\ result\ (dBuV/m) Average\ limit\ (dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column

Page 21 Rev. 00

7.3 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Reference No.:SZ060824B05-RP

Date of Issue: September 28, 2006

Frequency Range (MHz)	Limits (dBμV)					
(IVIIIZ)	Quasi-peak	Average				
0.15 to 0.50	66 to 56*	56 to 46*				
0.50 to 5	56	46				
5 to 30	60	50				

^{*} Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Page 22 Rev. 00

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Reference No.:SZ060824B05-RP

Date of Issue: September 28, 2006

Test Data

Operation Mode: TX+RX **Test Date:** August 30, 2006

Temperature: 25°C **Tested by:** Maya

Humidity: 55% RH

FREQ	PEAK	Q.P.	AVG	Q.P.	AVG	Q.P.	AVG	NOTE
MHz	RAW	RAW	RAW	Limit	Limit	Margin	Margin	
	dBuV	dBuV	dBuV	dBuV	dBuV	dB	dB	
0.187	35.37			64.94	54.94		-19.57	L1
0.268	29.66			62.61	52.61		-22.95	L1
0.728	28.96			56.00	46.00		-17.04	L1
11.675	27.66			60.00	50.00		-22.34	L1
14.256	27.13			60.00	50.00		-22.87	L1
20.252	30.07			60.00	50.00		-19.93	L1
0.187	36.12			64.94	54.94		-18.82	L2
0.750	29.23			56.00	46.00		-16.77	L2
3.170	27.29			56.00	46.00		-18.71	L2
3.859	27.52			56.00	46.00		-18.48	L2
4.444	26.20			56.00	46.00		-19.80	L2
24.004	29.49			60.00	50.00		-20.51	L2

Remark:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
- 3. The IF bandwidth of SPN between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
- 4. $L1 = Line \ One \ (Live \ Line) / L2 = Line \ Two \ (Neutral \ Line)$

Page 23 Rev. 00

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP LINE CONDUCTED EMISSION TEST





Page 24 Rev. 00

RADIATED EMISSION TEST



Page 25 Rev. 00