

LS Research, LLC

W66 N220 Commerce Court • Cedarburg, WI 53012 • USA

Phone: 262.375.4400 • Fax: 262.375.4248

www.lsr.com

ENGINEERING TEST REPORT # 306549-TR-TCB v2

Compliance Testing of:

TN-4 Door Handle Transceiver

Test Date(s):

November 28TH, 2006

Prepared For:

**SimonsVoss Technologies, Incorporated
10125 South 52ND Street
Franklin, WI 53132
U.S.A.**

In accordance with:

**Federal Communications Commission (FCC)
Part 15, Subpart C, Section 15.209, and 15.109**

General Operating Requirements for Low-Power License-Exempt Transceivers

This Test Report is issued under the Authority of:

Brian E. Petted, VP of Engineering



Signature:

Date: December 5, 2006


Test Report Prepared by:

Teresa A. White, Document Coordinator

Tested by:

Abtin Spantman, EMC Engineer

Signature:



Date: December 5, 2006

Signature:



Date: December 5, 2006

This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

LS Research, LLC	Prepared For: SimonsVoss	Template: 15.209-TR- v0 (2006-12-01)
Report #: 306549-TR-TCB v2	Customer FCC ID #: UUC-01	Page 1 of 28

TABLE OF CONTENTS (page 1 of 2)

EXHIBIT 1. INTRODUCTION	4
1.1 Scope	4
1.2 Normative References	4
1.3 LS Research, LLC Test Facility	5
1.4 Location of Testing	5
1.5 Test Equipment Utilized	5
EXHIBIT 2. PERFORMANCE ASSESSMENT	6
2.1 Client Information	6
2.2 Equipment Under Test (EUT) Information	6
2.3 Associated Antenna Description	6
2.4 EUT's Technical Specifications	7
2.5 Product Description	8-9
EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS	10
3.1 Climate Test Conditions	10
3.2 Applicability & Summary of EMC Emission Test Results	10
3.3 Modifications Incorporated in the EUT for Compliance Purposes	10
3.4 Deviations & Exclusions from Test Specifications	10
EXHIBIT 4. DECLARATION OF CONFORMITY	11
EXHIBIT 5. RADIATED EMISSIONS TEST	12
5.1 Test Setup	12
5.2 Test Procedure	12
5.3 Test Equipment Utilized	13
5.4 Test Results	13
5.5 Calculation of Radiated Emission Measurements	14-15
5.6 Radiated Emissions Test Data Chart	16
5.7 Test Setup Photo(s)-Radiated Emissions Test	17-18
5.8 Screen Captures-Radiated Emissions Testing	19-22
EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE: 15.207	23
EXHIBIT 7. OCCUPIED BANDWIDTH	24
7.1 Limits	24
7.2 Method of Measurements	24
7.3 Test Equipment List	24
7.4 Screen Captures – Occupied Bandwidth	25

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 2 of 28

TABLE OF CONTENTS *(Page 2 of 2)*

EXHIBIT 8	FREQUENCY & POWER STABILITY OVER VOLTAGE & TEMPERATURE VARIATIONS	26
APPENDIX A	TEST EQUIPMENT LIST	27
APPENDIX B	ANTENNA SPECIFICATION(S)	28

LSC Revision Control

Date	Revision #	Revised By
2006-11-27	0.0	TW/AS

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 3 of 28

EXHIBIT 1. INTRODUCTION

1.1 SCOPE

References:	FCC Part 15, Subpart C, Section 15.209
Title:	Telecommunication – Code of Federal Regulations, CFR 47, Part 15
Purpose of Test:	To gain FCC Certification Authorization for Low-Power License-Exempt Transmitters.
References:	FCC Part 15, Subpart B, Section 15.109
Title:	Telecommunication – Code of Federal Regulations, CFR 47, Part 15
Purpose of Test:	To gain FCC Certification Authorization for a Digital Device or a Non-Intentional Radiator.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	<ul style="list-style-type: none">Commercial, Industrial or BusinessResidential

1.2 NORMATIVE REFERENCES

Publication	Year	Title
47 CFR, Parts 0-15 (FCC)	2005	Code of Federal Regulations - Telecommunications
ANSI C63.4	2004	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
CISPR 16-1-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus.
CISPR 16-2-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 201: Conducted disturbance measurement.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 4 of 28

1.3 LS Research, LLC TEST FACILITY

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted. A copy of the accreditation may be accessed on our web site: www.lsr.com. Accreditation status can be verified at A2LA's web site: www.a2la2.net.

1.4 LOCATION OF TESTING

All testing was performed at LS Research, LLC, W66 N220 Commerce Court, Cedarburg, Wisconsin, 53012 USA, utilizing the facilities listed below, unless otherwise noted.

List of Facilities Located at LS Research, LLC:

- Compact Chamber
- Semi-Anechoic Chamber
- Open Area Test Site (OATS)

1.5 TEST EQUIPMENT UTILIZED

A complete list of equipment utilized in testing is provided in Appendix A of this test report. Calibration dates are indicated in Appendix A. All test equipment is calibrated in accordance with A2LA standards.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 5 of 28

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1 CLIENT INFORMATION

Manufacturer Name:	SimonsVoss Technologies, Incorporated 
Address:	10125 South 52ND Street Franklin, WI 53132 U.S.A
Contact Person:	Mr. Warren Simonsen
Contact Phone:	1-414-421-2496
Contact Email:	WARREN.SIMONSEN@SIMONS-VOSS.US

2.2 EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information has been supplied by the applicant.

Product Name:	TN-4 Door Handle Mechanism
Model Number:	SV1
Serial Number:	Engineering Units

2.3 ASSOCIATED ANTENNA DESCRIPTION

This product has an on-board AM/ASK transponder.

The AM transponder portion of the product uses a proprietary custom internal AM-Loop type antenna.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 6 of 28

2.4 EUT'S TECHNICAL SPECIFICATIONS

Additional Information:

Frequency Range (in MHz)	25 kHz
RF Power in Watts	0.001 mW
Conducted Output Power (in dBm)	N/A
Field Strength (and at what distance)	77.5 dB μ V/m @1m ; 25.0 kHz
Occupied Bandwidth (99% BW)	14 kHz
Type of Modulation	AM / ASK
Emission Designator	14k0 A1D
Transmitter Spurious (worst case)	65.1 dB μ V/m @1m ; 22.5 kHz
Frequency Tolerance %, Hz, ppm	10 %
Microprocessor Model # (if applicable)	Microchip PIC 16 family
EUT will be operated under FCC Rule Part(s)	47 CFR 15.209
Antenna Information:	
a) Antenna Type	Custom, internal permanent.
b) Detachable/Non-Detachable	Non-detachable
c) Antenna Gain (in dBi)	Not declared
Modular Filing	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

RF Technical Information:

Type of Evaluation (check one)	SAR Evaluation: Device Used in the Vicinity of the Human Head
	SAR Evaluation: Body-worn Device
	✓ RF Evaluation

If RF Evaluation checked above, test engineer to complete the following:

- Evaluated against exposure limits: General Public Use Controlled Use
- Duty Cycle used in evaluation: 100 %
- Standard used for evaluation: 47 CFR 2.1093
- Measurement Distance: 3 m
- RF Value: 0.0075 V/m A/m W/m²
 Measured Computed Calculated

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 7 of 28

2.5 PRODUCT DESCRIPTION

General Family of Product description:

The SimonsVoss entry access control system is designed to control entry access points by means of an RF encrypted key and lock combinations, along with interface modules for incorporation into legacy systems. The system is designed to provide complete wireless access control requiring no additional holes, no wires, and all the features of electronic access control. Each lockset can support up to 64,000 users, while keeping track of the last 5,000 transactions. User access can be limited by time and day or the lock can be automatically programmed to unlock and relock at predetermined times. Access is granted with the use of a pebble-shaped transponder, a finger-print biometric transponder, or a wireless keypad each of which has won awards for their design and appearance.

In addition to the locksets for the door, the same transponders can be used to activate a SmartRelay™ which contains all the same access control features as the lockset, but activates a relay in place of the mechanical interface for overhead doors, parking gates, and other motor-driven portals. The SmartRelay can be expanded with up to 16 8-output SmartOutput™ modules so that each transponder can activate a unique combination of up to 128 relay outputs for elevator and tool-crib control. The entire system can be programmed and monitored through a network or individually with the use of a proprietary configuration tool.

SimonsVoss entry keys (Left photo) and typical lock mechanism (right photo)



A sampling of other SimonsVoss Interface Devices



Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 8 of 28

(Product Description continued)

Specific “Equipment Under Test” (EUT) description:

This report covers the testing that was performed on the TN-4 electronic access control core, in assessing conformity to the regulations as set forth by FCC and IC.

TN-4 electronic access control core is used in the US Cylindrical and Mortise locks and fits completely in a standard door handle. The TN-4 module contains a transceiver that operates at 25 kHz using amplitude modulation and is powered by two CR2450 coin-cell 3.0 VDC batteries. The TN-4 is used in the handle of a door to grant or deny access by engaging or disengaging the outside handle from the latch that prevents the door from opening. In order to request access a user activates a transponder (LSR report #:360550-TR). The transponder communicates to the TN-4 using the 25kHz signal, sending an encrypted, rolling-code binary information format. When communication is established through the challenge/response protocol, the TN-4 uses the transponders identification to look up the user in a table kept in its software. If the user is allowed access at this time and date, the outside handle is connected to the latch allowing the latch to be retracted and the door opened. The TN-4 and the transponder both use identical antennas which are a wire-wound coil wrapped around a ferrite core. The TN-4 is completely self-contained with no other power, radio, or data connections. There are no cable attachments for either data or power. All power is supplied by two CR2450 coin cell batteries. All data is transmitted by the 25 kHz radio.

Simons-Voss lock mechanism (Left photo) and typical application (right photo)



Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 9 of 28

EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS

3.1 CLIMATE TEST CONDITIONS

Temperature:	22 °C
Humidity:	44%
Pressure:	98 kPa

3.2 APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Paragraph	Test Requirements	Compliance (yes/no)
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes
15.107	Power Line Conducted Emissions Measurements	N/A
15.109	Un-Intentional Radiated Emissions	Yes
15.207	Power Line Conducted Emissions Measurements	N/A
15.209 (a)	Maximum RF Output Power	Yes
15.209 (c)	Maximum RF Spurious Emissions	Yes
15.109 & 15.205	Transmitter General Radiated Emissions	Yes

The digital circuit portion of the EUT has been tested and verified to comply with FCC Part 15, Subpart B, Class B Digital Devices and the associated Radio Receiver has also been tested and found to comply with Part 15, Subpart B – Radio Receivers. The Receiver Test Report is available upon request.

3.3 MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None Yes (explain below)

3.4 DEVIATIONS & EXCLUSIONS FROM TEST SPECIFICATIONS

None Yes (explain below)

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 10 of 28

EXHIBIT 4. DECLARATION OF CONFORMITY

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.209, and Industry Canada RSS-210 (2005), Section 2.6 for a Low-Power License-Exempt Transmitters, as well as the specification of FCC Title 47, CFR Part 15.109, and Industry Canada RSS-210 (2005), Section 7 for non-intentional radiators.

If some emissions are seen to be within 3 dB of their respective limits:

As these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 11 of 28

EXHIBIT 5. RADIATED EMISSIONS TEST

5.1 Test Setup

The test setup was assembled in accordance with Title 47, CFR FCC Part 15 and ANSI C63.4-2003. The EUT was placed on an 80cm high non-conductive pedestal, centered on a flush mounted 2-meter diameter turntable inside a 3 meter Semi-Anechoic, FCC listed Chamber. The EUT was operated in continuous transmit CW mode during the transmitter testing, and continuous receive mode during the receiver testing, using power as provided by two type 'CR2450' batteries. The unit is capable of operating on only one channel, and was placed in CW mode by modifying the firmware code on the transceiver.

The applicable limits apply at a 300 meter distance. The measurement distance was reduced to 30m, 20m, 10m and 3m in succession, while measurements for the RF emissions were carried out in order to calculate a more accurate field attenuation rate. The RF power and emissions were finally measured at 1 meter separation in a semi-anechoic chamber. This device would qualify for the 40 dB per decade linear distance extrapolation factor as allowed under 47CFR 15.31(f)(2).

The calculations to determine these limits are detailed in the following pages. Please refer to Appendix A for a complete list of test equipment.

5.2 Test Procedure

Final Radiated RF measurements were performed on the EUT in a 3 meter Semi-Anechoic, FCC listed Chamber. The frequency range from 9 kHz to 1000 MHz was scanned and investigated. The radiated RF emission levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive pedestal in the 3 meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters from the EUT. An active Loop antenna was used to measure emissions from 9 kHz to 30MHz. A Biconical Antenna was used to measure emissions from 30 MHz to 300 MHz, and a Log Periodic Antenna was used to measure emissions from 300 MHz to 1000 MHz. The maximum radiated RF emissions were found by raising and lowering the antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities

The battery voltage was checked frequently, and the batteries were replaced as necessary.

The EUT was rotated along three orthogonal axis during the investigations to find the highest emission levels.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 12 of 28

5.3 Test Equipment Utilized

A list of the test equipment and antennas utilized for the Radiated Emissions test can be found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. All calibrations of the antennas used were performed at an N.I.S.T. traceable site. In addition, the Connecting Cables were measured for losses using a calibrated Signal Generator and a HP 8546A EMI Receiver. The resulting correction factors and the cable loss factors from these calibrations were entered into the HP 8546A EMI Receiver database. As a result, the data taken from the HP 8546A EMI Receiver accounts for the antenna correction factor as well as cable loss or other corrections, and can therefore be entered into the database as a corrected meter reading. The HP 8546A EMI Receiver was operated with resolution bandwidths as prescribed in ANSI C63.4 (2003).

Test Equipment List

Test Equipment	Manufacturer	Model No.	Serial No.
EMI Receiver	HP	8546A	3617A00320
EMI Receiver Pre-Select.	HP	85460A	3448A00296
Spectrum Analyzer	Agilent	E4446A	US45300564
Log Periodic Antenna	EMCO	93146	9701-4855
Horn Antenna	EMCO	3115	6907
Bicon Antenna	EMCO	93110B	9702-2918
Pre-Amp	Adv. Microwave	WLA612	1145A04094
Horn Antenna – Std. Gain	EMCO	3160-09	9809-1120

5.4 Test Results

The EUT was found to **MEET** the Radiated Emissions requirements as described within the specification of FCC Title 47, CFR Part 15.209, and Industry Canada RSS-210 (2005), Section 2.6 for a Low-Power License-Exempt Transmitters, as well as the specification of FCC Title 47, CFR Part 15.109, and Industry Canada RSS-210 (2005), Section 7 for non-intentional radiators. The frequencies with significant RF signal strength were recorded and plotted as shown in the Data Charts and Graphs.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 13 of 28

5.5 CALCULATION OF RADIATED EMISSIONS LIMITS

Transmitter Limits

The maximum peak output power of an intentional radiator in the 9-490 kHz band, as specified in Title 47 CFR 15.209, is calculated in a formula as described below. The harmonic and spurious RF emissions, with appropriate receiver bandwidths, as specified in 15.209 (c), shall be below the measured power of the desired signal, and must also meet the requirements described in 15.205(c) where applicable.

The following table depicts the general radiated emission limits. These limits are obtained from Title 47 CFR, Part 15.209, for radiated emissions measurements. These limits were applied to the fundamental emission of the intentional radiator as well as all other significant spurious signals.

Frequency (MHz)	Limit μ V/m	Limit (dB μ V/m)	Measurement Distance (m)
0.009-0.490	2400/F (kHz)	Note 1	300
0.490-1.705	24000/F (kHz)		30
1.705-30.0	30		30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
960-24,000	500	54.0	3

Note 1: Sample calculation for the Fundamental Emission of the transmitter:

Given the transmitter operates at a fundamental frequency of 25 kHz, the emission limit may be calculated:

$$2400/F = 2400/25 = 96.0 \mu\text{V}/\text{m} \text{ if measured at 300 meters separation.}$$

Expressed in decibels: $20 \log_{10} (96.0) = 39.64 \text{ dB}\mu\text{V}/\text{m}$ at 300 m separation.

At 3 meters separation, the limit may be extrapolated by the addition of 40 dB/decade per 47CFR 15.31(f)(2)

If measured at 1.0 meter separation, the extrapolation is calculated at $40 \log_{10} (300/1) = 99.08 \text{ dB}$

Limit for the fundamental emission = $39.64 \text{ dB}\mu\text{V}/\text{m} + 99.08 \text{ dB} = 138.72 \text{ dB}/\mu\text{V}/\text{m}$ at 1 meter.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 14 of 28

Receiver Limits

The following table depicts the Class B limits for an unintentional radiator. These limits are obtained from Title 47 CFR, Part 15.109(a), for radiated emissions measurements.

Frequency (MHz)	3 m Limit (μ V/m)	3 m Limit (dB μ V/m)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-10,000	500	54.0

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 15 of 28

5.6

RADIATED EMISSIONS DATA CHART

3 Meter Measurements of Electromagnetic Radiated Emissions

Test Standard: 47CFR, Part 15.209

Frequency Range Inspected: 9 kHz to 1000 MHz

Manufacturer:	SimonsVoss Technologies, Incorporated				
Date(s) of Test:	November 28 th , 2006				
Test Engineer(s):	Abtin Spantman				
Voltage:	3.0 VDC				
Operation Mode:	Normal, and CW modes				
Environmental Conditions in the Lab:	Temperature: 20 – 25°C Relative Humidity: 30 – 60 %				
EUT Power:		Single Phase <input type="checkbox"/> VAC		3 Phase <input type="checkbox"/> VAC	
	<input checked="" type="checkbox"/>	Battery		Other:	
EUT Placement:	<input checked="" type="checkbox"/>	80cm non-conductive table		10cm Spacers	
EUT Test Location:	<input checked="" type="checkbox"/>	3 Meter Semi-Anechoic FCC Listed Chamber		3/10m OATS	
Measurements:		Pre-Compliance		Preliminary	<input checked="" type="checkbox"/> Final
Detectors Used:	<input checked="" type="checkbox"/>	Peak	<input checked="" type="checkbox"/>	Quasi-Peak	<input checked="" type="checkbox"/> Average

The following table depicts the level of significant spurious radiated RF emissions seen
At 1 meter separation distance:

Frequency (MHz)	Ant./EUT Polarity	Tx / Rx Mode	Height (meters)	Azimuth (0° - 360°)	Measured EFI (dB μ V/m)	Emission Limit (dB μ V/m)	Margin (dB)
0.0225	B / H	Tx	1.00	65	65.1	77.5	12.4
0.0271	B / H	Tx	1.00	65	63.3	77.5	14.2

The following table depicts the level of significant radiated RF fundamental and harmonic emissions seen
At 1 meter separation distance:

Frequency (MHz)	Ant./EUT Polarity	Height (meters)	Azimuth (0° - 360°)	Measured EFI (dB μ V/m)	15.209 Limit (dB μ V/m)	Margin (dB)
0.025	B / H	1.00	65	77.5	138.7	61.2
0.050				Note (2)		
0.075				Note (2)		
0.100				Note (2)		
0.125				Note (2)		
0.150				Note (2)		
0.175				Note (2)		
0.200				Note (2)		
0.225				Note (2)		
0.250				Note (2)		

Notes:

- 1) An Average Detector function was used in measurements below 30 MHz, a Quasi-Peak Detector was used in measurements between 30 MHz and 1 GHz, and an Average Detector was used in measurements above 1 GHz. A peak detector was used to ensure the peak emissions did not exceed 20 dB above the stated limits.
- 2) No significant emissions noted - measurement at receiver system noise floor.
- 3) There were no significant emissions observed during the receiver testing.


Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 16 of 28

5.7 Test Setup Photo(s) – Radiated Emissions Test

Vertical Orientation




Horizontal Orientation

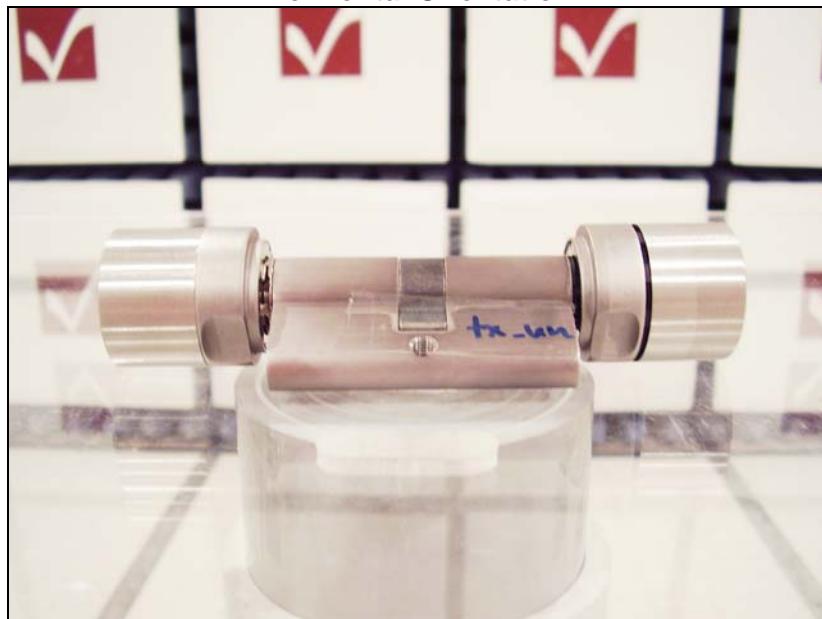

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 17 of 28

EUT on Test Pedestal

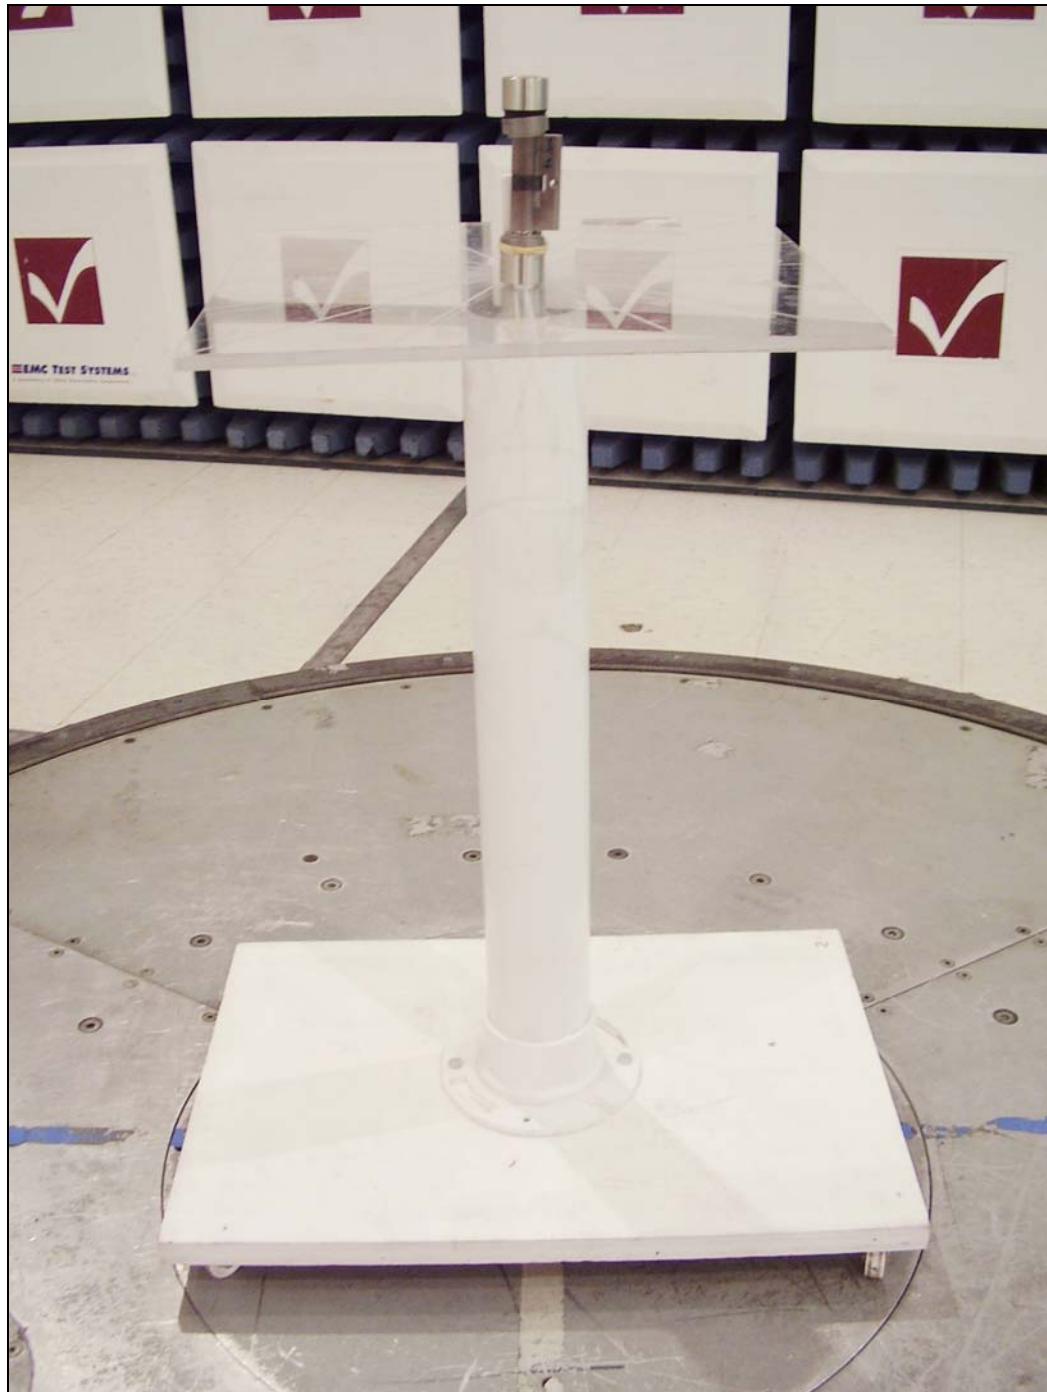


Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 18 of 28

5.8 Screen Captures - Radiated Emissions Testing


These screen captures represent Peak Emissions. An Average Detector was used for radiated emission measurements below 30 MHz, a Quasi-Peak Detector was used for measurements between 30 MHz and 1000 MHz.

The signature scans shown here are from worst-case emissions, as measured with the sense antennas both in vertical and horizontal polarity (Active Loop antenna also tested at Bore sight) for worst case presentations.

Signature Emissions from the Transmitter **Antenna Bore-Sight, 9 kHz – 50 kHz, at 1m**

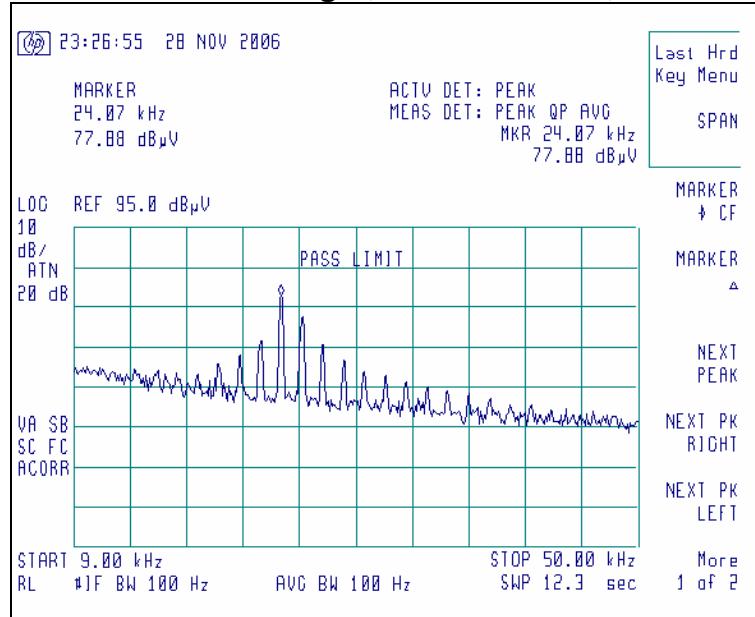

Antenna Bore-Sight, fundamental emission at 25 kHz, at 1m

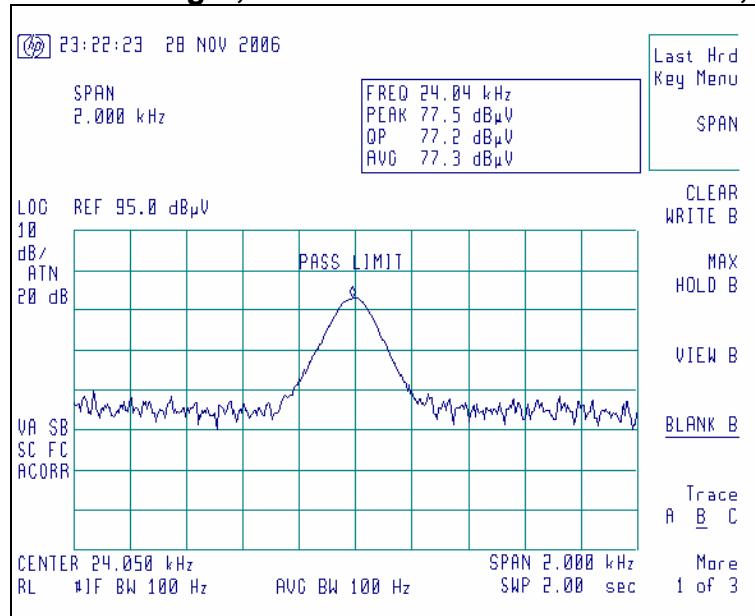


Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 19 of 28


Screen Captures - Radiated Emissions Testing (continued)

Signature Emissions from the Transmitter

Antenna Bore-Sight, 50 kHz – 150 kHz, at 1m

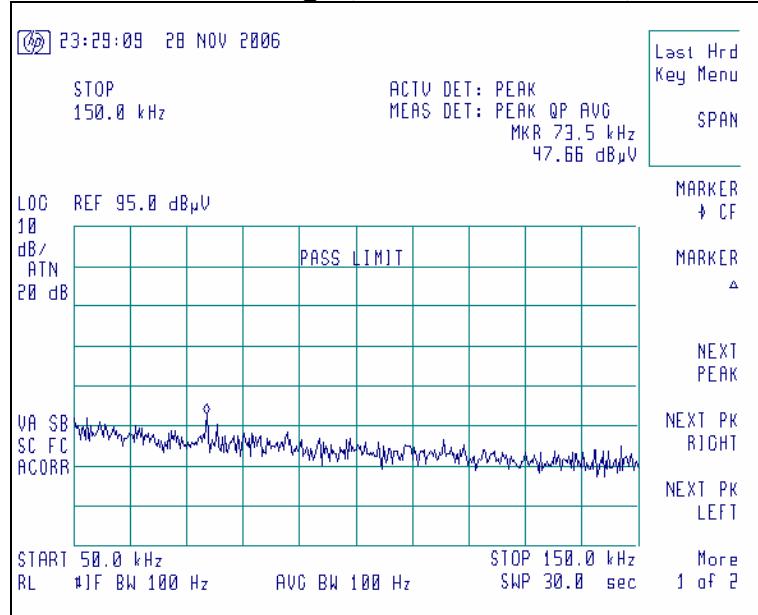

Antenna Horizontally polarized, 30-300 MHz, at 3m

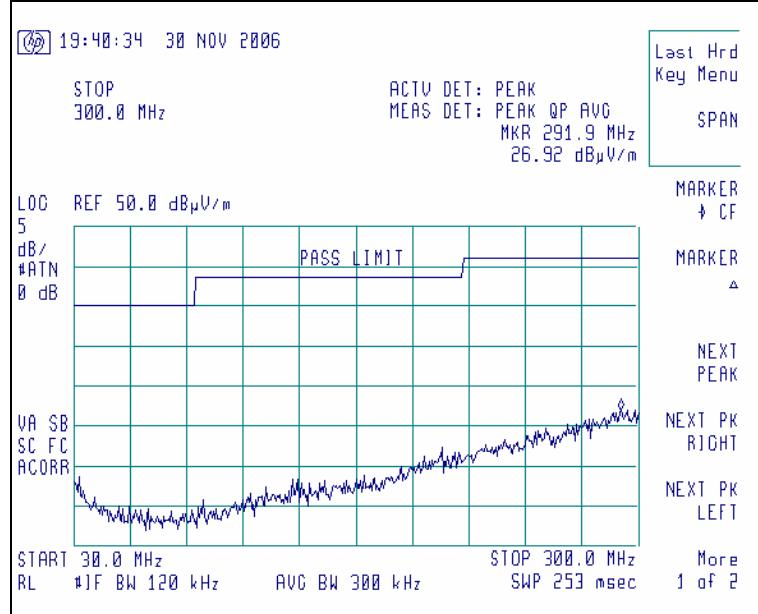


Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 20 of 28

Screen Captures - Radiated Emissions Testing (continued)

Signature Emissions from the Transmitter

Antenna Horizontally polarized, 300-1000 MHz, at 3m

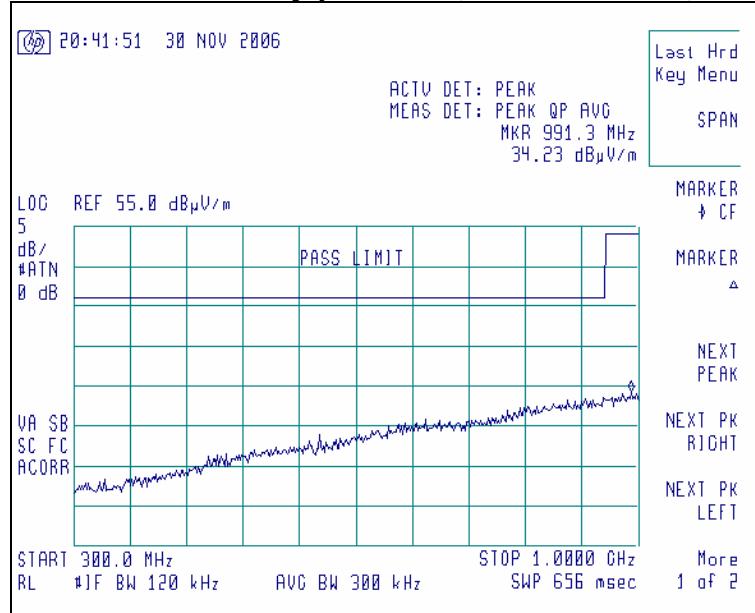


Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 21 of 28


Screen Captures - Radiated Emissions Testing (continued)

Signature Emissions from the Receiver

Antenna Vertically polarized, 30-300 MHz, at 3m

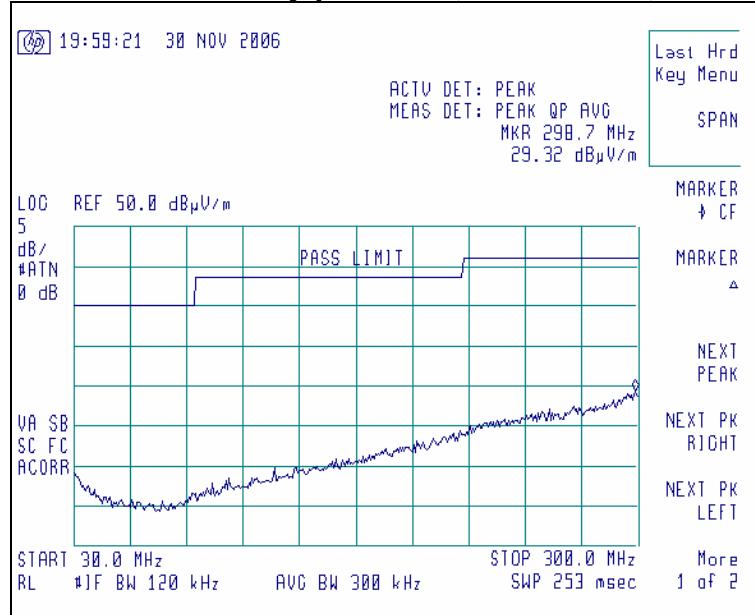

Antenna Vertically polarized, 300-1000 MHz, at 3m

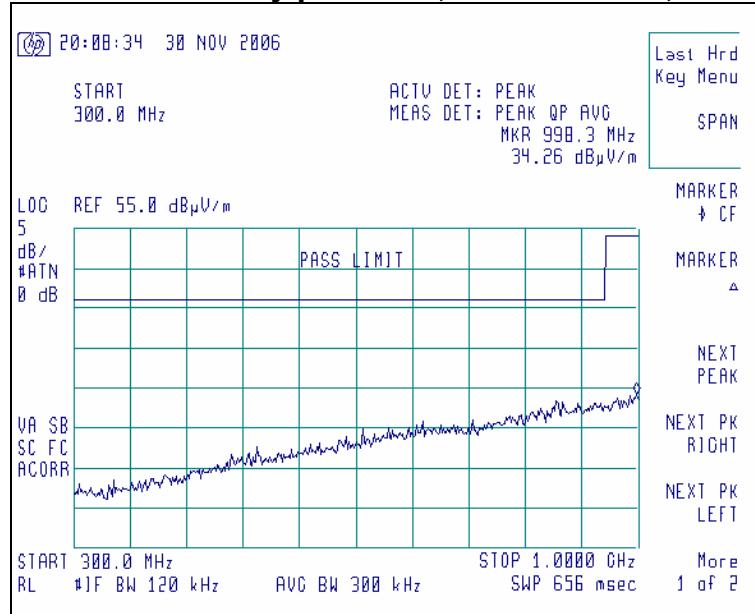

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 22 of 28

EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE: 15.207

This product does not have contingencies for connecting to AC mains at this time.

No testing was performed to measure conducted RF emissions on this product.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 23 of 28

EXHIBIT 7. OCCUPIED BANDWIDTH

7.1 Limits

There are no stated limits for the occupied bandwidth for devices operating under 47CFR Part 15.209. The data presented here is for completeness only.

7.2 Method of Measurements

ANSI C63.4 and FCC standard procedures were adhered to in these measurements.

The transmitter output was placed in continuous transmit mode, with modulation from typical data as generated by the device. The bandwidth of the fundamental frequency was measured with the Spectrum Analyzer using RBW=100 Hz and VBW=100 Hz.

Test Data

Center Frequency (kHz)	Measured -6 dBc Occ. BW (kHz)	Measured -20 dBc Occ. BW (kHz)
24.5	2.10	13.95


7.3 Test Equipment List

Test Equipment	Manufacturer	Model No.	Serial No.
EMI Receiver	HP	8546A	3617A00320
EMI Receiver Pre-Select.	HP	85460A	3448A00296


Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 24 of 28

7.4 Screen Captures - OCCUPIED BANDWIDTH

-6 dBc Occupied Bandwidth

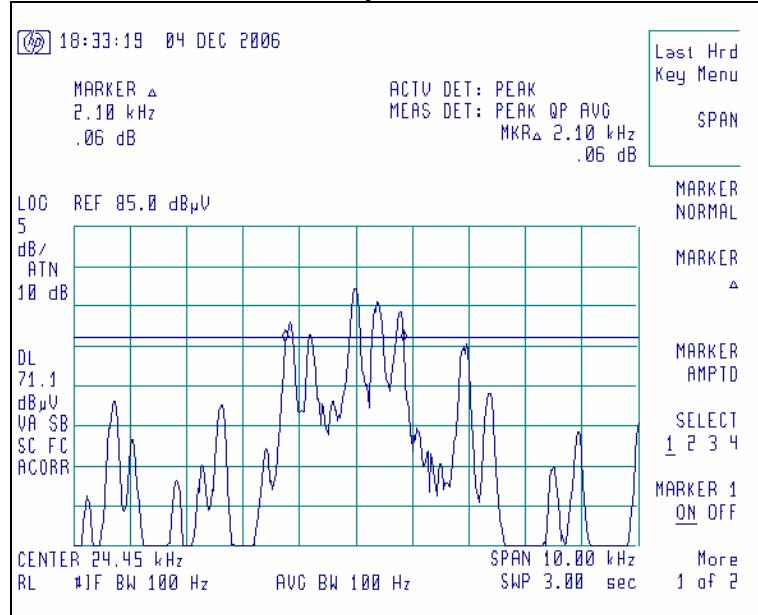

-20 dBc Occupied Bandwidth

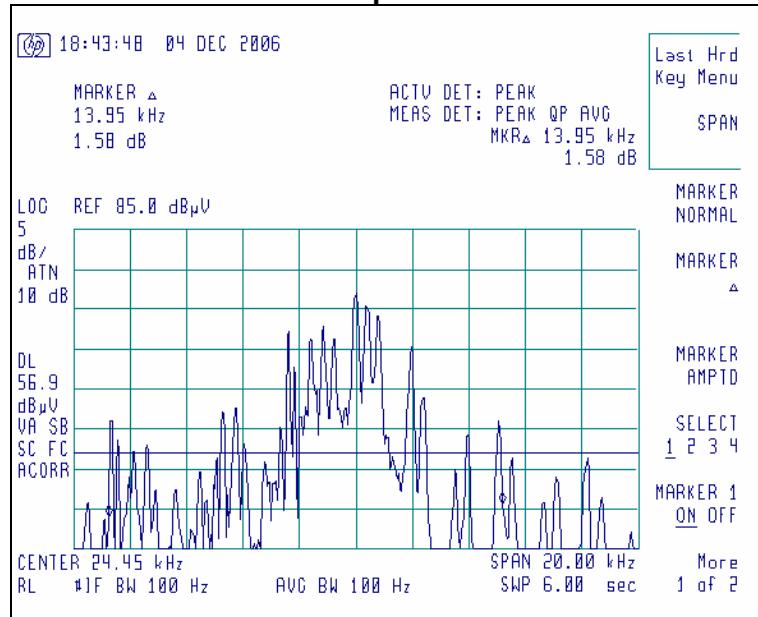

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 25 of 28

EXHIBIT 12. FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS

The stability of the device was examined as a function of the input voltage available to the EUT

In this case, the EUT uses two type "CR-2450" batteries in parallel, with a nominal voltage of 3.0 VDC. The working range of this battery is 3.4 VDC to 2.5 VDC (50% life), but the defined operation range of the EUT is limited to 2.80 VDC on the low end.

A spectrum analyzer was used to measure the frequency at the appropriate frequency markers. For this test, the EUT was placed in continuous transmit CW mode. Power to the EUT was supplied by an external bench-type variable power supply. The frequency of operation was monitored using the spectrum analyzer with RBW=VBW=30Hz settings while the voltage was varied.

RF Fundamental Frequency Variance

DC Voltage Source		
2.5 VDC	3.0 VDC	3.4 VDC
24.020 (kHz)	24.038 (kHz)	24.040 (kHz)

The RF Power Output of the EUT was also monitored in a separate test, also using a Spectrum Analyzer with RBW=VBW=100 Hz setting while the voltage was varied.

RF Output Power Variance

DC Voltage Source		
2.5 VDC	3.0 VAC	3.4 VDC
60.4 (dB μ V/m)	77.3 (dB μ V/m)	79.5 (dB μ V/m)

The power was then cycled On/Off to observe system response. No unusual response was observed, the emission characterizes were well behaved, and the system returned to the same state of operation as before the power cycle.

A wide frequency sweep was also investigated, with minimum and maximum input voltages, to ensure that no unexpected anomalies have occurred.

No anomalies were noted, in the measured transmit power during the voltage variation tests.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 26 of 28

APPENDIX A

Test Equipment List

Asset #	Manufacturer	Model #	Serial #	Description	Date	Due
AA960008	EMCO	3816/2NM	9701-1057	Line Impedance Stabilization Network	9/27/05	9/27/06
AA960031	HP	119474A	3107A01708	Transient Limiter	Note 1	Note 1
AA960077	EMCO	93110B	9702-2918	Biconical Antenna	7/26/06	7/26/07
AA960078	EMCO	93146	9701-4855	Log-Periodic Antenna	7/20/06	7/20/07
AA960081	EMCO	3115	6907	Double Ridge Horn Antenna	12/07/05	12/07/06
CC00221C	Agilent	E4407B	US39160256	Spectrum Analyzer	12/29/05	12/29/06
EE960004	EMCO	2090	9607-1164	Device Controller	N/A	N/A
EE960013	HP	8546A	3617A00320	Receiver RF Section	9/29/05	9/29/06
EE960014	HP	85460A	3448A00296	Receiver Pre-Selector	9/29/05	9/29/06
EE960073	Agilent	E4446A	US45300564	Spectrum Analyzer	2/01/06	2/01/07
N/A	LSC	Cable	0011	3 Meter 1/2" Armored Cable	Note 1	Note 1
N/A	LSC	Cable	0050	10 Meter RG 214 Cable	Note 1	Note 1
N/A	Pasternack	Attenuator	N/A	10 dB Attenuator	Note 1	Note 1

Note 1 - Equipment calibrated within a traceable system.

Uncertainty Statement

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k=2.

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.24 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.8 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.18 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.92 dB
Conducted Emissions	Shielded Room/EMCO LISN	1.60 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	1.128 Volts/Meter
Conducted Immunity	3 Volts level	1.0 V

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 27 of 28

Appendix B

Antenna Specification(s)

This product has an on-board AM/ASK transponder.

The AM transponder portion of the product uses a proprietary custom internal AM-Loop type antenna.

Prepared For: SimonsVoss	Model #: SV1	LS Research, LLC
EUT: TN-4 Door Handle Receiver	Serial #: Engineering Units	Template: 15.209 - v0 (2006-11-27)
Report #:306549-TR-TCB-v2	Customer FCC ID #: UUC-01	Page 28 of 28