

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Report No.: SZEM161201121902 Fax: +86 (0) 755 2671 0594

Fax: +86 (0) 755 2671 0594 Page: 1 of 88

TEST REPORT

Application No.: SZEM1612011219CR **Applicant:** Measurement ltd.

Address of Applicant: Block A, 19/F., Prince Industrial Building, 106 King Fuk Street, San Po Kong,

Kowloon, H.K

Manufacturer: Measurement ltd.

Address of Manufacturer: Block A, 19/F., Prince Industrial Building, 106 King Fuk Street, San Po Kong,

Kowloon, H.K

Factory: Measurement ltd.

Address of Factory: Block A, 19/F., Prince Industrial Building, 106 King Fuk Street, San Po Kong,

Kowloon, H.K

Equipment Under Test (EUT):

EUT Name: MedHab StepRite insole

Model No.: RPM2
FCC ID: UUI-RPM2

Standards: 47 CFR Part 15, Subpart C 15.247

Date of Receipt: 2017-11-01

Date of Test: 2017-11-01 to 2017-11-24

Date of Issue: 2017-11-27

Test Result : Pass*



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM161201121902

Page: 2 of 88

	Revision Record						
Version	Chapter	Date	Modifier	Remark			
01		2017-11-27		Original			

Authorized for issue by:		
Tested By	Edison li	
	Edison Li /Project Engineer	
Checked By	Eric Fu	
	Eric Fu /Reviewer	



Report No.: SZEM161201121902

Page: 3 of 88

2 Test Summary

Radio Spectrum Technical Requirement						
Item Standard Method Requirement						
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass		
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass		

Radio Spectrum Matter Part						
Item	Standard	Method	Requirement	Result		
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass		
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass		
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass		
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass		
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass		
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass		
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass		
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass		
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass		



Report No.: SZEM161201121902

Page: 4 of 88

3 Contents

			Page
1	COVE	R PAGE	1
2	TEST	SUMMARY	3
3	CONT	ENTS	2
4	GENE	RAL INFORMATION	
	4.1 DET	AILS OF E.U.T.	
	4.2 DES	CRIPTION OF SUPPORT UNITS	
	4.3 TEST	ENVIRONMENT	
		SUREMENT UNCERTAINTY	
		NDARDS APPLICABLE FOR TESTING	
		LOCATION	
		FACILITY	
		IATION FROM STANDARDS	
	4.9 ABN	ORMALITIES FROM STANDARD CONDITIONS	10
5	EQUIP	MENT LIST	1
6	BADIC	SPECTRUM TECHNICAL REQUIREMENT	1/
U			
		ENNA REQUIREMENT	
	6.1.1	Test Requirement:	
	6.1.2	Conclusion	
	6.2 Отн <i>6.2.1</i>	ER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM HOPPING SEQUENCE Test Requirement:	
	6.2.1 6.2.2	Conclusion	
	-		
7	RADIC	SPECTRUM MATTER TEST RESULTS	17
	7.1 20D	BANDWIDTH	17
	7.1.1	E.U.T. Operation	
	7.1.2	Test Setup Diagram	
	7.1.3	Measurement Data	
		DUCTED PEAK OUTPUT POWER	
	7.2.1	E.U.T. Operation	
	7.2.2	Test Setup Diagram	
		Measurement Data	
	7.3 CAR 7.3.1	rier Frequencies Separation	
	7.3.1 7.3.2	Test Setup Diagram	
	7.3.3	Measurement Data	
		PING CHANNEL NUMBER	
	7.4.1	E.U.T. Operation	
	7.4.2	Test Setup Diagram	
	7.4.3	Measurement Data	
	7.5 DWF	ELL TIME	
	7.5.1	E.U.T. Operation	
	7.5.2	Test Setup Diagram	
	7.5.3	Measurement Data	
		DUCTED SPURIOUS EMISSIONS	
	7.6.1	E.U.T. Operation	
	7.6.2	Test Setup Diagram	24

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM161201121902

Page: 5 of 88

7.6.3	Measurement Data	24
7.7 RAD		
7.7.2		
7.7.3		
7.8 RAD		
7.8.2	Test Setup Diagram.	32
7.8.3		
7.9 CON		
7.9.1		
7.9.2		
7.9.3	Measurement Data	38
PHOT	OGRAPHS	39
8.1 RAD	NATED SPURIOUS EMISSIONS TEST SETUP(BELOW 1GHz)	39
APPE	NDIX	4 1
9.1 Appi	endix 15.247	41-88
	7.7 RAD 7.7.1 7.7.2 7.7.3 7.8 RAD 7.8.1 7.8.2 7.8.3 7.9 CON 7.9.1 7.9.2 7.9.3 PHOTE 8.1 RAD 8.2 RAD 8.3 EUT APPEI	7.7 RADIATED SPURIOUS EMISSIONS 7.7.1 E.U.T. Operation 7.7.2 Test Setup Diagram 7.7.3 Measurement Data 7.8 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS 7.8.1 E.U.T. Operation 7.8.2 Test Setup Diagram 7.8.3 Measurement Data 7.9 CONDUCTED BAND EDGES MEASUREMENT 7.9.1 E.U.T. Operation 7.9.2 Test Setup Diagram 7.9.3 Measurement Data PHOTOGRAPHS 8.1 RADIATED SPURIOUS EMISSIONS TEST SETUP(BELOW 1GHz) 8.2 RADIATED SPURIOUS EMISSIONS TEST SETUP(ABOVE 1GHZ) 8.3 EUT CONSTRUCTIONAL DETAILS APPENDIX



Report No.: SZEM161201121902

Page: 6 of 88

4 General Information

4.1 Details of E.U.T.

Power supply: DC 3.7V, 220mAh rechargeable battery which charged by wireless

charging coil.

Test voltage: DC 3.7V

Bluetooth Version: Bluetooth V2.1+EDR

Modulation Technique: Frequency Hopping Spread Spectrum(FHSS)

Modulation Type: GFSK, π/4 DQPSK, 8DPSK

Number of Channel: 79

Hopping Channel Type: Adaptive Frequency Hopping systems

Sample Type: Fixed production

Antenna type Integral
Antenna gain 1.3dBi

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		



Report No.: SZEM161201121902

Page: 7 of 88

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.2 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Serial No.
Wireless charger	Provided by client	SA-H0001	
Adapter	Provided by client	G0926U-050-200	

4.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	55 % RH	
Atmospheric Pressure:	1010 mbar	



Report No.: SZEM161201121902

Page: 8 of 88

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty	
1	Radio Frequency	7.25 x 10-8	
2	Duty cycle	0.37%	
3	Occupied Bandwidth	3%	
4	RF conducted power	0.75dB	
5	RF power density	2.84dB	
6	Conducted Spurious emissions	0.75dB	
7	DE Dadieted verses	4.5dB (below 1GHz)	
/	RF Radiated power	4.8dB (above 1GHz)	
0	Dadieted Courieus emissies test	4.5dB (30MHz-1GHz)	
8	Radiated Spurious emission test	4.8dB (1GHz-18GHz)	
9	Temperature test	1℃	
10	Humidity test	3%	
11	Supply voltages	1.5%	



Report No.: SZEM161201121902

Page: 9 of 88

4.5 Standards Applicable for Testing

Table 1: Tests Carried Out Under 47 CFR Part 15, Subpart C 15.247

Item	Status
20dB Bandwidth	√
Conducted Peak Output Power	√
Carrier Frequencies Separation	√
Hopping Channel Number	√
Dwell Time	√
Minimum 6dB Bandwidth	×
Power Spectrum Density	×
Conducted Spurious Emissions	√
Radiated Spurious Emissions	√
Radiated Emissions which fall in the restricted bands	√
Conducted Band Edges Measurement	√
Antenna Requirement	√
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	√

- x Indicates that the test is not applicable
- $\sqrt{}$ Indicates that the test is applicable



Report No.: SZEM161201121902

Page: 10 of 88

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC -Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.8 Deviation from Standards

None

4.9 Abnormalities from Standard Conditions

None



Report No.: SZEM161201121902

Page: 11 of 88

5 Equipment List

RF Conducted Test								
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date			
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-27			
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2017-09-27	2018-09-27			
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A			
Coaxial Cable	SGS	N/A	SEM031-02	2017-07-13	2018-07-12			
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A			
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-27			
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-27			

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-02	2020-05-01	
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM026-01	2017-07-13	2018-07-12	
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13	
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C SEM003-02		2017-03-05	2020-03-05	
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14	
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-14	2017-06-16	2020-06-15	
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017-09-27	2018-09-27	
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2017-09-27	2018-09-27	
Pre-amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2016-12-02	2017-12-01	
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2017-04-14	2018-04-13	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced expert in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM161201121902

Page: 12 of 88

DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-09-27	2018-09-27
Active Loop Antenna	ETS-Lindgren	6502	6502 SEM003-08		2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

Radiated Spurious Emissions							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-02	2020-05-01		
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A		
Coaxial Cable	SGS	N/A	SEM026-01	2017-07-13	2018-07-12		
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13		
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2017-03-05	2020-03-05		
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14		
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-14	2017-06-16	2020-06-15		
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017-09-27	2018-09-27		
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2017-09-27	2018-09-27		
Pre-amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2016-12-02	2017-12-01		
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	mpliance ons Systems PAP-2640-50 SEM005-08		2017-04-14	2018-04-13		
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-09-27	2018-09-27		
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21		
Band filter	N/A	N/A	SEM023-01	N/A	N/A		



Report No.: SZEM161201121902

Page: 13 of 88

General used equipment								
Equipment	Manufacturer	Manufacturer Model No Inventory No		Cal Date	Cal Due Date			
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2017-10-12	2018-10-12			
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2017-10-12	2018-10-12			
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2017-10-12	2018-10-12			
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2017-05-18	2018-05-18			



Report No.: SZEM161201121902

Page: 14 of 88

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

6.1.2 Conclusion


Standard Requirment:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

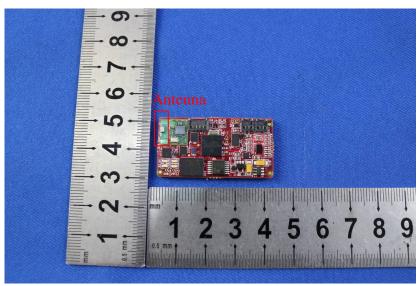

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.3dBi.



Report No.: SZEM161201121902

Page: 15 of 88

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

6.2.2 Conclusion

Standard Requirment:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- · Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

20 62 46 77 7 64 8 73 16 75 1

Each frequency used equally on the average by each transmitter.



Report No.: SZEM161201121902

Page: 16 of 88

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Report No.: SZEM161201121902

Page: 17 of 88

7 Radio Spectrum Matter Test Results

7.1 20dB Bandwidth

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.7

Limit: NA

7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test mode: b: TX_non-Hop mode, Keep the EUT working in continuously transmitting mode with

GFSK modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

7.1.2 Test Setup Diagram

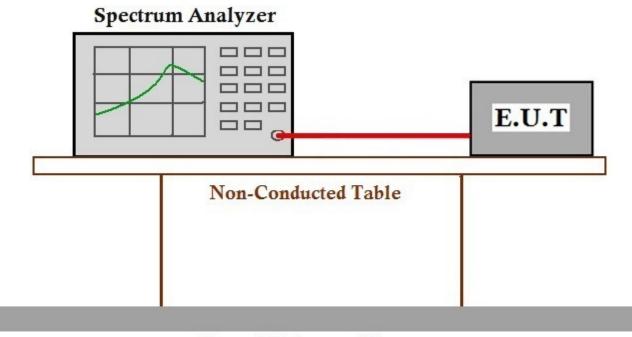

Ground Reference Plane

7.1.3 Measurement Data

The detailed test data see: Appendix 15.247



Report No.: SZEM161201121902

Page: 18 of 88

7.2 Conducted Peak Output Power

Test Requirement: 47 CFR Part 15C Section 15.247 (b)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
	1w for ≥50 hopping channels
902-928	0.25w for <50 hopping channels
	1 for digital modulation
	1w for ≥75 non-overlapping hopping channels
2400-2483.5	0.125w for all other frequency hopping systems
	1w for digital modulation
5725-5850	1w for frequency hopping systems and digital modulation

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test mode: b: TX_non-Hop mode, Keep the EUT working in continuously transmitting mode with

GFSK modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been


tested and only the data of worst case is recorded in the report.



Report No.: SZEM161201121902

Page: 19 of 88

7.2.2 Test Setup Diagram

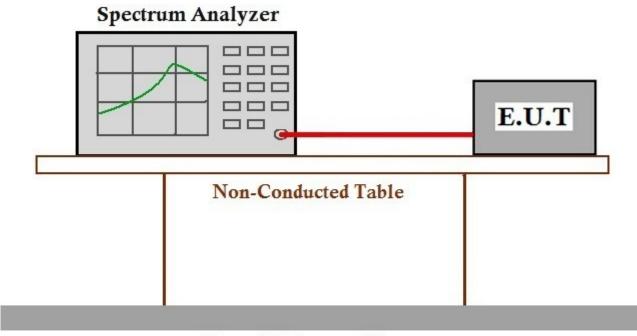

Ground Reference Plane

7.2.3 Measurement Data

The detailed test data see: Appendix 15.247



Report No.: SZEM161201121902

Page: 20 of 88

7.3 Carrier Frequencies Separation

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than

0.125W

7.3.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test mode: d: TX_Hop mode, Keep the EUT working in frequency hopping mode with GFSK

modulation, $\pi/4DQPSK$ modulation, 8DPSK modulation. All modes have been tested

and only the data of worst case is recorded in the report.

7.3.2 Test Setup Diagram

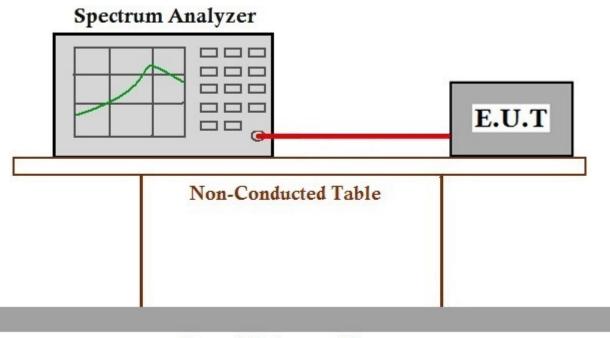

Ground Reference Plane

7.3.3 Measurement Data

The detailed test data see: Appendix 15.247



Report No.: SZEM161201121902

Page: 21 of 88

7.4 Hopping Channel Number

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Channel Number(minimum)		
902-928	50 for 20dB bandwidth <250kHz		
	25 for 20dB bandwidth ≥250kHz		
2400-2483.5	15		
2725-5850	75		

7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test mode: d: TX_Hop mode, Keep the EUT working in frequency hopping mode with GFSK

modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been tested

and only the data of worst case is recorded in the report.

7.4.2 Test Setup Diagram

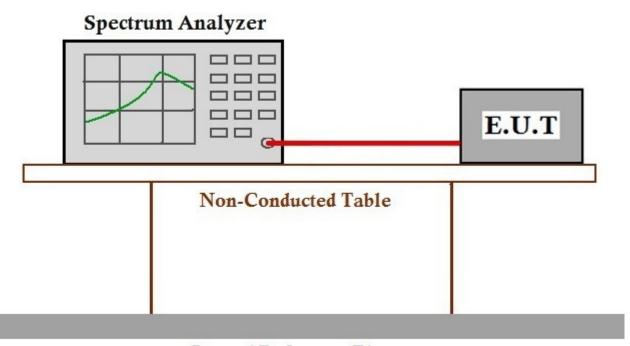

Ground Reference Plane

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM161201121902

Page: 22 of 88

7.4.3 Measurement Data

The detailed test data see: Appendix 15.247



Report No.: SZEM161201121902

Page: 23 of 88

7.5 Dwell Time

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit		
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)		
902-926	0.4S within a 10S period(20dB bandwidth≥250kHz)		
2400-2483.5	0.4S within a period of 0.4S		
5725-5850	0.4S within a 30S period		

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test mode: d: TX_Hop mode, Keep the EUT working in frequency hopping mode with GFSK

modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been tested

and only the data of worst case is recorded in the report.

7.5.2 Test Setup Diagram

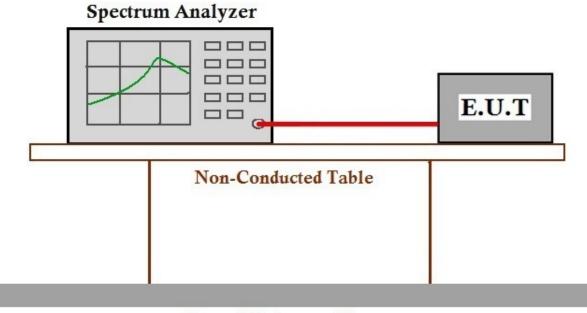

Ground Reference Plane

7.5.3 Measurement Data

The detailed test data see: Appendix 15.247

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM161201121902

Page: 24 of 88

7.6 Conducted Spurious Emissions

Test Requirement: 47 CFR Part 15C Section 15.247 (d)
Test Method: ANSI C63.10 (2013) Section 7.8.8

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread

spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test mode: b: TX_non-Hop mode , Keep the EUT working in continuously transmitting mode with

GFSK modulation, $\pi/4DQPSK$ modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

7.6.2 Test Setup Diagram

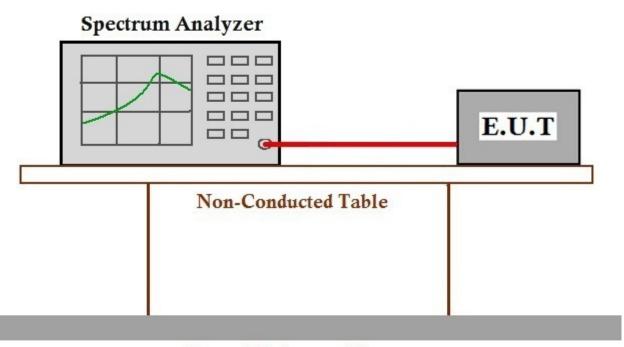

Ground Reference Plane

7.6.3 Measurement Data

The detailed test data see: Appendix 15.247

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM161201121902

Page: 25 of 88

7.7 Radiated Spurious Emissions

Test Requirement: 47 CFR Part 15C Section 15.209 and 15.205
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



Report No.: SZEM161201121902

Page: 26 of 88

7.7.1 E.U.T. Operation

Operating Environment:


Temperature: 24.0 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar


Test mode: b: TX_non-Hop mode, Keep the EUT working in continuously transmitting mode with

GFSK modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.


7.7.2 Test Setup Diagram





Below 30MHz

30MHz-1GHz



Above 1GHz



Report No.: SZEM161201121902

Page: 27 of 88

7.7.3 Measurement Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.



Report No.: SZEM161201121902

Page: 28 of 88

Below 1GHz:

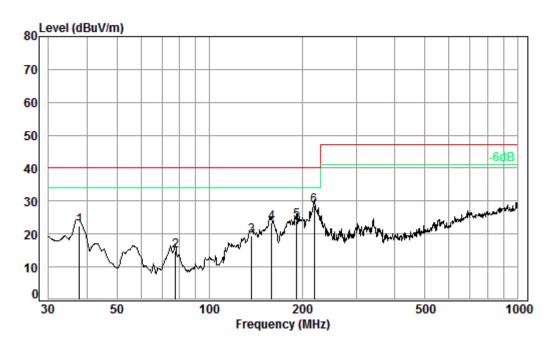

Condition: 3m HORIZONTAL

Job No. : 11219CR


Test mode: b

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	37.81	0.60	14.33	27.33	34.87	22.47	40.00	-17.53
2	77.59	1.03	7.51	27.23	33.51	14.82	40.00	-25.18
3	136.94	1.29	7.98	26.97	37.11	19.41	40.00	-20.59
4	159.23	1.33	9.55	26.86	39.34	23.36	40.00	-16.64
5	191.75	1.39	10.12	26.73	39.31	24.09	40.00	-15.91
6 pp	219.08	1.51	11.19	26.63	42.38	28.45	40.00	-11.55



Report No.: SZEM161201121902

Page: 29 of 88

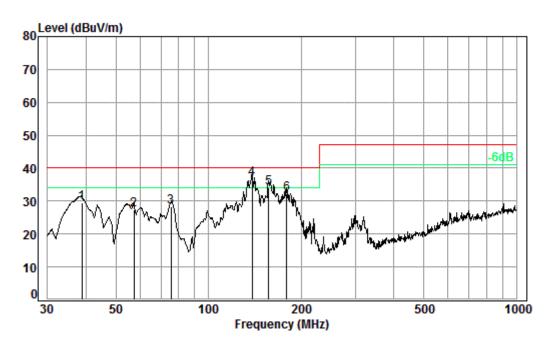

Condition: 3m VERTICAL

Job No. : 11219CR

Test mode: b

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	38.75	0.60	13.80	27.32	42.47	29.55	40.00	-10.45
2	57.19	0.80	7.62	27.27	46.22	27.37	40.00	-12.63
3	75.71	0.97	7.36	27.24	47.09	28.18	40.00	-11.82
4 pp	138.87	1.29	8.05	26.96	54.47	36.85	40.00	-3.15
5	157.01	1.33	9.42	26.87	50.27	34.15	40.00	-5.85
6	179.39	1.37	9.88	26.78	47.66	32.13	40.00	-7.87



Report No.: SZEM161201121902

Page: 30 of 88

Above 1GHz:

Mode:b; Polarization:Horizontal; Low channel

Freq	Antenna_Fact	Cable_Lo	Preamp_Gai	Read_Lev	Level	Limit_Line	Over_Limi
(MHz)	or (dB/m)	ss (dB)	n (dB)	el (dBuV)	(dBuV/m)	(dBuV/m)	t (dB)
3831.060	33.15	7.75	37.98	44.32	47.24	74	-26.76
4804.000	34.16	8.87	38.40	46.85	51.48	74	-22.52
5853.787	34.61	10.15	38.33	44.21	50.64	74	-23.36
7206.000	36.42	10.68	37.11	42.64	52.63	74	-21.37
9608.000	37.52	12.50	35.10	37.48	52.40	74	-21.60
12173.120	38.71	14.42	36.02	36.16	53.27	74	-20.73

Mode:b; Polarization:Vertical; Low channel

Freq (MHz)	Antenna_Facto	Cable_Loss	Preamp_Gai	Read_Level	Level	Limit_Line	Over_Limi
ried (MHZ)	r (dB/m)	(dB)	n (dB)	(dBuV)	(dBuV/m)	(dBuV/m)	t (dB)
3792.453	33.04	7.74	37.98	44.63	47.43	74	-26.57
4804.000	34.16	8.87	38.40	47.69	52.32	74	-21.68
5786.418	34.58	9.96	38.34	44.60	50.80	74	-23.20
7206.000	36.42	10.68	37.11	41.54	51.53	74	-22.47
9608.000	37.52	12.50	35.10	37.12	52.04	74	-21.96
12067.890	38.64	14.50	35.76	35.76	53.14	74	-20.86

Mode:b; Polarization:Horizontal; Middle channel

Freq	Antenna_Fact	Cable_Los	Preamp_Ga	Read_Lev	Level	Limit_Line	Over_Limi
(MHz)	or (dB/m)	s (dB)	in (dB)	el (dBuV)	(dBuV/m)	(dBuV/m)	t (dB)
3954.973	33.48	7.79	38.00	44.46	47.73	74	-26.27
4882.000	34.30	8.98	38.44	46.61	51.45	74	-22.55
6016.949	34.71	10.54	38.28	44.03	51.00	74	-23.00
7323.000	36.37	10.72	37.01	42.91	52.99	74	-21.01
9764.000	37.55	12.58	35.02	38.00	53.11	74	-20.89
########	38.67	14.46	35.89	36.38	53.62	74	-20.38

Mode:b; Polarization:Vertical; Middle channel

Freq (MHz)	Antenna_Fact or (dB/m)	Cable_Los s (dB)	Preamp_Ga in (dB)	Read_Lev el (dBuV)	Level (dBuV/m)	_	Over_Limi t (dB)
3727.173	32.86	7.71	37.97	44.65	47.25	74	-26.75
4882.000	34.30	8.98	38.44	46.57	51.41	74	-22.59
6060.637	34.75	10.48	38.24	45.68	52.67	74	-21.33
7323.000	36.37	10.72	37.01	43.63	53.71	74	-20.29
9764.000	37.55	12.58	35.02	37.73	52.84	74	-21.16
12226.070	38.74	14.37	36.14	36.15	53.12	74	-20.88



Report No.: SZEM161201121902

Page: 31 of 88

Mode:b; Polarization:Horizontal; High channel

Freq	Antenna_Fact	Cable_Los	Preamp_Ga	${\sf Read_Lev}$	Level	Limit_Line	Over_Limi
(MHz)	or (dB/m)	s (dB)	in (dB)	el (dBuV)	(dBuV/m)	(dBuV/m)	t (dB)
3594.760	32.48	7.67	37.96	44.10	46.29	74	-27.71
4960.000	34.43	9.09	38.48	46.56	51.60	74	-22.40
6069.413	34.76	10.47	38.23	43.89	50.89	74	-23.11
7440.000	36.32	10.77	36.90	42.70	52.89	74	-21.11
9920.000	37.58	12.67	34.94	37.03	52.34	74	-21.66
#######	38.73	14.39	36.10	36.86	53.88	74	-20.12

Mode:b; Polarization:Vertical; High channel

Freq (MHz)	Antenna_Facto	Cable_Loss	Preamp_Gain	Read_Leve	Level	Limit_Line	Over_Limi
ried (MHZ)	r (dB/m)	(dB)	(dB)	I (dBuV)	(dBuV/m)	(dBuV/m)	t (dB)
3615.625	32.54	7.67	37.96	44.63	46.88	74	-27.12
4960.000	34.43	9.09	38.48	47.86	52.90	74	-21.10
6166.787	34.84	10.34	38.13	44.50	51.55	74	-22.45
7440.000	36.32	10.77	36.90	42.43	52.62	74	-21.38
9920.000	37.58	12.67	34.94	37.09	52.40	74	-21.60
12297.040	38.78	14.31	36.31	36.26	53.04	74	-20.96

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only above measurement data were shown in the report.



Report No.: SZEM161201121902

Page: 32 of 88

7.8 Radiated Emissions which fall in the restricted bands

Test Requirement: 47 CFR Part 15C Section 15.209 and 15.205

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar


Test mode: b: TX_non-Hop mode, Keep the EUT working in continuously transmitting mode with

GFSK modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

7.8.2 Test Setup Diagram





30MHz-1GHz Above 1GHz



Report No.: SZEM161201121902

Page: 33 of 88

7.8.3 Measurement Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only above measurement data were shown in the report.



Report No.: SZEM161201121902

Page: 34 of 88

Mode:b; Polarization:Horizontal

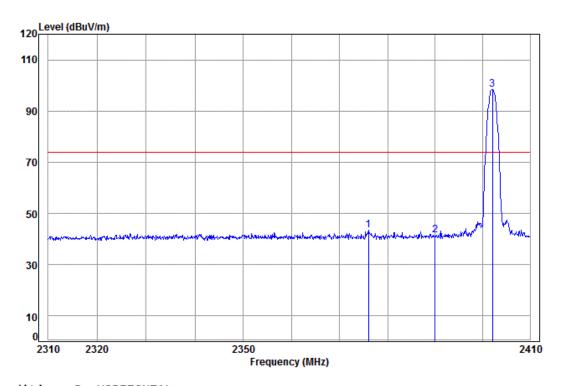

Condition: 3m HORIZONTAL

Job No: : 11219CR

Mode: : 2402 Bandedge

: BT


			Cable	Ant	Preamp	Read		Limit	0ver
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2376.027	5.33	29.04	37.96	47.11	43.52	74.00	-30.48
2		2390.000	5.34	29.08	37.96	45.14	41.60	74.00	-32.40
3	pp	2402.047	5.35	29.11	37.96	102.07	98.57	74.00	24.57



Report No.: SZEM161201121902

Page: 35 of 88

Mode:b; Polarization:Vertical

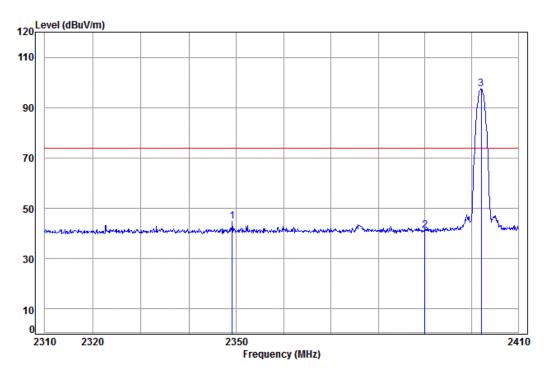

Condition: 3m Vertical Job No: : 11219CR

Mode: : 2402 Bandedge

: BT


			Cable	Ant	Preamp	Kead		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	-	MU-				40.47	dD: ///m	dD.M/m	
		MHz	ub	ub/m	ub	abuv	ubuv/m	abuv/m	dB
1		2349.094	5.31	28.95	37.97	48.37	44.66	74.00	-29.34
2		2390,000	5.34	29.08	37.96	44.90	41.36	74.00	-32.64
_									
3	pр	2402.047	5.35	29.11	37.96	100.85	97.35	74.00	23.35



Report No.: SZEM161201121902

Page: 36 of 88

Mode:b; Polarization:Horizontal

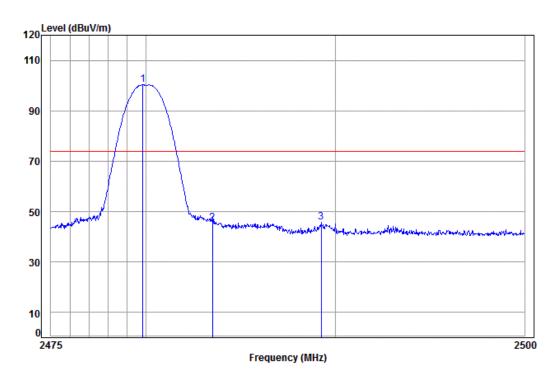

Limit

Oven

Condition: 3m HORIZONTAL

Job No: : 11219CR

Mode: : 2480 Bandedge

Cabla

: BT

	Line						Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	
-28.45	74.00	45.55	48.74	37.95	29.35	5.41	2479.830 2483.500 2489.244	2


Ant Drooms Road



Report No.: SZEM161201121902

Page: 37 of 88

Mode:b; Polarization:Vertical

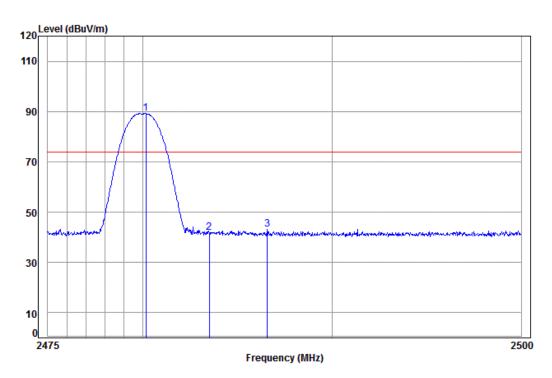

Condition: 3m VERTICAL Job No: : 11219CR

Mode: : 2480 Bandedge

: BT

		Гиса							Over
		Freq	LOSS	ractor	Factor	rever	rever	Line	LIMIC
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
				,					
1	pp	2480.154	5.41	29.34	37.95	92.33	89.13	74.00	15.13
2		2483.500	5.41	29.35	37.95	44.98	41.79	74.00	-32.21
3		2486.569	5.41	29.36	37.95	46.27	43.09	74.00	-30.91



Report No.: SZEM161201121902

Page: 38 of 88

7.9 Conducted Band Edges Measurement

Test Requirement: 47 CFR Part 15C Section 15.247 (d)
Test Method: ANSI C63.10 (2013) Section 7.8.6

7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test mode: b: TX_non-Hop mode, Keep the EUT working in continuously transmitting mode with

GFSK modulation, $\pi/4DQPSK$ modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.9.2 Test Setup Diagram

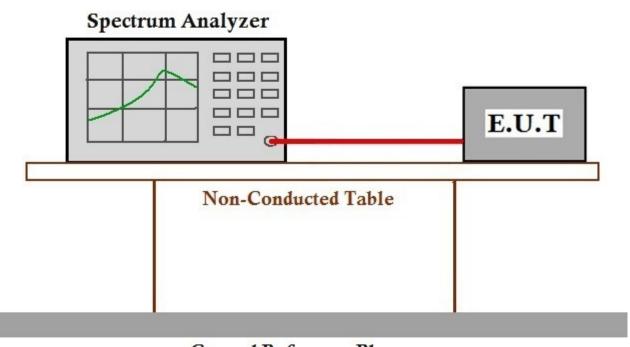

Ground Reference Plane

7.9.3 Measurement Data

The detailed test data see: Appendix 15.247




Report No.: SZEM161201121902


Page: 39 of 88

8 Photographs

8.1 Radiated Spurious Emissions Test Setup(Below 1GHz)

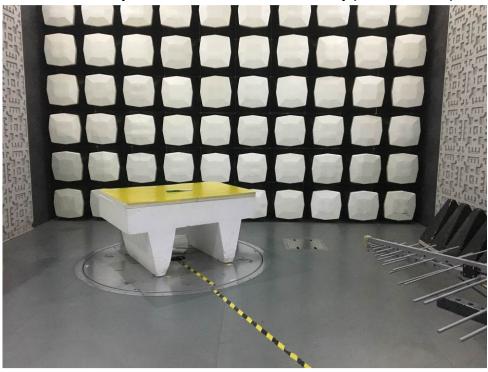

8.2 Radiated Spurious Emissions Test Setup(Above 1GHz)

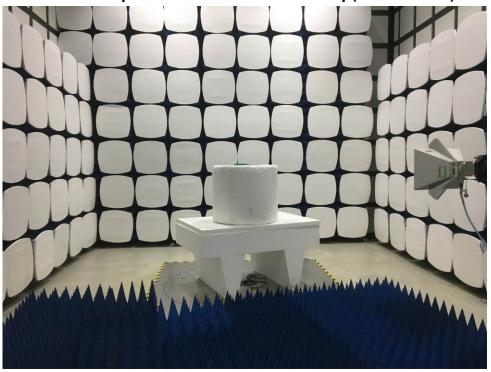

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM161201121902

Page: 40 of 88

8.3 EUT Constructional Details

Refer to Appendix A(External photos and internal photos).



Report No.: SZEM161201121902

Page: 41 of 88

9 Appendix

9.1 Appendix 15.247


1.20 dB Bandwidth

Test Mode	Test Channel	EBW[MHz]	Limit	Verdict
DH5	2402	1026.00		PASS
DH5	2441	1029.00		PASS
DH5	2480	1029.00		PASS
2DH5	2402	1080.00		PASS
2DH5	2441	1086.00		PASS
2DH5	2480	1086.00		PASS
3DH5	2402	1152.00		PASS
3DH5	2441	1155.00		PASS
3DH5	2480	1158.00		PASS



Report No.: SZEM161201121902


Page: 42 of 88

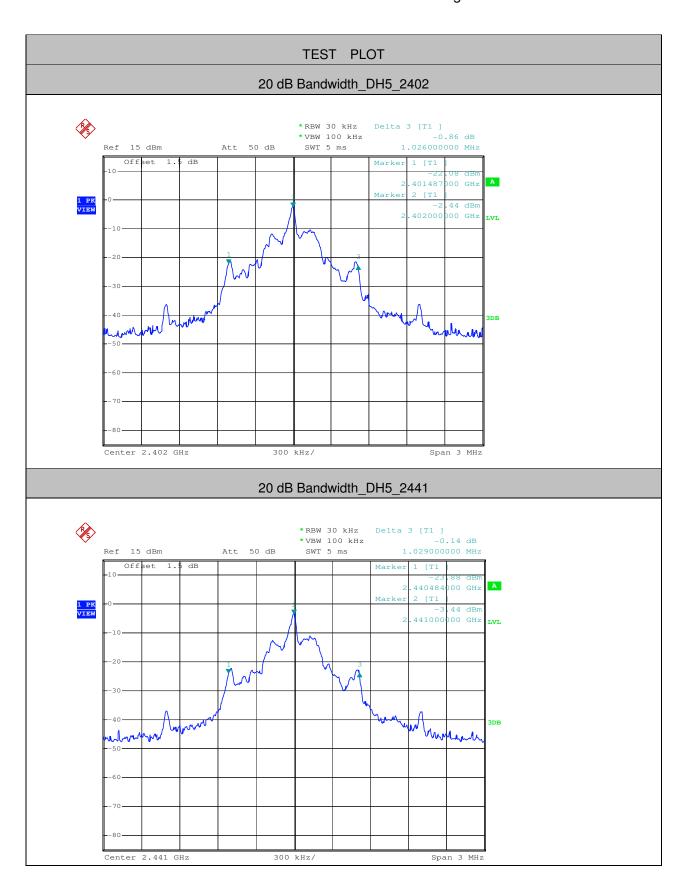



Report No.: SZEM161201121902


Page: 43 of 88

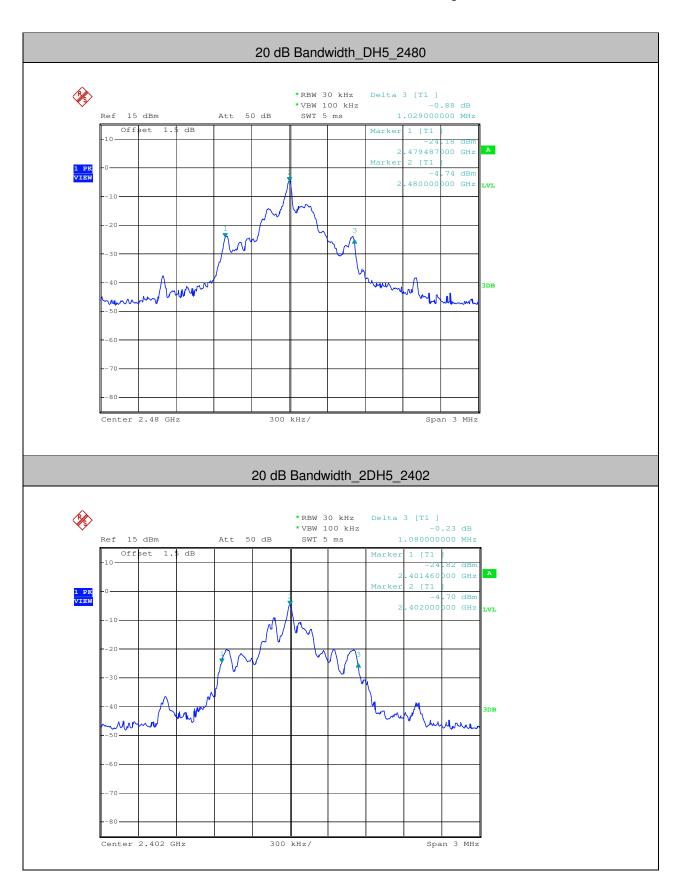



Report No.: SZEM161201121902


Page: 44 of 88

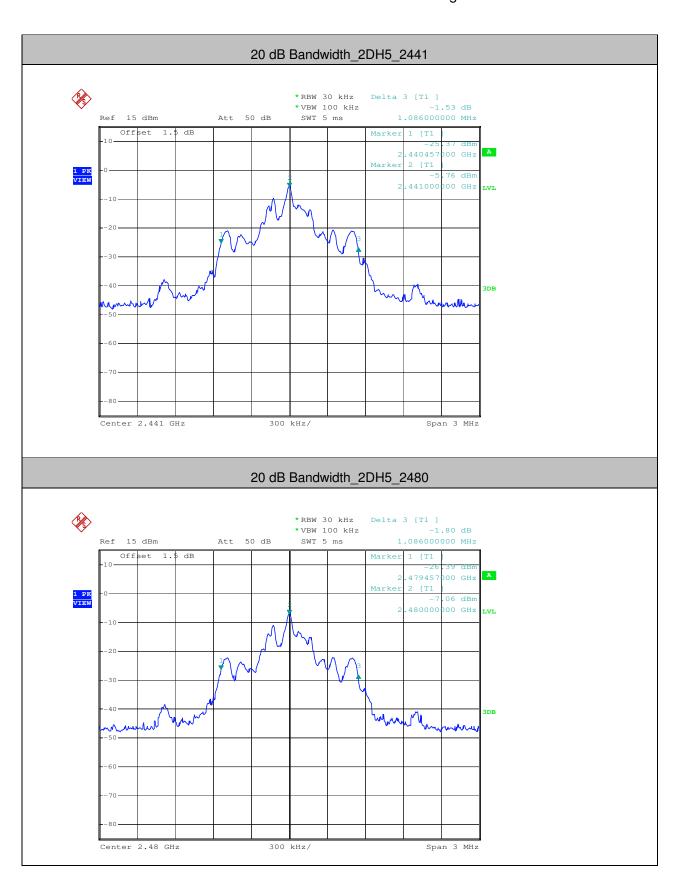



Report No.: SZEM161201121902


Page: 45 of 88

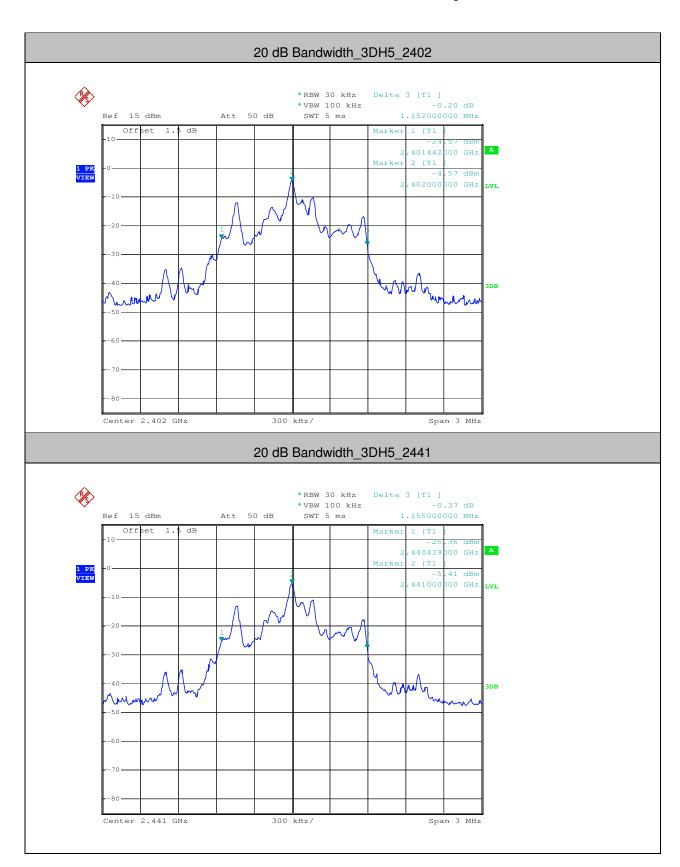



Report No.: SZEM161201121902

Page: 46 of 88

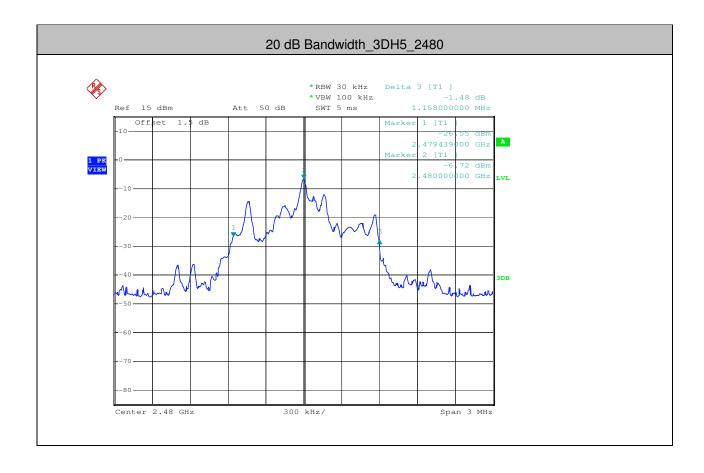



Report No.: SZEM161201121902

Page: 47 of 88


2.Conducted Peak Output Power

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
DH5	2402	2.74	<20.97	PASS
DH5	2441	3.98	<20.97	PASS
DH5	2480	3.99	<20.97	PASS
2DH5	2402	0.71	<20.97	PASS
2DH5	2441	2.29	<20.97	PASS
2DH5	2480	2.18	<20.97	PASS
3DH5	2402	1.03	<20.97	PASS
3DH5	2441	2.61	<20.97	PASS
3DH5	2480	2.58	<20.97	PASS



Report No.: SZEM161201121902

Page: 48 of 88

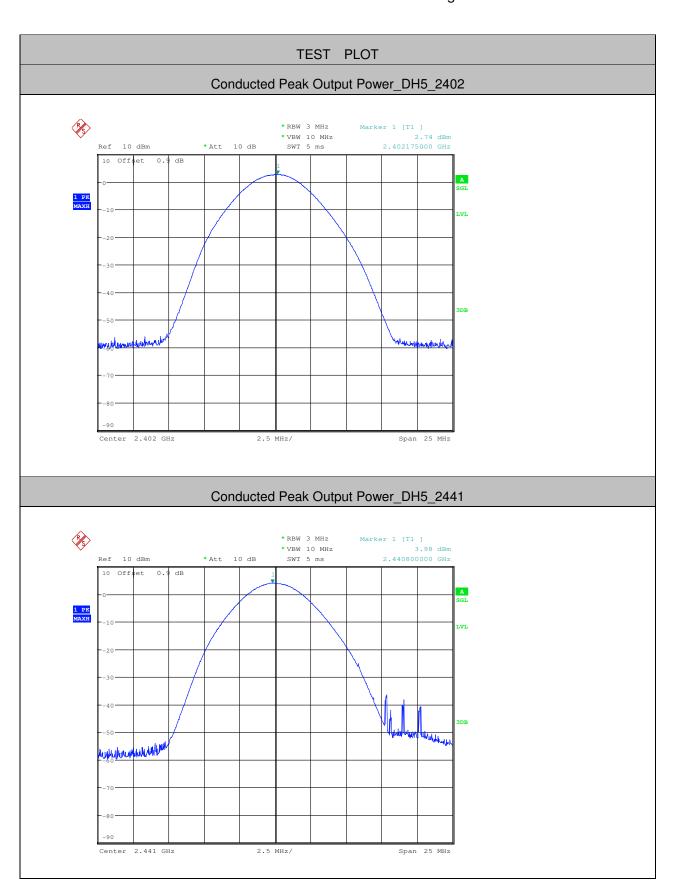


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and ofcannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM161201121902


Page: 49 of 88

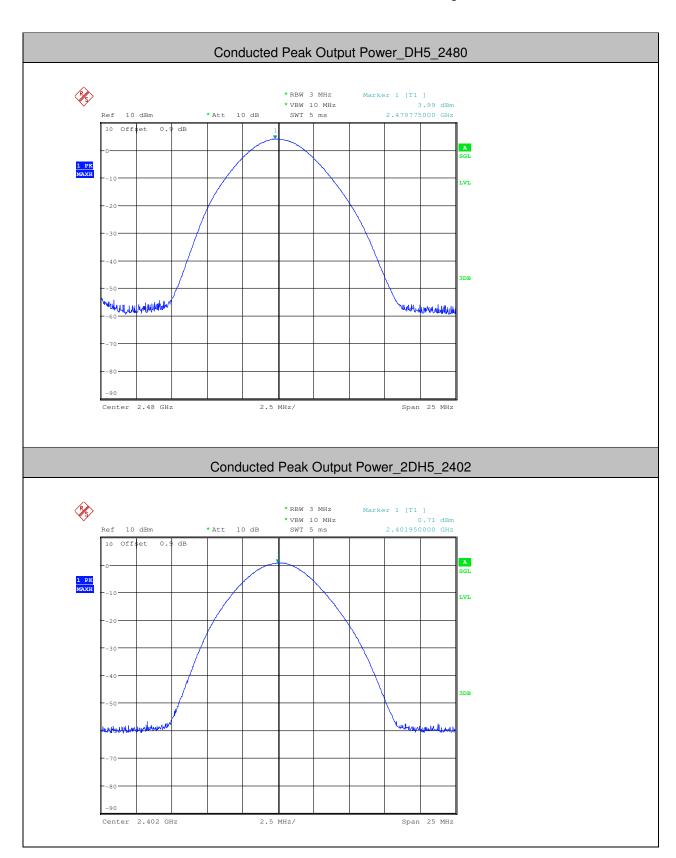



Report No.: SZEM161201121902


Page: 50 of 88

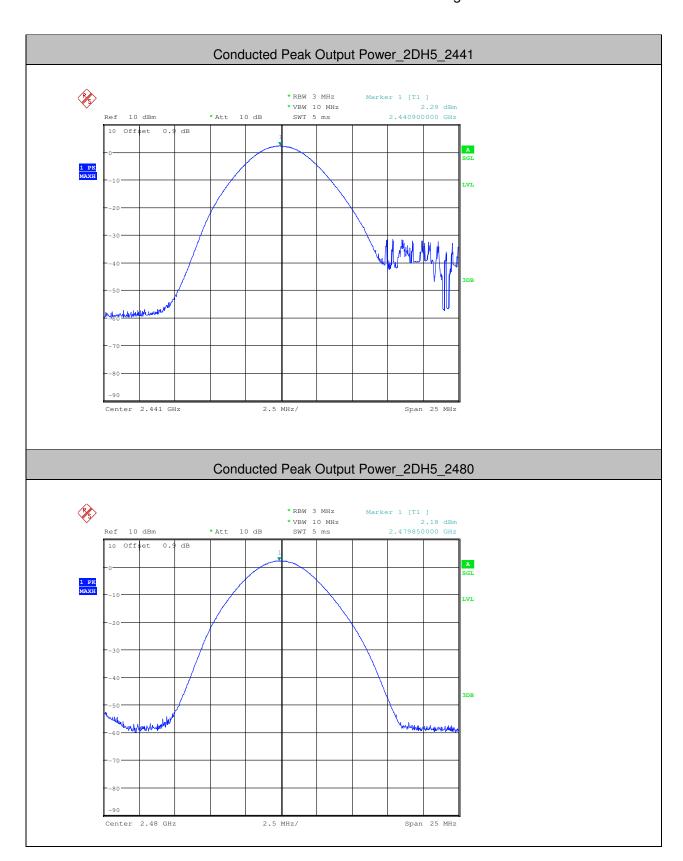



Report No.: SZEM161201121902


Page: 51 of 88

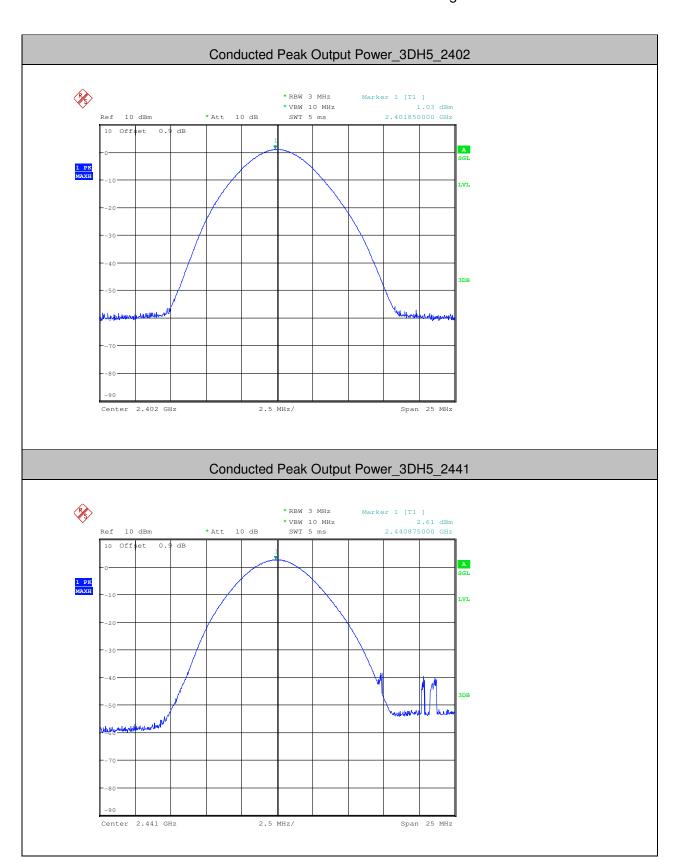



Report No.: SZEM161201121902

Page: 52 of 88

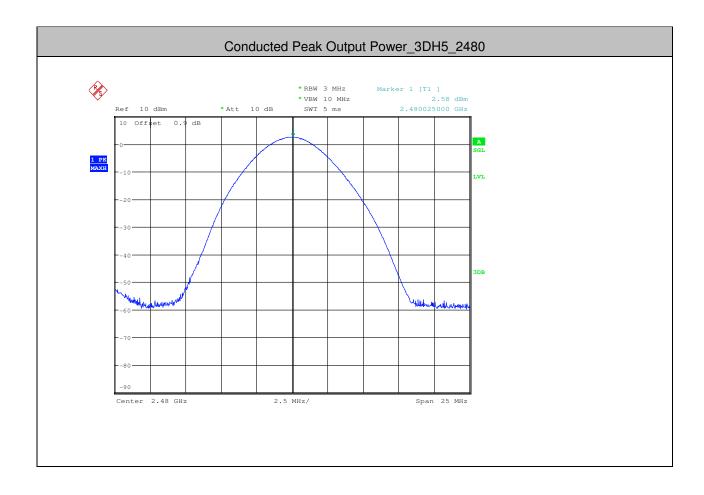




Report No.: SZEM161201121902

Page: 53 of 88

3. Carrier Frequency Separation


Test Mode	Test Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	2441	1.005	>=0.69	PASS
2DH5	2441	0.999	>=0.72	PASS
3DH5	2441	1.008	>=0.77	PASS

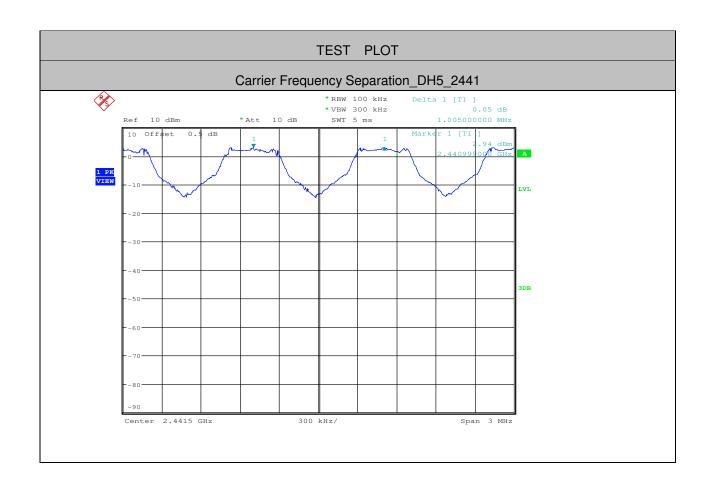



Report No.: SZEM161201121902

Page: 54 of 88

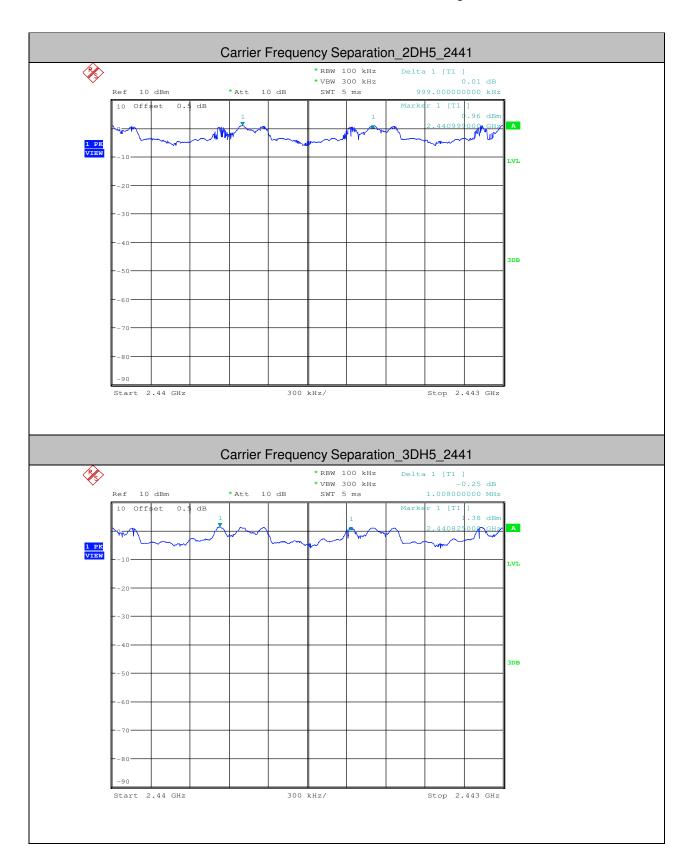



Report No.: SZEM161201121902

Page: 55 of 88


4.Dwell Time

Test Mode	Test Channel	Burst Width[ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[ms]	Limit[ms]	Verdict
DH1	2402	0.4	320	0.128	<0.4	PASS
DH3	2402	1.66	160	0.266	<0.4	PASS
DH5	2402	2.9	110	0.319	<0.4	PASS
2DH1	2402	0.41	320	0.131	<0.4	PASS
2DH3	2402	1.67	160	0.267	<0.4	PASS
2DH5	2402	2.91	100	0.291	<0.4	PASS
3DH1	2402	0.41	320	0.131	<0.4	PASS
3DH3	2402	1.67	160	0.267	<0.4	PASS
3DH5	2402	2.91	110	0.32	<0.4	PASS



Report No.: SZEM161201121902

Page: 56 of 88

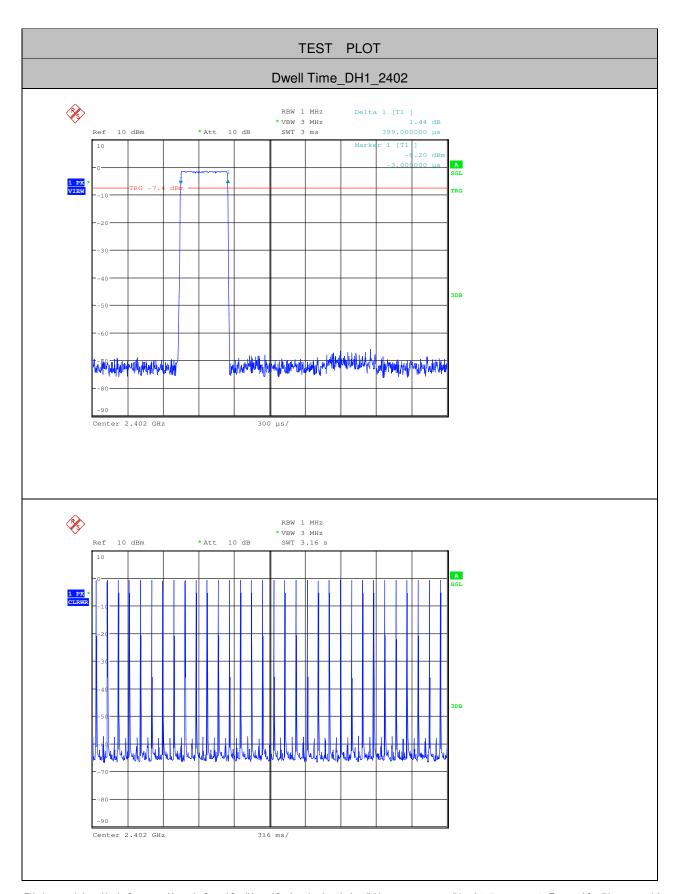


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and ofcannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM161201121902


Page: 57 of 88

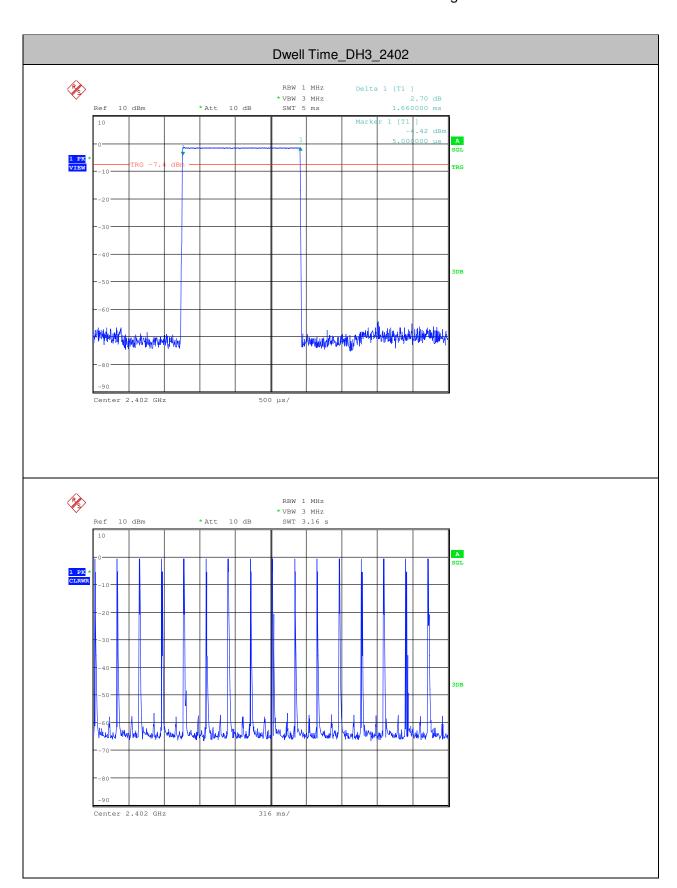



Report No.: SZEM161201121902


Page: 58 of 88

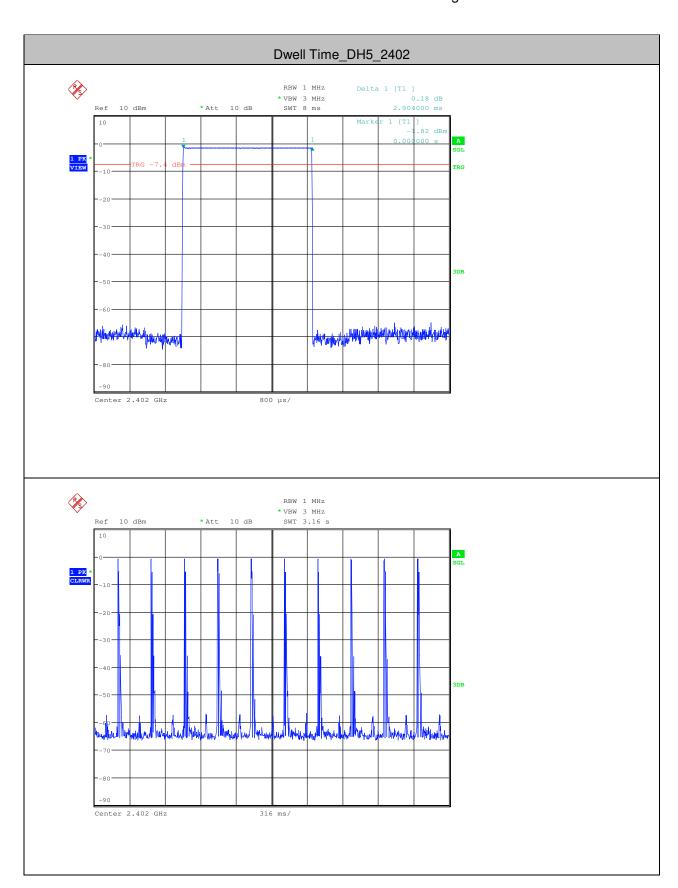



Report No.: SZEM161201121902


Page: 59 of 88

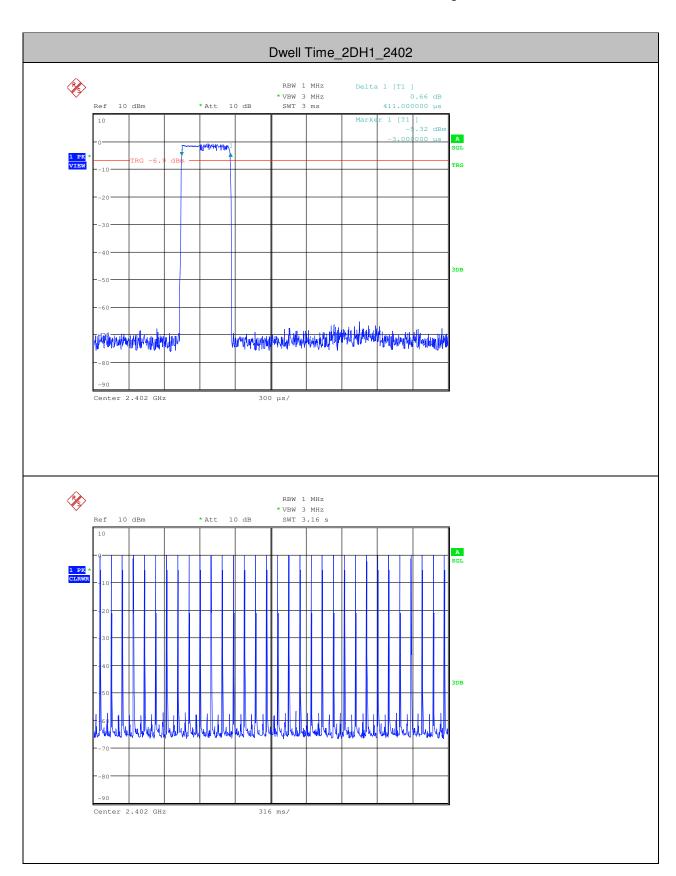



Report No.: SZEM161201121902


Page: 60 of 88

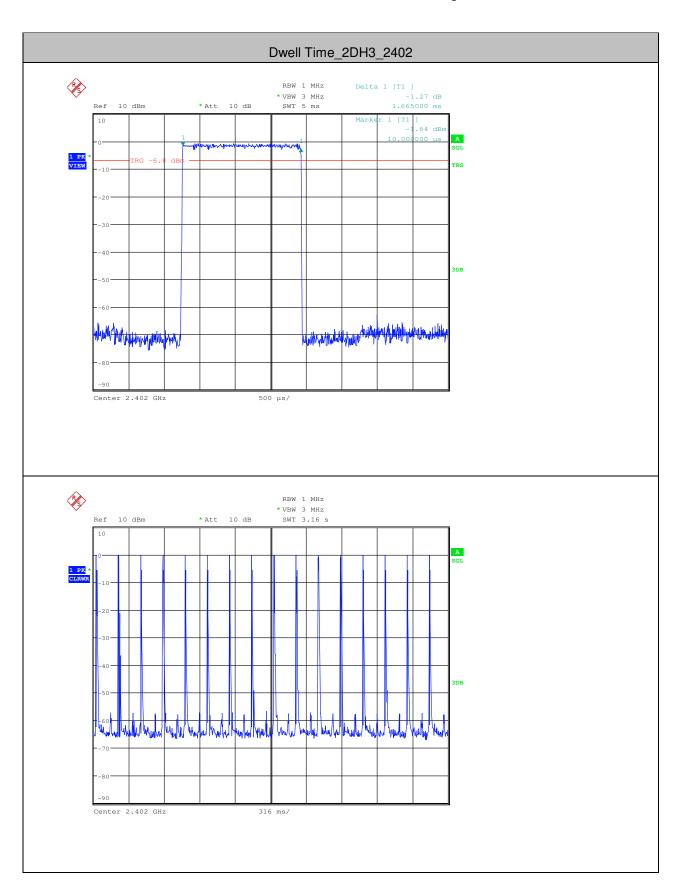



Report No.: SZEM161201121902


Page: 61 of 88

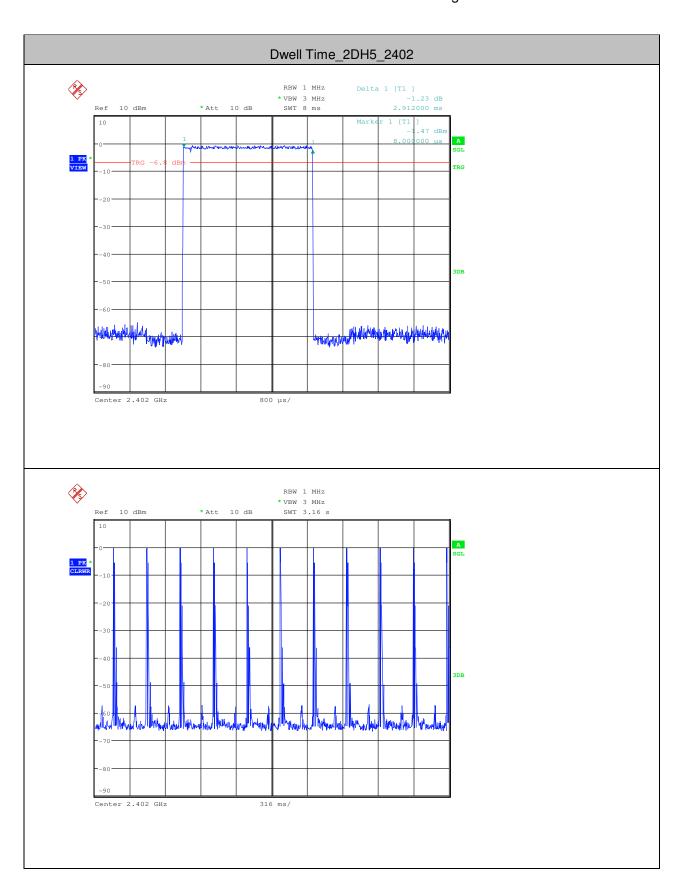



Report No.: SZEM161201121902


Page: 62 of 88

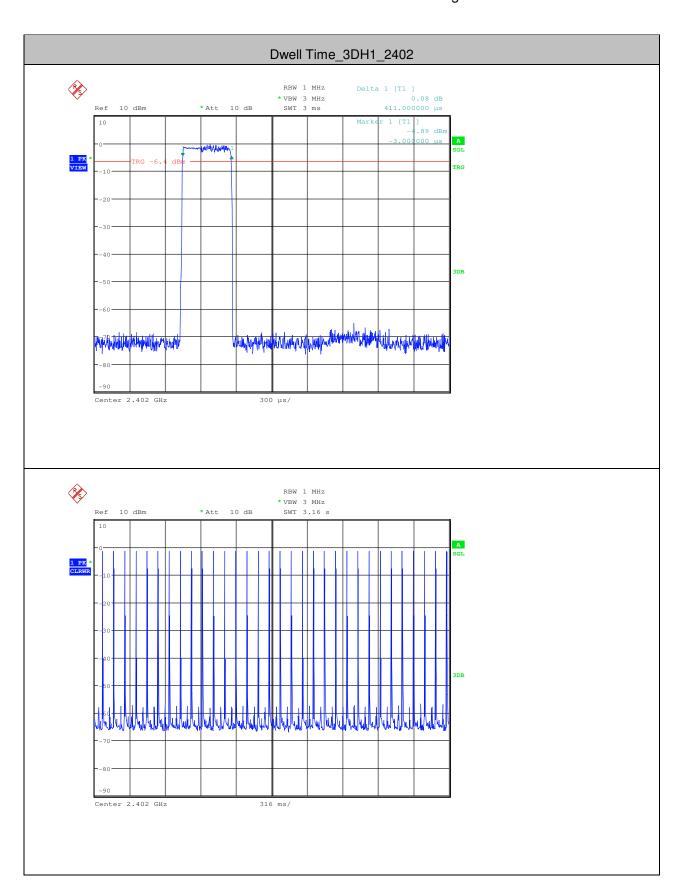



Report No.: SZEM161201121902


Page: 63 of 88

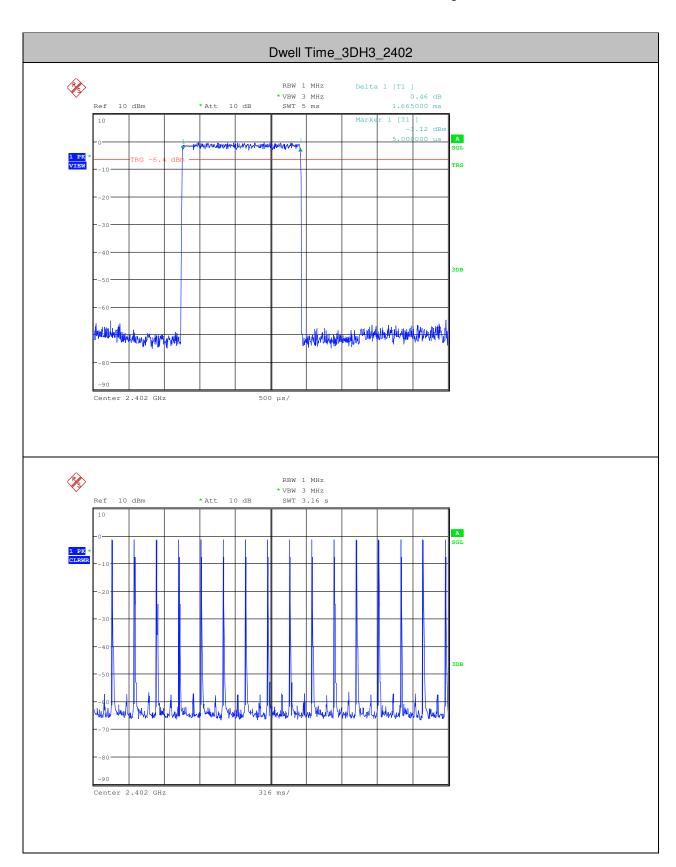



Report No.: SZEM161201121902

Page: 64 of 88

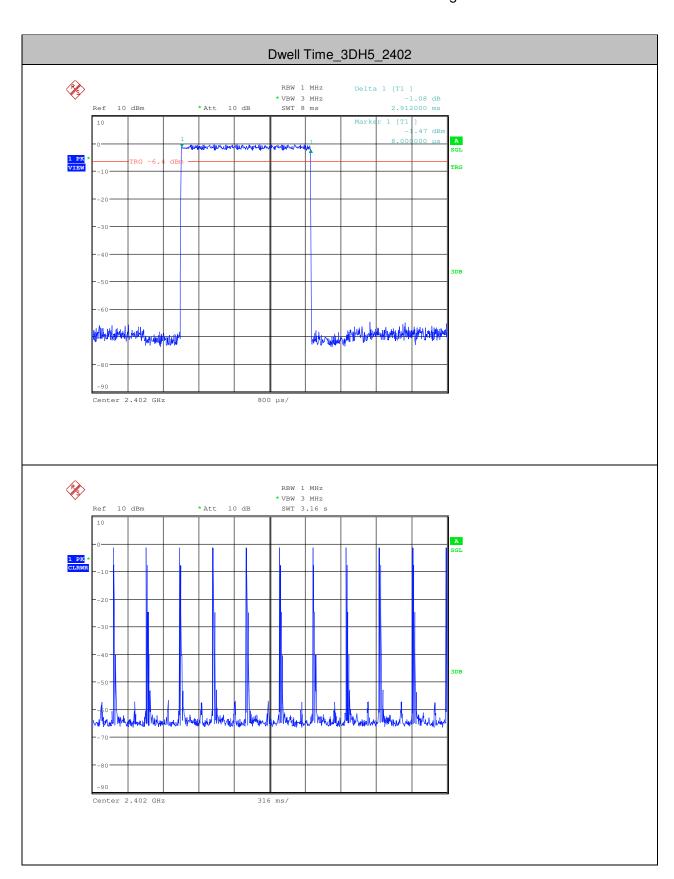




Report No.: SZEM161201121902

Page: 65 of 88

5. Hopping Channel Number


Test Mode	Test Channel	Number of Hopping Channel[N]	Limit[N]	Verdict
DH5	2402	79	>=15	PASS
2DH5	2402	79	>=15	PASS
3DH5	2402	79	>=15	PASS

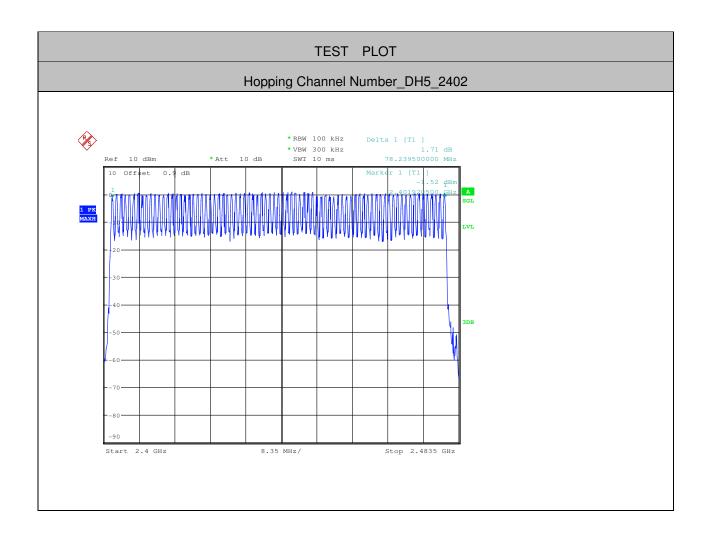



Report No.: SZEM161201121902

Page: 66 of 88

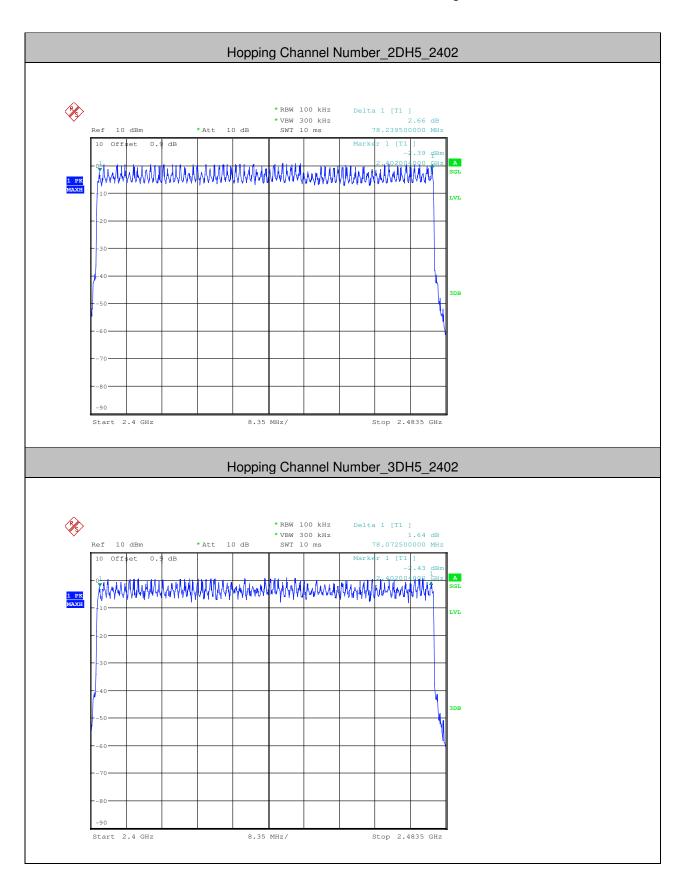



Report No.: SZEM161201121902

Page: 67 of 88


6.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Hopping	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit[dBm]	Verdict
DH5	2402	On	0.090	-54.423	<-19.91	PASS
DH5	2480	On	-0.040	-58.382	<-20.04	PASS
2DH5	2402	On	0.290	-55.378	<-19.71	PASS
2DH5	2480	On	-1.040	-59.139	<-21.04	PASS
3DH5	2402	On	0.910	-55.908	<-19.09	PASS
3DH5	2480	On	-2.060	-58.637	<-22.06	PASS
DH5	2402	Off	0.870	-48.439	<-19.13	PASS
DH5	2480	Off	-1.460	-62.422	<-21.46	PASS
2DH5	2402	Off	-1.600	-50.230	<-21.6	PASS
2DH5	2480	Off	-3.860	-62.824	<-23.86	PASS
3DH5	2402	Off	-1.530	-50.281	<-21.53	PASS
3DH5	2480	Off	-3.410	-63.011	<-23.41	PASS



Report No.: SZEM161201121902


Page: 68 of 88

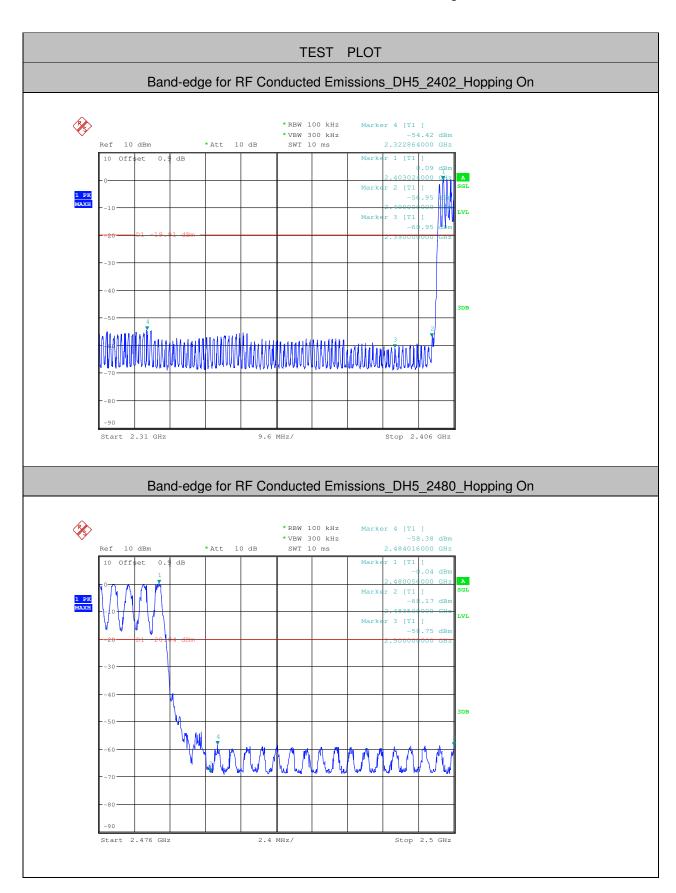



Report No.: SZEM161201121902


Page: 69 of 88

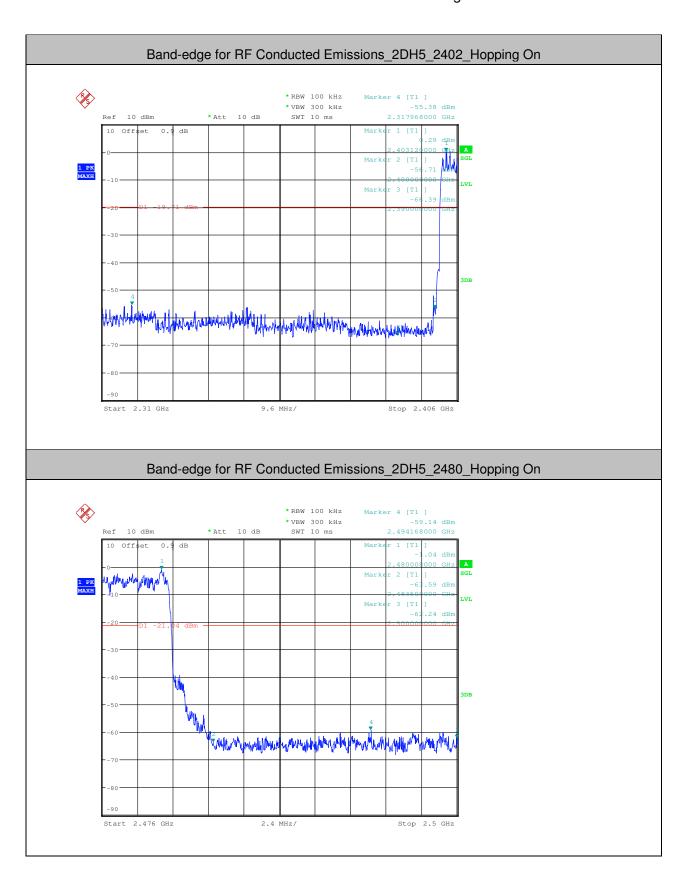



Report No.: SZEM161201121902


Page: 70 of 88

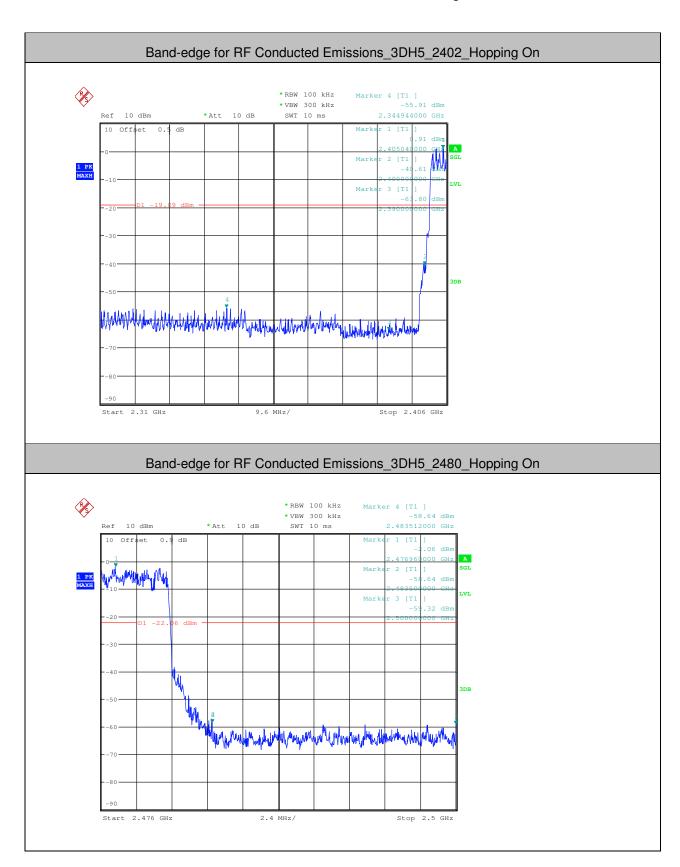



Report No.: SZEM161201121902


Page: 71 of 88

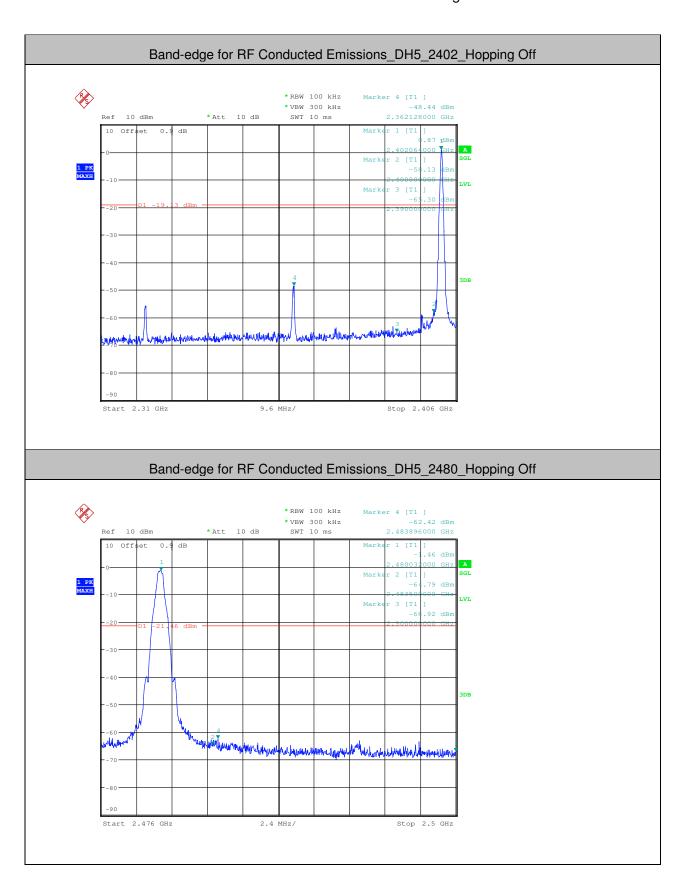



Report No.: SZEM161201121902


Page: 72 of 88

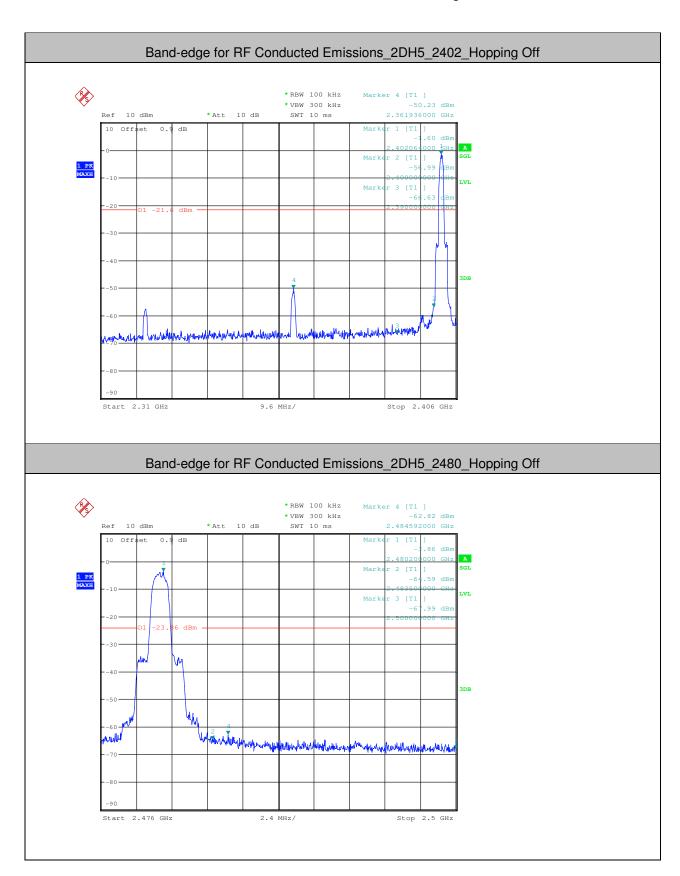



Report No.: SZEM161201121902

Page: 73 of 88

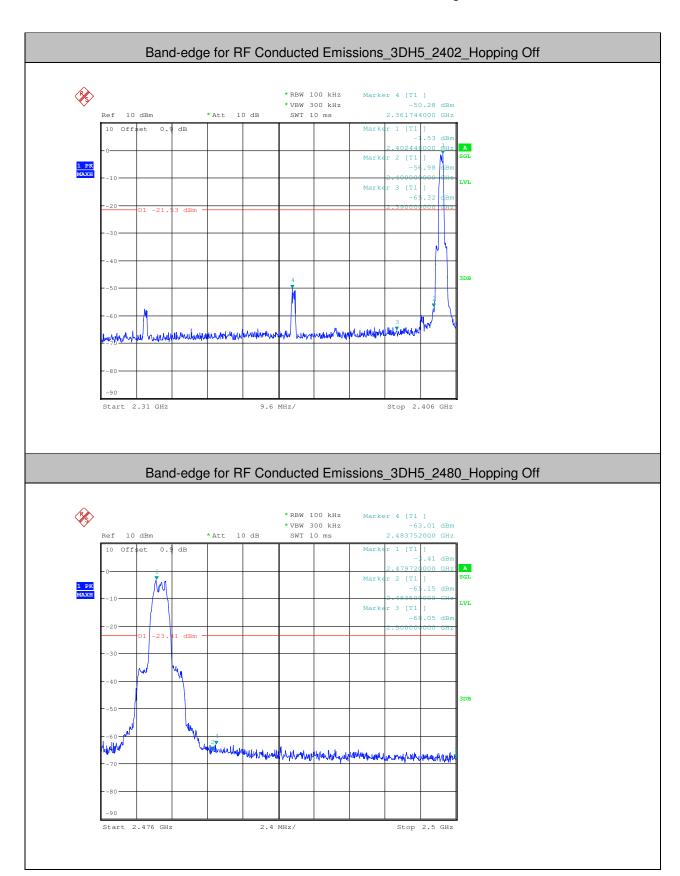



Report No.: SZEM161201121902

Page: 74 of 88


7.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
DH5	2402	30	10000	1000	3000	2.45	-44.790	<-17.55	PASS
DH5	2402	10000	25000	1000	3000	2.45	-63.040	<-17.55	PASS
DH5	2441	30	10000	1000	3000	3.59	-43.980	<-16.41	PASS
DH5	2441	10000	25000	1000	3000	3.59	-65.150	<-16.41	PASS
DH5	2480	30	10000	1000	3000	3.58	-42.960	<-16.42	PASS
DH5	2480	10000	25000	1000	3000	3.58	-65.160	<-16.42	PASS
2DH5	2402	30	10000	1000	3000	-0.9	-42.690	<-20.9	PASS
2DH5	2402	10000	25000	1000	3000	-0.9	-65.330	<-20.9	PASS
2DH5	2441	30	10000	1000	3000	0.69	-45.520	<-19.31	PASS
2DH5	2441	10000	25000	1000	3000	0.69	-65.480	<-19.31	PASS
2DH5	2480	30	10000	1000	3000	-0.11	-44.200	<-20.11	PASS
2DH5	2480	10000	25000	1000	3000	-0.11	-65.180	<-20.11	PASS
3DH5	2402	30	10000	1000	3000	-0.89	-27.970	<-20.89	PASS
3DH5	2402	10000	25000	1000	3000	-0.89	-65.320	<-20.89	PASS
3DH5	2441	30	10000	1000	3000	0.8	-44.490	<-19.2	PASS
3DH5	2441	10000	25000	1000	3000	0.8	-65.160	<-19.2	PASS
3DH5	2480	30	10000	1000	3000	0.6	-44.370	<-19.4	PASS
3DH5	2480	10000	25000	1000	3000	0.6	-65.160	<-19.4	PASS



Report No.: SZEM161201121902


Page: 75 of 88

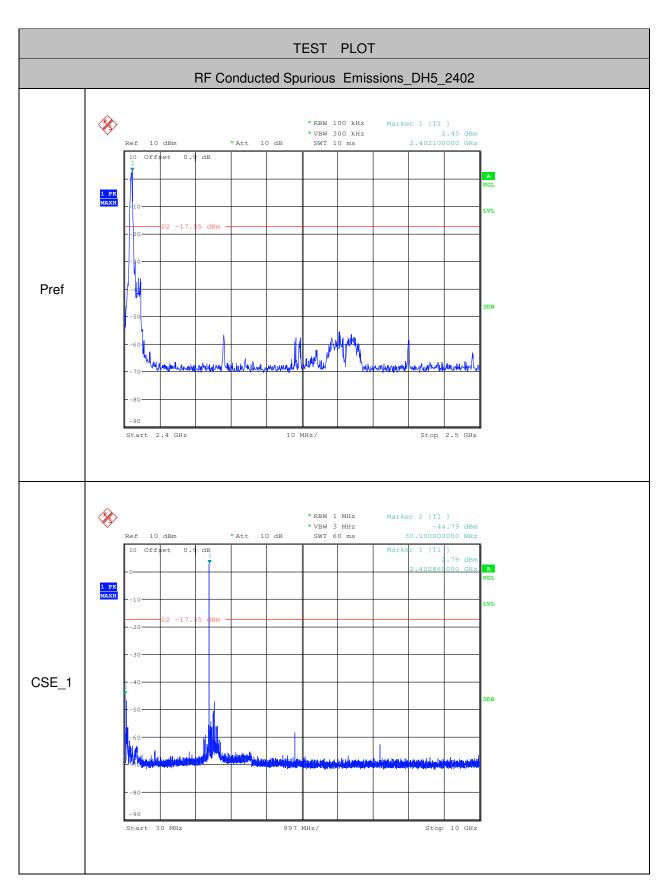



Report No.: SZEM161201121902


Page: 76 of 88

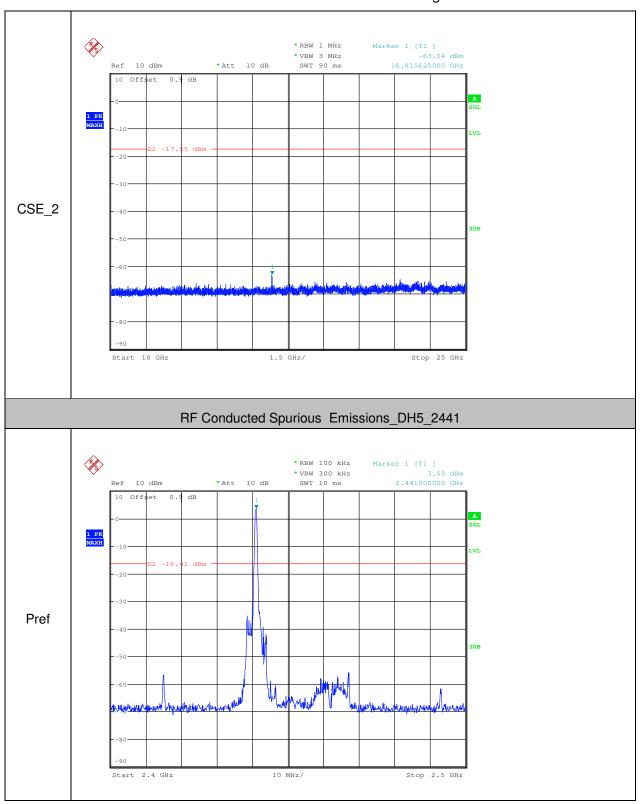



Report No.: SZEM161201121902


Page: 77 of 88

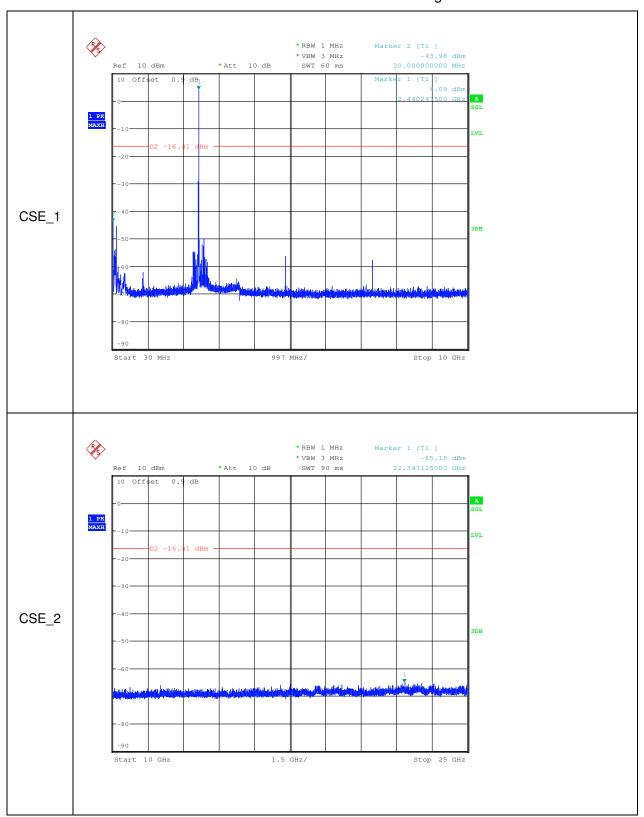



Report No.: SZEM161201121902


Page: 78 of 88

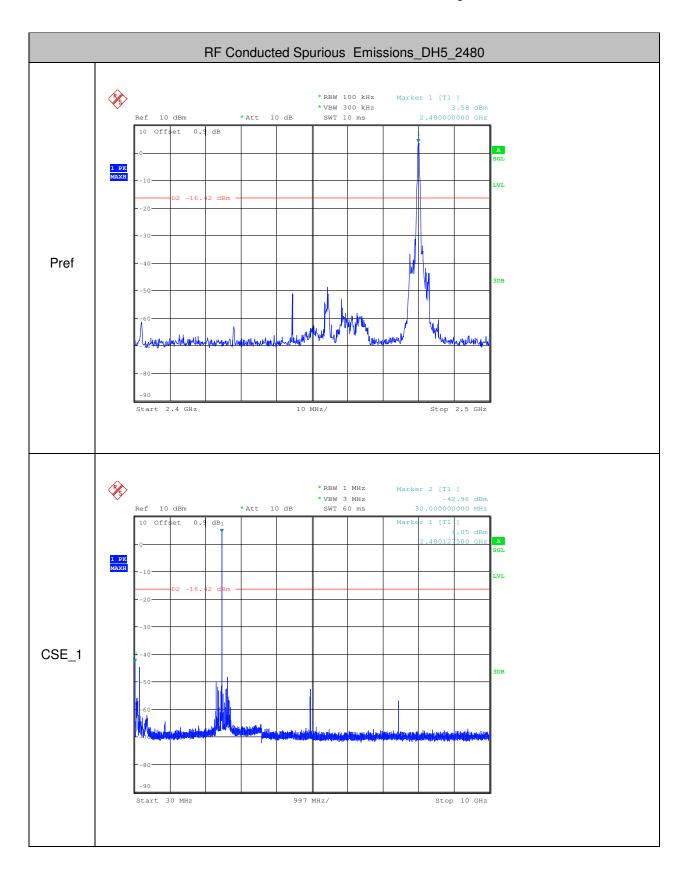



Report No.: SZEM161201121902


Page: 79 of 88

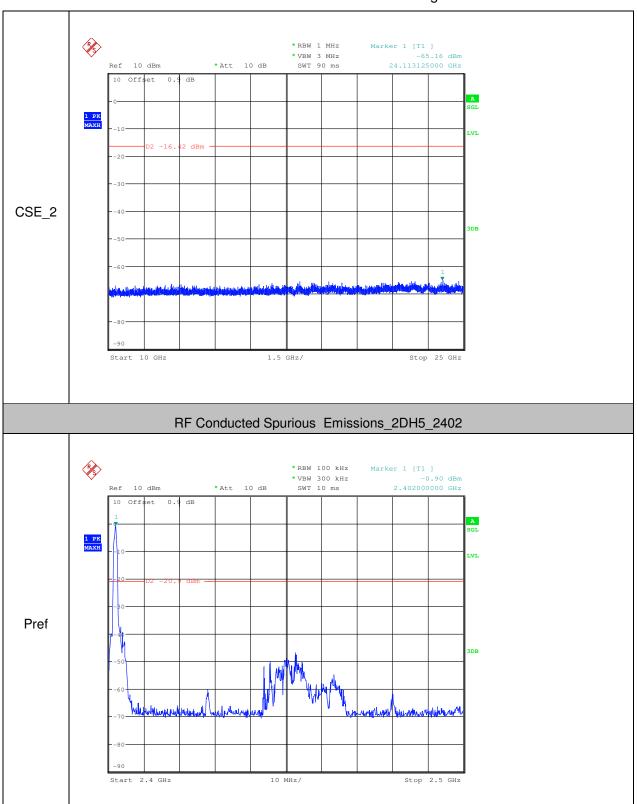



Report No.: SZEM161201121902


Page: 80 of 88

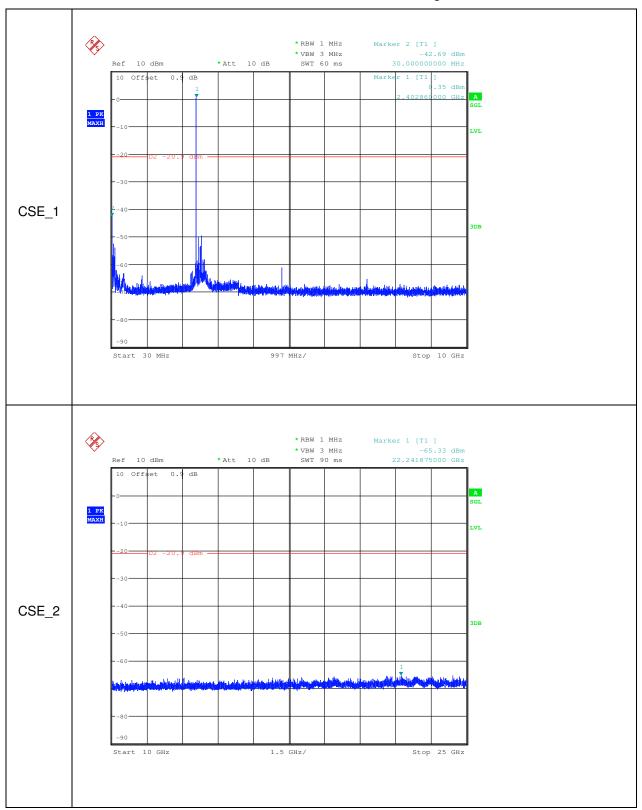



Report No.: SZEM161201121902


Page: 81 of 88

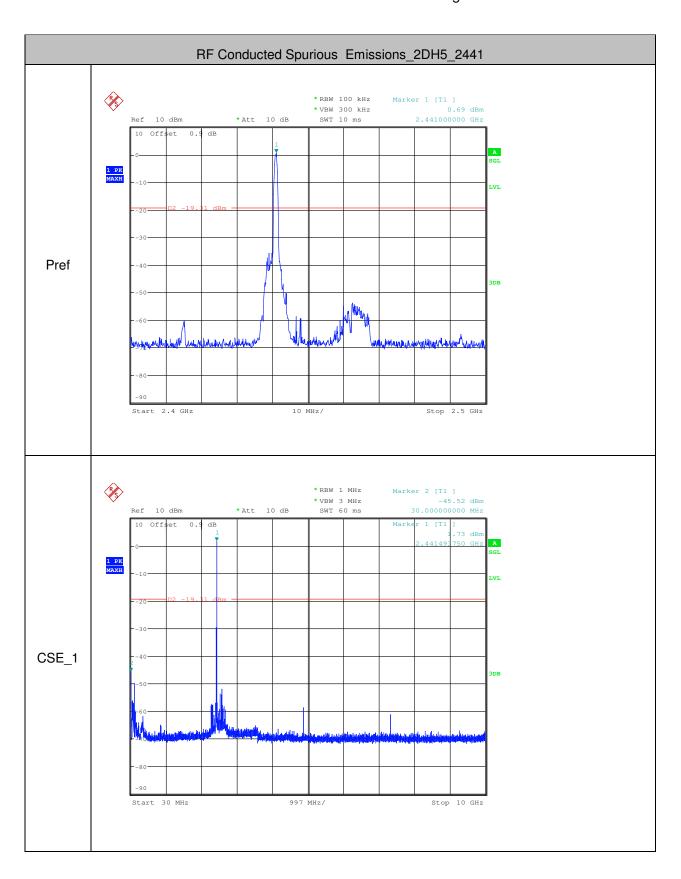



Report No.: SZEM161201121902


Page: 82 of 88

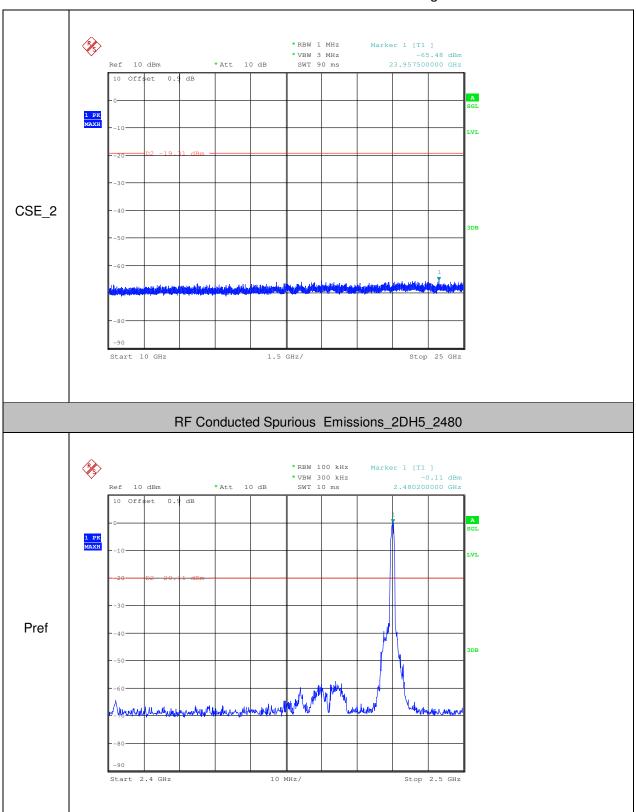



Report No.: SZEM161201121902


Page: 83 of 88

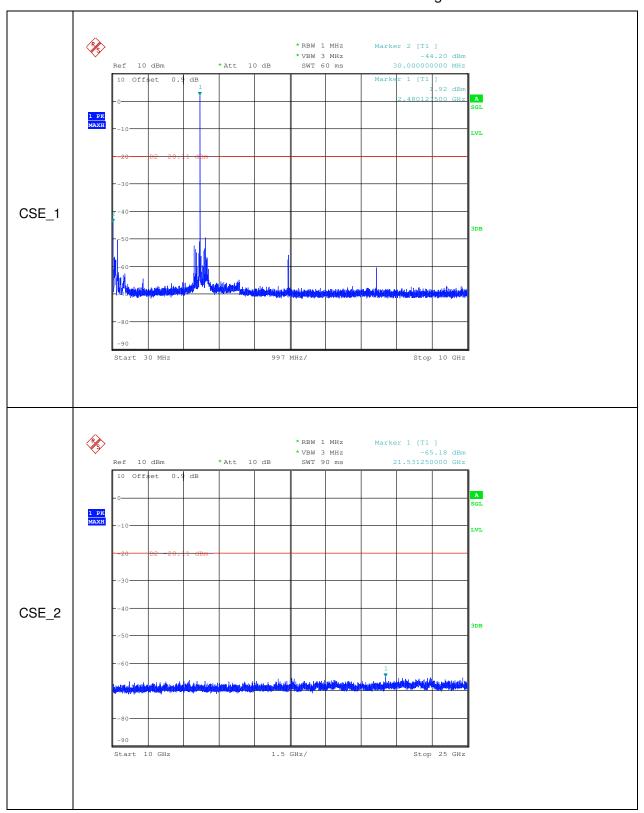



Report No.: SZEM161201121902


Page: 84 of 88

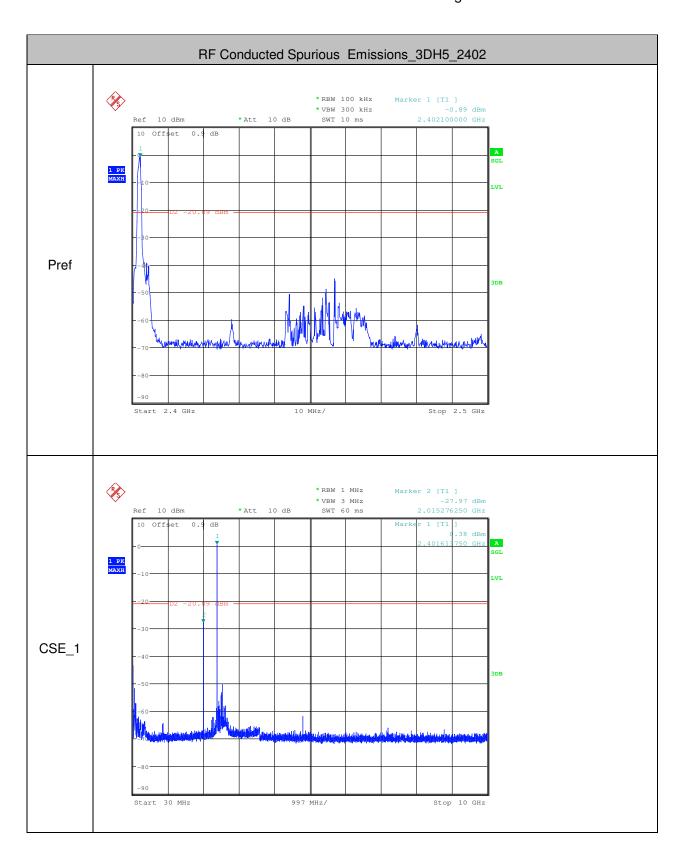



Report No.: SZEM161201121902


Page: 85 of 88

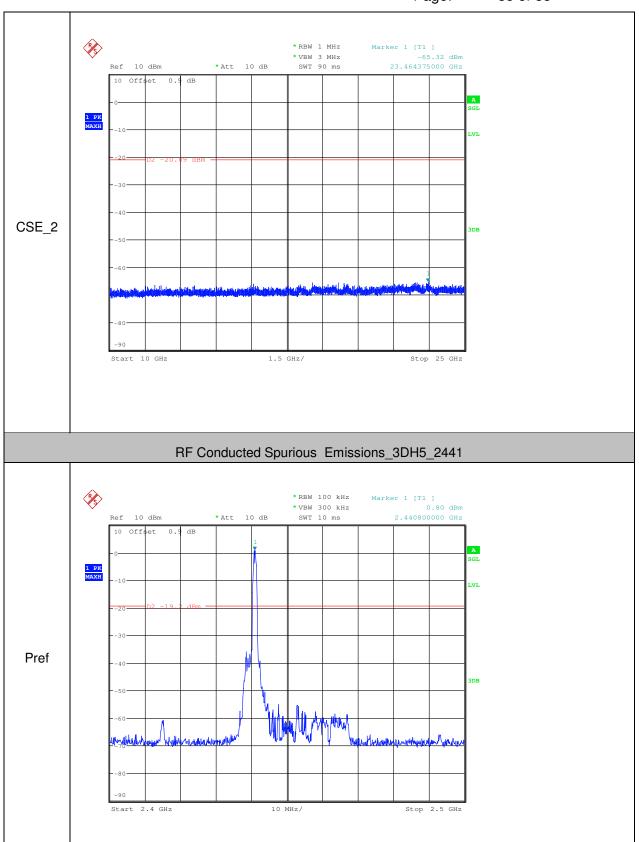



Report No.: SZEM161201121902


Page: 86 of 88

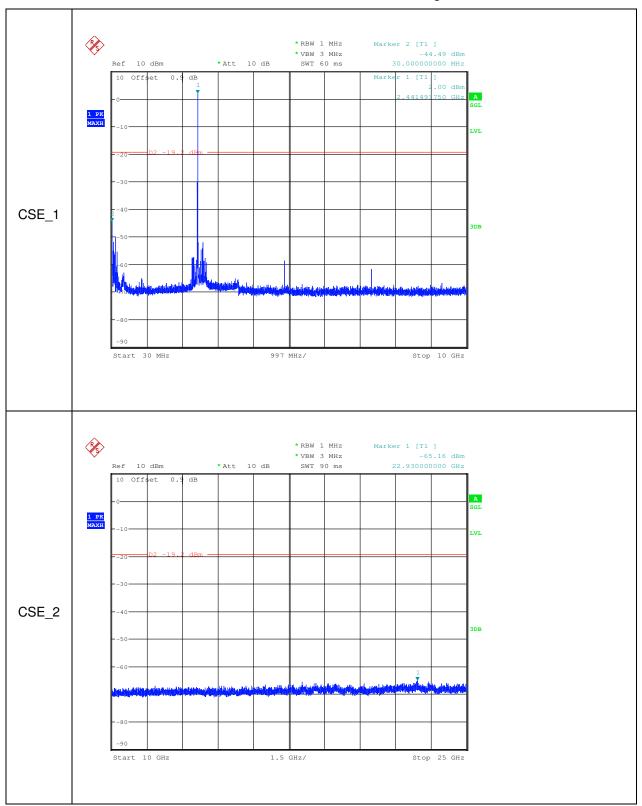



Report No.: SZEM161201121902

Page: 87 of 88

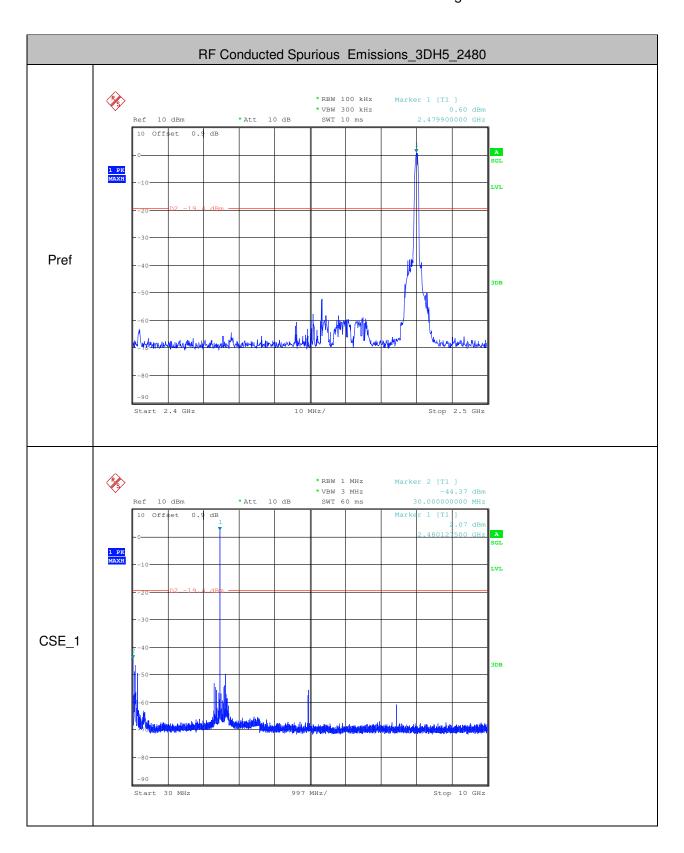



Report No.: SZEM161201121902

Page: 88 of 88

