



CE MARKING

**ELECTROMAGNETIC COMPATIBILITY
ELECTRICAL SAFETY
LASER SPECTROSCOPY
ENVIRONMENTAL PHYSIC**



Organizzazione con Sistema
di Gestione certificato
Company with Management
System certified

ISO 9001:2008



G.S.D. Srl PISA - Italy	Test Report n. FCC-14359B	Rev. 00
Manufacturer	CAEN RFID s.r.l.	
Address	Via Vetraia, 11 55049 Viareggio (LU) Italy	
Test Family Name	R4300 ION (UHF)	
Testing Laboratory Name	G.S.D. S.r.l.	
Address	Via Marmiceto, 8 56121 Ospedaletto Pisa (PI) Italy	
Tel/Fax	+39 050 984254 / +39 050 984262	
P.IVA/VAT	01343950505	
http – e-mail	www.gsd.it - info@gsd.it	
	FCC Listed: Registration Number: 424037	
Location and Date of Issue	Pisa, 2014 April 08	

G.S.D. s.r.l.
Via Marmiceto, 8
56121 OSPEDALETTO - PISA
Tel. 050.984254 - Fax 050.984262
P. IVA 01343950505

SENIOR EMC TEST MANAGER
Dr. Gian Luca Genovesi

QUALITY MANAGER
Dr. David Bellincia
D. Bellincia

INDEX

1. MANUFACTURER AND EUT IDENTIFICATION	3
2. REFERENCE STANDARDS.....	5
3. TEST GENERALITY, RESULT, CONDITION, MEASUREMENT UNCERTAINTY.....	6
4. RADIATED EMISSIONS.....	8
5. POWERLINE CONDUCTED EMISSIONS.....	11
6. PHOTO.....	20

1. MANUFACTURER AND EUT IDENTIFICATION¹

Manufacturer	CAEN RFID s.r.l..
Address	Via Vetraia, 11 55049 Viareggio (LU) Italy
Test Family Name	R4300 ION (UHF)
Date of reception	2014 January 23
Sampling	Laboratory sample for certification
Test Item Description	RFID Device
Nominal Input Voltage	24 Vdc
FCC ID	UVECAENRFID008

¹A detailed documentation is preserved in the internal fascicle.

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.

Report n. FCC-14359B Rev. 00, page 3 / 21



*Fig. 1.1
Equipment Photo*

2. REFERENCE STANDARDS

Tests and measurements are performed accordingly to the reference standards given in the table below:

TEST	STANDARD
Emissions: Radiated – Section 15.109	FCC Rules ad Regulations, Title 47 (2008) Part 15 – Sub part B ANSI C63.4 (2009) – American National Standard for Methods of Measuring of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
Emissions: Conducted – Section 15.107	FCC Rules ad Regulations, Title 47 (2008) Part 15 – Sub part B ANSI C63.4 (2009) – American National Standard for Methods of Measuring of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz

This document may be only fully reproduced.

*Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-14359B Rev. 00, page 5 / 21*

3. TEST GENERALITY, RESULT, CONDITION, MEASUREMENT UNCERTAINTY

Sub-part 2.1033(b)

Test And Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2 and the following individual Parts: 15.109; Unintentional Radiators

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing: In accordance with ANSI C63.4-2009, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures.

All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.

Summary of Test Results

TEST	RESULT
Emissions: conducted Section 15.107	Pass
Emissions: radiated Section 15.109	Pass

Measurement uncertainty


TEST	EXPANDED UNCERTAINTY
Conducted Emission – 50Ω/50µH (150 kHz - 30 MHz)	± 3.5 dB
Radiated Emission – (Semianechoic Room) (30 MHz - 18 GHz)	± 4.7 dB

Climatic Conditions

PARAMETER	VALUE
Temperature	(293 ± 3) K
Relative humidity	(50 ± 5) %

Extensions

The results refer only to the sampled EUT and under the specified conditions.

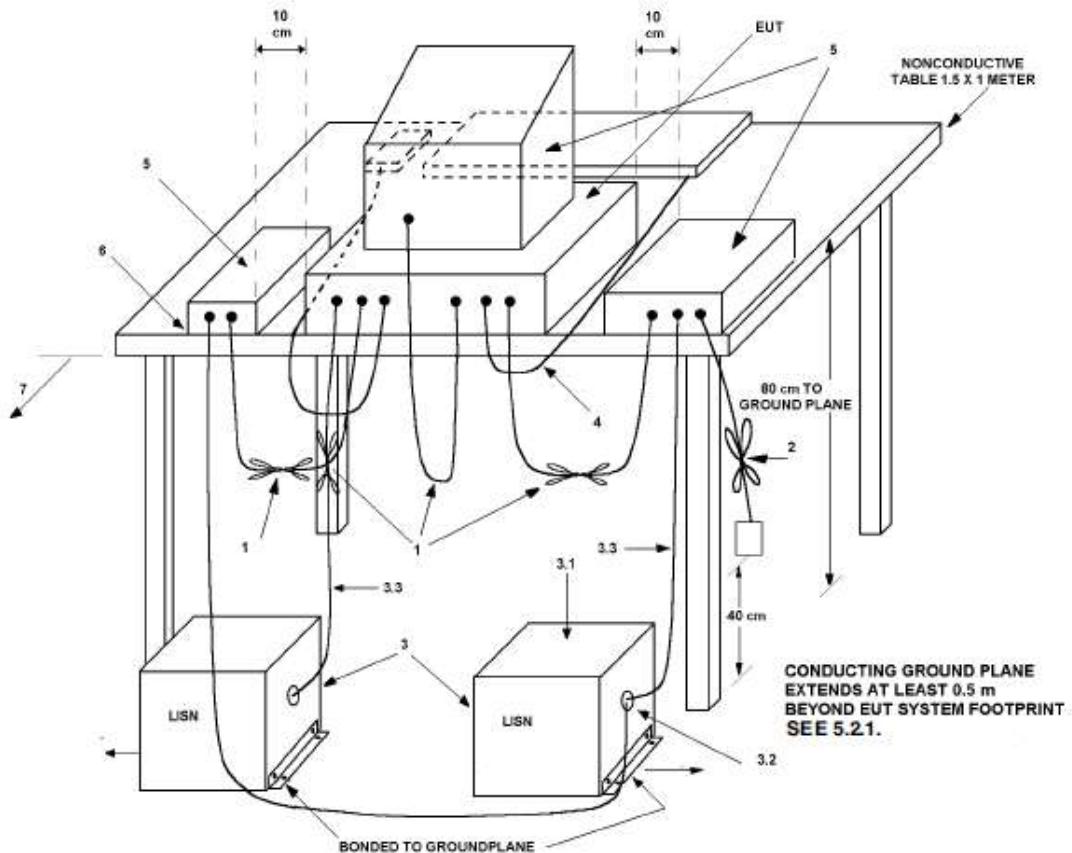

Conducted and Radiated EUT Test Set-up example (ANSI C63.4 2009)

Test Mode: the EUT was used with a personal computer and it was tested with standard SW CAEN RFID Easy Controller by USB.

4. RADIATED EMISSIONS

In the following table you can find the limits established by the reference standard:

FREQUENCY RANGE (MHz)	Field Strength QUASI-PEAK LIMITS [dB (μ V/m)]
30 ÷ 88	40
88 ÷ 216	43,5
216 ÷ 960	46
Above 960	54

Test Equipment

EQUIPMENT	MANUFACTURER	MODEL	CAL. DUE
EMI Receiver	HP	HP8546A	01/2015
EMI Receiver Filter Section	HP	HP85460A	01/2015
Anechoic Chamber	Comtest	CSA01	01/2015
Bilog Antenna	Schaffner	CBL6112B	01/2015
Horn Antenna	EMCO	3115	01/2015
Controller	Deisel	HD100	01/2015
Turn Table	Deisel	MA240	01/2015
LISN	GSD	NTW06	01/2015

Test procedure: RE22R02

Notes

Azimuth position EUT-Antenna corresponding to 0° identifies the rotating table orientation (TT) in which the instrument to be tested shows the front part turned towards the antenna. Positive grades individuate clockwise rotations of TT when this one is observed from the top. For negative degrees, TT rotation is anticlockwise.

Antenna height respect to the mass plane is conventionally individuated with: MA=XXX where XXX indicates the height (always positive for e>100) expressed in cm.

Antenna horizontal polarisation is indicated by POL=H.

Antenna vertical polarisation is indicated by POL=V.

EUT was tested in the three orthogonal planes.


Results and conclusions

In all the operative conditions, equipment complied with the standard limits. Graphics in following figures show the most significant registrations of the performed measurements.

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.


Report n. FCC-14359B Rev. 00, page 8 / 21

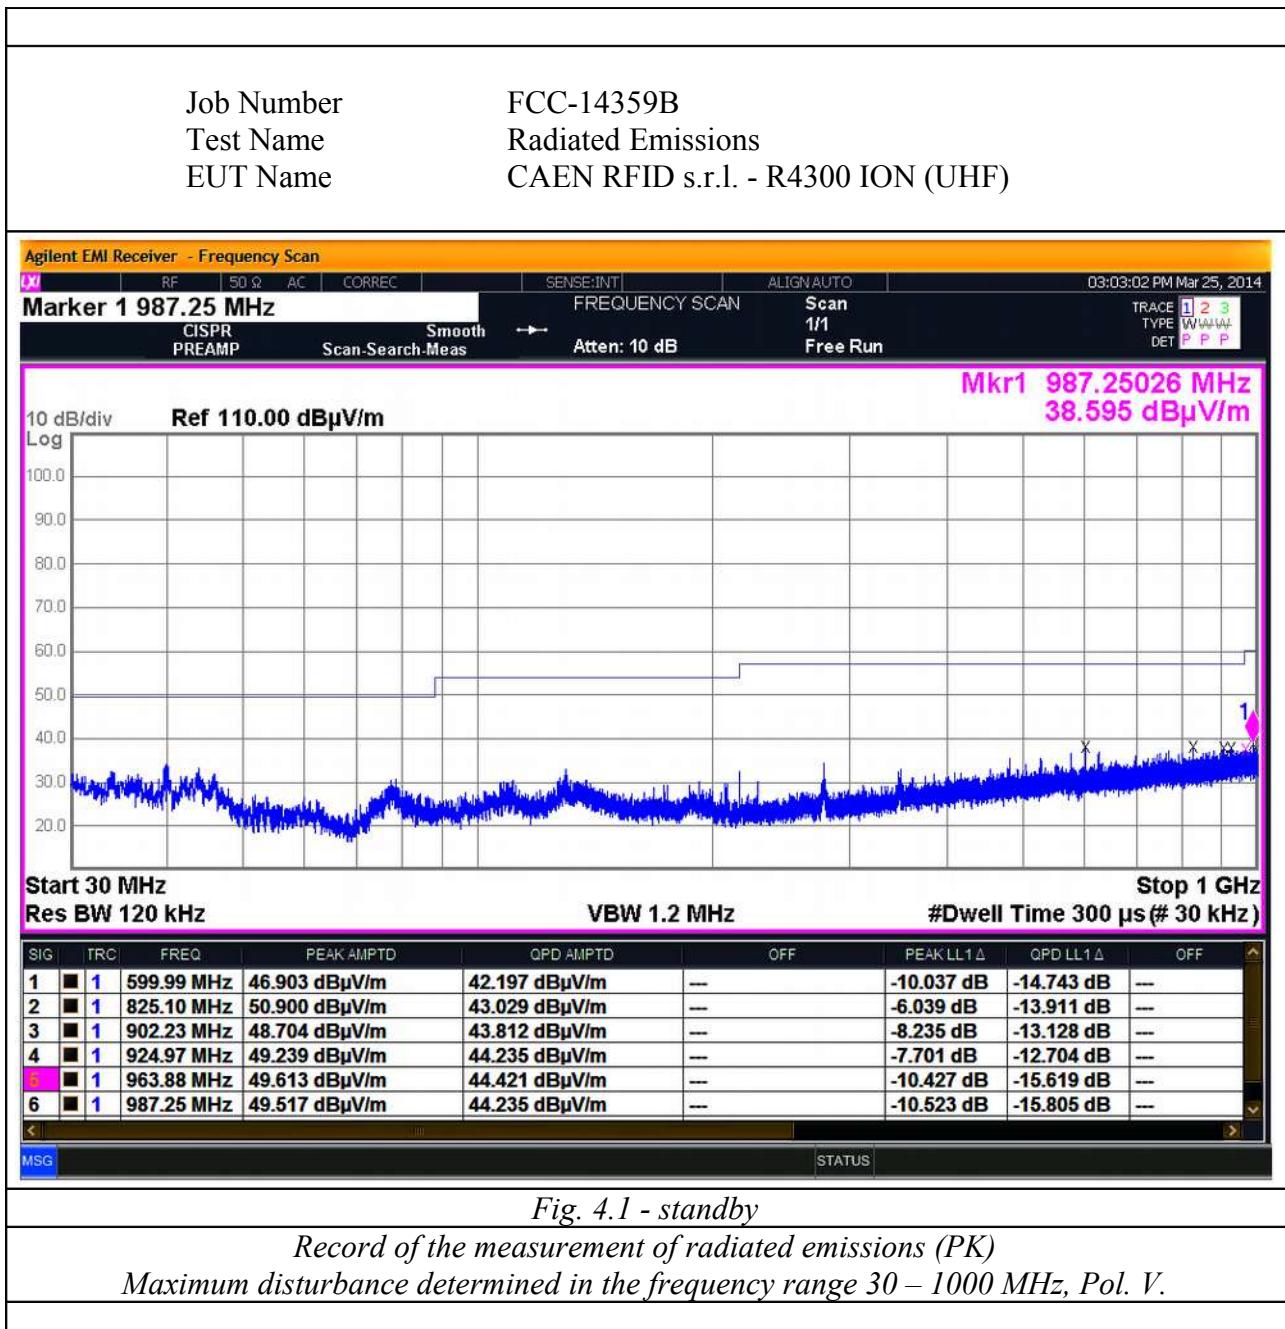

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.

Report n. FCC-14359B Rev. 00, page 9 / 21

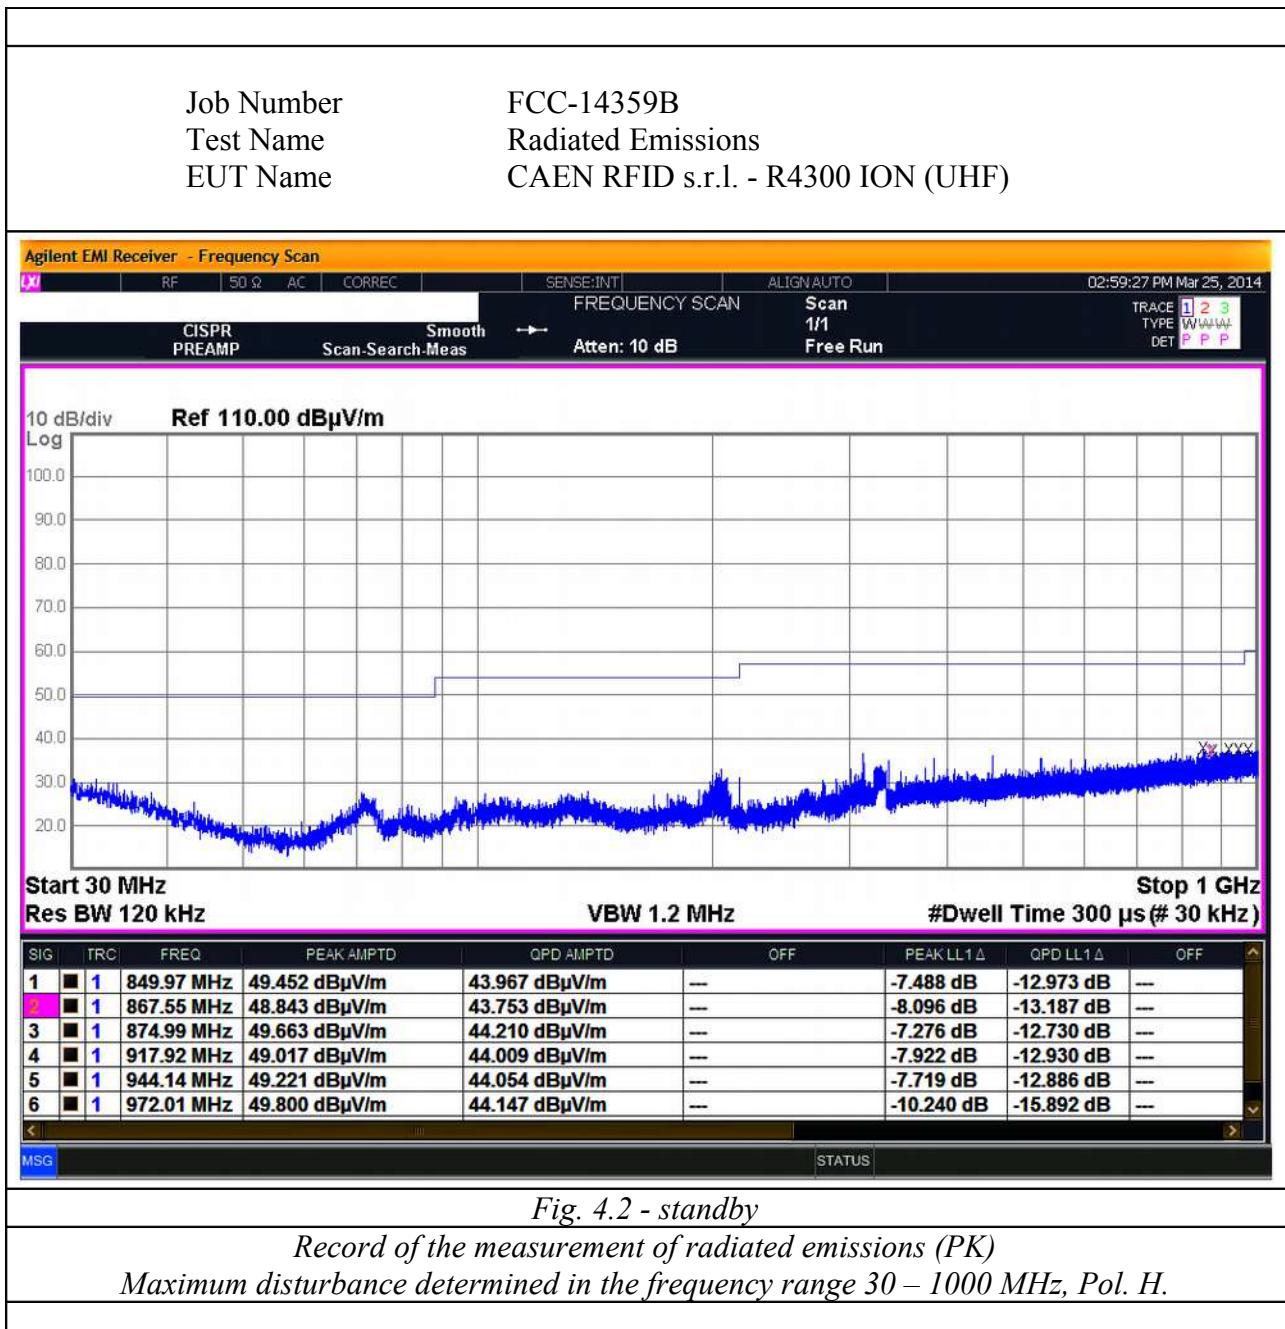

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-14359B Rev. 00, page 10 / 21

5. POWERLINE CONDUCTED EMISSIONS

Equipment shall meet the limits below when using a CISPR16 quasi-peak and average detector receivers.

FCC, 15.107

FREQUENCY RANGE (MHz)	QUASI-PEAK LIMIT [dB (μV)]	AVERAGE LIMIT [dB (μV)]
0.15 ÷ 0.50	66 ÷ 56 ^(*)	56 ÷ 46 ^(*)
0.50 ÷ 5	56	46
5 ÷ 30	60	50

^(*) Limit decreasing linearly with logarithm of frequency

Test Equipment

EQUIPMENT	MANUFACTURER	MODEL	CAL. DUE
EMI Receiver	HP	HP8546A	
EMI Receiver Filter Section	HP	HP85460A	
Screened Room	GSD	CSC01	
Transient Limiter	HP	11947A	01/2015
LISN	GSD	GSDA01	01/2015

Test procedure: CE22R01

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a spectrum analyzer by a transient limiter. The conducted emissions from 150 kHz to 30 MHz were monitored and compared to the specification limits

Test method


Test method was in accordance with the reference standard.

EUT modes of operations were tested in order to achieve the maximum level of emission.

Results


Equipment complied with the test specification limits.

Graphics in following figures show some registrations of the frequency spectrum of the conducted emissions.

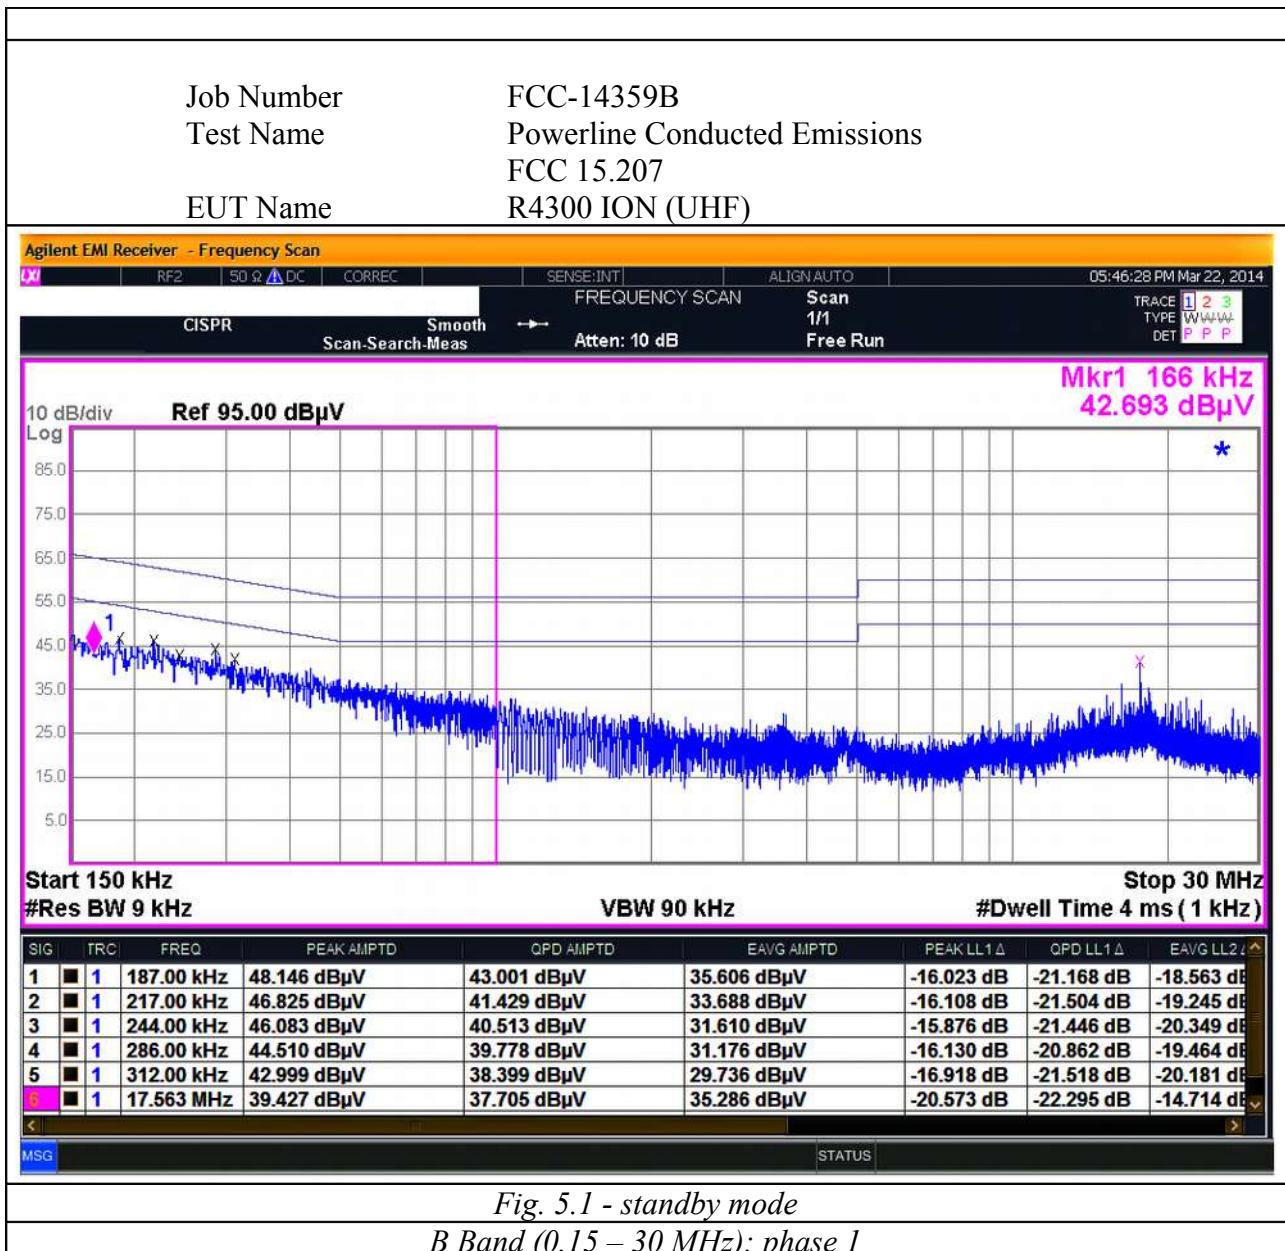


This document may be only fully reproduced.


Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-14359B Rev. 00, page 12 / 21

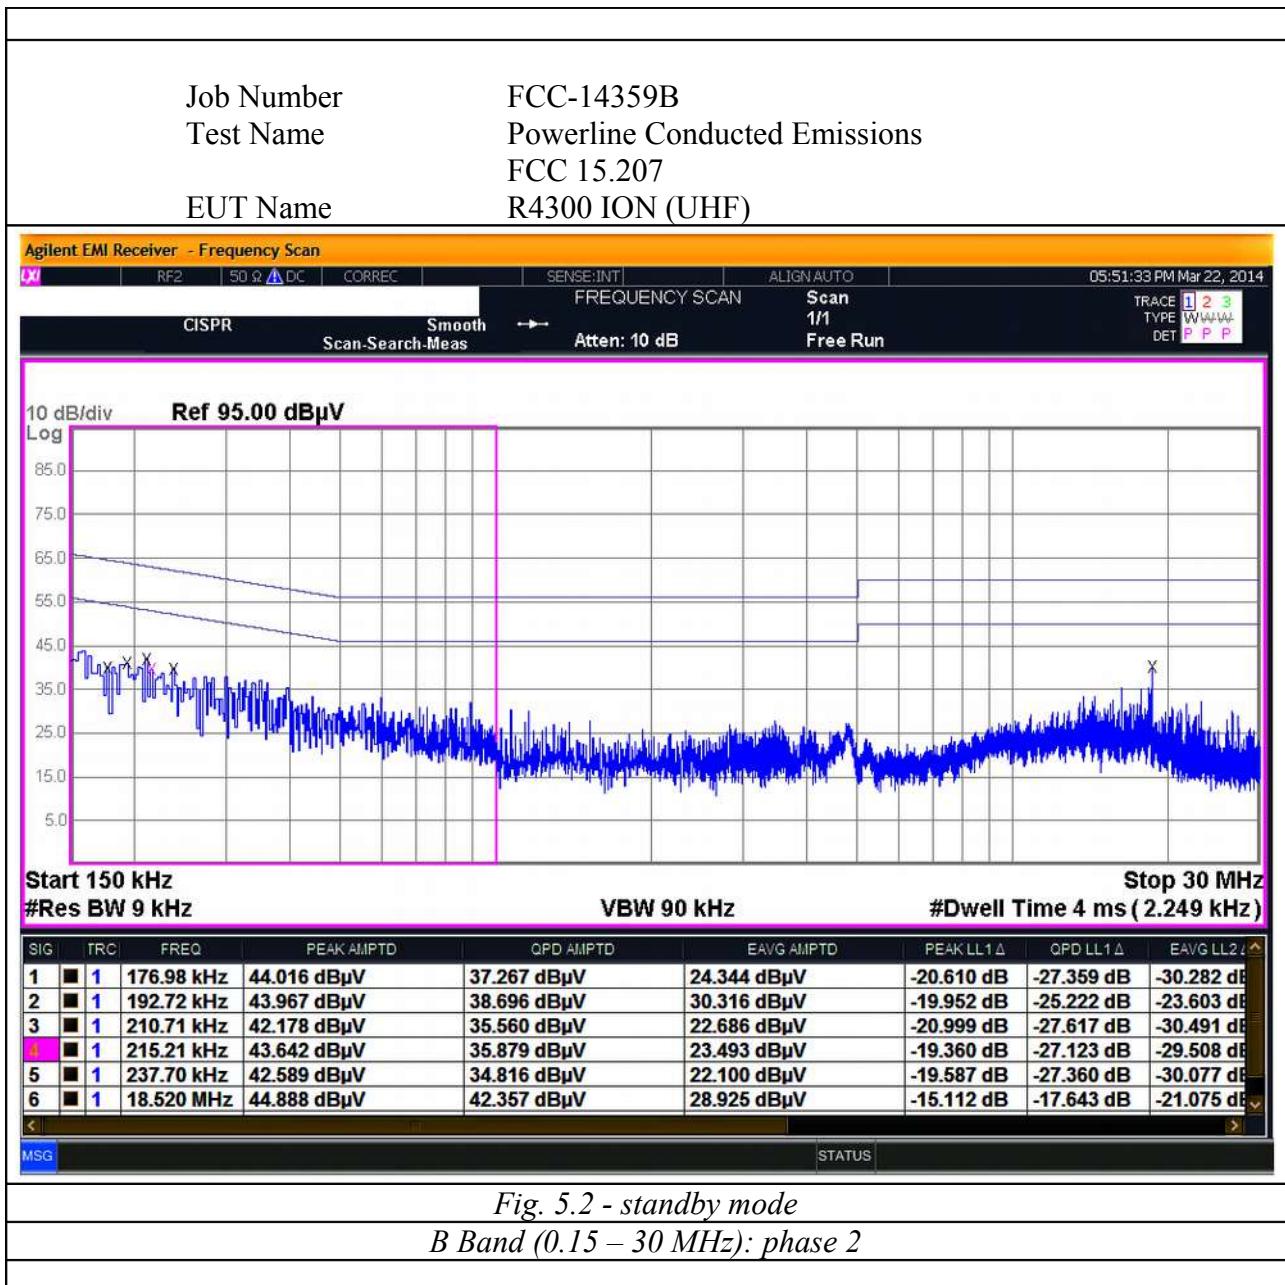

This document may be only fully reproduced.


Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-14359B Rev. 00, page 13 / 21

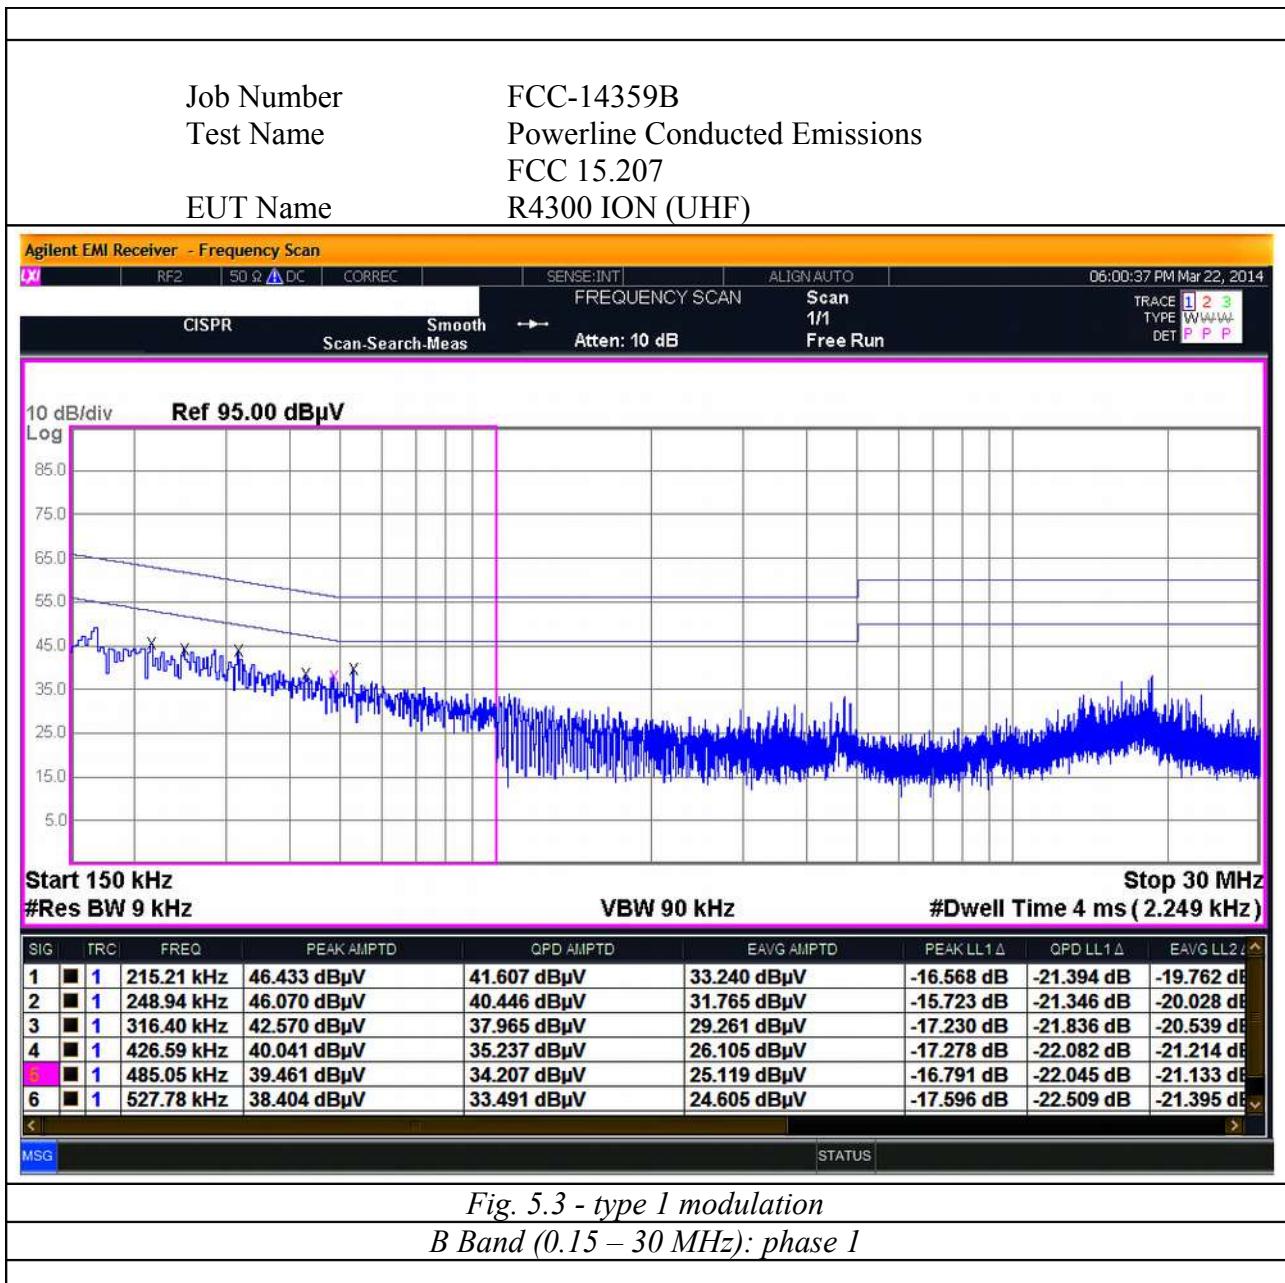

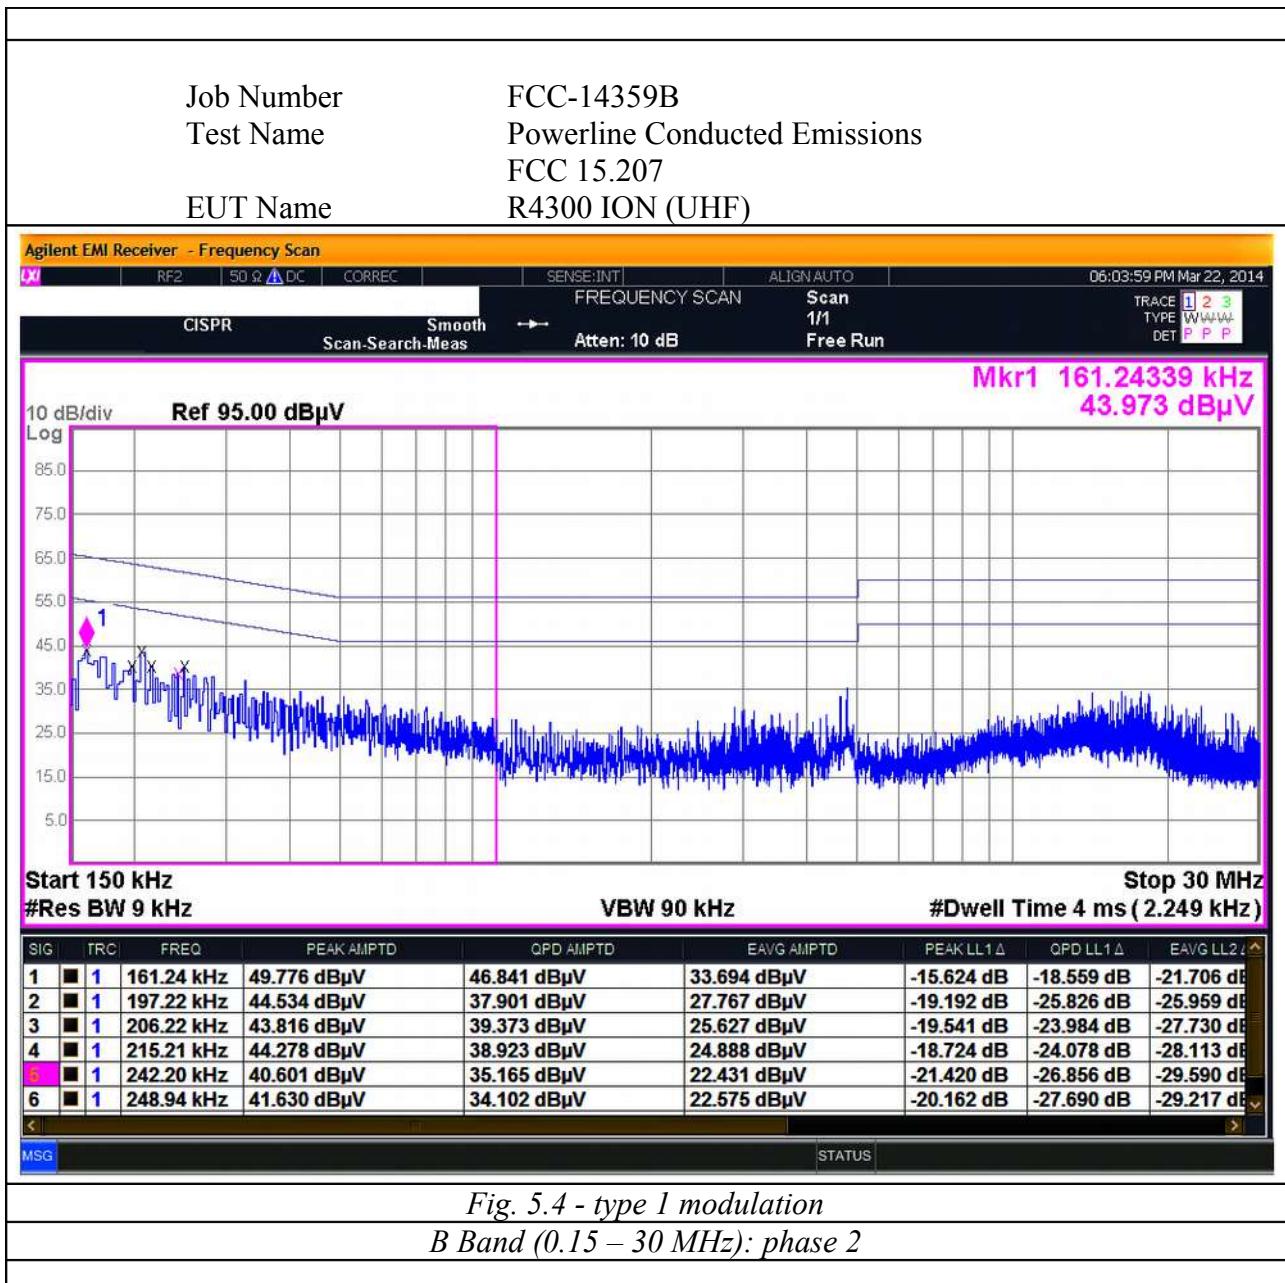


This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-14359B Rev. 00, page 15 / 21

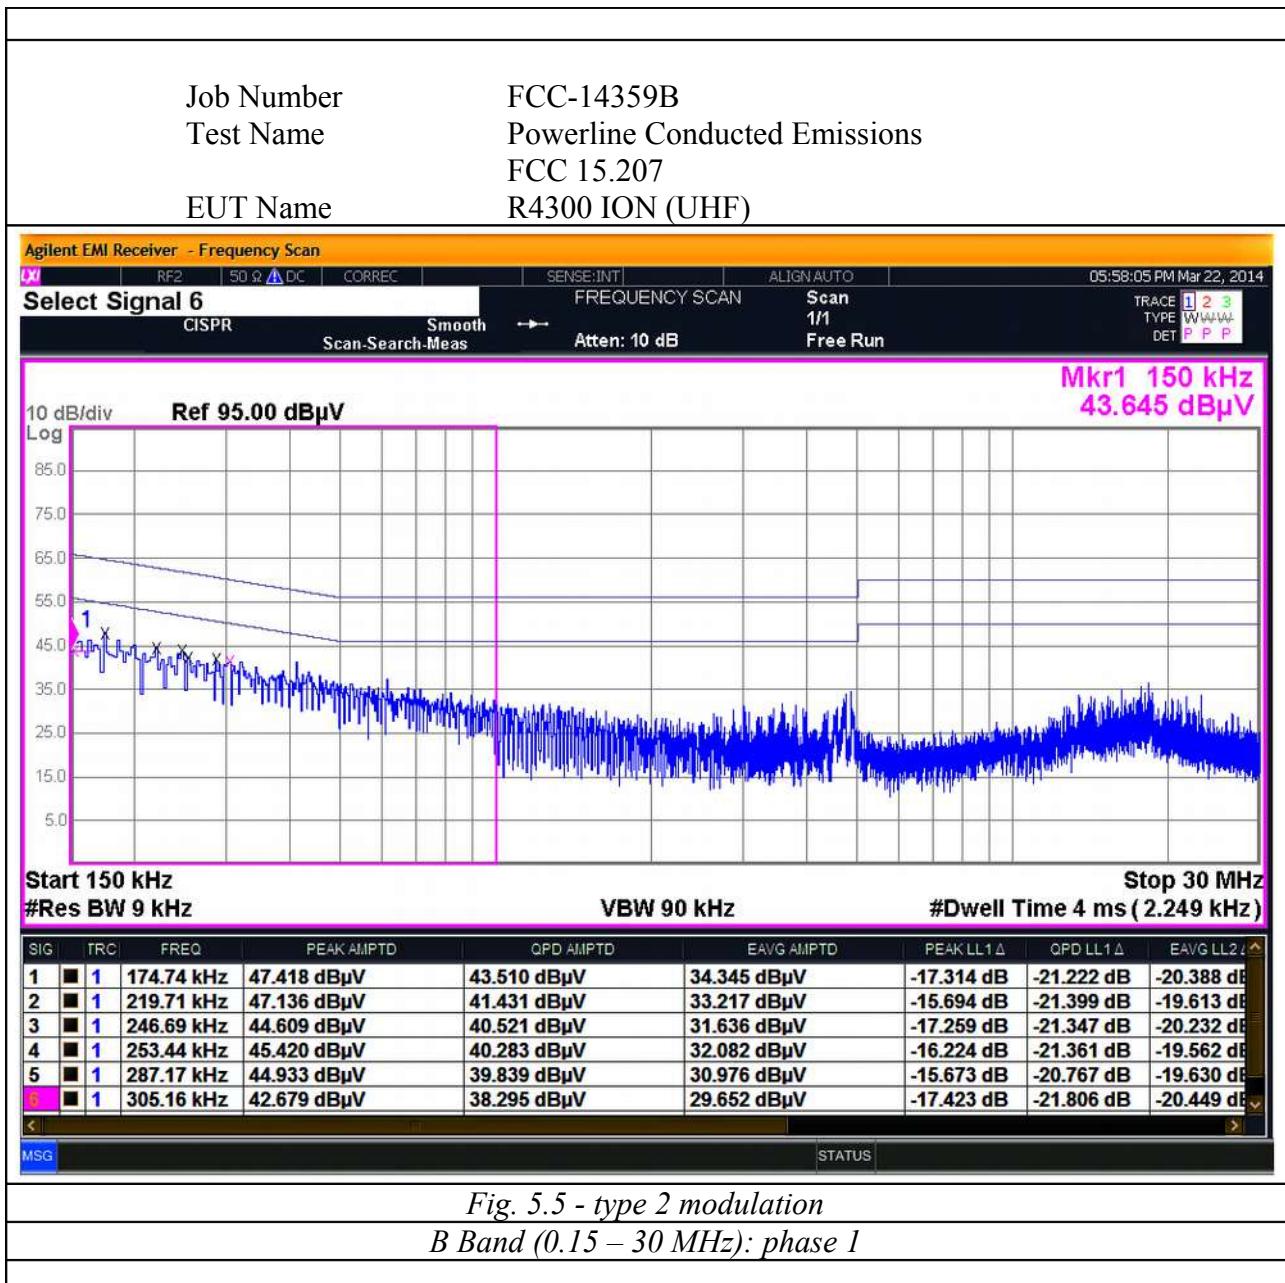


This document may be only fully reproduced.


Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-14359B Rev. 00, page 16 / 21

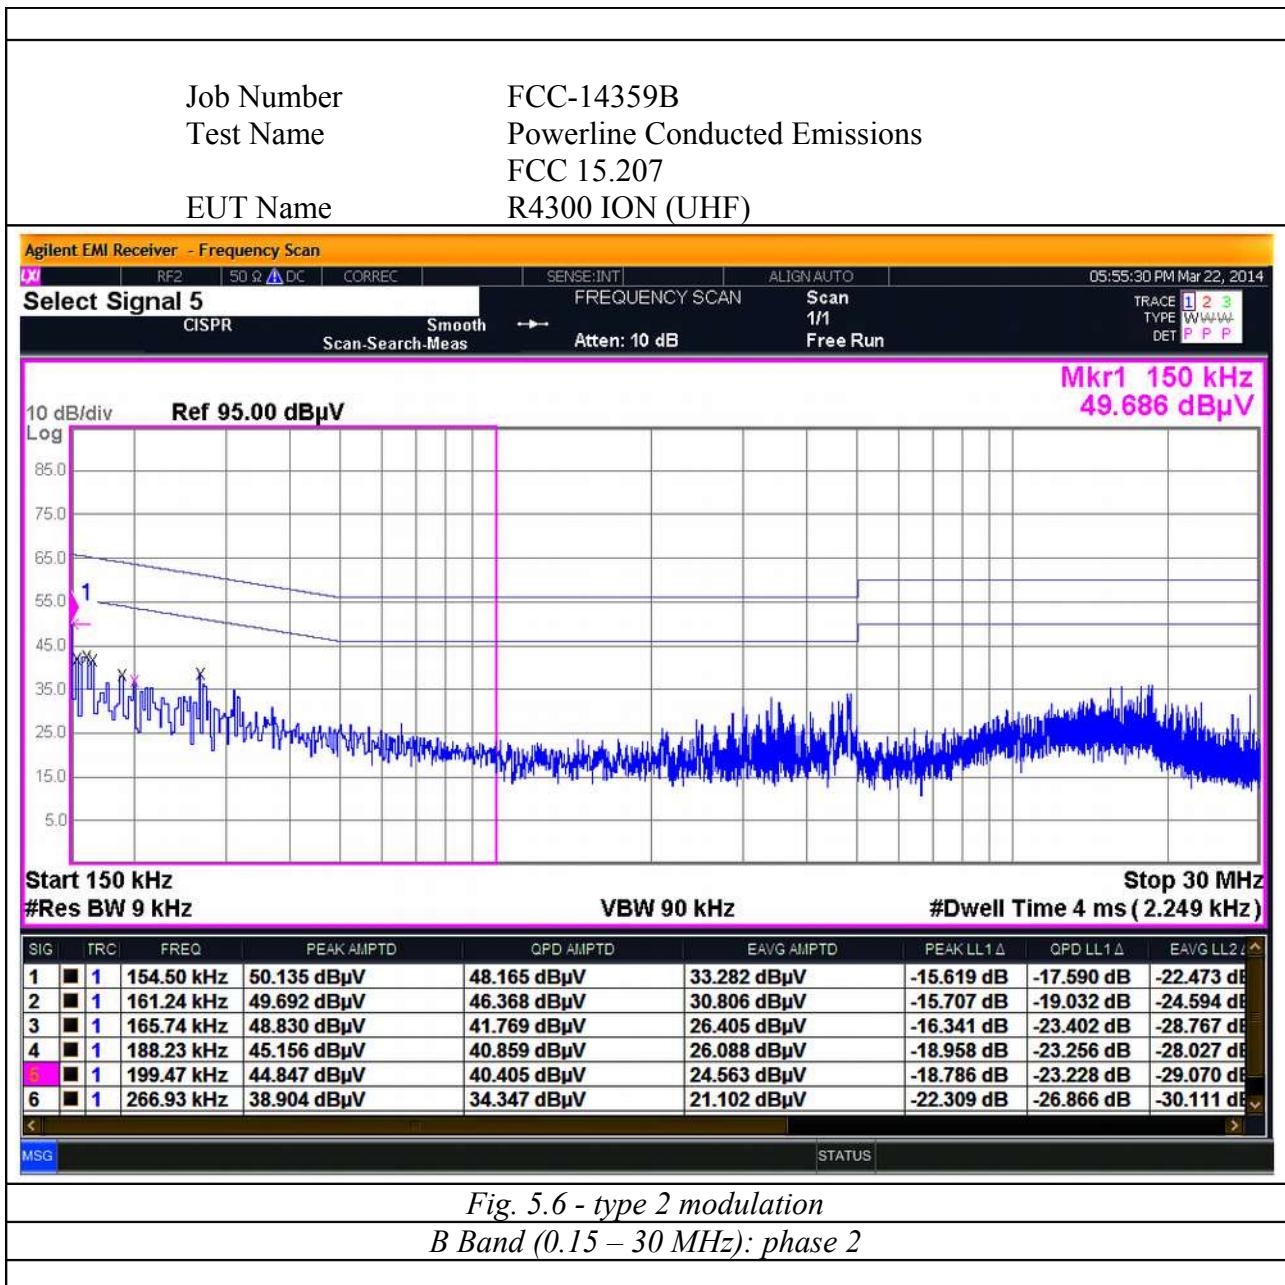


This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-14359B Rev. 00, page 17 / 21

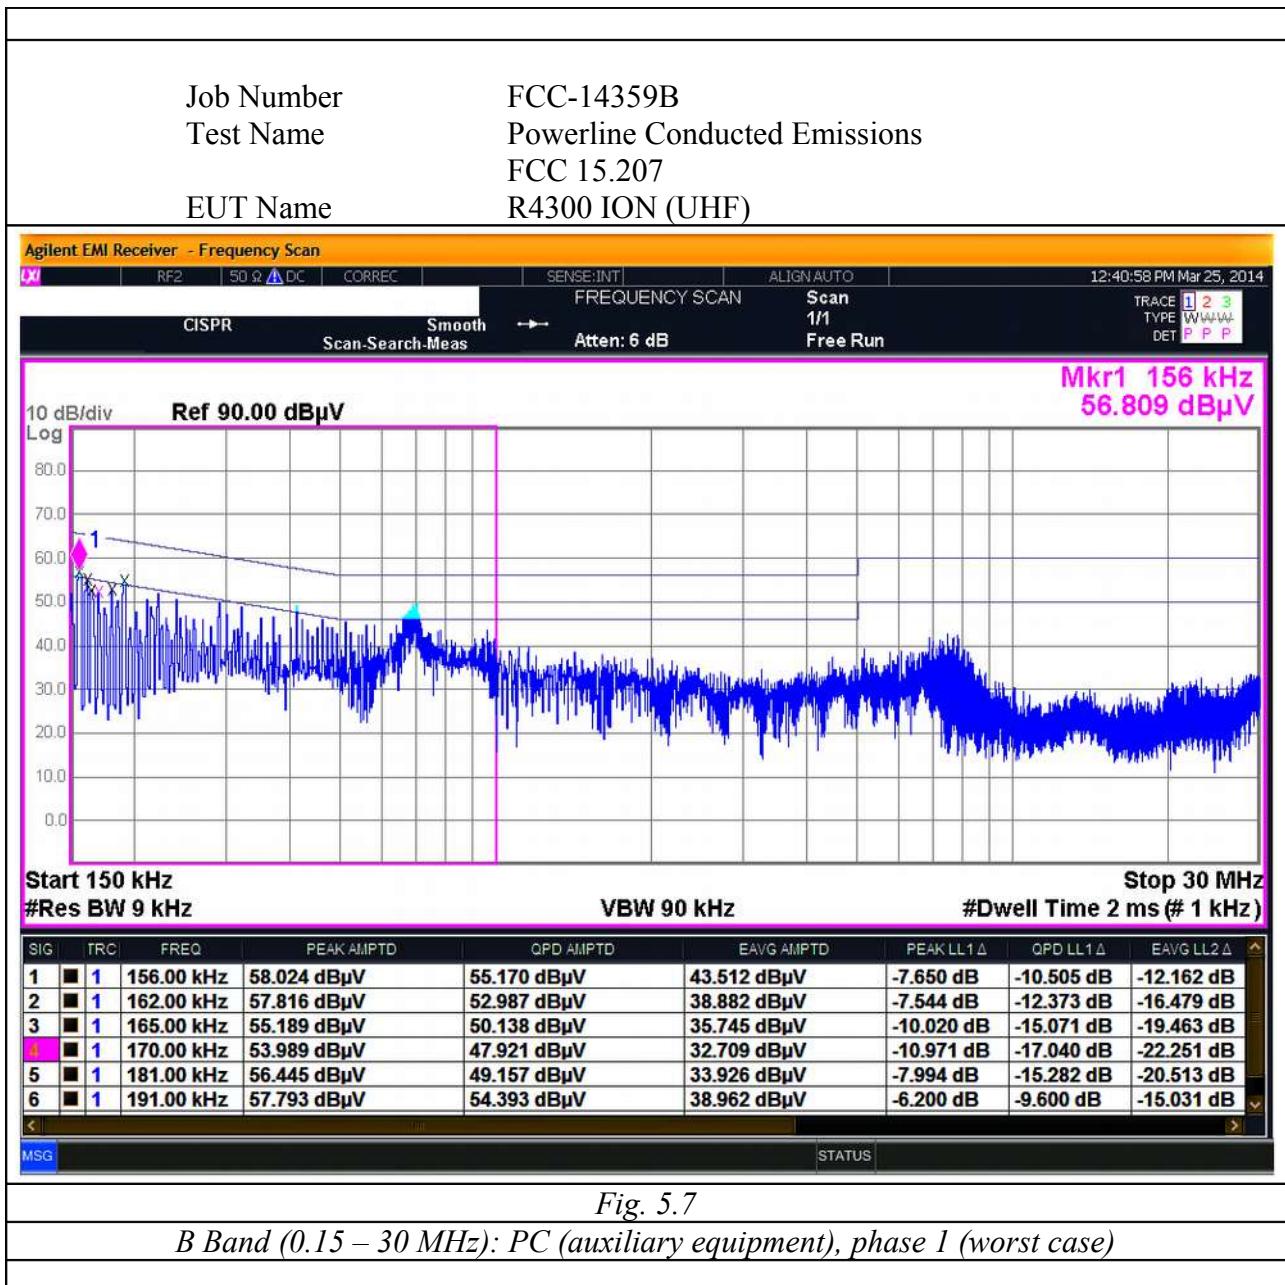

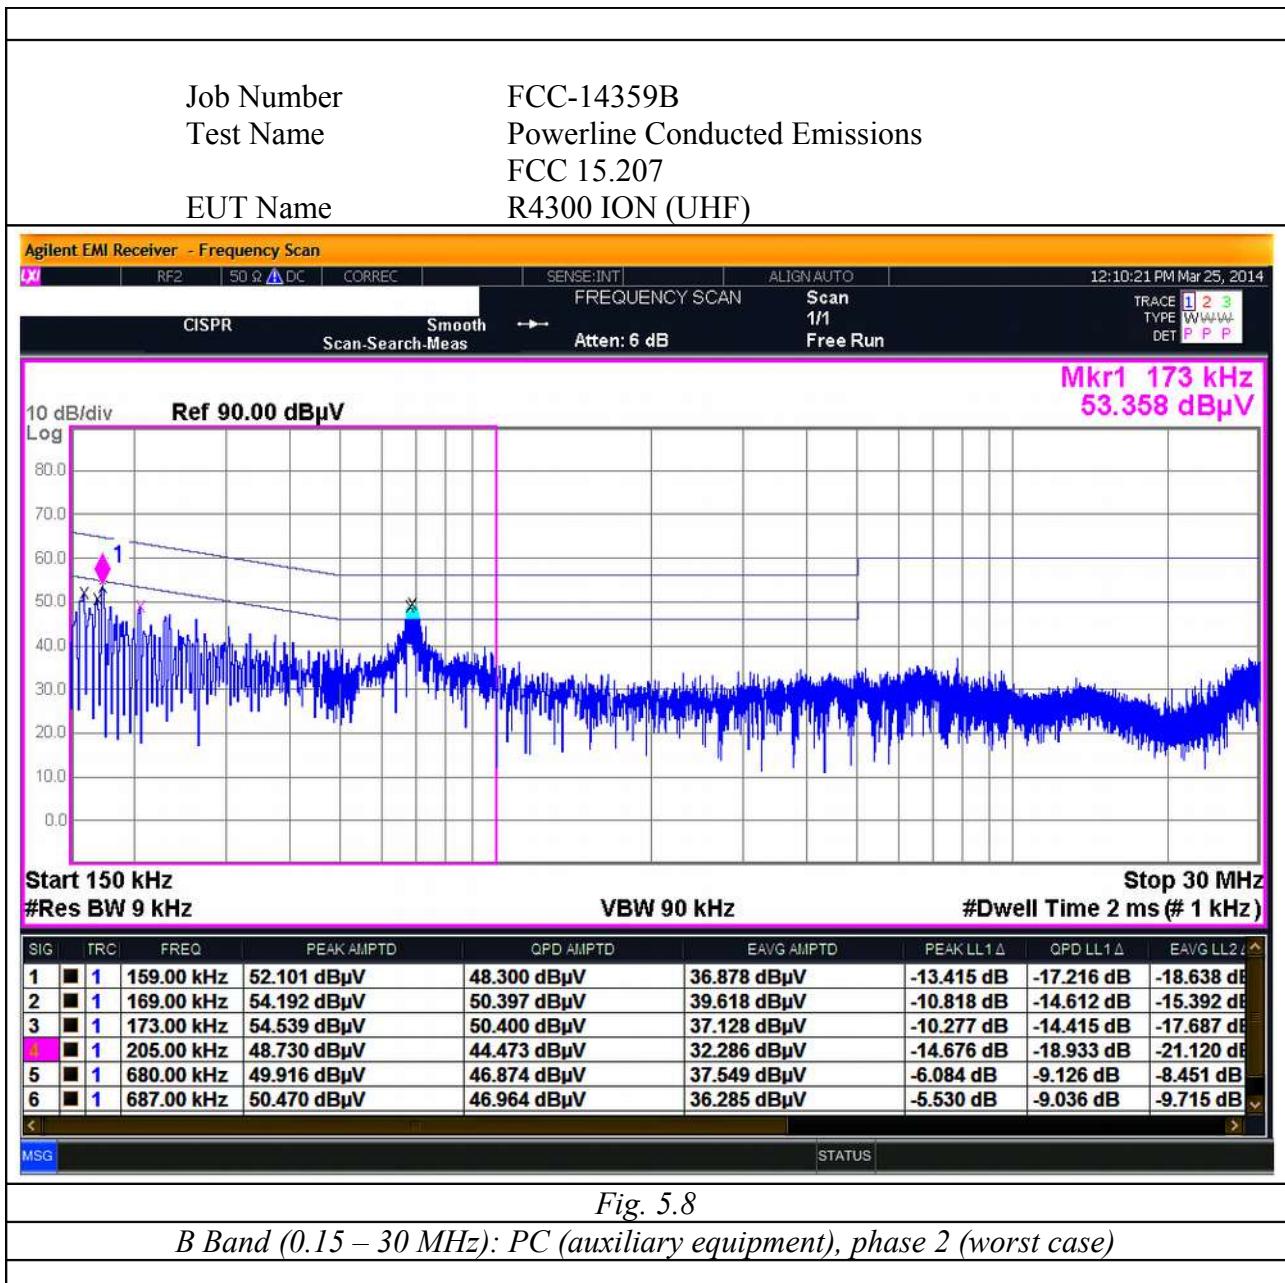

6. PHOTO

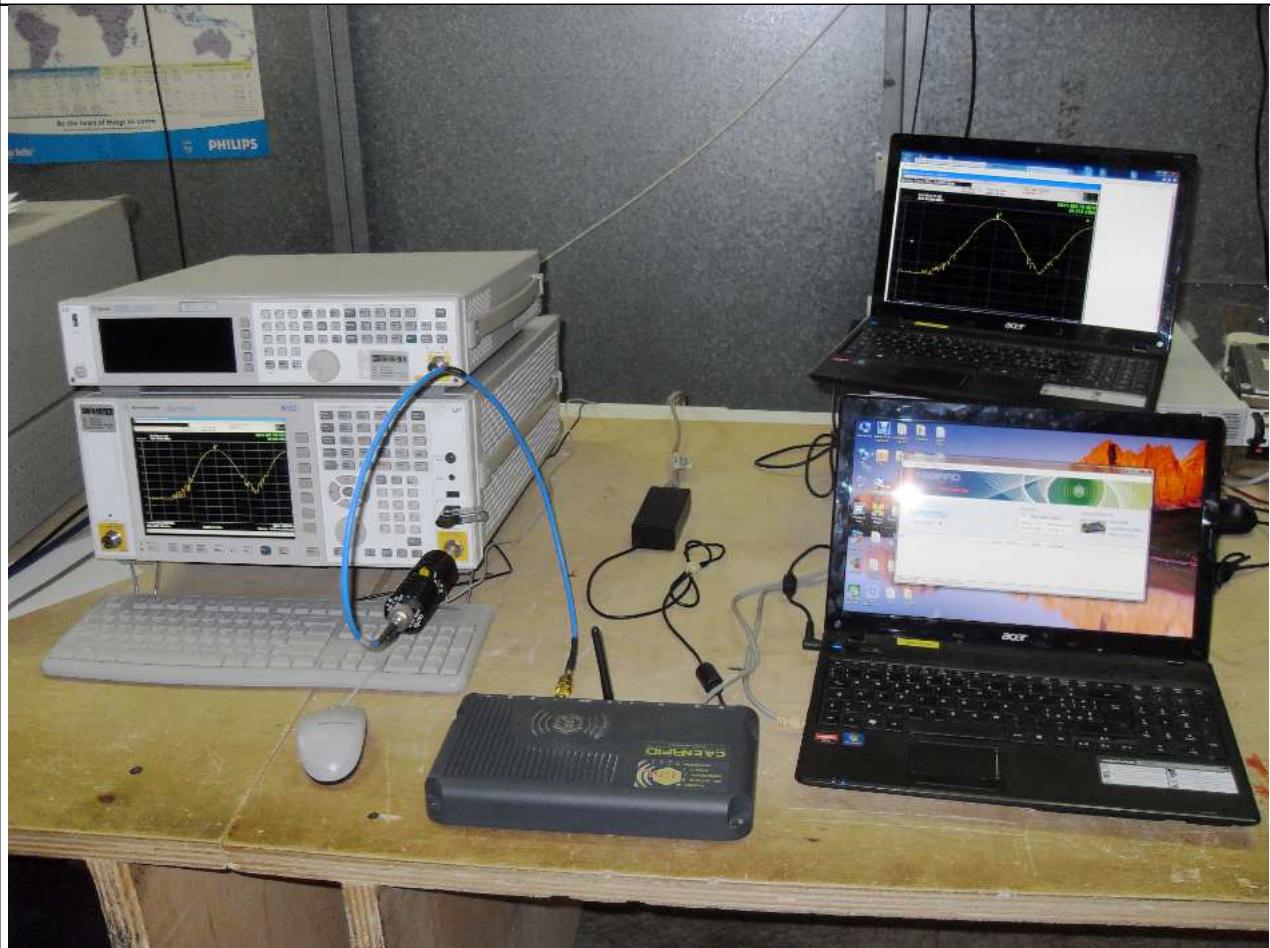

*Fig. 6.1
Conducted Emissions Test Set-up*



*Fig. 6.2
Radiated Emissions Test Set-up*