

TEST REPORT # EMCC-910036IBB, 2011-06-16

EQUIPMENT UNDER TEST:

Trade Name: RFID Reader Module EAST M21 with Antennas
Type Designation(s): MP02001 (M21) with antennas: MK07476 (EXP),
MK07487-00 (INSP), MK07491 (CO2), MK07891 (WAL)
Serial Number: 001666103 (M21), ASBE-0048 (EXP), ASBE-0048 (INSP),
ASBE-0024 (CO2), ASBE-0013 (WAL)
Equipment Class: Low Power Transceiver
Manufacturer: Dräger Medical GmbH
Address: Moislinger Allee 53-55
23558 Lübeck
Germany
Phone: +49 451 882 4684
Fax: +49 451 882 4351

RELEVANT STANDARD(S):

47 CFR 15.225, RSS-210 Issue 8,
limited tests performed, only

MEASUREMENT PROCEDURE:

RSS-Gen Issue 3 ANSI C63.4-2003 Other

TEST REPORT PREPARED BY:

Wolfgang Döring
EMCCons DR. RAŠEK GmbH & Co. KG
Moggast, Boelwiese 8
91320 Ebermannstadt
Germany
Phone: +49 9194 9016
Fax: +49 9194 8125
E-mail: w.doering@emcc.de

TEST PERSONNEL:



Wolfgang Döring

HEAD OF LABORATORY:



Reinhard Sauerschell

	Page
CONTENTS	
1 GENERAL INFORMATION	3
1.1 Purpose	3
1.2 Limits and Reservations	3
1.3 Test Location	3
1.4 Manufacturer	3
1.5 Dates and Test Location	4
1.6 Ordering Information	4
1.7 Climatic Conditions	4
2 Product Description	5
2.1 Equipment Under Test (EUT)	5
2.2 EUT Peripherals/Simulators	5
2.3 Mode of Operation During Testing	6
2.4 Modifications Required for Compliance	6
3 Test Results Summary	7
4 Antenna Requirement	8
4.1 Regulation	8
4.2 Result	8
5 Spectrum mask	9
5.1 Regulation	9
5.2 Test Equipment	10
5.3 Test Procedures	10
5.4 Test Results	10
5.5 Measurement Plots	10
6 Radiated Emissions 9 kHz – 30 MHz	19
6.1 Regulation	19
6.2 Test Equipment	20
6.3 Test Procedures	20
6.4 Calculation of Field Strength Limits	21
6.5 Field Strength Calculation	21
6.6 Test Results	22
6.7 Measurement Plots	22
7 Radiated Emissions 30 MHz – 1000 MHz	31
7.1 Regulation	31
7.2 Test Equipment	32
7.3 Test Procedures	32
7.4 Calculation of Field Strength Limits	33
7.5 Field Strength Calculation	33
7.6 Test Results	34
7.7 Pre-scan Plots	34
8 List of ANNEXES	43

1 GENERAL INFORMATION

1.1 Purpose

The purpose of this report is to show compliance to the FCC regulations for unlicensed devices operating under section 15.225 of the Code of Federal Regulations title 47.

Further the report addresses compliance with the Industry Canada RSS-210 requirements for the certification of licence-exempt (i.e. unlicensed) low-power radiocommunication devices (LPDs) defined as Category I equipment.

1.2 Limits and Reservations

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in this report. This test report shall not be reproduced except in full without the written permission of EMCCons DR. RAŠEK GmbH & Co. KG.

This test report substitutes Test Report # 910036IB, 2010-09-30.

1.3 Test Location

Test Laboratory:	EMCCons DR. RAŠEK GmbH & Co. KG
Accreditation No.:	D-PL-12067-01
Address of Labs I, II, III and Head Office:	EMCCons DR. RAŠEK GmbH & Co. KG Moggast, Boelwiese 8 91320 Ebermannstadt GERMANY
Address of Labs IV and V:	EMCCons DR. RAŠEK GmbH & Co. KG Stoernhofer Berg 15 91364 Unterleinleiter GERMANY
Laboratory:	Test Laboratory IV, The 3 m & 10 m semi-anechoic chamber site has been fully described in a report submitted to the FCC, and accepted under Registration Number 878769. This 3 m/10 m alternative test site is approved by Industry Canada under file number 3464C. +49 9194 9016 +49 9194 8125 emc.cons@emcc.de www.emcc.de
Phone:	+49 9194 9016
Fax:	+49 9194 8125
E-Mail:	emc.cons@emcc.de
Web:	www.emcc.de

1.4 Manufacturer

Company Name:	Dräger Medical GmbH
Street:	Moislinger Allee 53-55
City:	23558 Lübeck
Country:	Germany

Name for contact purposes:	Mr Markus Steeger
Phone:	+49 451 882-4684
Fax:	+49 451 882-4351
E-Mail:	markus.steeger@draeger.com

1.5 Dates and Test Location

Date of receipt of EUT: CW36/2010
Test date: CW36/2010
Test Location: Test Laboratory IV

1.6 Ordering Information

Purchase Order and Date: M61NB45339036, 2010-08-20
Vendor Number: 118562

1.7 Climatic Conditions

Date	Temperature [°C]	Relative Humidity [%]	Air Pressure [hPa]	Lab	Customer attended tests
2010-09-06	20	49	976	IV	yes *
2010-09-07	19	54	966	IV	no
2010-09-08	20	53	962	IV	no
2010-09-09	21	52	970	IV	no

* Mr. Markus Steeger from Dräger Medical partly attended tests.

2 PRODUCT DESCRIPTION

2.1 Equipment Under Test (EUT)

Trade Name:	RFID Reader Module EAST M21 with Antennas
Type Designation(s):	MP02001 (RFID Reader M21); MK07476 (Antenna EXP); MK07487-00 (Antenna INSP); MK07491 (Antenna CO2); MK07891 (Antenna WAL).
Serial Number(s):	001666103 (RFID Reader M21); ASBE-0048 (Antenna EXP); ASBE-0048 (Antenna INSP); ASBE-0024 (Antenna CO2); ASBE-0013 (Antenna WAL).
FCC ID:	UVFEASTM21
Industry Canada Certification Number:	IC: 5895C-M21
Application:	Low Power Transceiver
Transmit Frequency:	13.56 MHz
Modulation:	ASK
Emission designator:	10K0A1D
Antenna:	detachable, see above
Power supply:	24 VDC
Ports, RFID Reader M21:	Signal and supply - 5 pin connector Antenna ports A1 ... A8 – 8 U.FL series miniaturized SMD coaxial connectors (sockets, male); during test antenna port A1 used, only
Ports, Antennas:	U.FL series miniaturized SMD coaxial connector (socket, male), fitted with U.FL series miniaturized coaxial connector cable (f-f)
Variants:	none
Remarks:	none

2.2 EUT Peripherals/Simulators

The EUT was tested connected with

- Laptop personal computer (Toshiba) as RS-232 controller for the M21 reader,
- TTL Converter,
- Transponder (Infineon),
- standard laboratory DC power supply.



Peripheral/Simulator: Laptop PC,
labelling



Peripheral/Simulator: TTL Converter



Transponder (Tag), fixed on Styrofoam


2.3 Mode of Operation During Testing

The equipment under test (EUT) was operated during the tests under the following conditions:


- a) normal operating mode (INVENTORY mode w/ and w/o tag),
- b) CW mode.

All modes were set via RS-232 from the PC using test software "M21_Tester_3_Test03.07.09" for mode a) and "OBID ISOstart V06.06.00" for mode b) supplied by the applicant.


During all tests one single antenna was connected to antenna port A1. The EUT was powered with 24 VDC from by a standard laboratory DC supply. All peripherals/simulators were operated outside of the test environment, with the exception of the transponder.

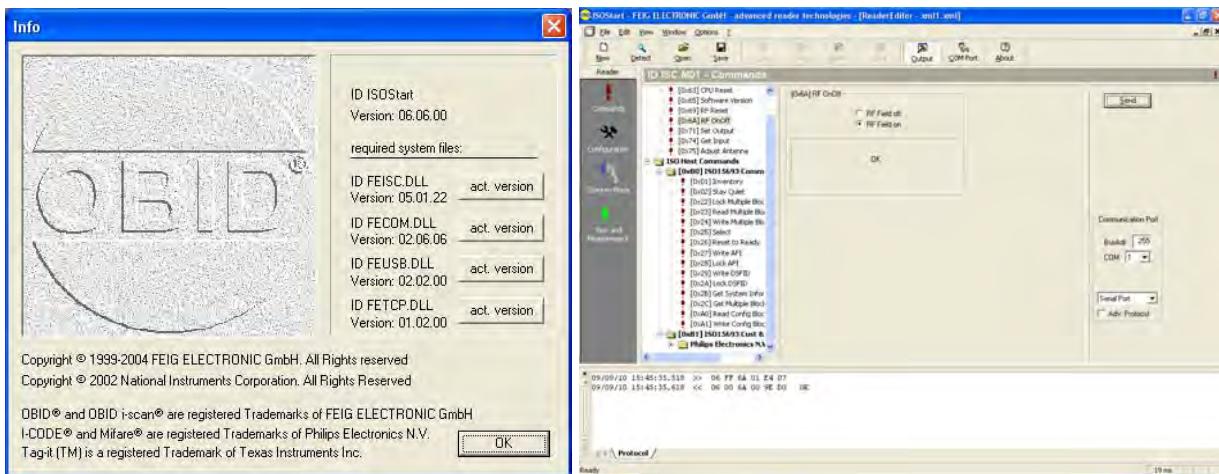


Screenshot: Software OBID ISOstart V06.06.00 with CW mode setting

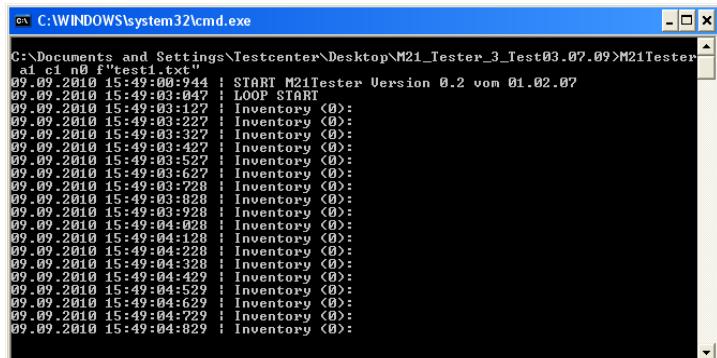


Screenshot: start-n0-inventory.bat – w/o tag

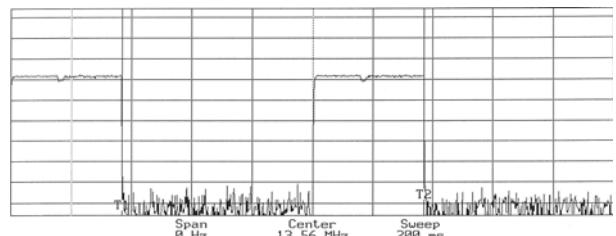

Plot: timing inventory w/o tag

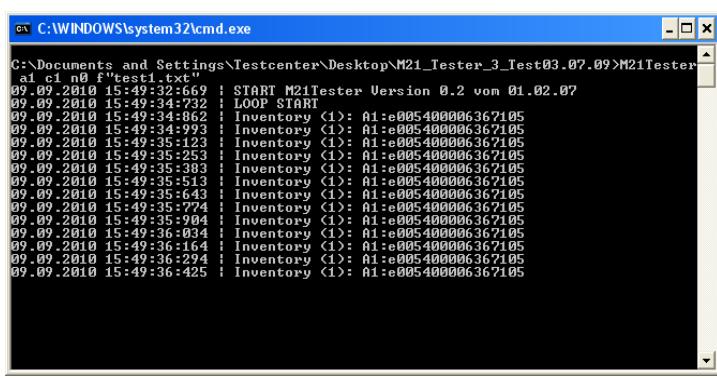

Screenshot: start-n0-inventory.bat – w/ tag

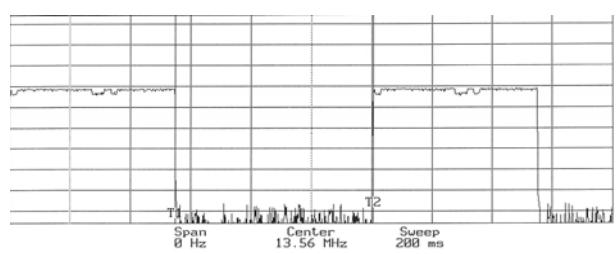

Plot: timing inventory w/ tag

2.4 Modifications Required for Compliance

None.

3 TEST RESULTS SUMMARY

Summary of Test Results for the following EUT:

Manufacturer: Dräger Medical GmbH

Device: RFID Reader Module EAST M21 with Antennas

Type(s): MP02001 (RFID Reader M21); MK07476 (Antenna EXP); MK07487-00 (Antenna INSP); MK07491 (Antenna CO2); MK07891 (Antenna WAL).

Serial No(s): 001666103 (RFID Reader M21); ASBE-0048 (Antenna EXP); ASBE-0048 (Antenna INSP); ASBE-0024 (Antenna CO2); ASBE-0013 (Antenna WAL)

Requirement	RSS, Section	47 CFR Section	Report Section	Result
Antenna Requirement	RSS-Gen, 7.1.2	15.203	4	Pass
Occupied Bandwidth (99%)	RSS-Gen, 4.6.1	2.202(a)	-	N.T.
Bandwidth of Emission (20 dB)	-	15.215(c)	-	N.T.
Class of Emission / Designation of Emissions	RSS-Gen, 4.3(a)(iv)	2.201, 2.202	-	N.T.
Conducted AC Powerline Emissions 150 kHz – 30 MHz	RSS-Gen, 7.2.4	15.207	-	N.T.
Spectrum Mask	RSS-210, A2.6	15.225(a)-(d)	5	Pass
Radiated Emissions 9 kHz – 30 MHz	RSS-210, A2.6 RSS-Gen, 7.2.2(b)(c), 7.2.5	15.205, 15.209, 15.225(d)	6	Pass
Radiated Emissions 30 MHz – 1 GHz	RSS-210, A2.6 RSS-Gen, 7.2.2(b)(c), 7.2.5	15.205, 15.209, 15.225(d)	7	Pass
Carrier Frequency Stability	RSS-210, A2.6 RSS-Gen, 4.7, 7.2.6	15.225(e)	-	N.T.
Radio frequency exposure	RSS-102 Issue 3		-	N.T.

N.A. – not applicable; N.T. – Not tested acc. to applicant's order.

The client has made the determination that EUT Condition, Characterization, and Mode of Operation are representative of production units, and meet the requirements of the specifications referenced herein. Consistent with Industry practice, measurement and test equipment not directly involved in obtaining measurement results but having an impact on measurements (such as cable loss, antenna factors, etc.) are factored into the "Correction Factor" documented in certain test results. Instrumentation employed for testing meets tolerances consistent with known Industry Standards and Regulations.

The measurements contained in this report were made in accordance with the procedures described in RSS-Gen Issue 3 and ANSI C63.4-2003.

All requirements were found to be within the limits outlined in this report.

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in this report.

Test Personnel: Wolfgang Döring

Issuance Date: 2011-06-16

4 ANTENNA REQUIREMENT

Test Requirement: 47 CFR 15.203, RSS-Gen

4.1 Regulation

FCC 15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site.

However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

RSS-Gen: 7.1.2 Transmitter Antenna

A transmitter can only be sold or operated with antennas with which it was approved. Transmitter may be approved with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest gain antenna of each combination of transmitter and antenna type for which approval is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type having equal or lesser gain as an antenna that had been successfully tested with the transmitter, will also be considered approved with the transmitter, and may be used and marketed with the transmitter. For Category I transmitters, the manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter. [...]

User Manual for Transmitters with Detachable Antennas

The user manual of transmitter devices equipped with detachable antennas shall contain the following information in a conspicuous location:

This radio transmitter (identify the device by certification number, or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated.

Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above statement, the manufacturer shall provide a list of all antennas acceptable for use with the transmitter. Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dB) and required impedance for each.

No antenna requirement specified in **RSS-210**.

4.2 Result

Device: RFID Reader Module EAST M21 with Antennas
Type: MP02001 with MK07476, MK07487-00, MK07491, MK07891
Serial number: 001666103, ASBE-0048, ASBE-0048, ASBE-0024, ASBE-0013

Antenna connectors are commercial available U.FL series miniaturized SMD coaxial connectors. The equipment however requires professional installation.

The EUT meets the requirements of this section.

5 SPECTRUM MASK

Test Requirement: FCC 47 CFR, Section 15.225(a)-(d); IC RSS-210 A2.6

Test Procedure: ANSI C63.4-2003, RSS-Gen

5.1 Regulation

FCC § 15.225 Operation within the band 13.110–14.010 MHz.

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

FCC § 15.31 Measurement standards

- (f) To the extent practicable, the device under test shall be measured at the distance specified in the appropriate rule section. The distance specified corresponds to the horizontal distance between the measurement antenna and the closest point of the equipment under test, support equipment or interconnecting cables as determined by the boundary defined by an imaginary straight line periphery describing a simple geometric configuration enclosing the system containing the equipment under test. The equipment under test, support equipment and any interconnecting cables shall be included within this boundary.
- (2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

IC RSS-210 A2.6 13.110-14.010 MHz

The field strength of any emission shall not exceed the following limits:

- (a) 15.848 millivolts/m (84 dB μ V/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dB μ V/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710MHz.
- (c) 106 microvolts/m (40.5 dB μ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010MHz.
- (d) 30 microvolts/m (29.5 dB μ V/m) at 30 m, outside the band 13.110-14.010 MHz.

→ The IC limits are equal to the FCC limits.

IC RSS-Gen 7.2.7 Measurement Distance

For the field strength limits specified in this document, the following conditions apply:

- (b) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in this standard. However, an attempt should be made to avoid taking measurements in the near field. Pending the development of an appropriate procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either taking measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor, or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

The extrapolation method used shall be described in the test report.

5.2 Test Equipment

Type	Manufacturer/ Model No.	EMCC Ident No.	Last Calibration	Next Calibration
Antenna (9 kHz – 30 MHz)	Rohde & Schwarz HFH-Z2	374	2008-09	2010-09
Receiver (9 kHz - 1 GHz)	Rohde & Schwarz ESS	303	2009-06	2010-12

5.3 Test Procedures

Spectrum mask was measured as magnetic field radiated emissions measurement with a reduced test distance of 3m. For details on set-up and H field measurement procedure refer to chapter 6.3 of this report.

EUT was operated in modulated mode. Test performed with EUT and test antenna orientated for maximum reading. Test performed separately for each external antenna twice: with and without transponder (tag). Test plots show fieldstrength at a distance of 3m with a limit adjustment based on the inverse linear distance extrapolation factor (40 dB/decade), i.e. the limit for 3m distance is increased by 40 dB (correction factor = $40 \log(D_{spec}/D_{test}) = 40 \log(30/3) = 40$ [dB]).

Otherwise the corrected field strength result for the specified 30 m distance could be obtained applying the a correction factor of -40 dB to the 3m result ($DF = 40 \log(D_{test}/D_{spec}) = 40 \log(3/30) = -40$ [dB]).

5.4 Test Results

EUT_Antenna	Frequency [MHz]	Detector	3m_Result [dB(µV/m)]	DistanceCorrection [dB]	30m_Result [dB(µV/m)]	30m_Limit [dB(µV/m)]	Margin [dB]
MK07476			70.9		30.9		53.1
MK07487-00			70.6		30.6		53.4
MK07491			68.1		28.1		55.9
MK07891			69.2		29.1		54.9

Sample calculation:

The tests performed at a reduced test distance of 3m instead of the Specified Distance of 30 m giving a Distance Extrapolation Factor of $DF = 40 \log(3m/30m) = -40$ [dB].

Assuming a measured field strength level of 68.1 dB μ V/m is obtained. The Distance Factor of -40 dB is added, giving a field strength of 28.1 dB μ V/m. The 28.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

Level in μ V/m = Common Antilogarithm ($28.1/20 = 25.41$)

Device: RFID Reader Module EAST M21 with Antennas
Type: MP02001 with MK07476, MK07487-00, MK07491, MK07891
Serial number: 001666103, ASBE-0048, ASBE-0048, ASBE-0024, ASBE-0013
All emissions in the range 13 MHz to 14.12 MHz are below the specified limits.

The EUT meets the requirements of this section.

5.5 Measurement Plots

refer to the following pages.

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

09. Sep 10 10:26

Spectrum Mask H Field in SAR, d=3m


EUT: M21 w/ MK07476
Manuf: Draeger
Op Cond: w/o tag, n0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: max position: II

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
13M	14.12M	2k	10k	PK	100ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

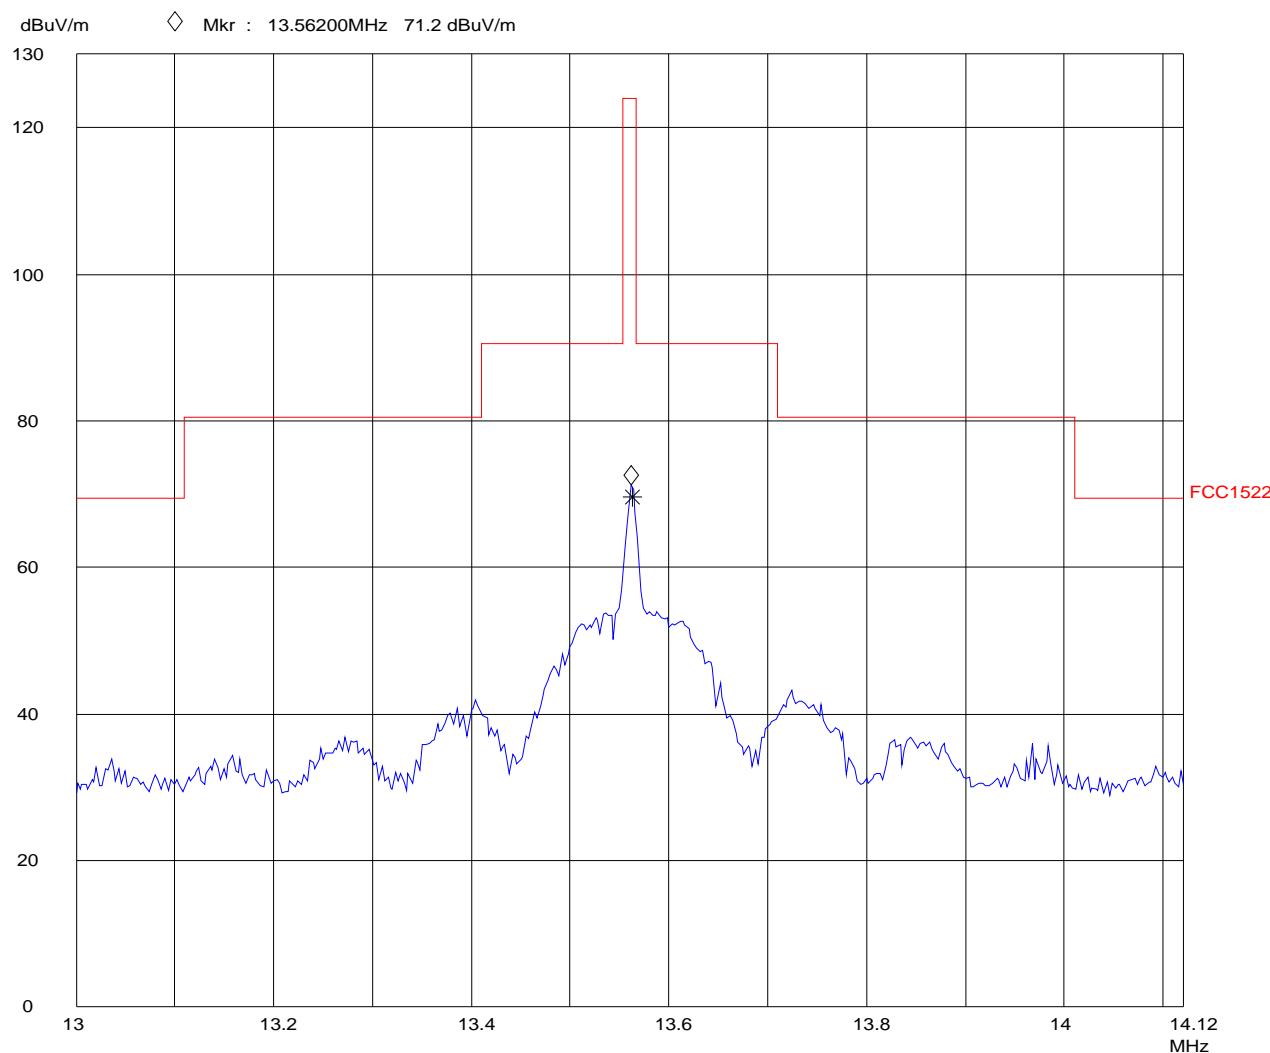

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8


EMCCons DR. RASEK
Spectrum Mask H Field in SAR, d=3m

09. Sep 10 10:32

EUT: M21 w/ MK07476
Manuf: Draeger
Op Cond: w/ tag, n0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: max position: II

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
13M 14.12M 2k 10k PK 100ms AUTO LD OFF 30dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

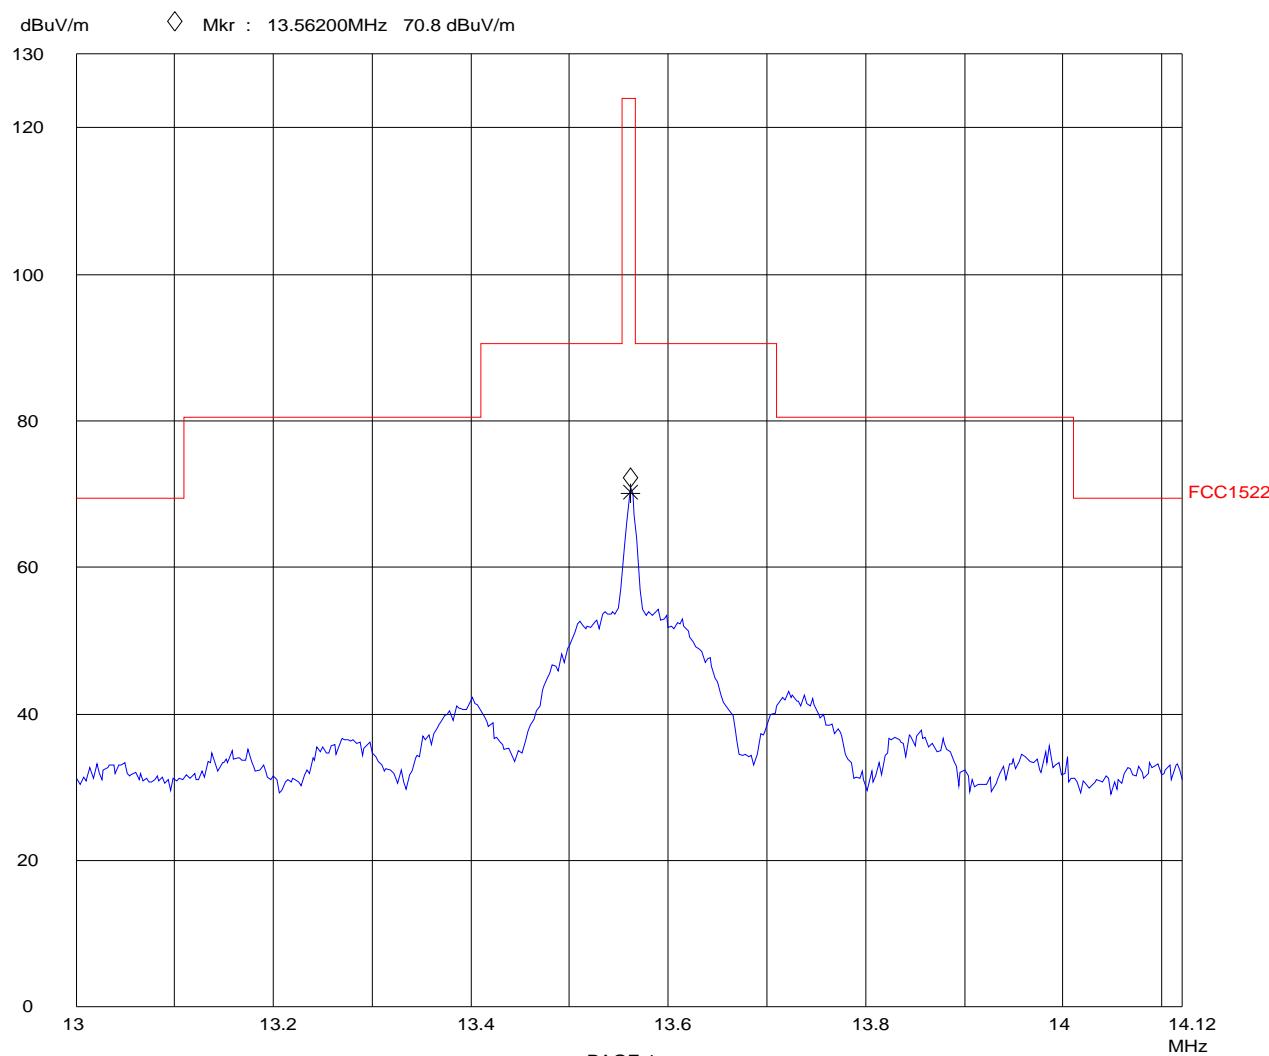

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

08. Sep 10 17:25

Spectrum Mask H Field in SAR, d=3m


EUT: M21 w/ MK07487
Manuf: Draeger
Op Cond: w/o tag, b0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: max position: II

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
13M	14.12M	2k	10k	PK	100ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

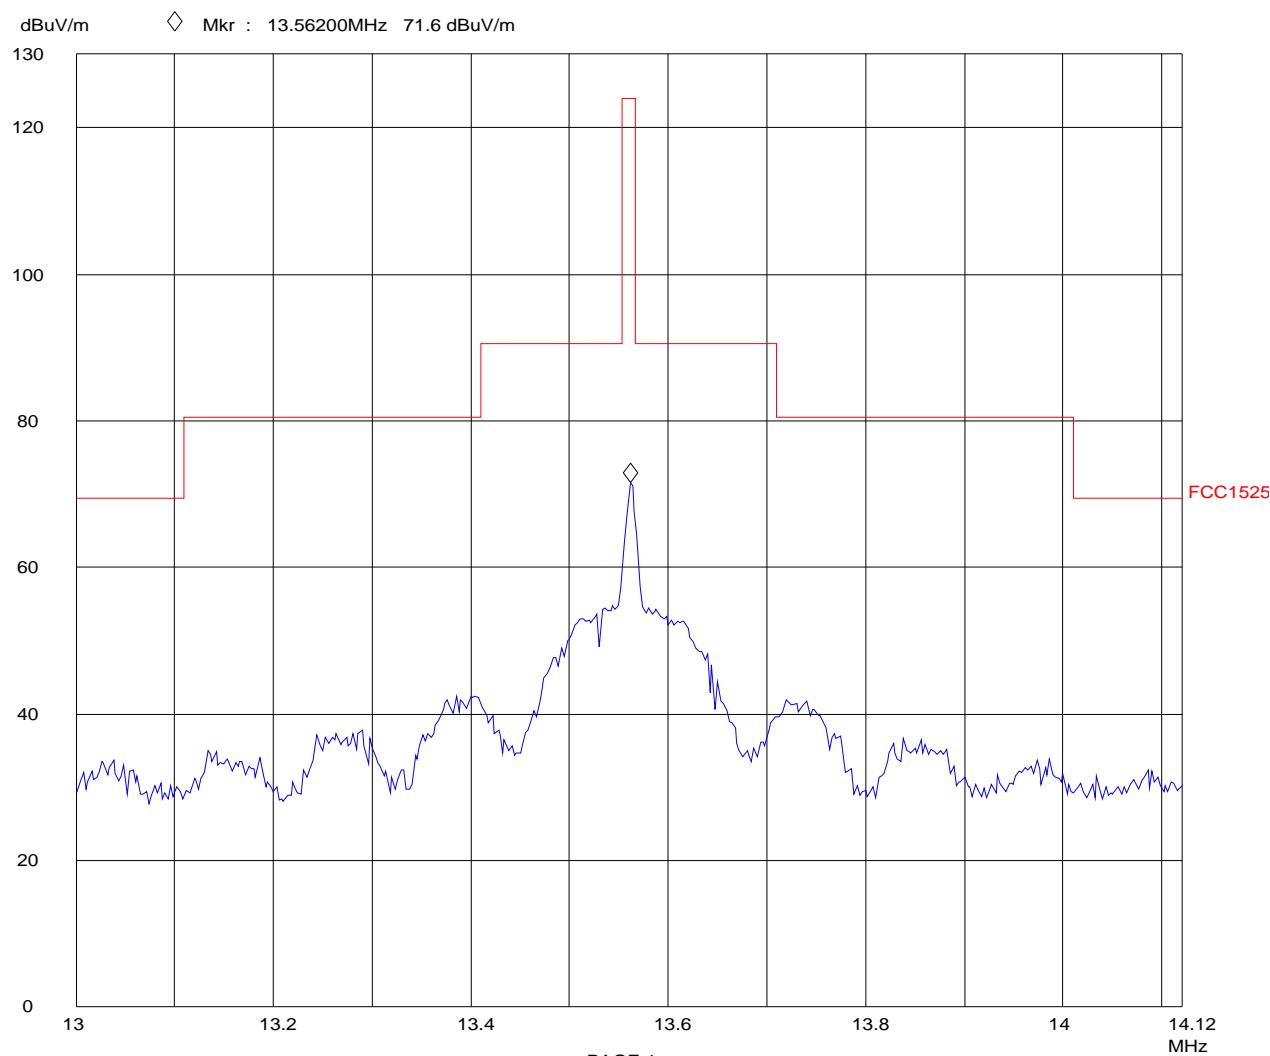

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK


08. Sep 10 17:29

Spectrum Mask H Field in SAR, d=3m

EUT: M21 w/ MK07487
Manuf: Draeger
Op Cond: w/ tag, b0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: max position: II

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
13M 14.12M 2k 10k PK 100ms AUTO LD OFF 30dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

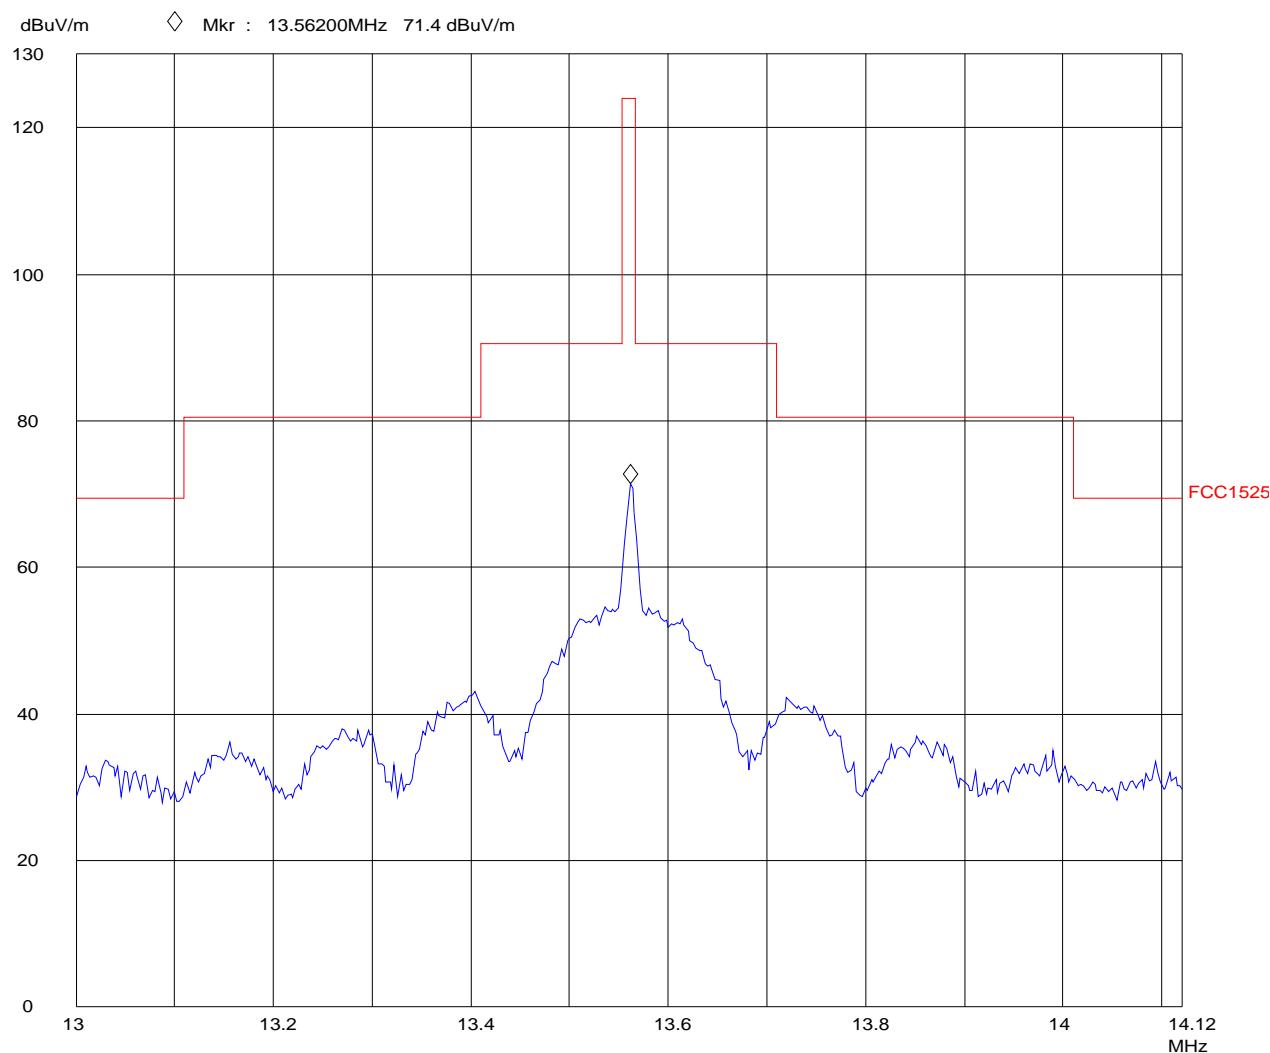

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK


08. Sep 10 16:34

Spectrum Mask H Field in SAR, d=3m

EUT: M21 w/ MK07491
Manuf: Draeger
Op Cond: w/o tag, n0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: max position: II

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
13M 14.12M 2k 10k PK 100ms AUTO LD OFF 30dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

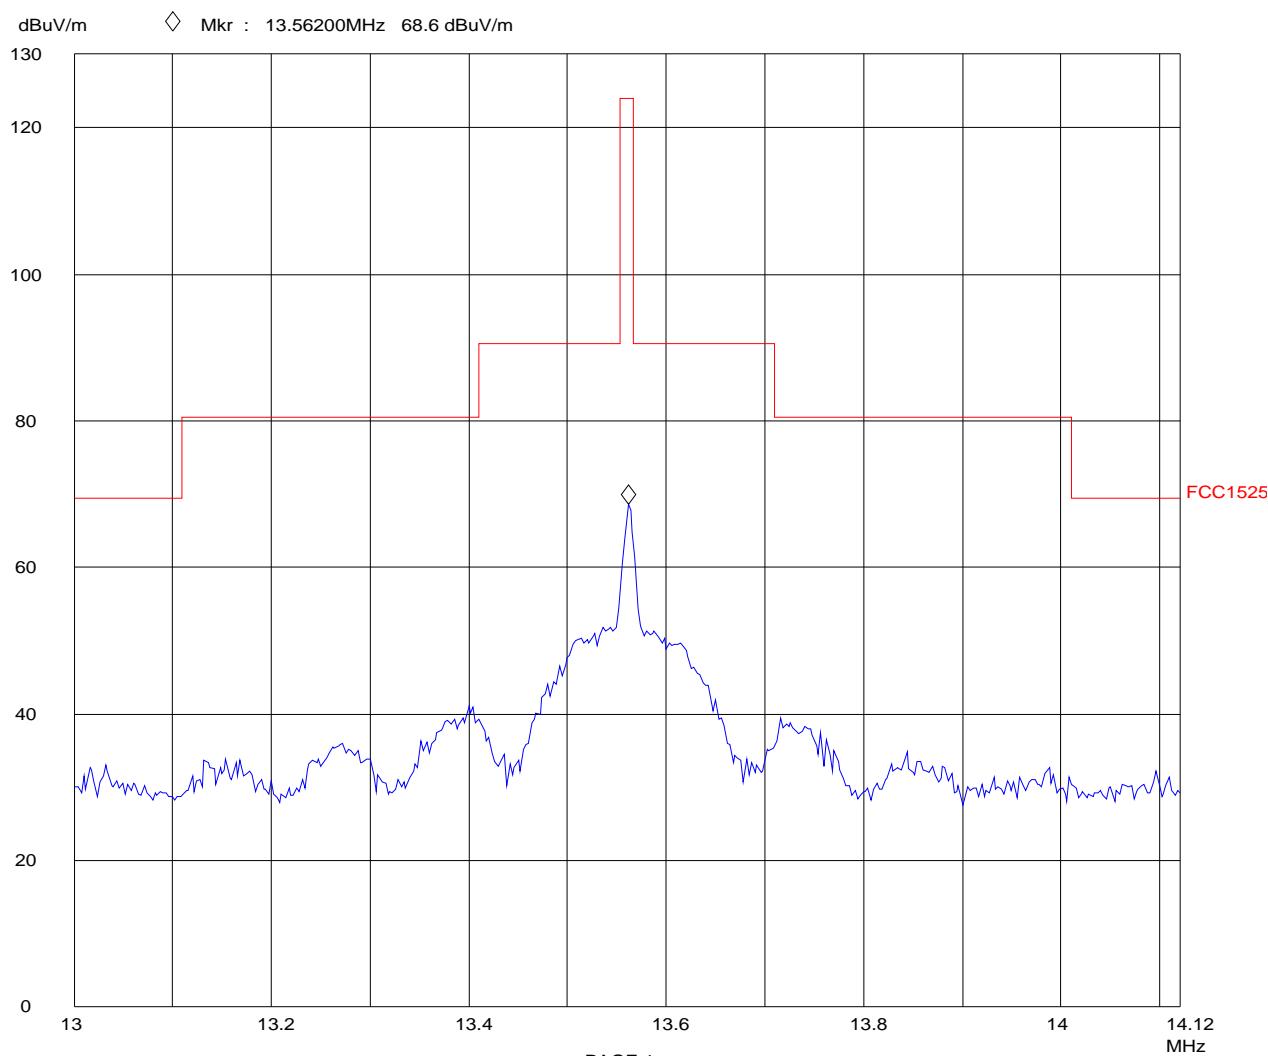

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK


08. Sep 10 16:30

Spectrum Mask H Field in SAR, d=3m

EUT: M21 w/ MK07491
Manuf: Draeger
Op Cond: w/ tag, n0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: max position: II

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
13M 14.12M 2k 10k PK 100ms AUTO LD OFF 30dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

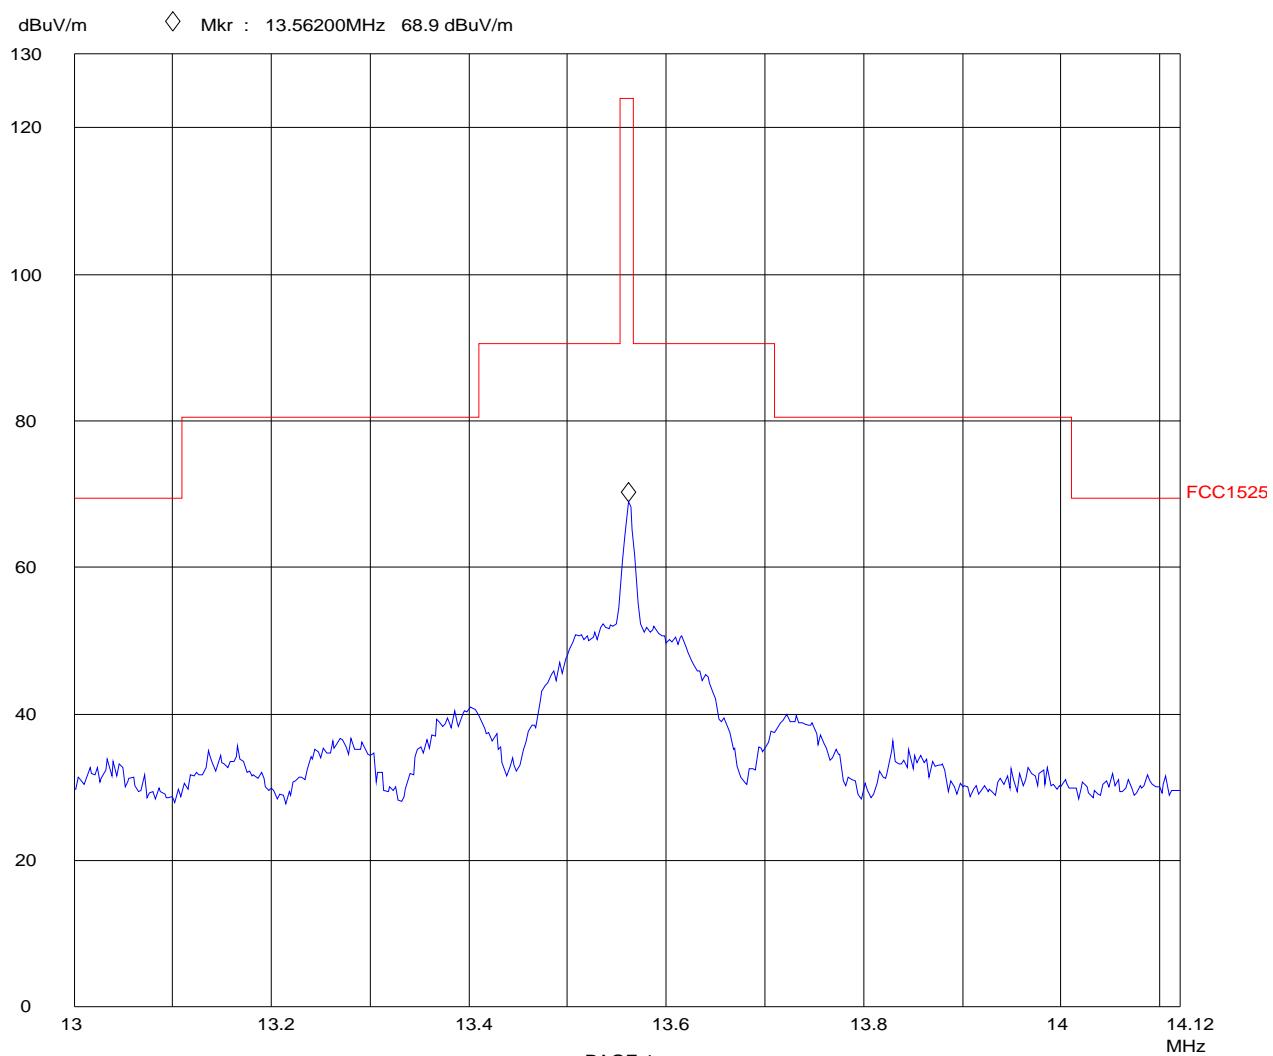

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

09. Sep 10 11:41

Spectrum Mask H Field in SAR, d=3m


EUT: M21 w/ MK07891
 Manuf: Draeger
 Op Cond: w/o tag, n0
 Operator: Doering
 Test Spec: FCC 15, RSS-210
 Comment: max position: II

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
13M	14.12M	2k	10k	PK	100ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s
 Subranges: 25
 Acc Margin: 30dB

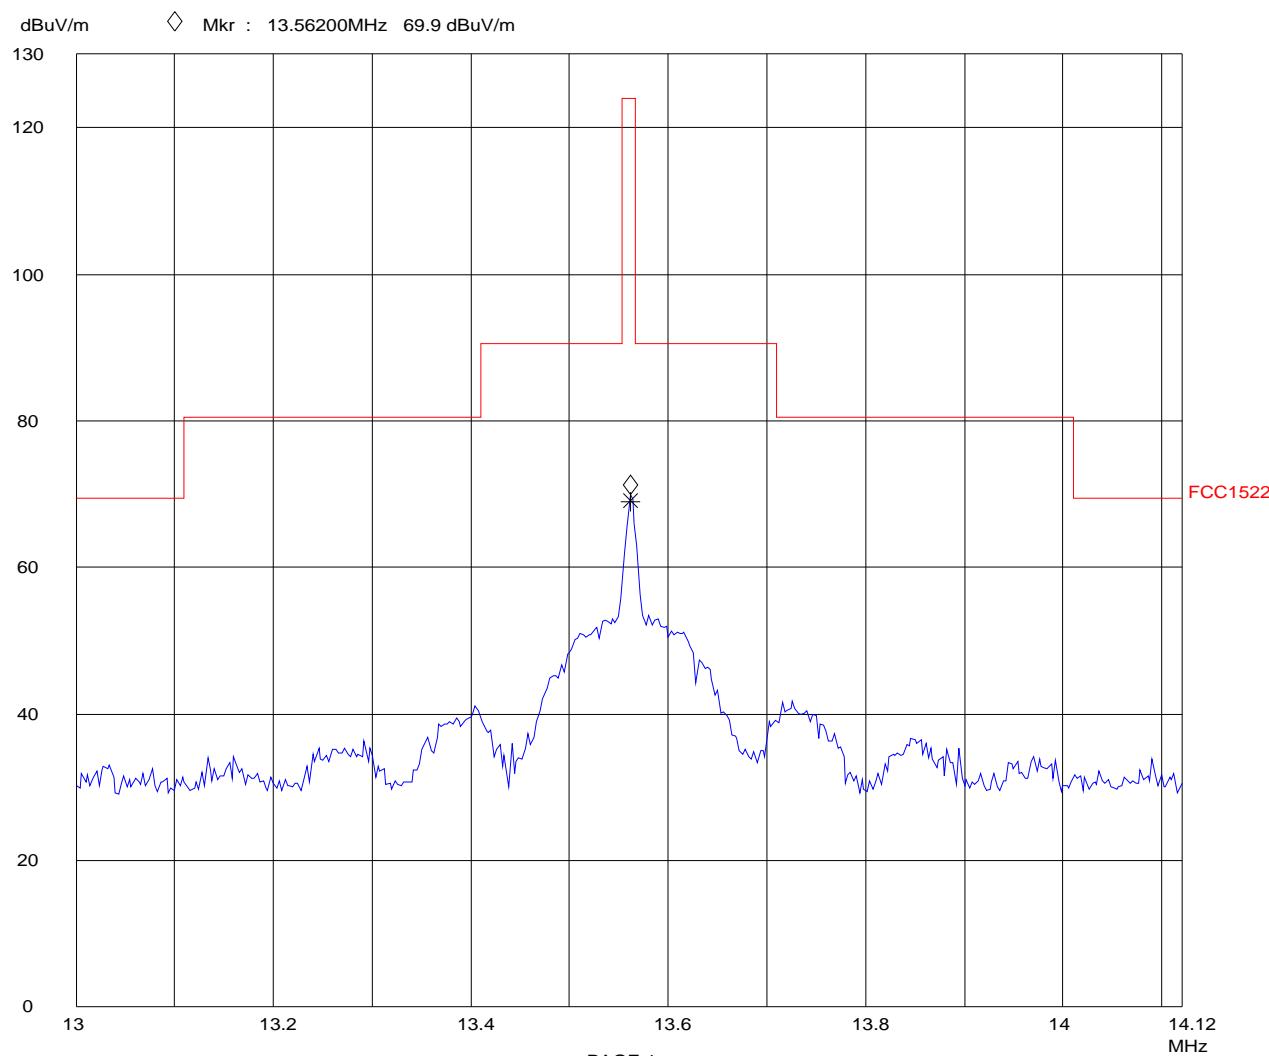

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK


09. Sep 10 11:46

Spectrum Mask H Field in SAR, d=3m

EUT: M21 w/ MK07891
Manuf: Draeger
Op Cond: w/ tag, n0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: max position: II

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
13M 14.12M 2k 10k PK 100ms AUTO LD OFF 30dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

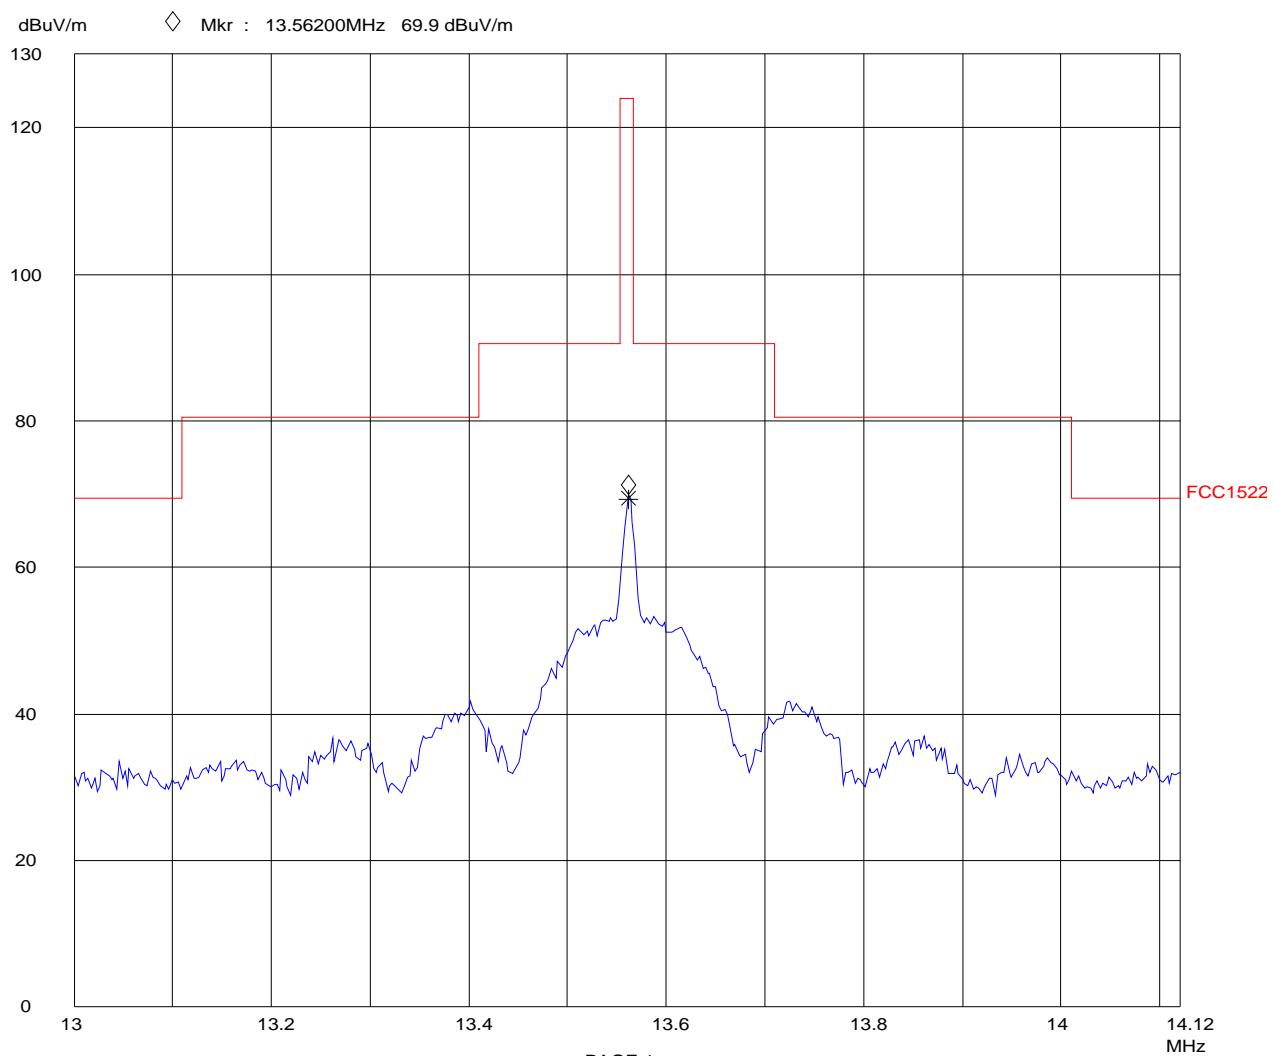

6 RADIATED EMISSIONS 9 kHz – 30 MHz

Test Requirement: FCC 47 CFR, §15.205, 15.209, 15.225(d);
IC RSS-Gen Issue 3, 7.2.2(b)(c), 7.2.5, RSS-210 A2.6
Test Procedure: ANSI C63.4-2003, RSS-Gen

6.1 Regulation

Section 15.33 Frequency range of radiated measurements:

(a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz [...]

Section 15.35 Measurement detector functions and bandwidths.

The conducted and radiated emission limits shown in this Part are based on the following, unless otherwise specified elsewhere in this Part:

(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified.

(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

Section 15.205(d)(7) Devices operated pursuant to § 15.225 are exempt from complying with this section for the 13.36–13.41 MHz band only.

Section 15.225 Operation within the band 13.110–14.010 MHz.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Section 15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency	Field Strength		Measurement distance
[MHz]	[μ V/m]	[dB(μ V/m)]	[m]
0.009–0.490	2400/F[kHz]	67.6 – 20 logF[kHz]	300
0.490–1.705	24000/F[kHz]	87.6 – 20 logF[kHz]	30
1.705–30.0	30	29.5	30

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

(e) The provisions in §§ 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

IC RSS-Gen 7.2.2 Emissions Falling Within Restricted Frequency Bands

(b) unwanted emissions falling into restricted bands of Table 1 shall comply with the limits specified in RSS-Gen;

(c) unwanted emissions not falling within restricted frequency bands shall either comply with the limits specified in the applicable RSS, or with those specified in RSS-Gen.

Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.

IC RSS-210 A2.6 Band 13.110-14.010 MHz

The field strength of any emission shall not exceed the following limits:

(d) 30 microvolts/m (29.5 dB μ V/m) at 30 m, outside the band 13.110-14.010 MHz.

→ The IC limits are equal to the FCC limits.

6.2 Test Equipment

Type	Manufacturer/Model No.	EMCC Ident No.	Last Calibration	Next Calibration
Antenna (9 kHz – 30 MHz)	Rohde & Schwarz HFH-Z2	374	2008-09	2010-09
Receiver (9 kHz - 1 GHz)	Rohde & Schwarz ESS	303	2009-06	2010-12

6.3 Test Procedures

Measurement was performed in a semi-anechoic room at a test distance of 3 m. A calibrated loop antenna as specified in ANSI C63.4 clause 4.1.5.1 was positioned with its plane vertical at the test distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. For certain applications, the loop antenna may also need to be positioned horizontally at the specified distance from the EUT. Instead of changing the loop antenna polarization to horizontal the EUT antenna was rotated by 90 degrees. I.e. tests performed for 2 EUT antenna polarizations. The center of the loop antenna was 1 m above the ground.

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

Portable, small, lightweight, or modular devices that may be hand-held, worn on the body, or placed on a table during operation are positioned on a nonconducting platform, the top of which is 80 cm above the reference groundplane. The EUT was tested on a 0.8 meter high tabletop.

The EUT is connected to its associated peripherals, with any excess I/O cabling bundled to approximately 1 meter.

In certain applications, a remotely located device may be connected to the EUT. In these cases, it is permissible for cabling from the remotely located device to the EUT or accessories to be placed directly on the reference groundplane or, if normally installed beneath the reference groundplane, beneath it.

The remotely located device shall be located at a distance sufficient to ensure that it does not contribute to the measured level. This procedure evaluates the interference potential of the EUT, its accessories, and interconnecting cables or wires standing apart from the remotely located device, which in turn shall be evaluated separately, if required.

[Remark: The control Laptop PC was located outside of the test environment.]

Worst case emissions are listed under chapter: test results.

Radiated Emissions Test Characteristics	
Frequency range	9 kHz - 30 MHz
Test distance	3 m*
Test instrumentation resolution bandwidth	200 Hz (9 kHz - 150 kHz) 10 kHz (150 kHz - 30 MHz)
Receive antenna height	1 m
Receive antenna polarization	Vertical

* According to Section 15.31 (f)(2): At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The 40 dB/decade factor was used.

6.4 Calculation of Field Strength Limits

E.g. radiated spurious emissions field strength limits for the band 1.705–30.0 MHz:

$\mu\text{V/m}$ at 30 meters = 30

30 $\mu\text{V/m}$ corresponds with 29.5 $\text{dB}\mu\text{V/m}$.

6.5 Field Strength Calculation

All emission measurements performed using the test receiver's transducer factor setting capability, i.e. the field strength value measured directly without the necessity of additional correction factors.

For test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f)(2) the field strength is calculated by adding additionally an extrapolation factor of 40 dB/decade (inverse linear-distance for field strength measurements). The basic equation with a sample calculation is as follows:

$$\text{FS} = \text{FST} + \text{DF}$$

where

FS = Field Strength in $\text{dB}\mu\text{V/m}$

FST = Field Strength at test distance in $\text{dB}\mu\text{V/m}$

DF = Distance Extrapolation Factor in dB,

where $\text{DF} = 40 \log (\text{Dtest}/\text{Dspec})$ where Dtest = Test Distance and Dspec = Specified Distance

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

Assume the tests performed at a reduced Test Distance of 3 m instead of the Specified Distance of 30m giving a Distance Extrapolation Factor of $DF = 40 \log(3m/30m) = -40$ dB.

Assuming a measured field strength level of 58.8 dB μ V/m is obtained. The Distance Factor of -40 dB is added, giving a field strength of 18.8 dB μ V/m. The 18.8 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$FS = 58.8 - 40 = 18.8 \text{ [dB}\mu\text{V/m]}$$

$$\text{Level in }\mu\text{V/m} = \text{Common Antilogarithm } (18.8/20) = 8.7$$

6.6 Test Results

EUT_Antenna	Frequency [MHz]	Detector	3m_Result [dB(μ V/m)]	Distance Correction [dB]	30m_Result [dB(μ V/m)]	μ V/m	30m_Limit [dB(μ V/m)]	Margin [dB]
MK07476	0.61	QP	55	-40	15	39.3	31.9	16.9
MK07476	0.63		53		13	38.1	31.6	18.6
MK07487-00	0.61		62.2		22.2	39.3	31.9	9.7
MK07491	0.61		52.9		12.9	39.3	31.9	19
MK07891	0.61		54.6		14.6	39.3	31.9	17.3
MK07891	0.665		54.6		14.6	36.1	31.1	16.5
MK07891	0.73		52.3		12.3	32.9	30.3	18

The table above contains worst-case emissions, only. For further details refer to the test plots.

Device:

RFID Reader Module EAST M21 with Antennas

Type:

MP02001 with MK07476, MK07487-00, MK07491, MK07891

Serial number:

001666103, ASBE-0048, ASBE-0048, ASBE-0024, ASBE-0013

All emissions in the range 9 kHz to 30 MHz are below the specified limits.

The EUT meets the requirements of this section.

6.7 Measurement Plots

refer to the following pages.

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

09. Sep 10 09:34

Radiated Emissions H Field in SAR, d=3m


EUT: M21 w/ MK07476
Manuf: Draeger
Op Cond: w/ tag, n0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, ant: I, _

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	150k	100Hz	200Hz	PK	10ms	AUTO	LN OFF	60dB
150k	30M	5k	10k	PK	5ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

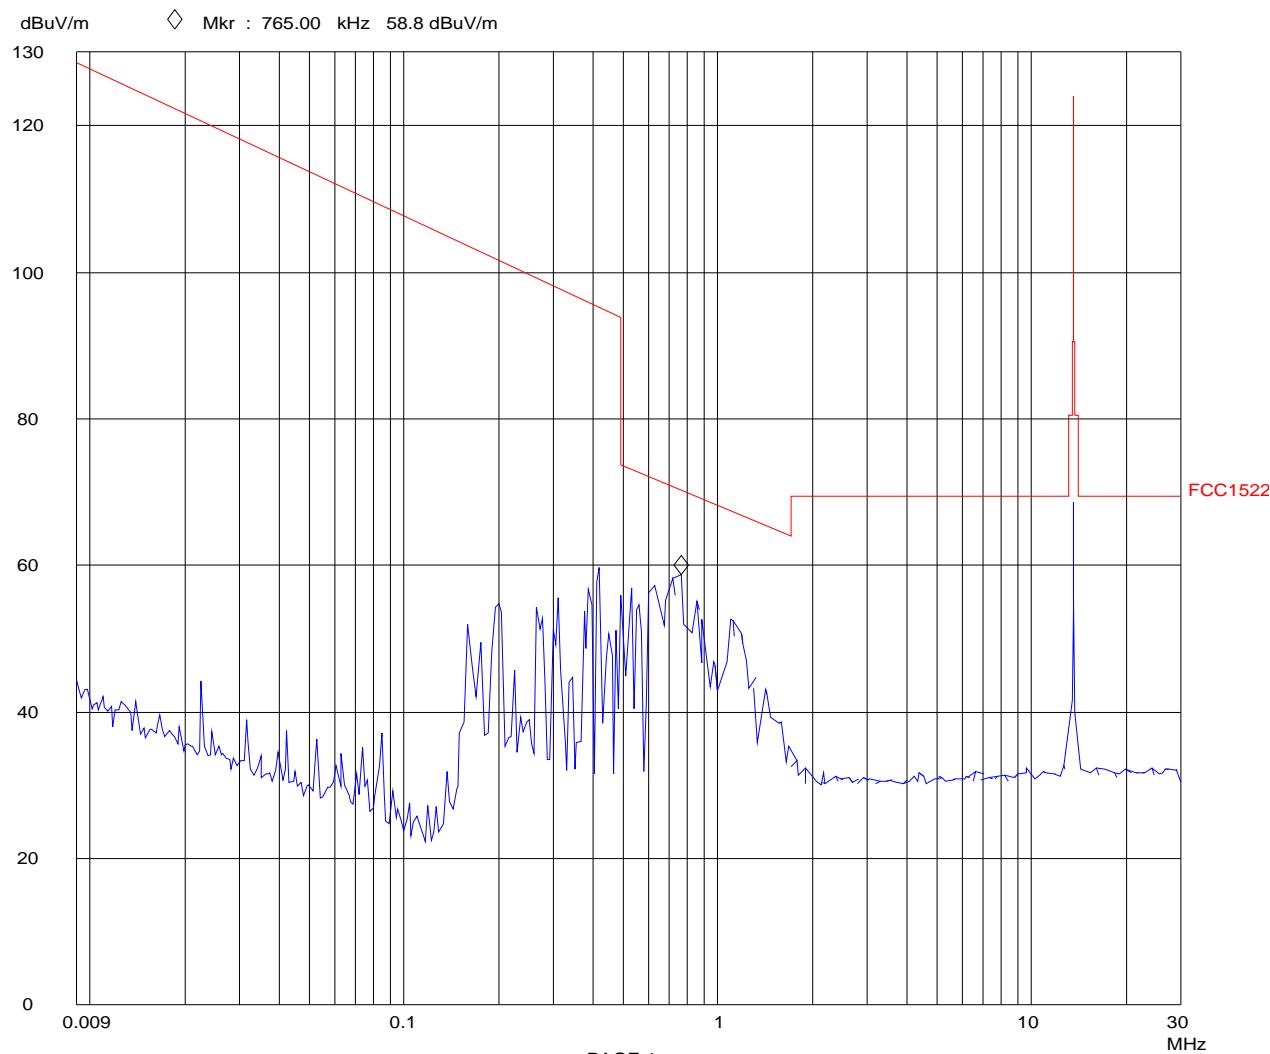

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

09. Sep 10 09:02

Radiated Emissions H Field in SAR, d=3m


EUT: M21 w/ MK07476
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, ant: I, _

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	150k	100Hz	200Hz	PK	10ms	AUTO	LN OFF	60dB
150k	30M	5k	10k	PK	5ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

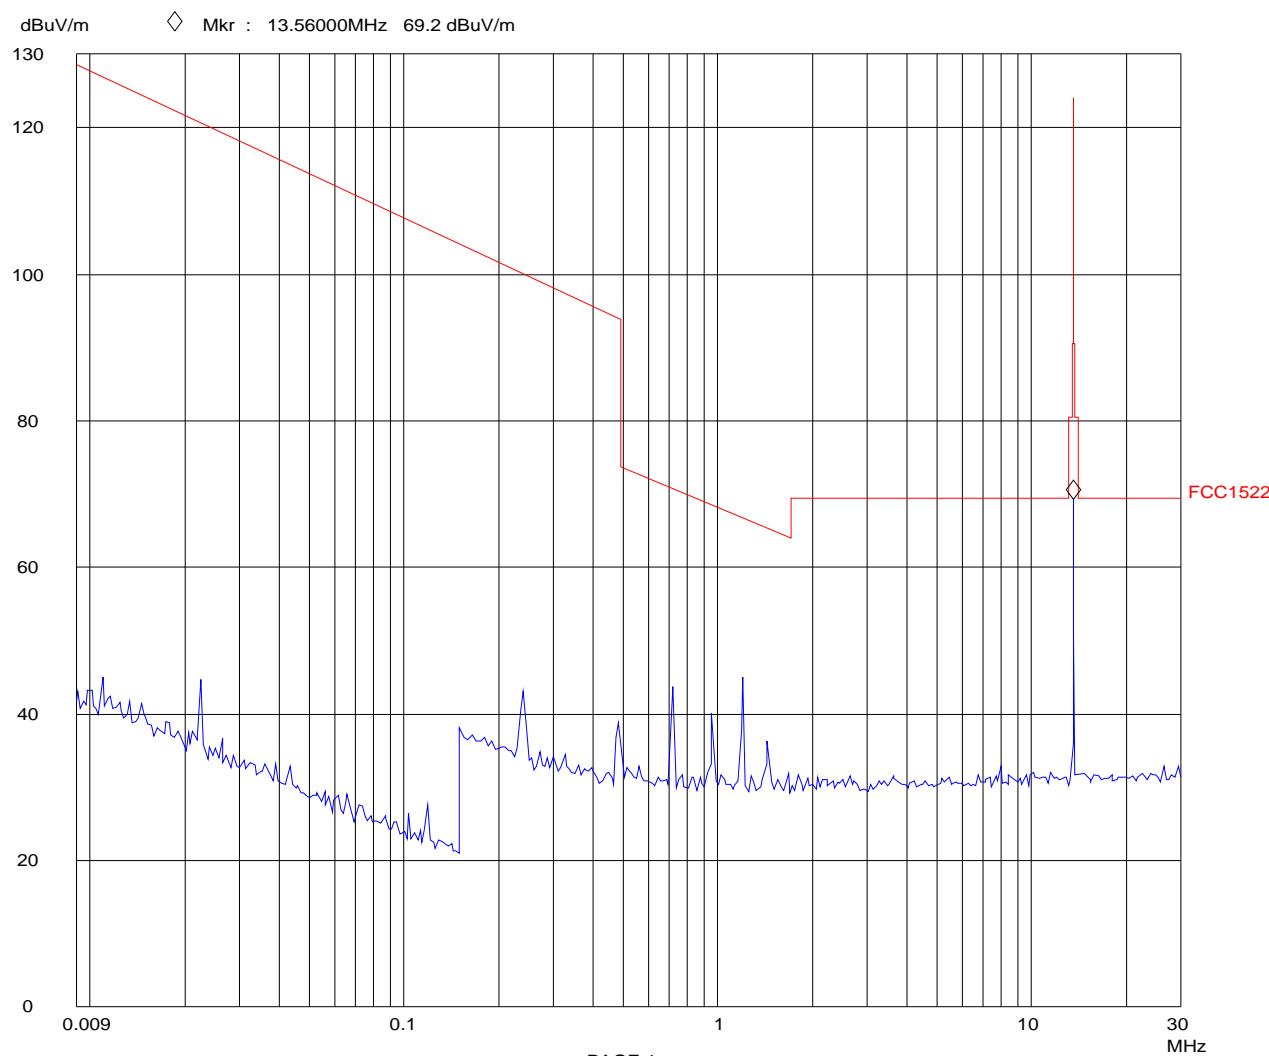

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

08. Sep 10 17:33

Radiated Emissions H Field in SAR, d=3m

EUT: M21 w/ MK07487
Manuf: Draeger
Op Cond: w/ tag, n0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, ant: I, _

Scan Settings (2 Ranges)


Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	150k	100Hz	200Hz	PK	10ms	AUTO	LN OFF	60dB
150k	30M	5k	10k	PK	5ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s

Subranges: 25

Acc Margin: 30dB

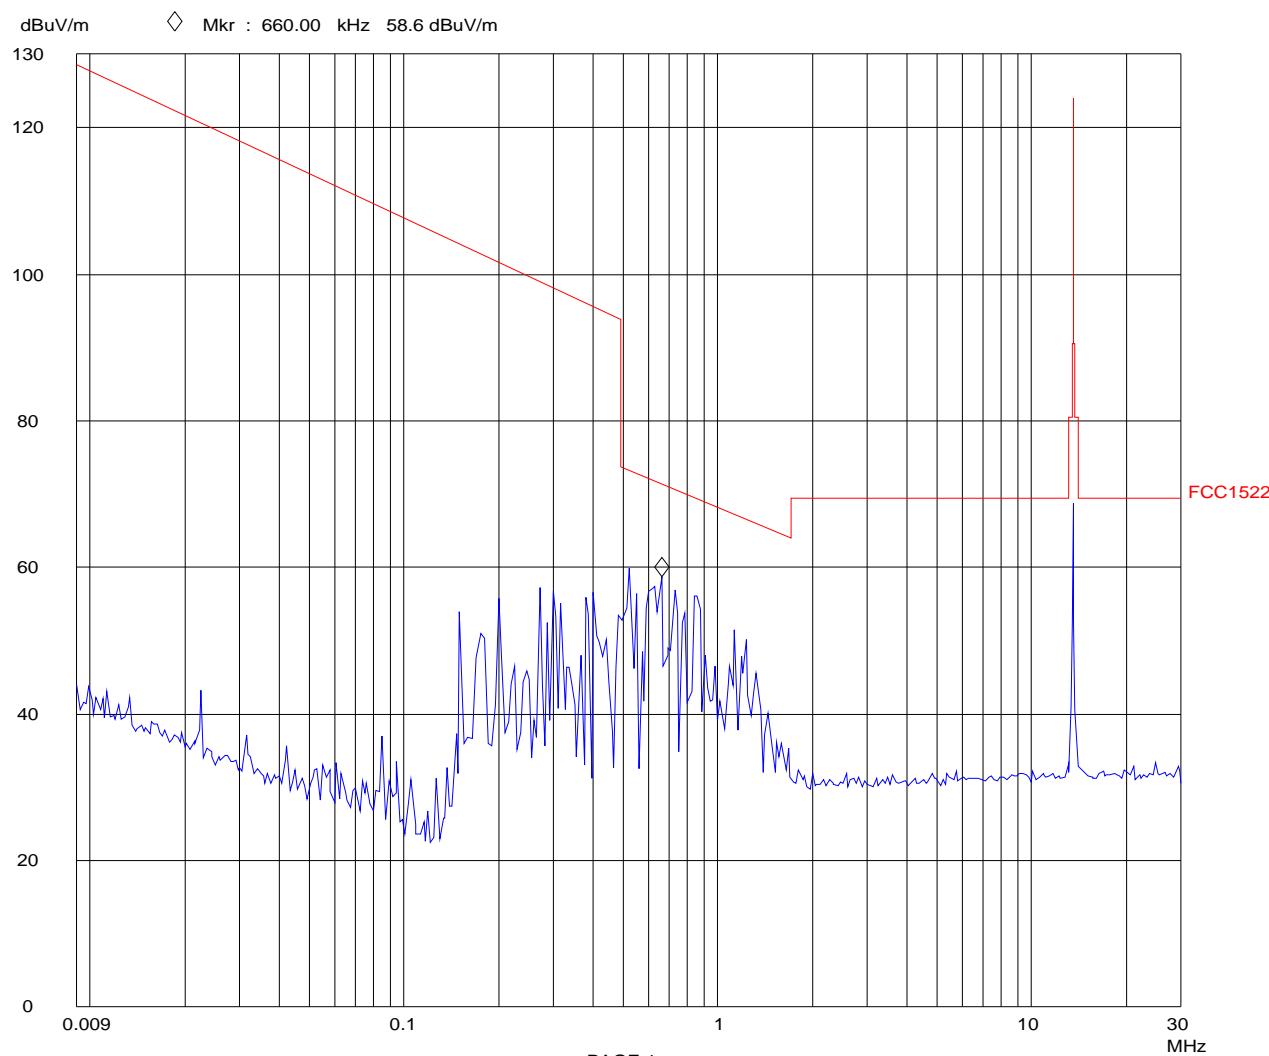

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

08. Sep 10 18:06

Radiated Emissions H Field in SAR, d=3m

EUT: M21 w/ MK07487
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, ant: I, _

Scan Settings (2 Ranges)


Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	150k	100Hz	200Hz	PK	10ms	AUTO	LN OFF	60dB
150k	30M	5k	10k	PK	5ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s

Subranges: 25

Acc Margin: 30dB

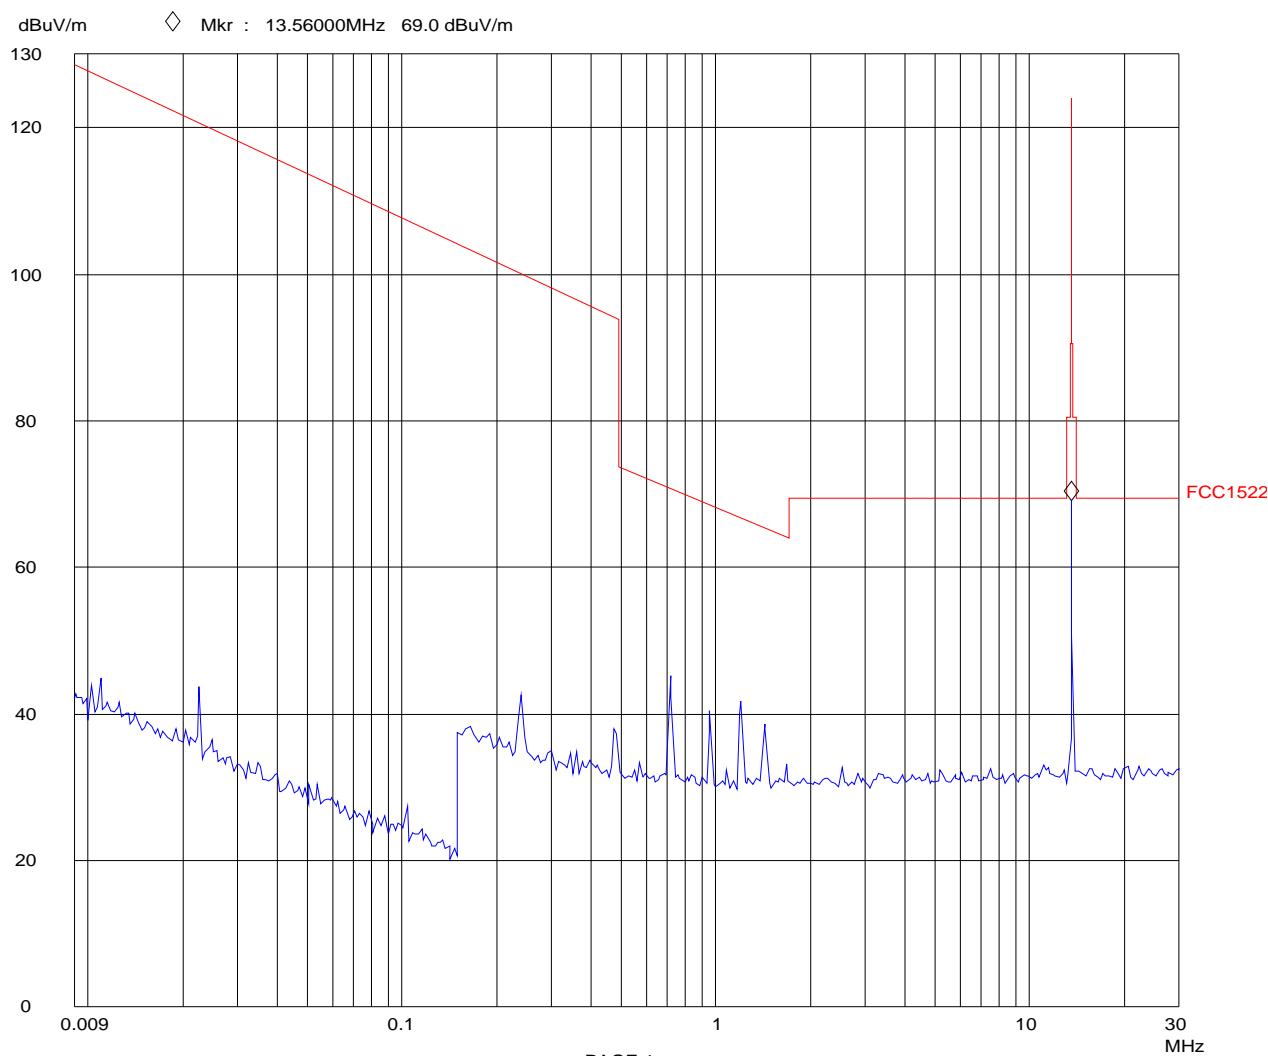

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

08. Sep 10 15:44

Radiated Emissions H Field in SAR, d=3m


EUT: M21 w/ MK07491
Manuf: Draeger
Op Cond: w/ tag, n0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, ant: I, _

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	150k	100Hz	200Hz	PK	10ms	AUTO	LN OFF	60dB
150k	30M	5k	10k	PK	5ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

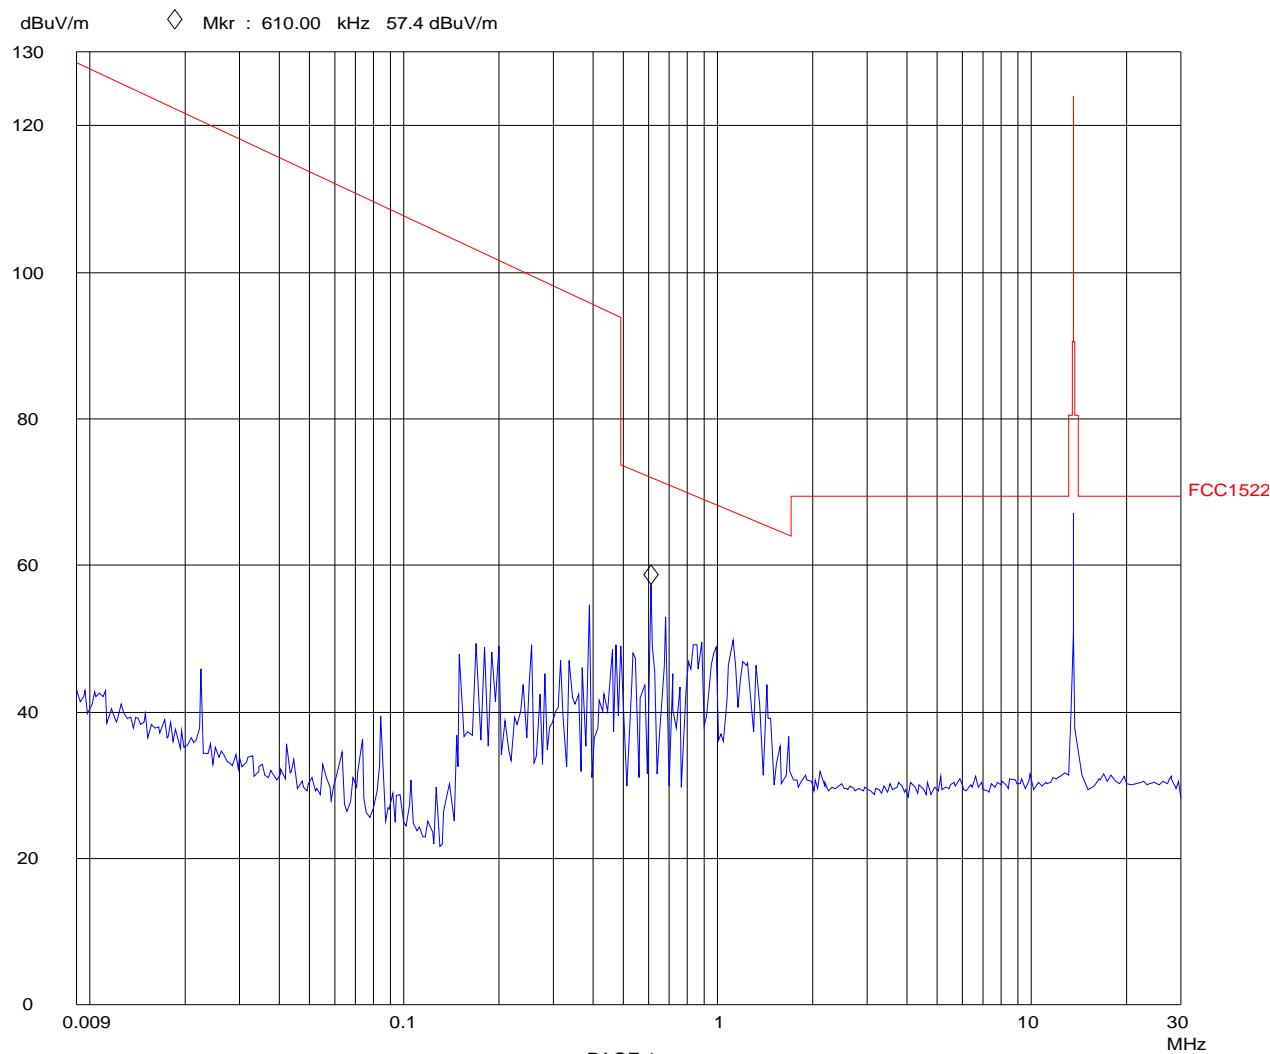

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

08. Sep 10 15:05

Radiated Emissions H Field in SAR, d=3m

EUT: M21 w/ MK07491
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, ant: I, _

Scan Settings (2 Ranges)


Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	150k	100Hz	200Hz	PK	1ms	AUTO	LN	ON 60dB
150k	30M	5k	10k	PK	1ms	AUTO	LD	ON 30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s

Subranges: 25

Acc Margin: 30dB

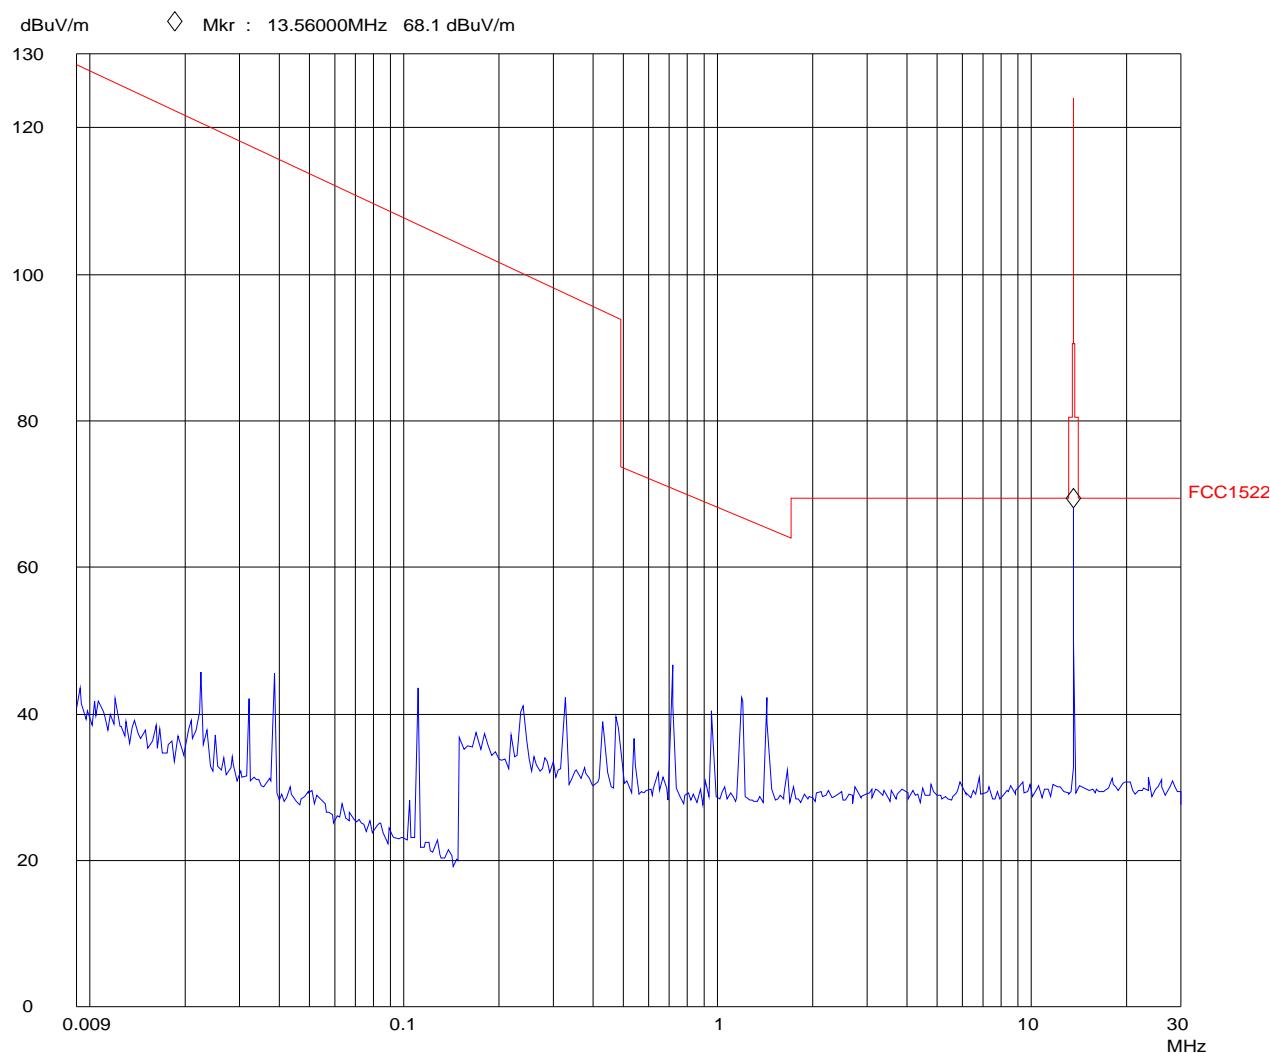

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

Radiated Emissions H Field in SAR, d=3m

09. Sep 10 11:54


EUT: M21 w/ MK07891
 Manuf: Draeger
 Op Cond: w/ tag, n0
 Operator: Doering
 Test Spec: FCC 15, RSS-210
 Comment: 4 sides, ant: I, _

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	150k	100Hz	200Hz	PK	10ms	AUTO	LN OFF	60dB
150k	30M	5k	10k	PK	5ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s
 Subranges: 25
 Acc Margin: 30dB

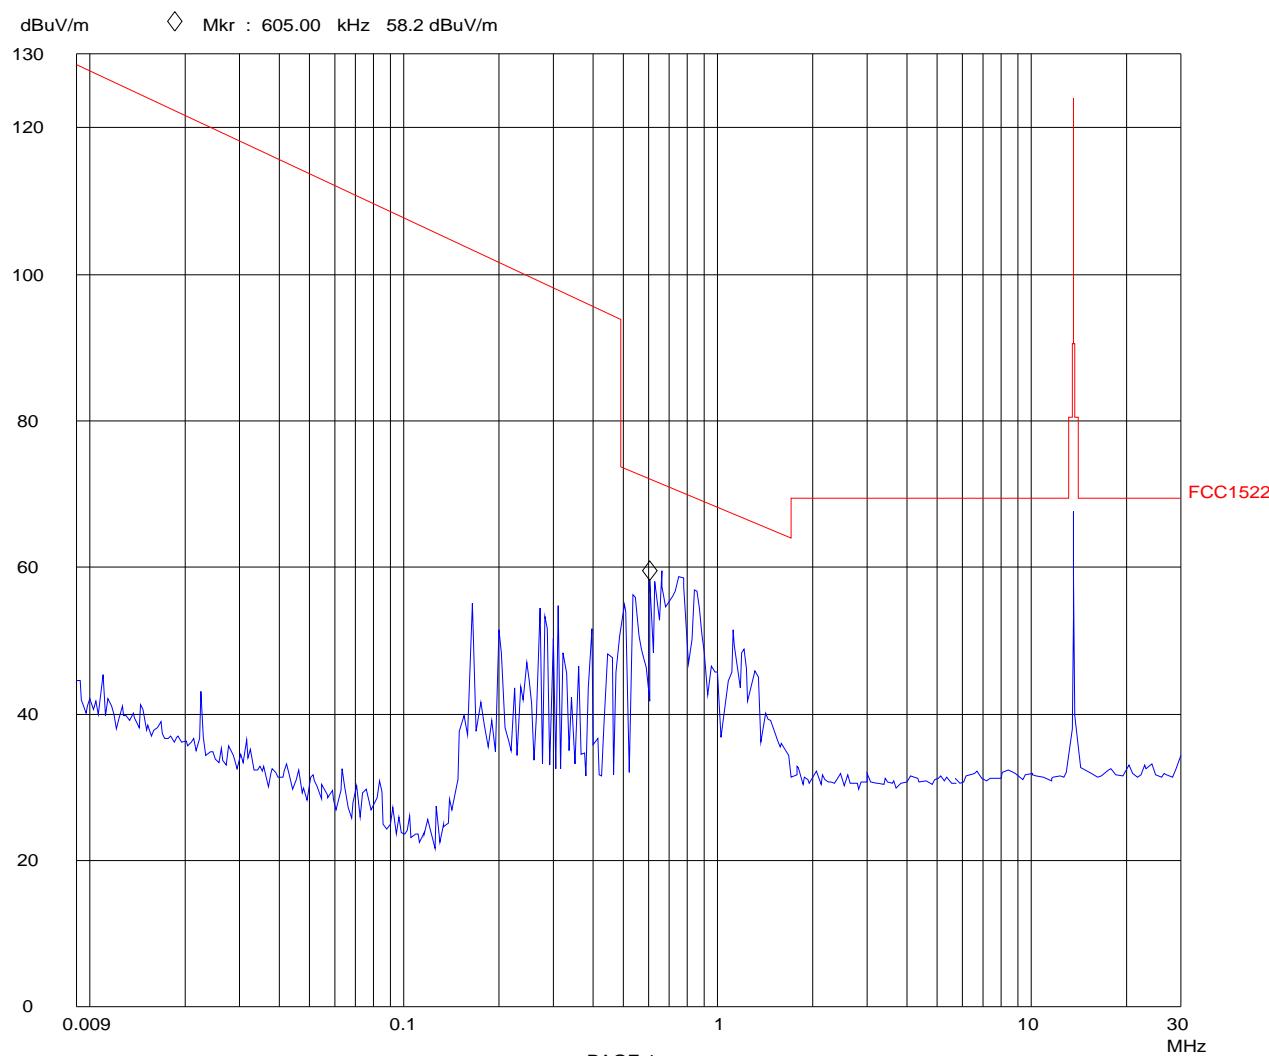

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

09. Sep 10 12:27

Radiated Emissions H Field in SAR, d=3m


EUT: M21 w/ MK07891
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, ant: I, _

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	150k	100Hz	200Hz	PK	10ms	AUTO	LN OFF	60dB
150k	30M	5k	10k	PK	5ms	AUTO	LD OFF	30dB

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

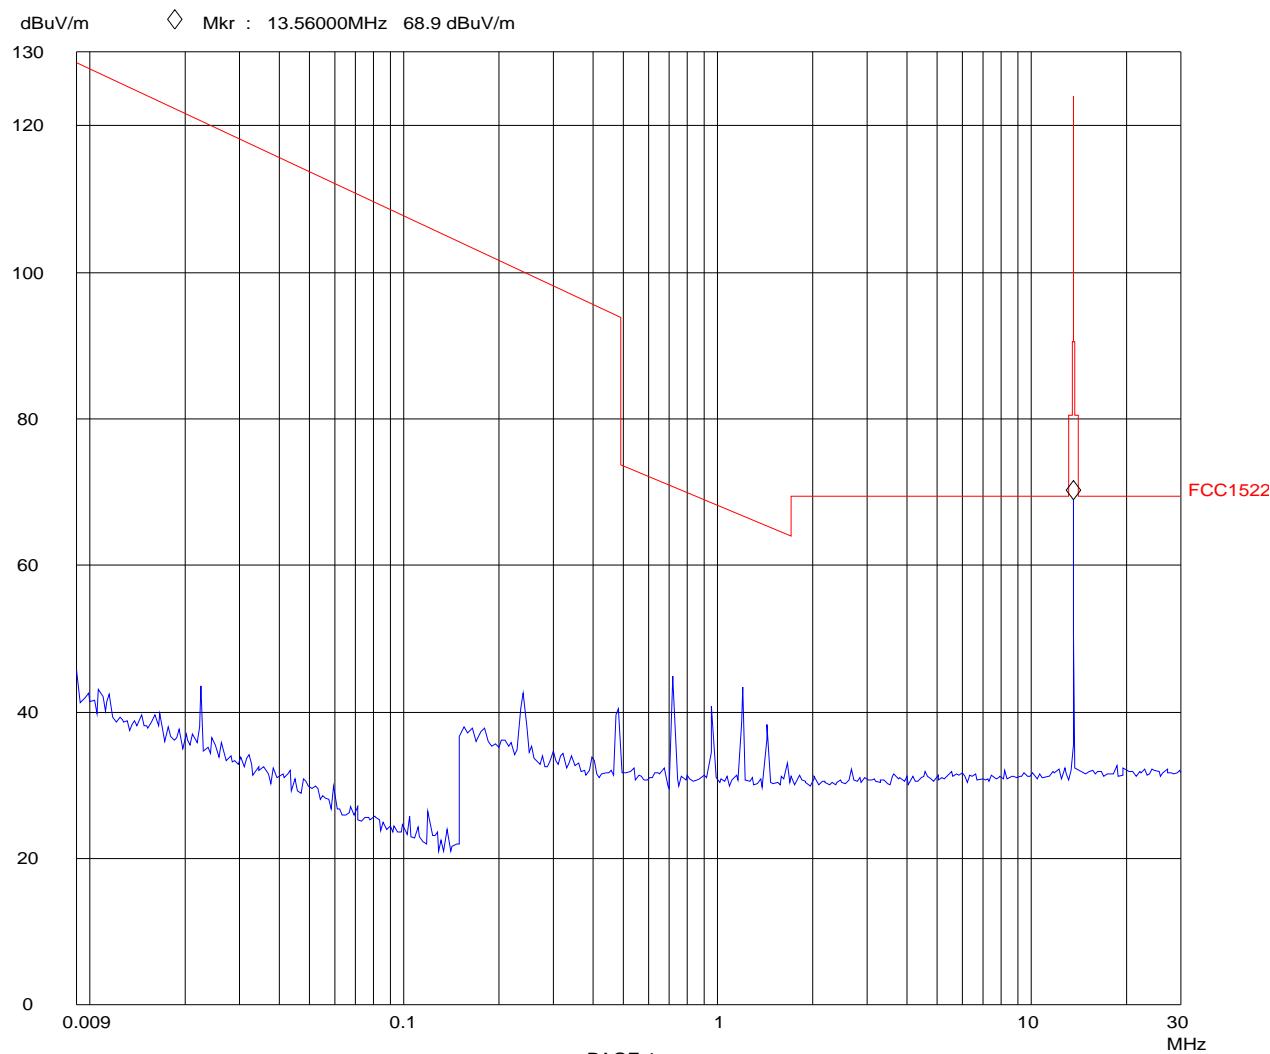

PAGE 1

7 RADIATED EMISSIONS 30 MHz – 1000 MHz

Test Requirement: FCC 47 CFR, §15.205, 15.209, 15.225(d);
IC RSS-Gen Issue 3, 7.2.2(b)(c), 7.2.5, RSS-210 A2.6
Test Procedure: ANSI C63.4-2003, RSS-Gen

7.1 Regulation

Section 15.33 Frequency range of radiated measurements:

(a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:
(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

Section 15.35 Measurement detector functions and bandwidths.

The conducted and radiated emission limits shown in this Part are based on the following, unless otherwise specified elsewhere in this Part:

(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Interference (CISPR) of the International Electrotechnical Commission. As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, as long as the same bandwidths as indicated for CISPR quasi-peak measurements are employed.

Note: For pulse modulated devices with a pulse-repetition frequency of 20 Hz or less and for which CISPR quasi-peak measurements are specified, compliance with the regulations shall be demonstrated using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, using the same measurement bandwidths that are indicated for CISPR quasi-peak measurements.

Section 15.225 Operation within the band 13.110–14.010 MHz.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Section 15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency	Field Strength		Measurement distance
[MHz]	[μ V/m]	[dB(μ V/m)]	[m]
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
Above 960	500	54.0	3

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(e) The provisions in §§ 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

IC RSS-Gen 7.2.2 Emissions Falling Within Restricted Frequency Bands

(b) unwanted emissions falling into restricted bands of Table 1 shall comply with the limits specified in RSS-Gen;

(c) unwanted emissions not falling within restricted frequency bands shall either comply with the limits specified in the applicable RSS, or with those specified in RSS-Gen.

Table 5: General Field Strength Limits for Transmitters at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960	500

Note: Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).

IC RSS-210 A2.6 Band 13.110-14.010 MHz

The field strength of any emission shall not exceed the following limits:

(d) 30 microvolts/m (29.5 dB μ V/m) at 30 m, outside the band 13.110-14.010 MHz.

→ The IC limits for radiated spurious emissions within the range above 960 MHz are equal to the FCC limits. In the range 30 – 960 MHz less stringent limits apply.

7.2 Test Equipment

Type	Manufacturer/Model No.	EMCC Ident No.	Last Calibration	Next Calibration
Antenna (30 MHz - 1 GHz)	EMCO Model 3143	898	2008-11	2010-11
Receiver (9 kHz - 1 GHz)	Rohde & Schwarz ESS	303	2009-06	2010-12

7.3 Test Procedures

Portable, small, lightweight, or modular devices that may be hand-held, worn on the body, or placed on a table during operation are positioned on a nonconducting platform, the top of which is 80 cm above the reference groundplane. The EUT was tested on a 0.8 meter high tabletop.

In certain applications, a remotely located device may be connected to the EUT. In these cases, it is permissible for cabling from the remotely located device to the EUT or accessories to be placed directly

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

on the reference groundplane or, if normally installed beneath the reference groundplane, beneath it. The remotely located device shall be located at a distance sufficient to ensure that it does not contribute to the measured level. This procedure evaluates the interference potential of the EUT, its accessories, and interconnecting cables or wires standing apart from the remotely located device, which in turn shall be evaluated separately, if required.

[Remark: The control Laptop PC was located outside of the test environment.]

With the EUT operating in "worst case" mode, emissions from the unit are maximized by adjusting the polarization and height of the receive antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions *[Remark: Not applicable]*. All tests performed with the EUT placed in both vertical and horizontal polarizations on the nonconductive table.

Measurement initially performed as a pre-scan in a fully anechoic room in the full frequency range in order to find worst case emissions. Final measurement performed at worst-case emission frequencies in a FCC and IC listed semi-anechoic room at the specified 3 m test distance. Due to signal timing issues maxima searched in CW mode, final measurement performed in modulated mode.

Worst case emissions are listed under chapter: test results.

Radiated Emissions Test Characteristics	
Frequency range	30 MHz - 1,000 MHz
Test distance	3 m
Test instrumentation resolution bandwidth	120 kHz (30 MHz - 1,000 MHz)
Receive antenna scan height	1 m - 4 m
Receive antenna polarization	Vertical/Horizontal

* According to Section 15.31 (f)(1): At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. (...) When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

7.4 Calculation of Field Strength Limits

E.g. radiated spurious emissions field strength limits for the restricted band 108-121.94 MHz:

$\mu\text{V/m}$ at 3 meters = 150

150 $\mu\text{V/m}$ corresponds with 43.5 dB $\mu\text{V/m}$.

7.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor. The basic equation with a sample calculation is as follows:

$$\text{FS} = \text{RA} + \text{AF} + \text{CF}$$

where

FS = Field Strength in dB $\mu\text{V/m}$

RA = Receiver Amplitude in dB μV

AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

Assume a receiver reading of 23.5 dB μ V is obtained. The Antenna Factor of 7.4 dB(1/m) and a Cable Factor of 1.1 dB are added, giving a field strength of 32 dB μ V/m. The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$FS = 23.5 + 7.4 + 1.1 = 32 \text{ [dB}\mu\text{V/m]}$$

Level in μ V/m = Common Antilogarithm (32/20) = 39.8

7.6 Test Results

EUT_Antenna	Frequency [MHz]	Polarization	Reading QP	Antenna factor	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
MK07476	40.69	v	29.3	10.6	39.9	40	0.1
MK07476	596.60	h	4.6	24.1	28.7	46	17.3
MK07487-00	40.69	v	23.0	10.6	33.6	40	6.4
MK07487-00	447.56	h	18.2	20.5	38.7	46	7.3
MK07487-00	488.24	h	16.3	21.9	38.2	46	7.8
MK07487-00	515.37	h	17.9	22.9	40.8	46	5.2
MK07491	40.69	v	25.5	10.6	36.1	40	3.9
MK07491	149.20	h	13.8	12.3	26.1	43.5	17.4
MK07491	379.75	h	19.5	18.8	38.3	46	7.7
MK07491	488.24	h	13.3	21.9	35.2	46	10.8
MK07491	542.50	h	13.1	23.8	36.9	46	9.1
MK07891	40.69	v	29.0	10.6	39.6	40	0.4
MK07891	488.24	h	16.5	21.9	38.4	46	7.6
MK07891	515.40	h	9.2	22.9	32.1	46	13.9
MK07891	542.50	h	8.9	23.8	32.7	46	13.3

All tests performed at 3 m distance. The table above contains worst-case emissions for the normal modulated mode (INVENTORY mode), only. For further details refer to the pre-scan test plots.

Device: RFID Reader Module EAST M21 with Antennas
Type: MP02001 with MK07476, MK07487-00, MK07491, MK07891
Serial number: 001666103, ASBE-0048, ASBE-0048, ASBE-0024, ASBE-0013
All emissions in the range 30 MHz to 1000 MHz are below the specified limits.

The EUT meets the requirements of this section.

7.7 Pre-scan Plots

Refer to the following pages.

Remarks: Initially test on first sample performed with modulation (INVENTORY mode). Due to signal timing issues (minimum 100 ms per frequency step required in modulated mode) and based on comparison with CW mode results, further tests performed in CW mode.

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

06. Sep 10 13:49

Radiated Emissions Prescan in FAR, d=3m


EUT: M21 w/ MK07476
Manuf: Draeger
Op Cond: w/ tag, n0
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 1 side, hor, 100ms/step

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 1000M 50k 120k PK 100ms AUTO LN ON 60dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 15dB

Transducer No. Start Stop Name
22 30M 1000M 2064FSMK

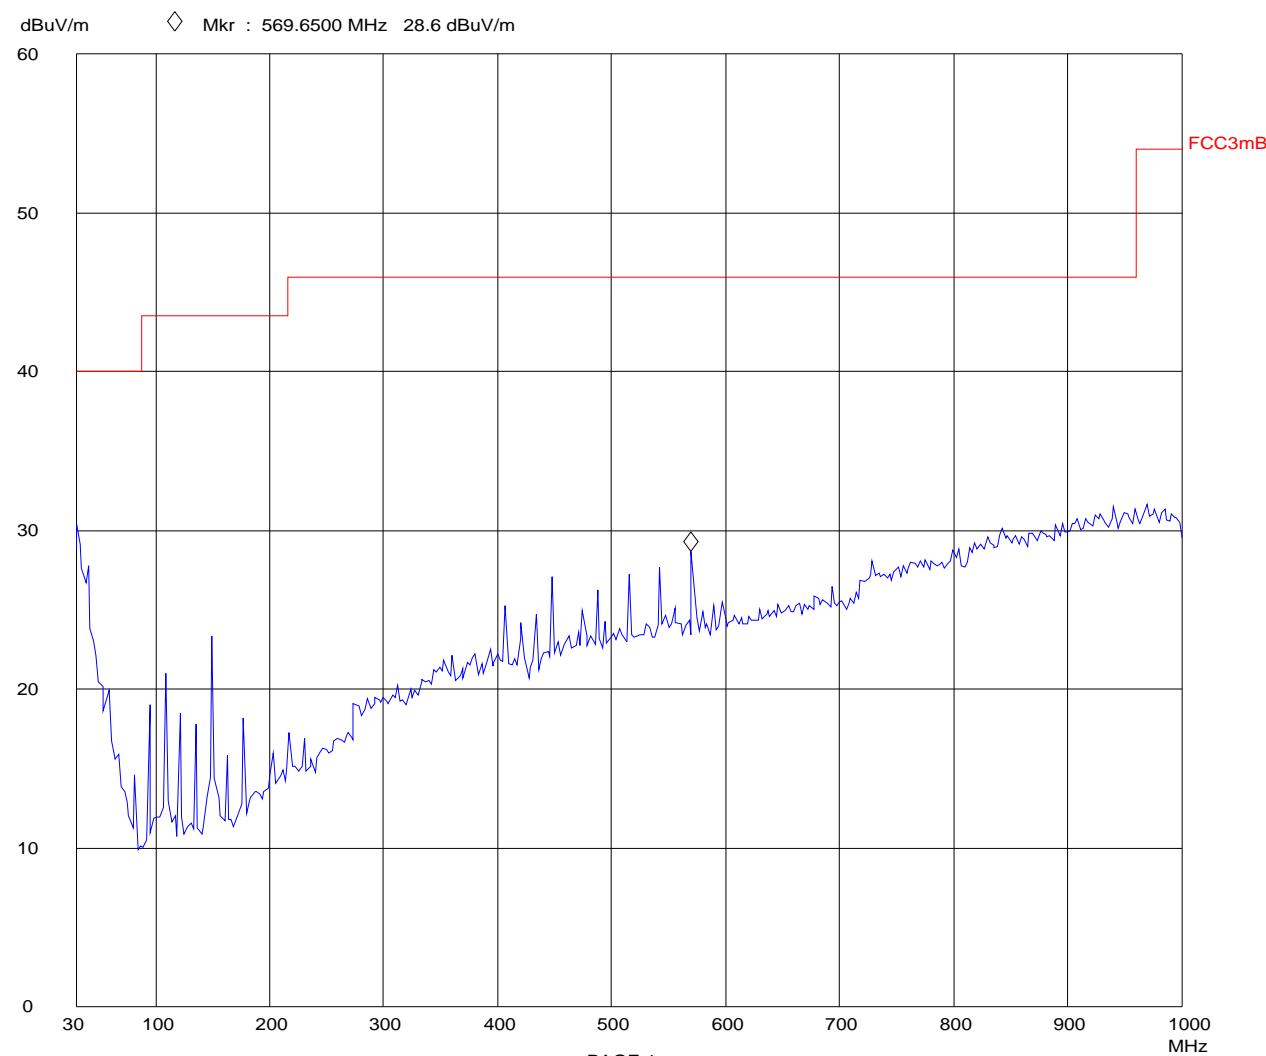

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

06. Sep 10 14:44

Radiated Emissions Prescan in FAR, d=3m


EUT: M21 w/ MK07476
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 1 side, hor, 5ms/step

Scan Settings (1 Range)

Frequencies |----- **Receiver Settings** -----|
 Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
 30M 1000M 50k 120k PK 5ms AUTO LN ON 60dB

Final Measurement: x Hor-Max / + Vert-Max
 Meas Time: 1 s
 Subranges: 25
 Acc Margin: 15dB

Transducer No. Start Stop Name
 22 30M 1000M 2064FSMK

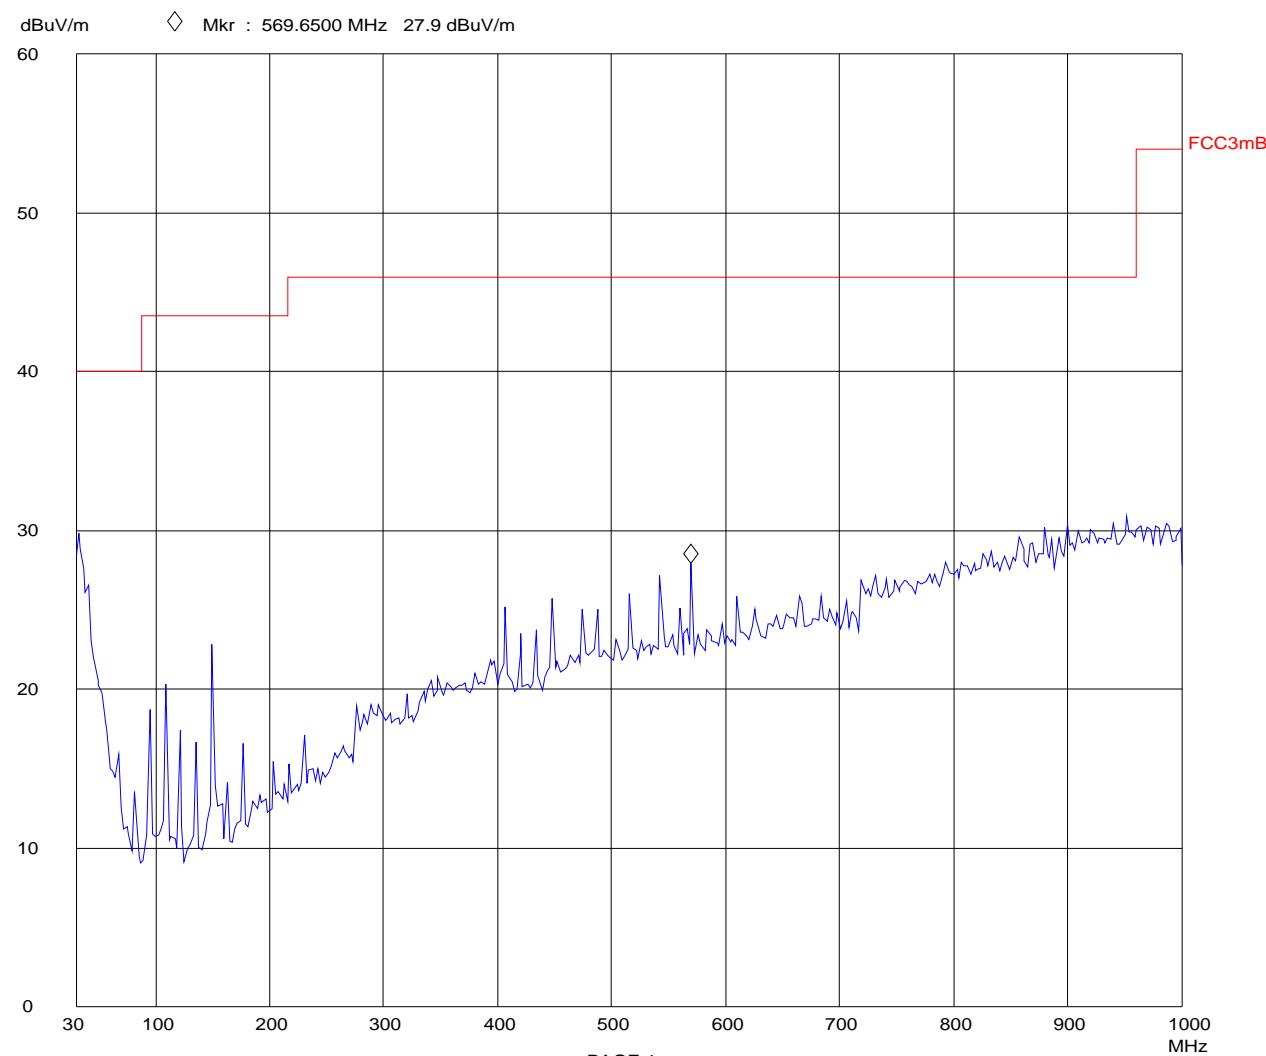

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

06. Sep 10 15:41

Radiated Emissions Prescan in FAR, d=3m


EUT: M21 w/ MK07476
Manuf: Draeger
Op Cond: w/o tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, hor+vert

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 1000M 50k 120k PK 1ms AUTO LN ON 60dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

Transducer No. Start Stop Name
22 30M 1000M 2064FSMK

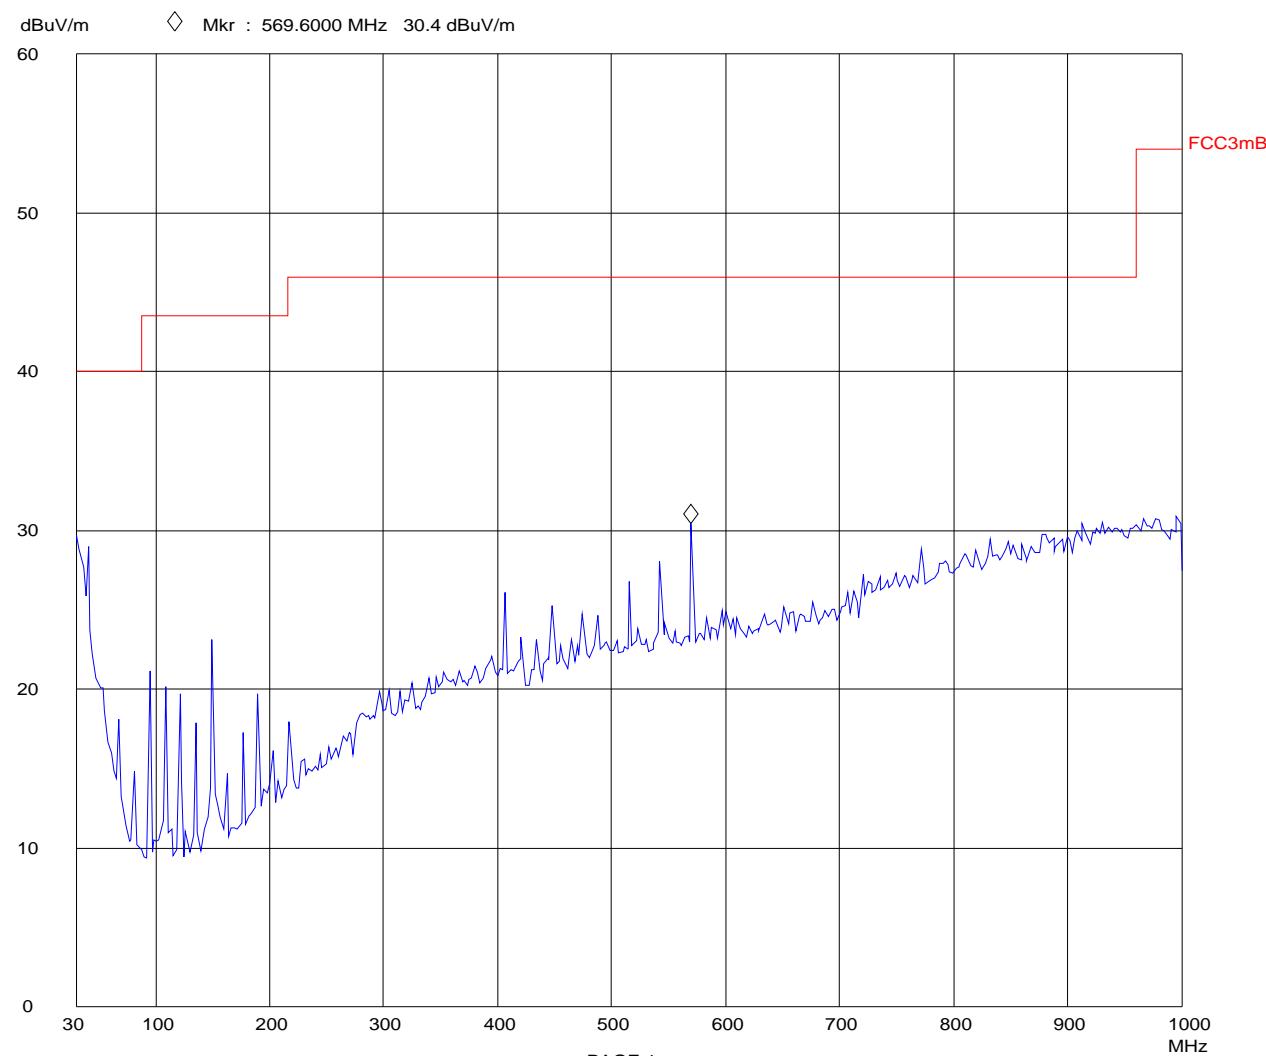

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

06. Sep 10 14:53

Radiated Emissions Prescan in FAR, d=3m


EUT: M21 w/ MK07476
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, hor+vert

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 1000M 50k 120k PK 5ms AUTO LN ON 60dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 15dB

Transducer No. Start Stop Name
22 30M 1000M 2064FSMK

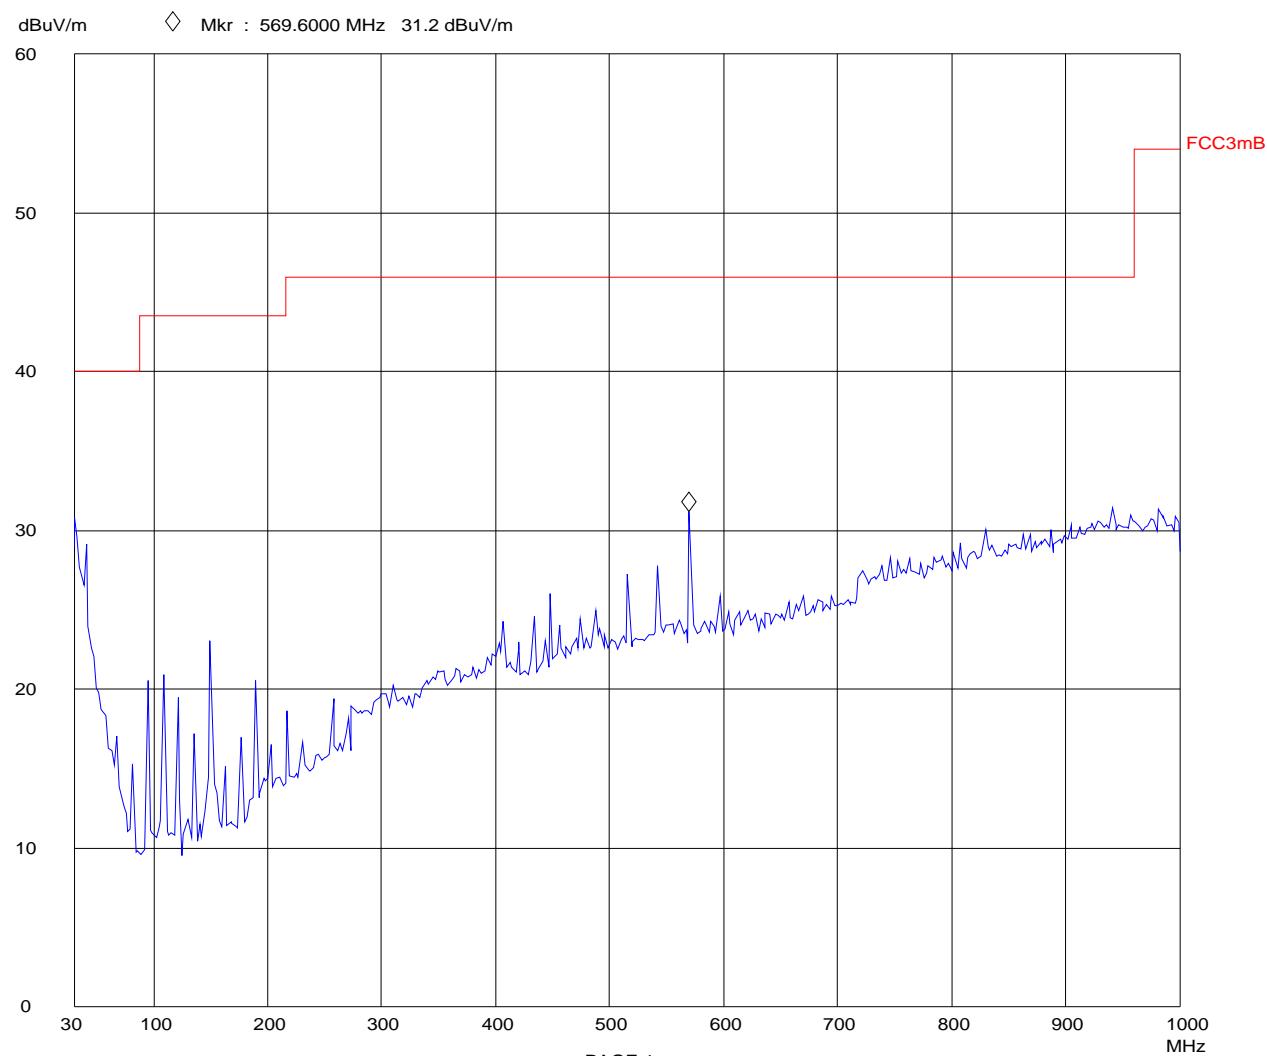

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

07. Sep 10 10:59

Radiated Emissions Prescan in FAR, d=3m


EUT: M21 w/ MK07487
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, hor+vert

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 1000M 50k 120k PK 1ms AUTO LN ON 60dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

Transducer No. Start Stop Name
22 30M 1000M 2064FSMK

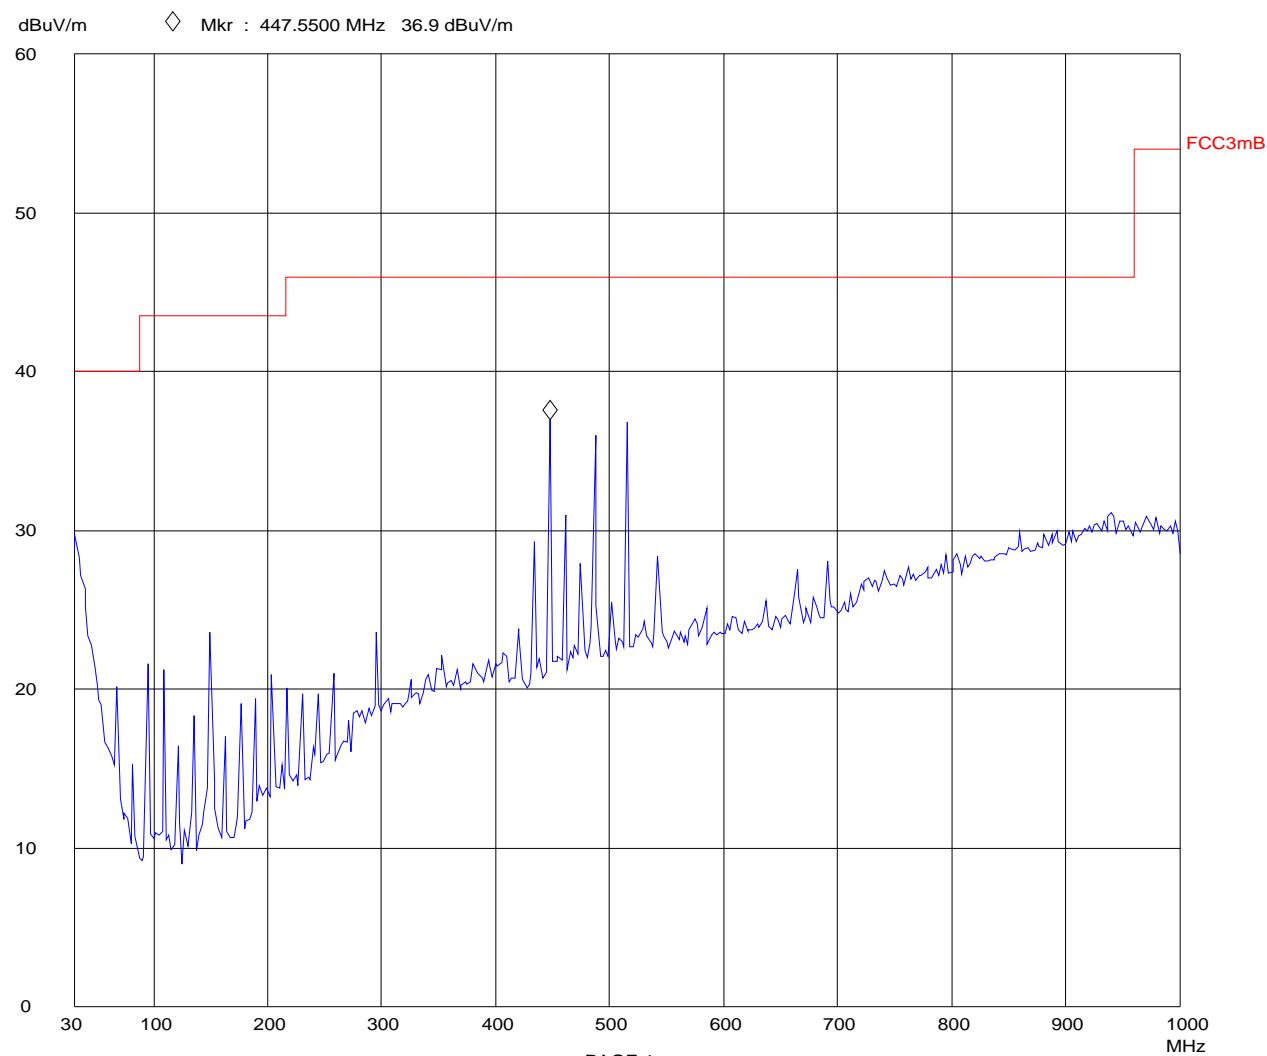

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

07. Sep 10 09:57

Radiated Emissions Prescan in FAR, d=3m


EUT: M21 w/ MK07487
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, hor+vert

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 1000M 50k 120k PK 1ms AUTO LN ON 60dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

Transducer No. Start Stop Name
22 30M 1000M 2064FSMK

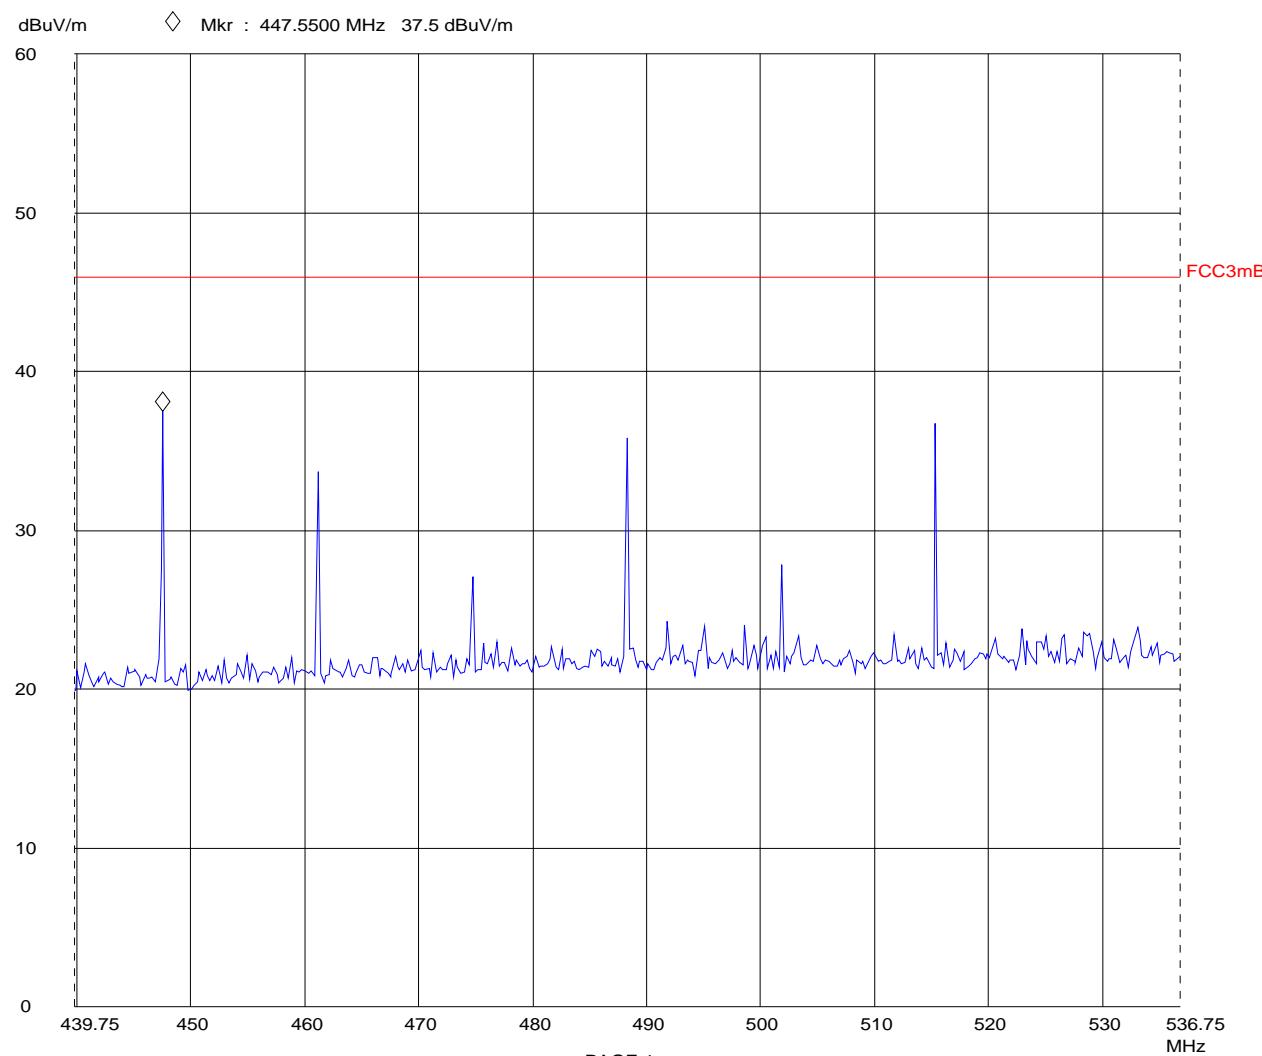

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

07. Sep 10 09:01

Radiated Emissions Prescan in FAR, d=3m


EUT: M21 w/ MK07491
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, hor+vert

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 1000M 50k 120k PK 1ms AUTO LN ON 60dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

Transducer No. Start Stop Name
22 30M 1000M 2064FSMK

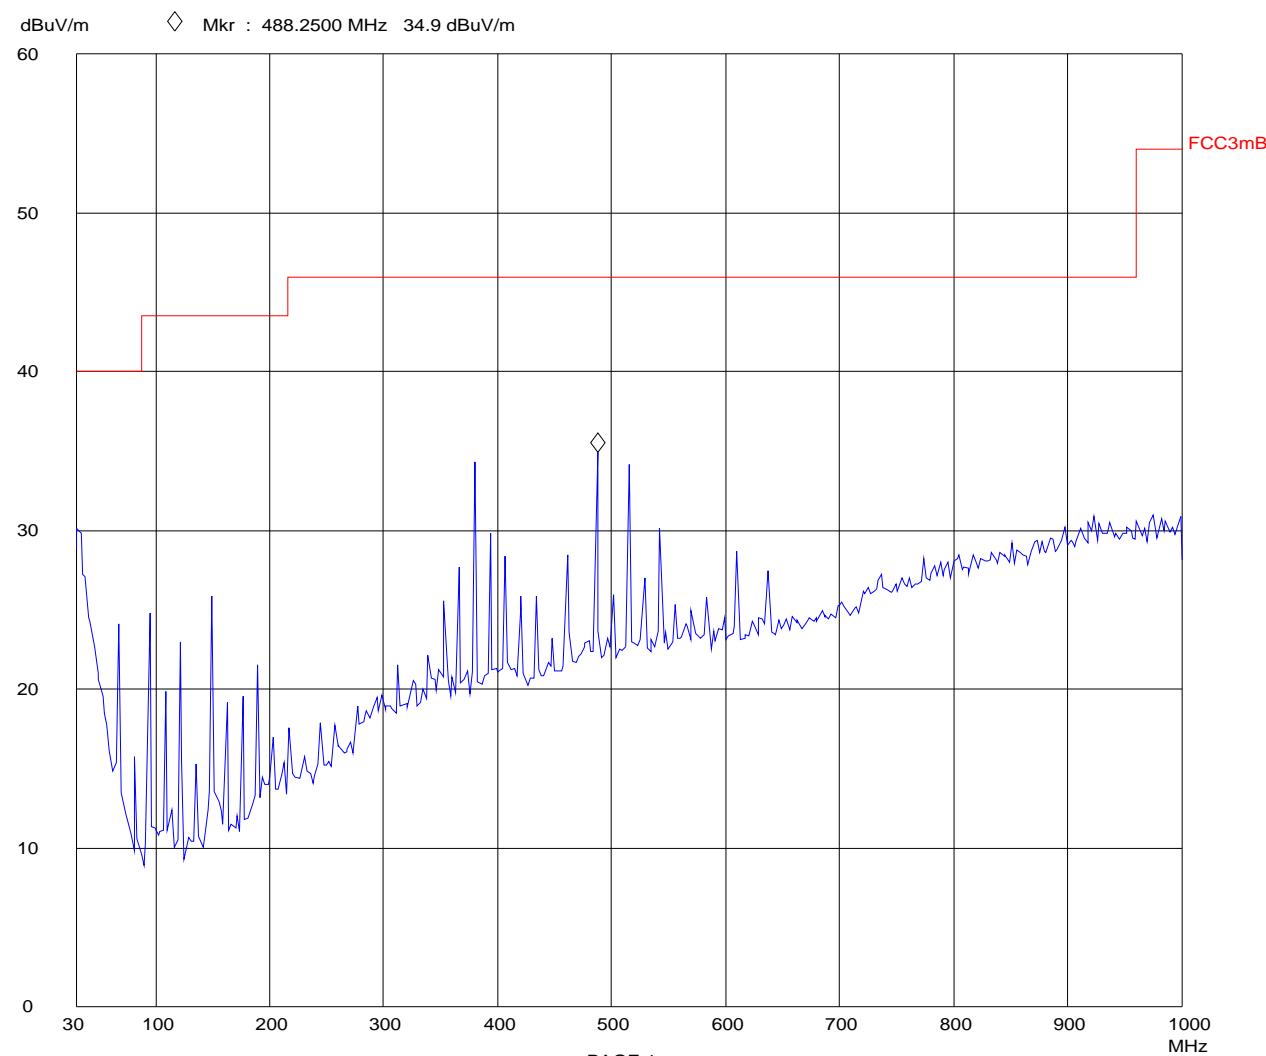

PAGE 1

Test of RFID Reader Module EAST M21 with Antennas to 47 CFR 15.225 and RSS-210 Issue 8

EMCCons DR. RASEK

06. Sep 10 16:47

Radiated Emissions Prescan in FAR, d=3m


EUT: M21 w/ MK07891
Manuf: Draeger
Op Cond: w/ tag, CW
Operator: Doering
Test Spec: FCC 15, RSS-210
Comment: 4 sides, hor+vert

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 1000M 50k 120k PK 1ms AUTO LN ON 60dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 25
Acc Margin: 30dB

Transducer No. Start Stop Name
22 30M 1000M 2064FSMK

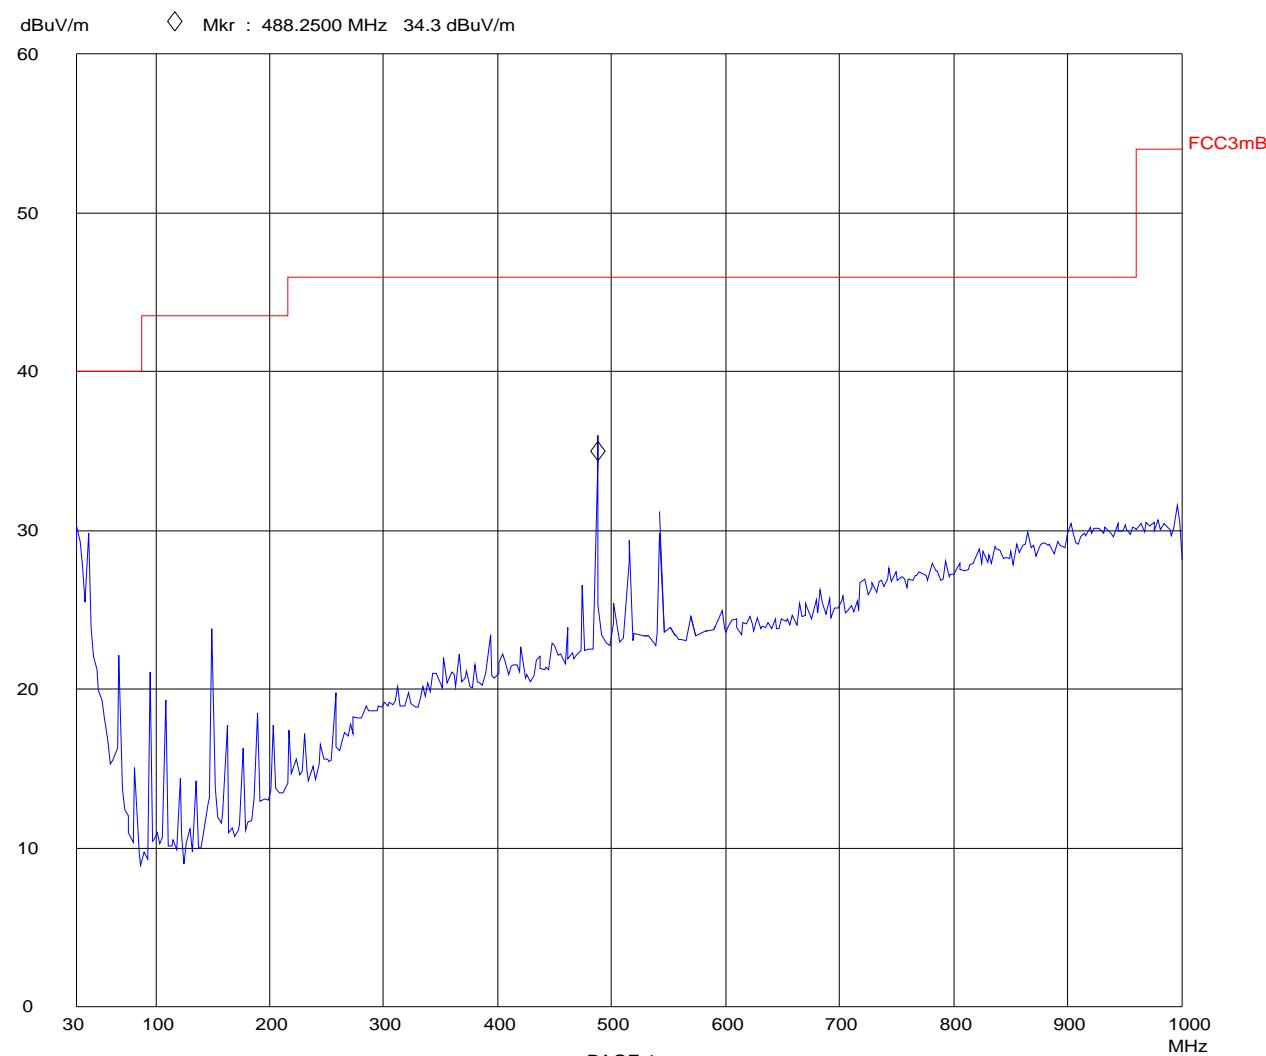

PAGE 1

8 LIST OF ANNEXES

Following annexes are separated parts from this test report.

Description	Pages
Annex 1: Photographs of test set-up	4
Annex 2: Photographs of equipment under test (EUT)	6