FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

2.4G OutDoor Device

Model: RAD500

Trade Name: Radmax

Issued to

Radmax Communication 205, Bajaj House 97 Nehru Place, New Delhi, India, Zip code: 1100019

Issued by



Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
http://www.ccsemc.com.tw
service@tw.ccsemc.com



Reference No.: 60517004

Date of Issue: January 15, 2007

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

TABLE OF CONTENTS

1. T	EST RESULT CERTIFICATION	3
2. E	UT DESCRIPTION	4
3. T	EST METHODOLOGY	5
3.1	EUT CONFIGURATION	5
3.2	EUT EXERCISE	
3.3	GENERAL TEST PROCEDURES	
3.4	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5	DESCRIPTION OF TEST MODES	7
4. IN	NSTRUMENT CALIBRATION	8
4.1	MEASURING INSTRUMENT CALIBRATION	8
4.2	MEASUREMENT EQUIPMENT USED	
5. F	ACILITIES AND ACCREDITATIONS	9
5.1	FACILITIES	9
5.2	EQUIPMENT	
5.3	TABLE OF ACCREDITATIONS AND LISTINGS.	
6. SI	ETUP OF EQUIPMENT UNDER TEST	11
6.1	SETUP CONFIGURATION OF EUT	11
6.2	SUPPORT EQUIPMENT	11
7. F	CC PART 15.247 REQUIREMENTS	12
7.1	6DB BANDWIDTH	12
7.2	PEAK POWER	16
7.3	AVERAGE POWER	
7.4	BAND EDGES MEASUREMENT	
7.5	PEAK POWER SPECTRAL DENSITY	
7.6	SPURIOUS EMISSIONS	
7.7	POWERLINE CONDUCTED EMISSIONS	66
APPE	NDIX I RADIO FREQUENCY EXPOSURE	69
APPE	NDIX II PHOTOGRAPHS OF TEST SETUP	71

1. TEST RESULT CERTIFICATION

Applicant:

Radmax Communication

205, Bajaj House 97 Nehru Place, New Delhi,

India, Zip code: 1100019

Equipment Under Test:

2.4G OutDoor Device

Trade Name:

Radmax

Model:

RAD500

Date of Test:

July 4 ~ 28, 2006

APPLICABLE STANDARDS				
STANDARD	TEST RESULT			
FCC 47 CFR Part 15 Subpart C No non-compliance note				

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Gavin Lim Section Manager

Compliance Certification Services Inc.

Join lim

Amanda Wu Section Manager

Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	2.4G OutDoor Device
Trade Name	Radmax
Model Number	RAD500
Model Discrepancy	N/A
Power Supply	Power Adapter: Model: SA06L48-V I/P: DC 100-240V 0.6A 50~60Hz O/P: AC 48V 0.4A
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b: 16.28 dBm (42.46 mW) IEEE 802.11g: 16.23 dBm (41.98 mW)
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 12, 9, 6 Mbps
Number of Channels	11 Channels
Antenna Specification	Panel Antenna: Gain: 14 dBi Dipole Antenna: Gain: 12 dBi, 9dBi

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2. This submittal(s) (test report) is intended for FCC ID: <u>UW8-RAD500</u> filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

Page 4 Rev. 00

Reference No.: 60517004

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

Reference No.: 60517004

Date of Issue: January 15, 2007

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

Page 5 Rev. 00

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Reference No.: 60517004

Date of Issue: January 15, 2007

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	$\binom{2}{}$
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Page 6 Rev. 00

² Above 38.6

⁽b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: RAD500) comes with two different types of antenna (internal panel antenna or external dipole antenna) for sale.

Reference No.: 60517004

Date of Issue: January 15, 2007

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and powerline conducted emissions below 30MHz, which worst case was with internal panel antenna in normal link mode only.

IEEE802.11b mode:

Channel Low, Channel Mid and Channel High with 11Mbps data rate were chosen for full testing.

IEEE802.11g mode:

Channel Low, Channel Mid and Channel High with 6Mbps data rate were chosen for full testing.

Page 7 Rev. 00

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Reference No.: 60517004

Date of Issue: January 15, 2007

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site								
Name of Equipment Manufacturer Model Serial Number Calibration Due								
Spectrum Analyzer Agilent E4446A MY43360131 01/17/2008								
Spectrum Analyzer								

3M Semi Anechoic Chamber						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
Spectrum Analyzer	Agilent	E4446A	US42510252	08/02/2007		
Test Receiver	Rohde&Schwarz	ESCI	100064	11/13/2007		
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2007		
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2007		
Horn-Antenna	TRC	HA-0502	06	06/06/2007		
Horn-Antenna	TRC	HA-0801	04	05/05/2007		
Horn-Antenna	TRC	HA-1201A	01	07/10/2007		
Horn-Antenna	TRC	HA-1301A	01	07/18/2007		
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2007		
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.		
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.		
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.		
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/25/2008		
Test S/W	LABVIEW (V 6.1)					

Remark: The measurement uncertainty is less than $\pm -2.0065dB$ (30MHz $\pm 1GHz$), $\pm -3.0958dB$ (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site									
Name of Equipment	Name of Equipment Manufacturer Model Serial Number Calibration Du								
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	10/31/2007					
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/14/2007					
LISN 10kHz-100MHz EMCO 3825/2 9106-1809 03/20/200									
Test S/W	LABVIEW (V 6.1)								

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Page 8 Rev. 00

5. FACILITIES AND ACCREDITATIONS

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
 □ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
 Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
 ☑ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan
 Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
 ☑ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Page 9 Rev. 00

Reference No.: 60517004

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	ACCREDITED 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	VCCI R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 3991-3, IC 3991-4) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	Canada IC 3991-3 IC 3991-4 IC 6106

^{*} No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

Page 10 Rev. 00

Reference No.: 60517004

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC (Remote)	IBM	2672 (X31)	99РВТКВ	ANO20030400LEG	Line Cable:	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2	Notebook PC (Remote)	IBM	2672 (X31)	9985Н9М	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 11 Rev. 00

Reference No.: 60517004

7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH


LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Reference No.: 60517004

Date of Issue: January 15, 2007

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	9420		PASS
Mid	2437	9420	>500	PASS
High	2462	10250		PASS

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16500		PASS
Mid	2437	16500	>500	PASS
High	2462	16500		PASS

Page 12 Rev. 00


Test Plot

IEEE 802.11b

6dB Bandwidth (CH Low)

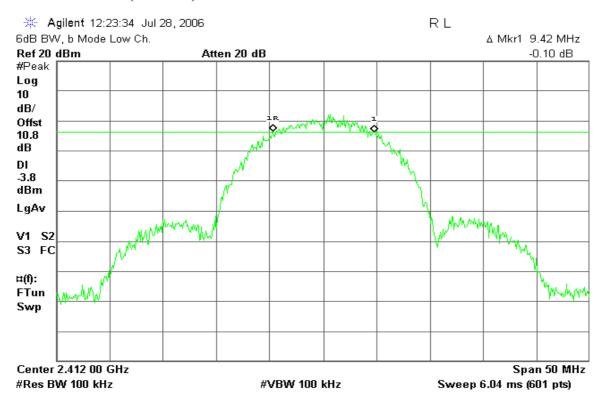


6dB Bandwidth (CH Mid)

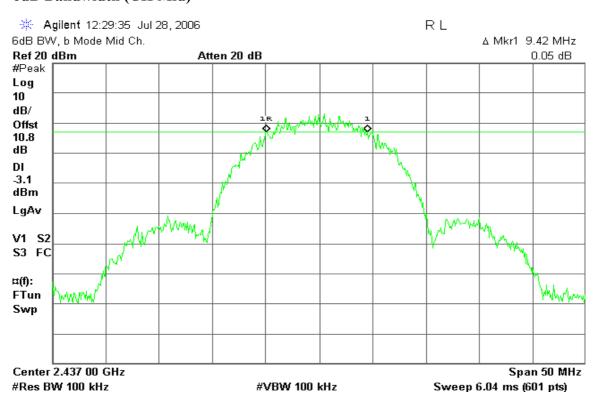


Page 13 Rev. 00

6dB Bandwidth (CH High)

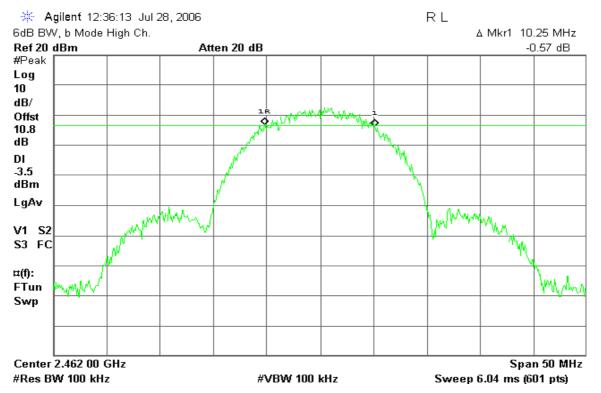

IEEE 802.11g


6dB Bandwidth (CH Low)

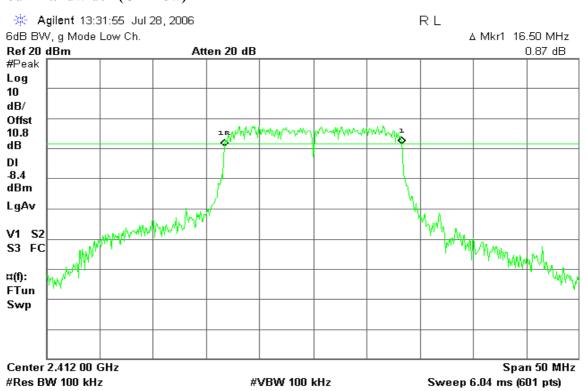


Page 14 Rev. 00

Reference No.: 60517004

6dB Bandwidth (CH Mid)

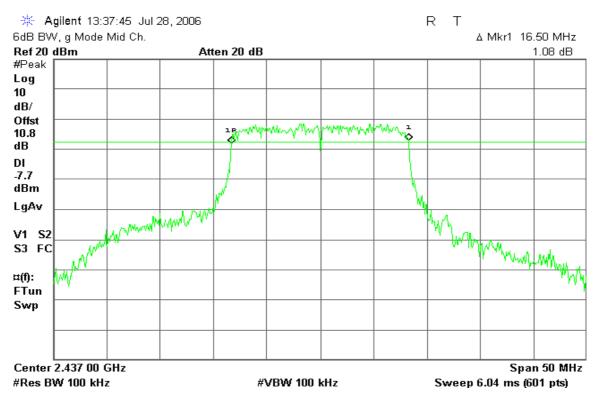

6dB Bandwidth (CH High)

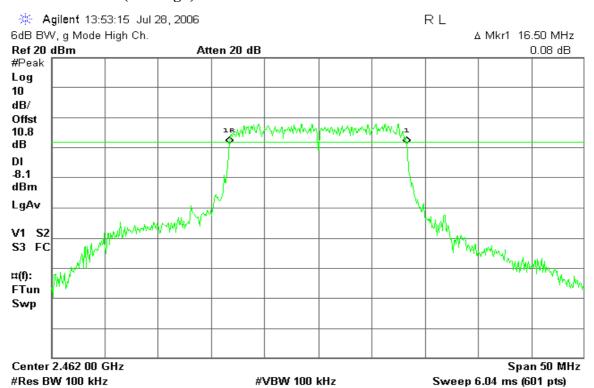

Page 15 Rev. 00

Reference No.: 60517004

7.2 PEAK POWER

LIMIT


The maximum peak output power of the intentional radiator shall not exceed the following:

Reference No.: 60517004

Date of Issue: January 15, 2007

- 1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	15.55	0.03589		PASS
Mid	2437	16.28	0.04246	0.158	PASS
High	2462	15.71	0.03724		PASS

Test mode: IEEE 802.11g

S .					
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.07	0.04046		PASS
Mid	2437	15.75	0.03758	0.158	PASS
High	2462	16.23	0.04198		PASS


Remark: The maximum antenna gain is 14 dBi; therefore the reduction due to antenna gain is 8 dB, so the limit is 22 dBm.

Page 16 Rev. 00

Test Plot

IEEE 802.11b

Peak Power (CH Low)

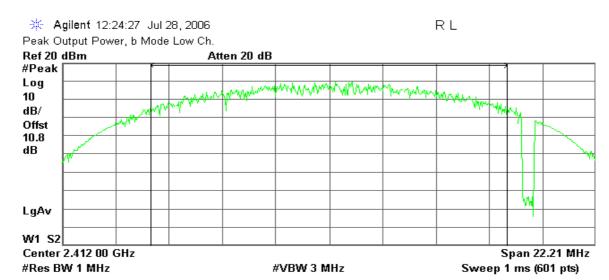

Channel Power

Power Spectral Density


15.55 dBm /14.8060 MHz

-56.16 dBm/Hz

Reference No.: 60517004

Date of Issue: January 15, 2007

Peak Power (CH Mid)

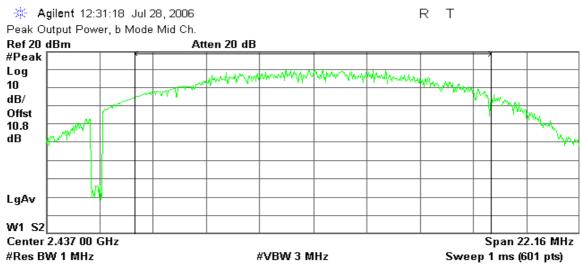

Channel Power


Power Spectral Density

16.28 dBm /14.7730 MHz

-55.42 dBm/Hz

Page 17 Rev. 00

Peak Power (CH High)

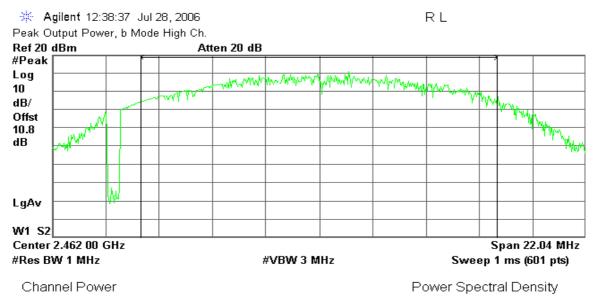


15.71 dBm /14.6960 MHz

-55.96 dBm/Hz

IEEE 802.11g

Peak Power (CH Low)

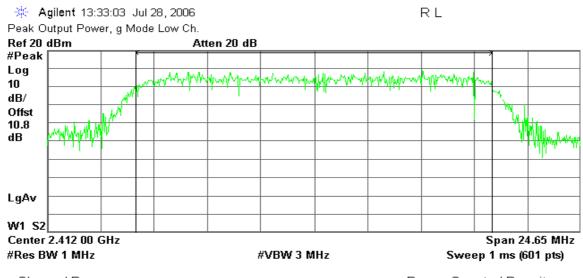

Channel Power


Power Spectral Density

16.07 dBm /16.4310 MHz

-56.09 dBm/Hz

Page 18 Rev. 00 Report No.: 70105001-RP1 FCC ID: UW8-RAD500 Date of Issue: January 15, 2007

Peak Power (CH Mid)

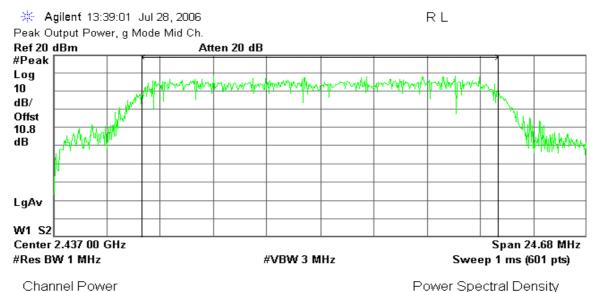


15.75 dBm /16.4500 MHz

-56.41 dBm/Hz

Reference No.: 60517004

Peak Power (CH High)

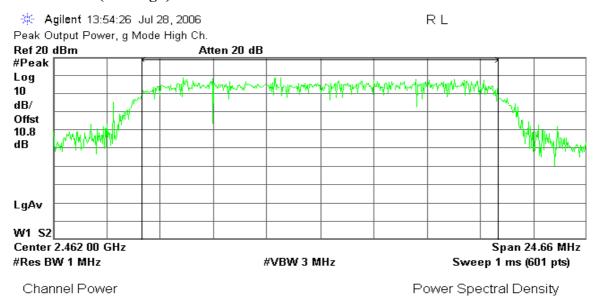

16.23 dBm /16.4420 MHz

-55.93 dBm/Hz


Page 19 Rev. 00

7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)
Low	2412	12.35
Mid	2437	12.91
High	2462	12.84

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	
Low	2412	12.73	
Mid	2437	12.31	
High	2462	12.85	


Page 20 Rev. 00

Reference No.: 60517004

Test Plot

IEEE 802.11b

CH Low

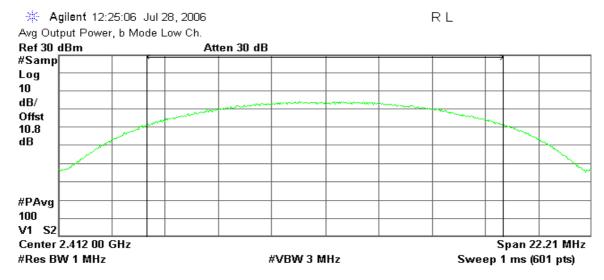


Channel Power

Power Spectral Density

12.35 dBm /14.8060 MHz

-59.35 dBm/Hz

CH Mid

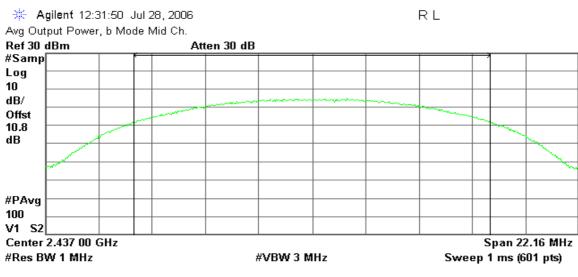

Channel Power


Power Spectral Density

12.91 dBm /14.7730 MHz

-58.79 dBm/Hz

Page 21 Rev. 00

CH High

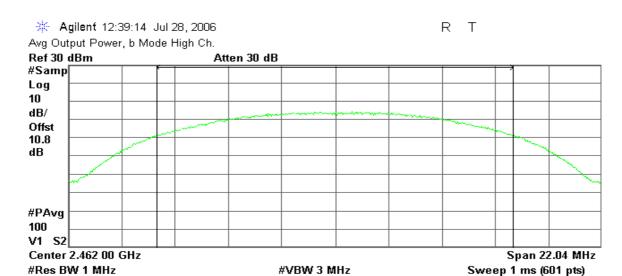

Channel Power

Power Spectral Density

12.84 dBm /14.6960 MHz


-58.83 dBm/Hz

Reference No.: 60517004

Date of Issue: January 15, 2007

IEEE 802.11g

CH Low

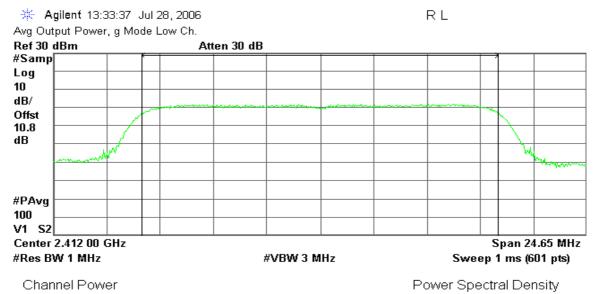


12.73 dBm /16.4310 MHz

-59.42 dBm/Hz

Page 22 Rev. 00

CH Mid

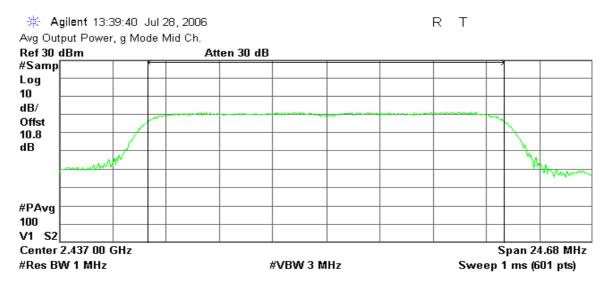


Channel Power

Power Spectral Density

12.31 dBm /16.4500 MHz

-59.85 dBm/Hz

CH High

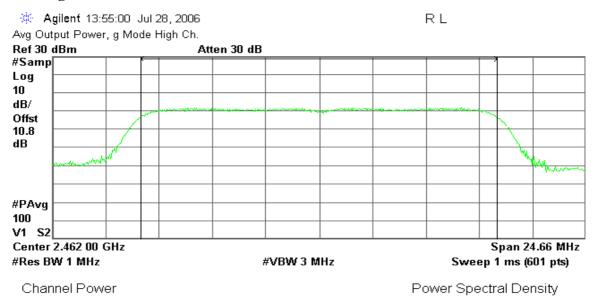

12.85 dBm /16.4420 MHz

-59.31 dBm/Hz

Page 23 Rev. 00

7.4 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Reference No.: 60517004

Date of Issue: January 15, 2007

Test Configuration

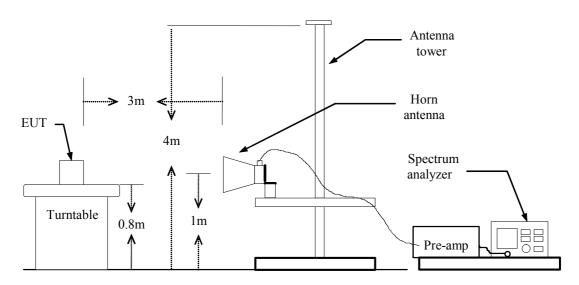

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.

Page 24 Rev. 00


External Antenna: Dipole Antenna

Band Edges (IEEE 802.11b / CH Low)

Detector mode: Peak Polarity: Vertical

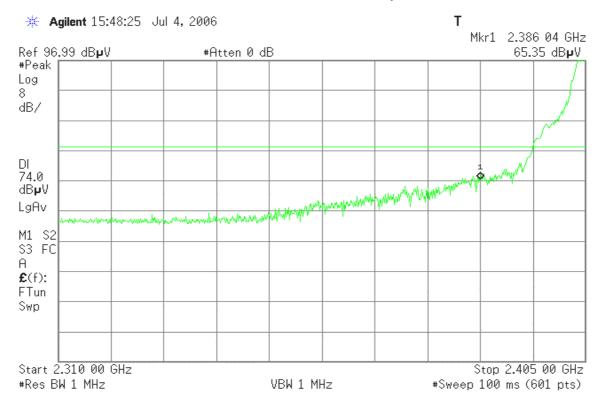


Polarity: Vertical Detector mode: Average

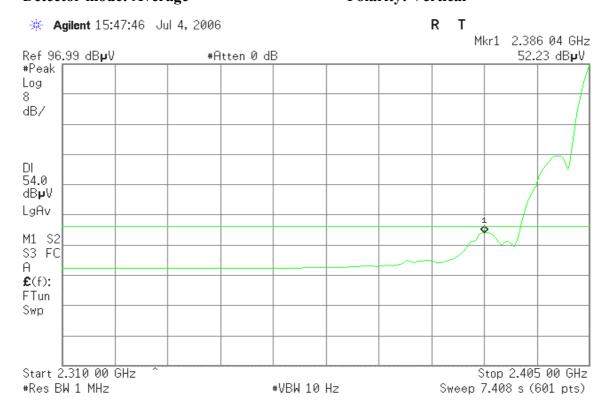


Page 25 Rev. 00

Detector mode: Peak Polarity: Horizontal

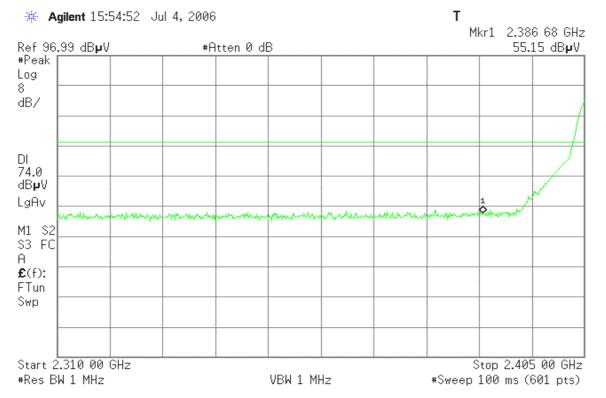

Detector mode: Average


Polarity: Horizontal

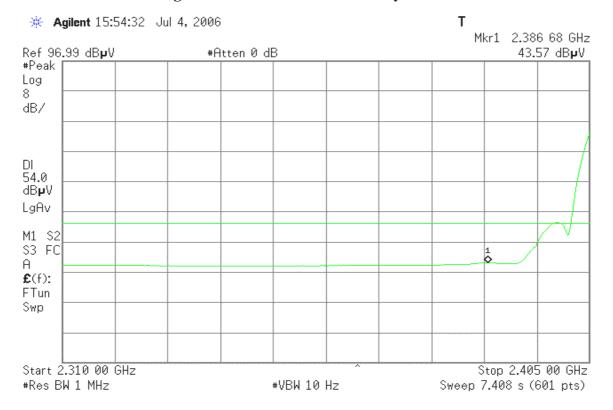

Page 26 Rev. 00

Band Edges (IEEE 802.11b / CH High)

Detector mode: Peak Polarity: Vertical

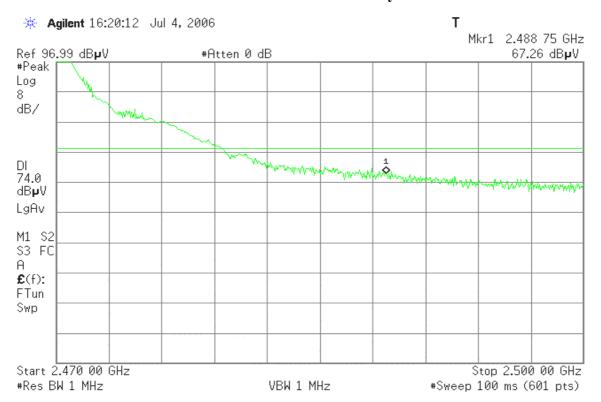


Detector mode: Average Polarity: Vertical



Page 27 Rev. 00


Reference No.: 60517004

Detector mode: Peak Polarity: Horizontal

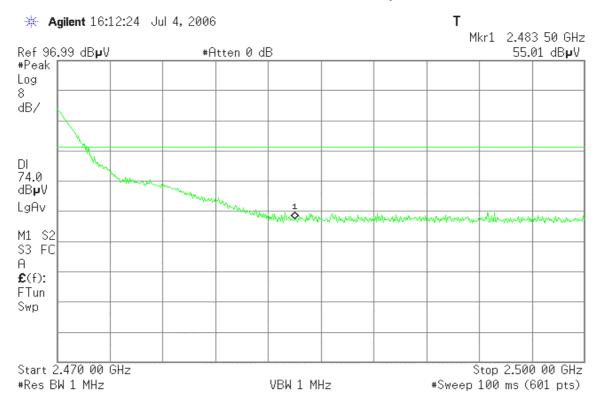


Detector mode: Average

Polarity: Horizontal

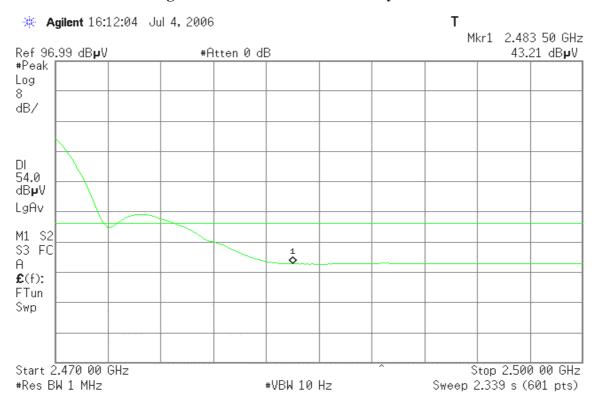


Page 28 Rev. 00 Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak Polarity: Vertical

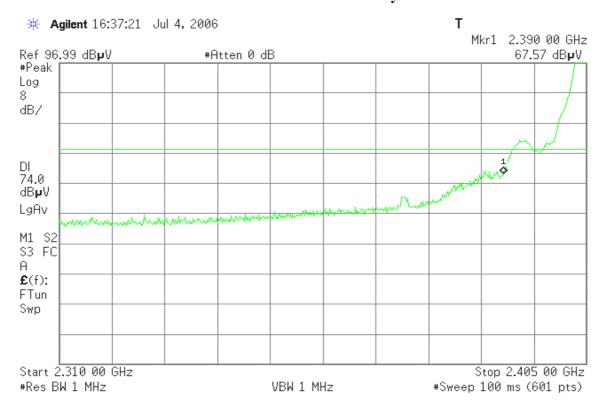


Detector mode: Average Polarity: Vertical

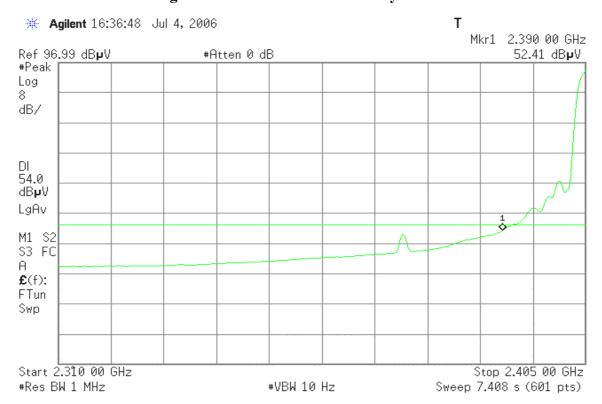

Page 29 Rev. 00

Reference No.: 60517004

Detector mode: Peak Polarity: Horizontal

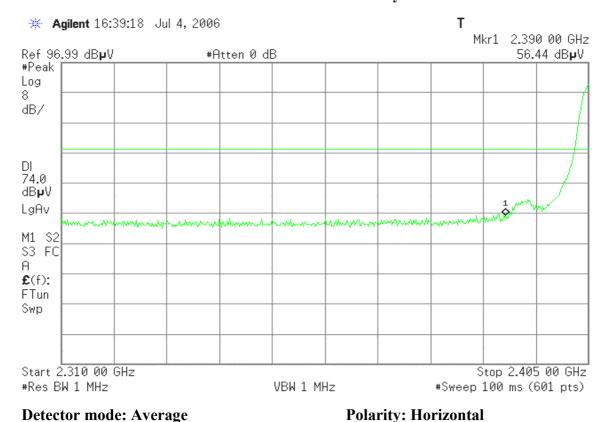

Detector mode: Average

#Res BW 1 MHz

* Agilent 16:39:01 Jul 4, 2006 Mkr1 2.390 00 GHz Ref 96.99 dBpV #Atten 0 dB 43.88 dB**µ**V #Peak Log dB/ DI 54.0 dB₽V LgAv M1 S2 S3 FC Α £(f): FTun Swp Stop 2.405 00 GHz Start 2.310 00 GHz

#VBW 10 Hz


Page 30 Rev. 00

Sweep 7.408 s (601 pts)


Reference No.: 60517004

Band Edges (IEEE 802.11g / CH High)

Detector mode: Peak Polarity: Vertical

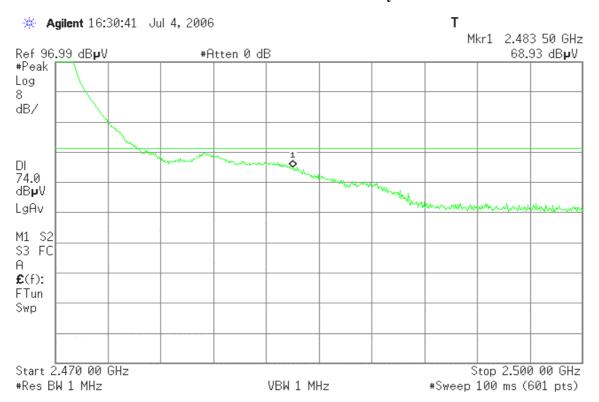


Polarity: Vertical Detector mode: Average

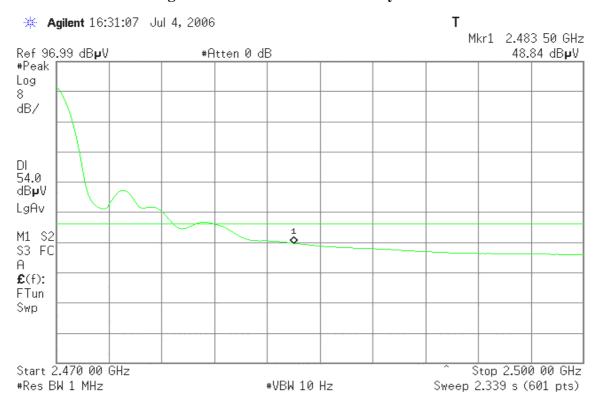


Page 31 Rev. 00

Detector mode: Peak Polarity: Horizontal

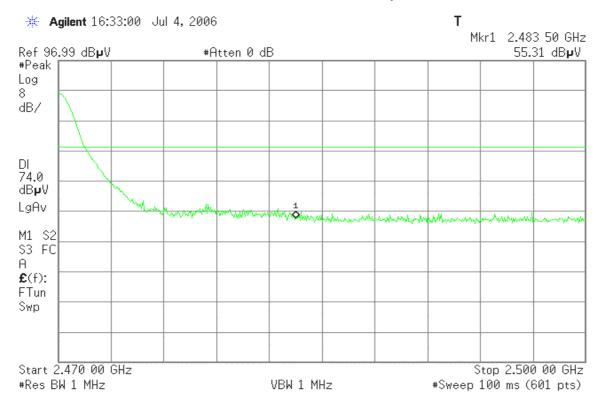

Detector mode: Average

Polarity: Horizontal

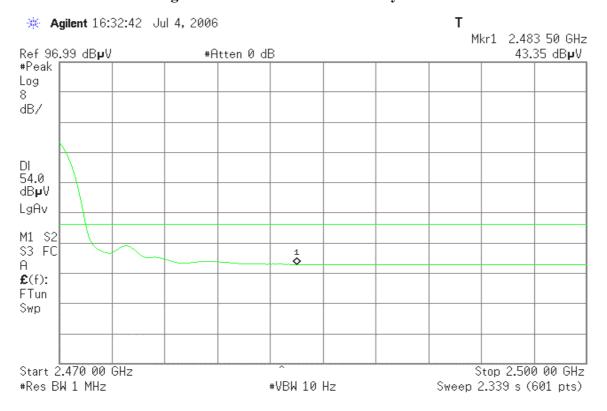


Page 32 Rev. 00


Internal Antenna: Panel Antenna

Band Edges (IEEE 802.11b / CH Low)


Detector mode: Peak Polarity: Vertical

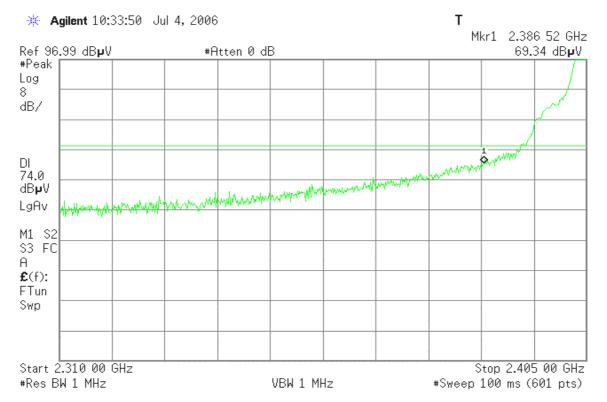

Polarity: Vertical Detector mode: Average

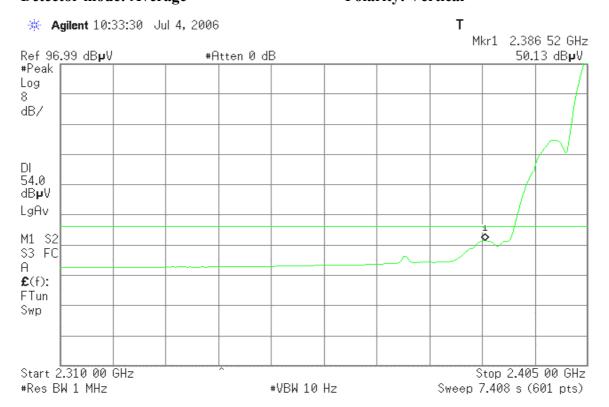

Page 33 Rev. 00 Detector mode: Peak Polarity: Horizontal

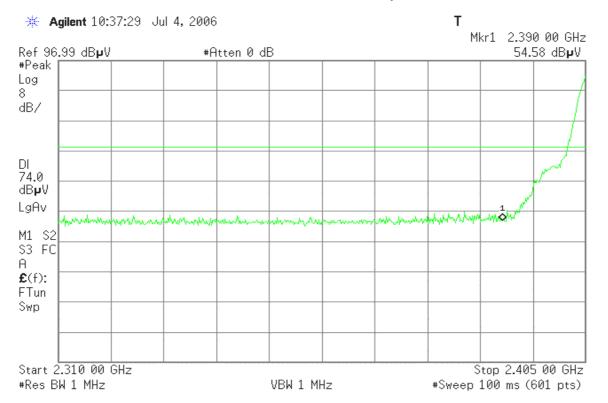


Detector mode: Average

Polarity: Horizontal

Reference No.: 60517004


Date of Issue: January 15, 2007

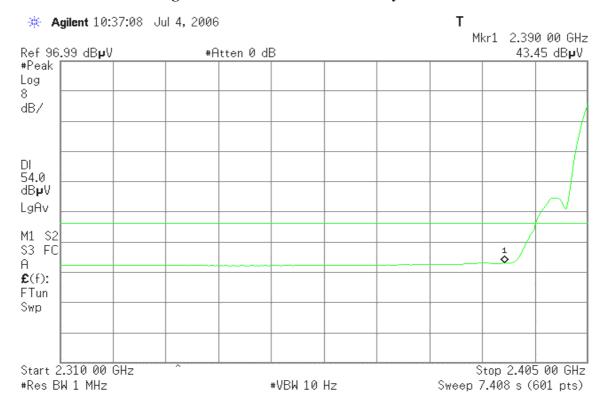


Page 34 Rev. 00

Band Edges (IEEE 802.11b / CH High)


Detector mode: Peak Polarity: Vertical

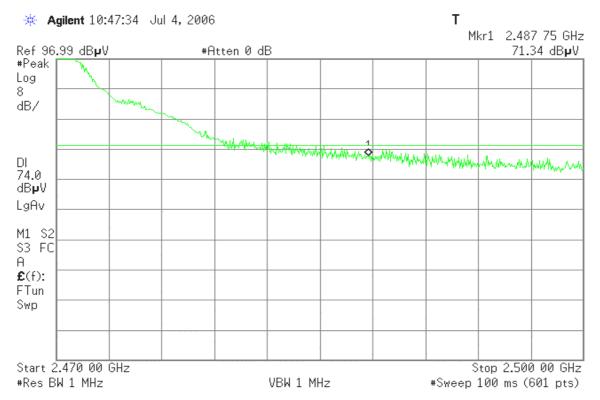

Polarity: Vertical Detector mode: Average

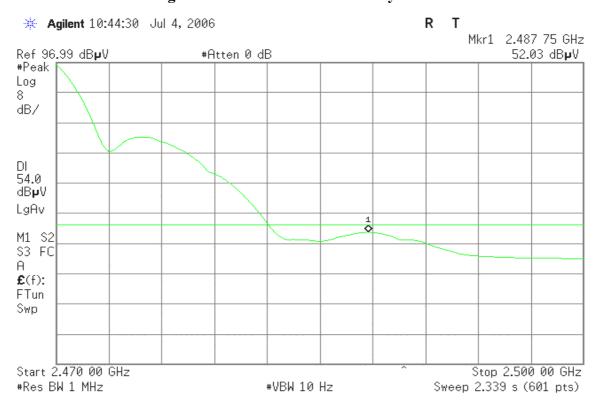

Page 35 Rev. 00 Detector mode: Peak Polarity: Horizontal

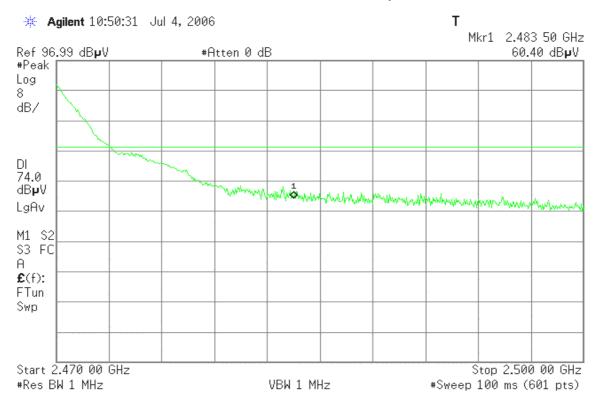


Detector mode: Average

Polarity: Horizontal

Reference No.: 60517004


Date of Issue: January 15, 2007

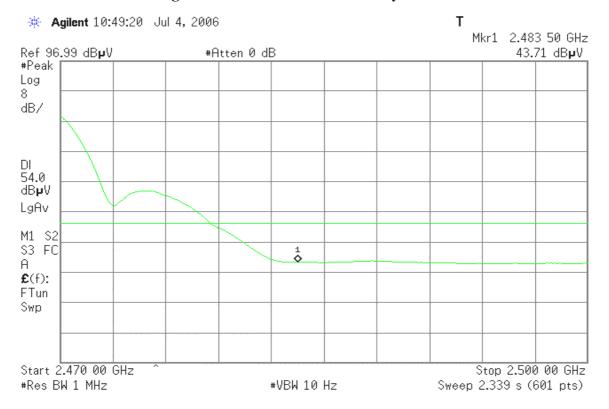


Page 36 Rev. 00

Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak Polarity: Vertical

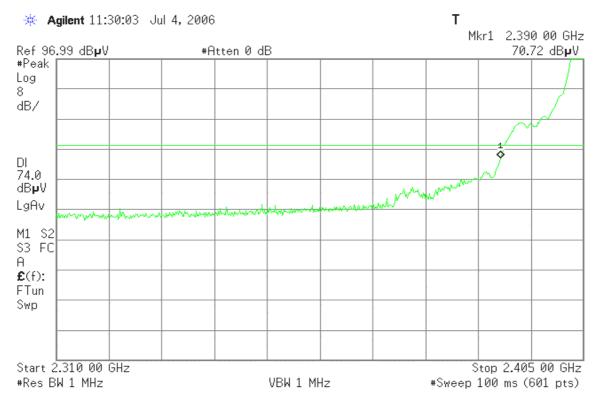


Polarity: Vertical Detector mode: Average

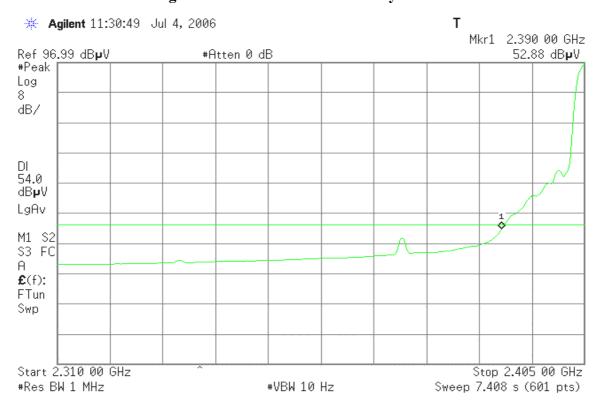


Page 37 Rev. 00

Detector mode: Peak Polarity: Horizontal

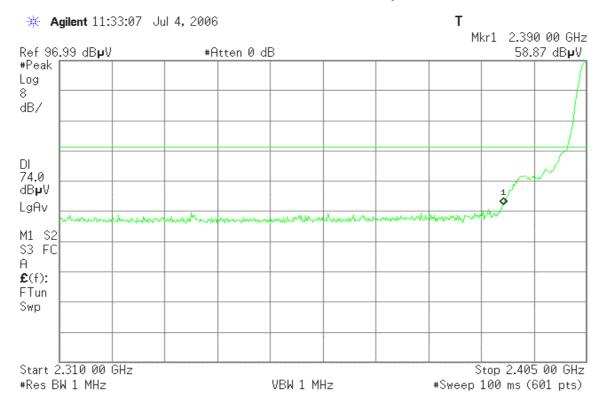

Detector mode: Average


Polarity: Horizontal

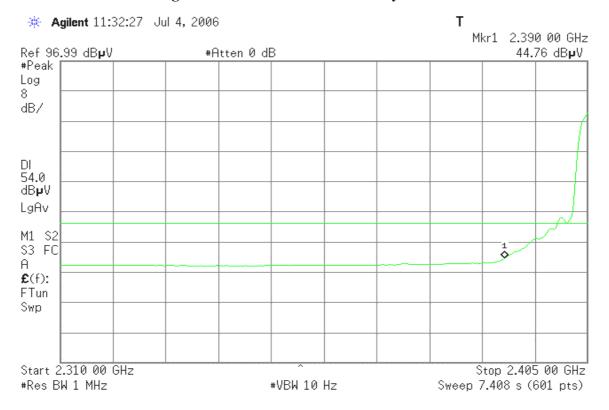


Page 38 Rev. 00

Band Edges (IEEE 802.11g / CH High)

Detector mode: Peak Polarity: Vertical

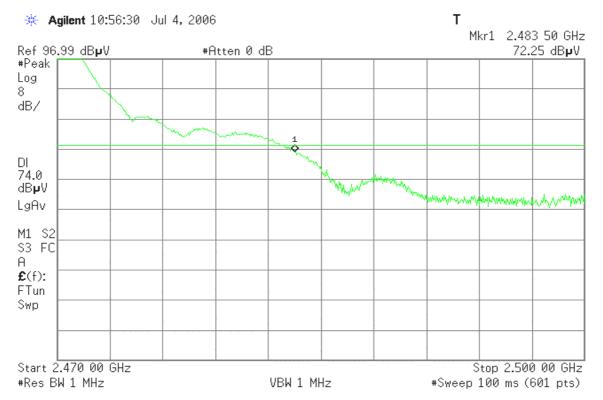


Polarity: Vertical Detector mode: Average

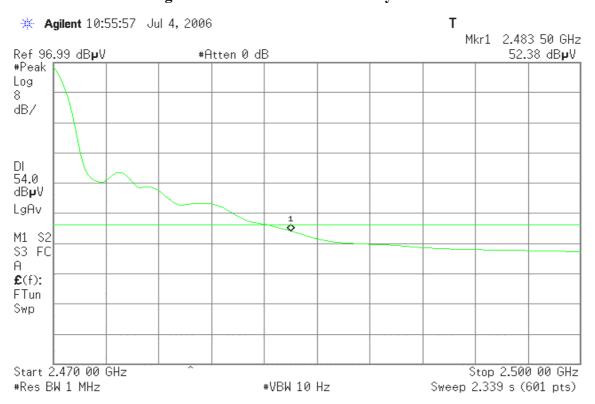


Page 39 Rev. 00

Detector mode: Peak Polarity: Horizontal

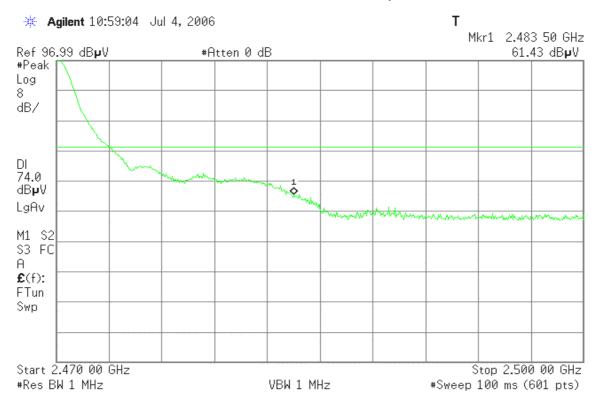

Detector mode: Average

Polarity: Horizontal

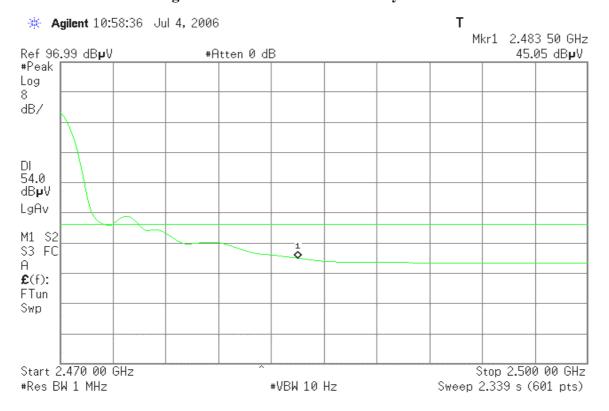

Page 40 Rev. 00

7.5 PEAK POWER SPECTRAL DENSITY

LIMIT


1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Reference No.: 60517004

Date of Issue: January 15, 2007

2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.

 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep = 100 s
- 3. Record the max reading.
- 4. Repeat the above procedure until the measurements for all frequencies are completed.

Page 41 Rev. 00

Report No.: 70105001-RP1 FCC ID: UW8-RAD500 Date of Issue: January 15, 2007

Reference No.: 60517004

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-10.49		PASS
Mid	2437	-10.07	0	PASS
High	2462	-10.30		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-13.79		PASS
Mid	2437	-13.99	0	PASS
High	2462	-14.93		PASS


Remark: The maximum antenna gain is 14 dBi; therefore the reduction due to antenna gain is 8 dB, so the limit is 0 dBm.

Page 42 Rev. 00


Test Plot

IEEE 802.11b

PPSD (CH Low)

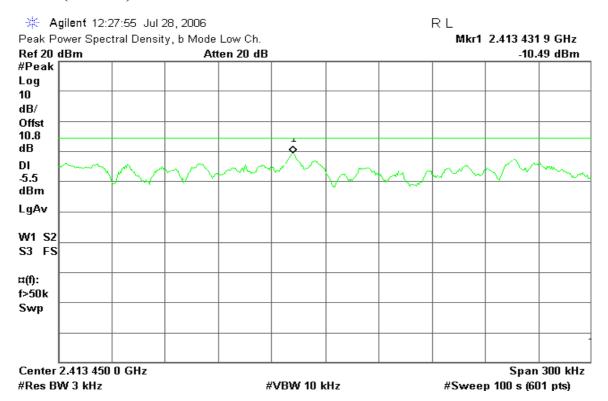

PPSD (CH Mid)

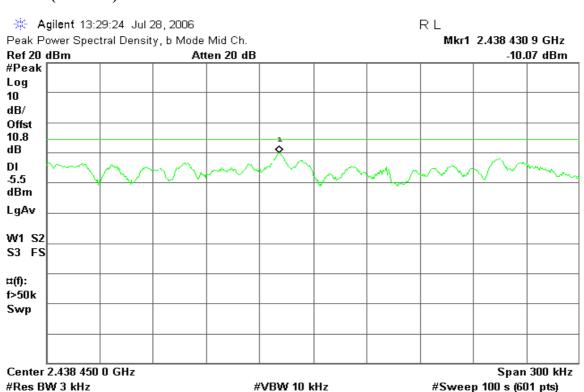


Page 43 Rev. 00

Reference No.: 60517004


Date of Issue: January 15, 2007

PPSD (CH High)

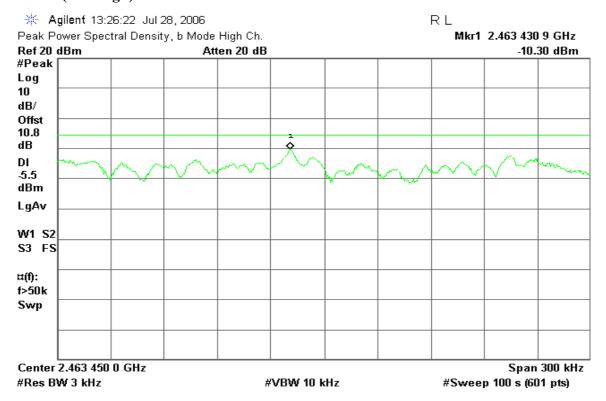


IEEE 802.11g


PPSD (CH Low)

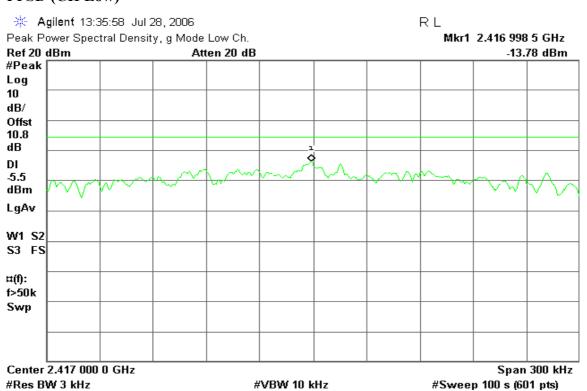

Page 44 Rev. 00 PPSD (CH Mid)

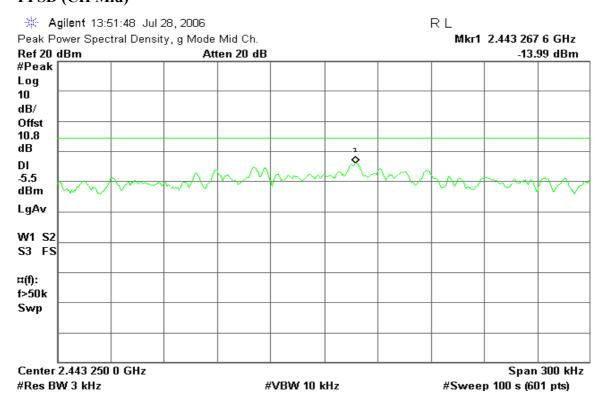

PPSD (CH High)

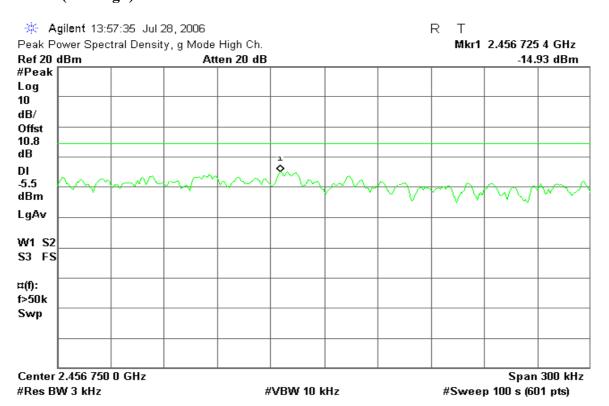

Page 45 Rev. 00

Reference No.: 60517004

Date of Issue: January 15, 2007

7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement


LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Reference No.: 60517004

Date of Issue: January 15, 2007

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted

Page 46 Rev. 00


Test Plot

IEEE 802.11b

CH Low

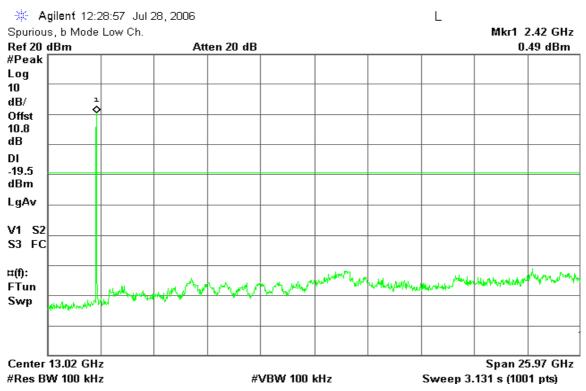

CH Mid

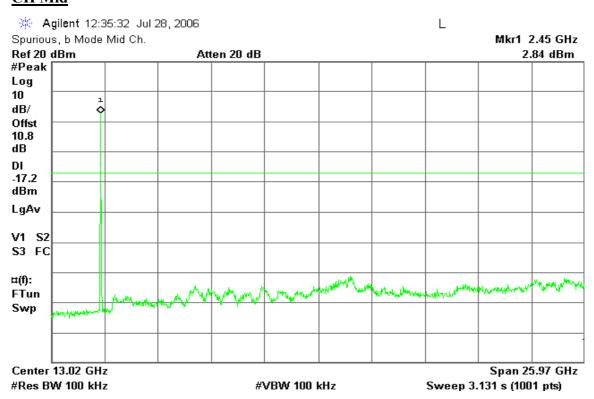


Page 47 Rev. 00

Reference No.: 60517004


Date of Issue: January 15, 2007

CH High

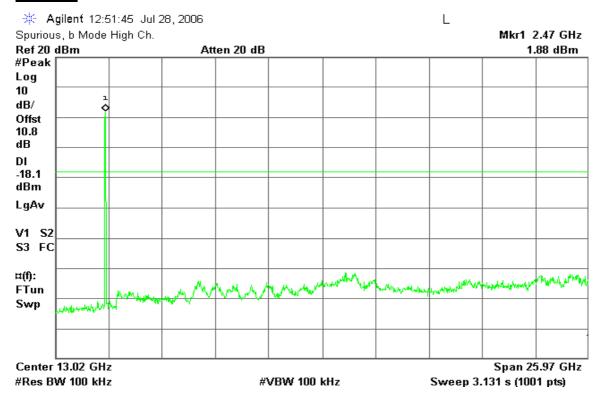


IEEE 802.11g

CH Low

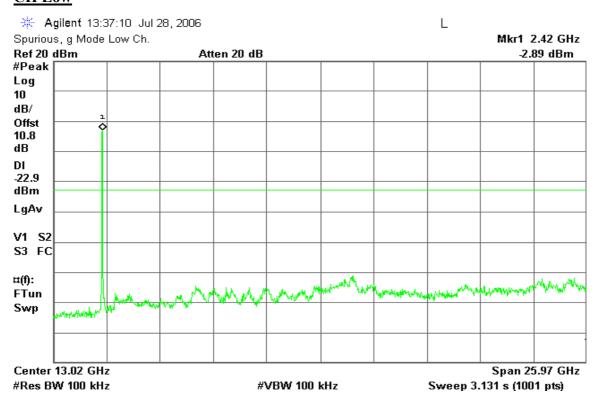


Page 48 Rev. 00

CH Mid

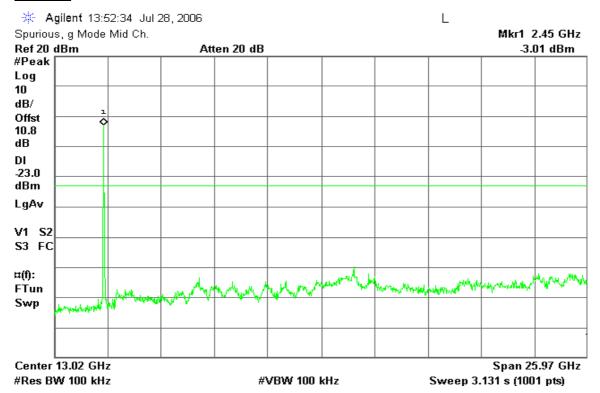

CH High

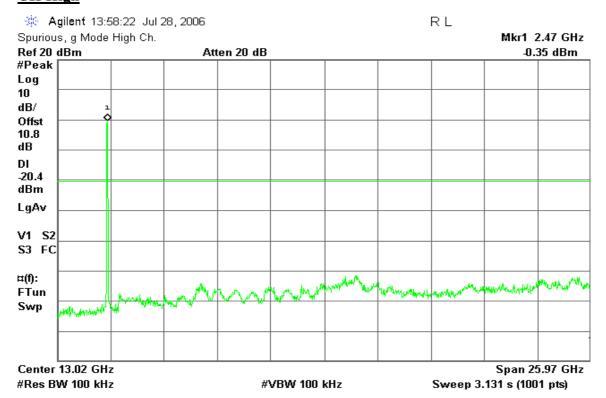

Page 49 Rev. 00

Reference No.: 60517004

Date of Issue: January 15, 2007

7.6.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Reference No.: 60517004

Date of Issue: January 15, 2007

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


Page 50 Rev. 00

cation Services Inc.


RP1 FCC ID: UW8-RAD500 Reference No.: 60517004
Date of Issue: January 15, 2007

Test Configuration

Below 1 GHz

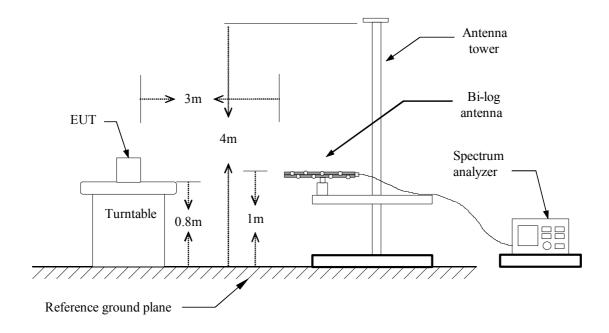

Above 1 GHz

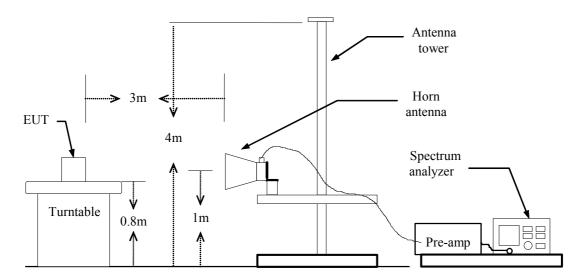

Page 51 Rev. 00

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

Reference No.: 60517004

Date of Issue: January 15, 2007

- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

Page 52 Rev. 00

TEST RESULTS

Below 1GHz

Operation Mode: Normal Link **Test Date:** July 11, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Temperature: 25°C Tested by: Bruce Chen

Humidity: 55% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
47.78	V	56.51	-17.04	39.47	40.00	-0.53	QP
78.50	V	53.89	-18.45	35.44	40.00	-4.56	QP
359.80	V	50.55	-10.15	40.39	46.00	-5.61	Peak
487.52	V	39.73	-7.43	32.30	46.00	-13.70	QP
498.83	V	33.40	-7.13	26.27	46.00	-19.73	QP
597.45	V	45.84	-5.43	40.40	46.00	-5.60	Peak
107.60	Н	52.17	-13.85	38.32	43.50	-5.18	Peak
379.20	Н	49.07	-9.71	39.36	46.00	-6.64	Peak
485.90	Н	48.05	-7.47	40.58	46.00	-5.42	Peak
511.77	Н	47.41	-6.83	40.58	46.00	-5.42	Peak
540.87	Н	46.91	-6.15	40.76	46.00	-5.24	Peak
755.88	Н	41.80	-2.91	38.89	46.00	-7.11	Peak

Remark:

- 1. Measuring frequencies from 30 MHz to the 1GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).

Page 53 Rev. 00

External Antenna: Dipole Antenna

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low Test Date: July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Temperature: 23°C **Tested by:** James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1326.67	V	21.49		27.55	49.04		74.00	54.00	-4.96	Peak
4825.00	V	47.63		0.39	48.02		74.00	54.00	-5.98	Peak
N/A										
1353.33	Н	20.81		27.55	48.37		74.00	54.00	-5.63	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 54 Rev. 00

23°C

Temperature:

Operation Mode: TX / IEEE 802.11b / CH Mid **Test Date:** July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Tested by: James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1330.00	V	21.30		27.55	48.85		74.00	54.00	-5.15	Peak
4875.00	V	61.20	48.29	0.38	61.58	48.67	74.00	54.00	-5.33	AVG
7308.33	V	46.15		4.49	50.64		74.00	54.00	-3.36	Peak
N/A										
1313.33	Н	20.88		27.55	48.42		74.00	54.00	-5.58	Peak
4875.00	Н	46.40		0.38	46.78		74.00	54.00	-7.22	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 55 Rev. 00

Operation Mode: TX / IEEE 802.11b / CH High **Test Date:** July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Temperature: 23°C **Tested by:** James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1330.00	V	20.34		27.55	47.89		74.00	54.00	-6.11	Peak
4925.00	V	61.63	46.61	0.38	62.01	46.99	74.00	54.00	-7.01	AVG
7383.33	V	58.82	35.48	4.39	63.21	39.87	74.00	54.00	-14.13	AVG
N/A										
1350.00	Н	21.34		27.55	48.89		74.00	54.00	-5.11	Peak
4925.00	Н	46.98		0.38	47.36		74.00	54.00	-6.64	Peak
7383.33	Н	43.78		4.39	48.18		74.00	54.00	-5.82	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 56 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH Low **Test Date:** July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Temperature: 23°C **Tested by:** James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1293.33	V	22.15		27.54	49.70		74.00	54.00	-4.30	Peak
4825.00	V	44.48		0.39	44.87		74.00	54.00	-9.13	Peak
N/A										
1293.33	Н	20.35		27.54	47.89		74.00	54.00	-6.11	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 57 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH Mid Test Date: July 4, 2006
Temperature: 23°C Tested by: James Yu

Reference No.: 60517004

Date of Issue: January 15, 2007

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1306.67	V	20.67		27.55	48.21		74.00	54.00	-5.79	Peak
3083.33	V	44.91		-2.31	42.60		74.00	54.00	-11.40	Peak
N/A										
1306.67	Н	20.28		27.55	47.83		74.00	54.00	-6.17	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 58 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH High **Test Date:** July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Temperature: 23°C **Tested by:** James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1303.33	V	21.19		27.54	48.74		74.00	54.00	-5.26	Peak
N/A										
1303.33	Н	21.42		27.54	48.96		74.00	54.00	-5.04	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 59 Rev. 00

Internal Antenna: Panel Antenna

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low Test Date: July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Temperature: 23°C **Tested by:** James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1320.00	V	19.66		27.55	47.21		74.00	54.00	-6.79	Peak
3041.67	V	48.30		-2.40	45.91		74.00	54.00	-8.09	Peak
3083.33	V	44.63		-2.31	42.32		74.00	54.00	-11.68	Peak
4825.00	V	45.17		0.39	45.56		74.00	54.00	-8.44	Peak
N/A										
1320.00	Н	19.82		27.55	47.37		74.00	54.00	-6.63	Peak
3041.67	Н	46.52		-2.40	44.12		74.00	54.00	-9.88	Peak
3083.33	Н	45.55		-2.31	43.24		74.00	54.00	-10.76	Peak
4825.00	Н	45.57		0.39	45.96		74.00	54.00	-8.04	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 60 Rev. 00

Operation Mode: TX / IEEE 802.11b / CH Mid **Test Date:** July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Temperature: 23°C **Tested by:** James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1346.67	V	19.92		27.55	47.48		74.00	54.00	-6.52	Peak
3041.67	V	48.25		-2.40	45.86		74.00	54.00	-8.14	Peak
3083.33	V	45.85		-2.31	43.54		74.00	54.00	-10.46	Peak
N/A										
1346.67	Н	19.32		27.55	46.87		74.00	54.00	-7.13	Peak
3041.67	Н	46.96		-2.40	44.56		74.00	54.00	-9.44	Peak
3083.33	Н	46.08		-2.31	43.76		74.00	54.00	-10.24	Peak
4875.00	Н	50.28		0.38	50.67		74.00	54.00	-3.33	Peak
7308.33	Н	44.72		4.49	49.21		74.00	54.00	-4.79	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 61 Rev. 00

23°C

Temperature:

Operation Mode: TX / IEEE 802.11b / CH High **Test Date:** July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Tested by: James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1303.33	V	19.65		27.54	47.20		74.00	54.00	-6.80	Peak
3041.67	V	48.49		-2.40	46.10		74.00	54.00	-7.90	Peak
3083.33	V	45.45		-2.31	43.14		74.00	54.00	-10.86	Peak
3175.00	V	43.87		-2.13	41.75		74.00	54.00	-12.25	Peak
N/A										
1303.33	Н	20.44		27.54	47.98		74.00	54.00	-6.02	Peak
3041.67	Н	47.56		-2.40	45.16		74.00	54.00	-8.84	Peak
3083.33	Н	46.02		-2.31	43.71		74.00	54.00	-10.29	Peak
4925.00	Н	48.40		0.38	48.77		74.00	54.00	-5.23	Peak
7383.33	Н	43.77		4.39	48.16		74.00	54.00	-5.84	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 62 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH Low **Test Date:** July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Temperature: 23°C **Tested by:** James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1273.33	V	20.37		27.54	47.91		74.00	54.00	-6.09	Peak
3000.00	V	47.61		-2.48	45.13		74.00	54.00	-8.87	Peak
3041.67	V	50.07		-2.40	47.68		74.00	54.00	-6.32	Peak
3083.33	V	48.14		-2.31	45.83		74.00	54.00	-8.17	Peak
6316.67	V	46.47		2.47	48.94		74.00	54.00	-5.06	Peak
N/A										
1273.33	Н	19.81		27.54	47.35		74.00	54.00	-6.65	Peak
3000.00	Н	45.52		-2.48	43.04		74.00	54.00	-10.96	Peak
3041.67	Н	49.71		-2.40	47.32		74.00	54.00	-6.68	Peak
3083.33	Н	47.58		-2.31	45.27		74.00	54.00	-8.73	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 63 Rev. 00

23°C

Temperature:

Operation Mode: TX / IEEE 802.11g / CH Mid **Test Date:** July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Tested by: James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1366.67	V	20.90		27.56	48.46		74.00	54.00	-5.54	Peak
3000.00	V	47.15		-2.48	44.67		74.00	54.00	-9.33	Peak
3041.67	V	49.76		-2.40	47.36		74.00	54.00	-6.64	Peak
3083.33	V	48.08		-2.31	45.77		74.00	54.00	-8.23	Peak
N/A										
1330.00	Н	20.78		27.55	48.33		74.00	54.00	-5.67	Peak
3000.00	Н	46.46		-2.48	43.98		74.00	54.00	-10.02	Peak
3041.67	Н	49.28		-2.40	46.88		74.00	54.00	-7.12	Peak
3083.33	Н	48.24		-2.31	45.93		74.00	54.00	-8.07	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 64 Rev. 00

23°C

Temperature:

Operation Mode: TX / IEEE 802.11g / CH High **Test Date:** July 4, 2006

Reference No.: 60517004

Date of Issue: January 15, 2007

Tested by: James Yu

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1323.33	V	20.13		27.55	47.68		74.00	54.00	-6.32	Peak
3000.00	V	48.01		-2.48	45.53		74.00	54.00	-8.47	Peak
3041.67	V	50.41		-2.40	48.02		74.00	54.00	-5.98	Peak
3083.33	V	48.54		-2.31	46.23		74.00	54.00	-7.77	Peak
N/A										
1323.33	Н	19.58		27.55	47.12		74.00	54.00	-6.88	Peak
3000.00	Н	46.65		-2.48	44.17		74.00	54.00	-9.83	Peak
3041.67	Н	48.79		-2.40	46.40		74.00	54.00	-7.60	Peak
3083.33	Н	48.99		-2.31	46.68		74.00	54.00	-7.32	Peak
4925.00	Н	44.23		0.38	44.61		74.00	54.00	-9.39	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 65 Rev. 00

7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to $\S15.207(a)$, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Reference No.: 60517004

Date of Issue: January 15, 2007

Frequency Range (MHz)	Limits (dBµV)					
(141112)	Quasi-peak	Average				
0.15 to 0.50	66 to 56*	56 to 46*				
0.50 to 5	56	46				
5 to 30	60	50				

^{*} Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Page 66 Rev. 00

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Reference No.: 60517004

Date of Issue: January 15, 2007

Test Data

Operation Mode:Normal LinkTest Date:July 7, 2006Temperature:25°CTested by:Eric Cheng

Humidity: 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.284	42.260	38.580	0.100	42.360	38.680	60.698	50.698	-18.338	-12.018	L1
0.423	44.460	43.090	0.100	44.560	43.190	57.389	47.389	-12.829	-4.199	L1
0.563	42.740	39.030	0.100	42.840	39.130	56.000	46.000	-13.160	-6.870	L1
1.135	42.920	38.630	0.100	43.020	38.730	56.000	46.000	-12.980	-7.270	L1
1.488	41.150	36.070	0.100	41.250	36.170	56.000	46.000	-14.750	-9.830	L1
16.378	24.760	22.380	0.910	25.670	23.290	60.000	50.000	-34.330	-26.710	L1
0.281	44.220	39.790	0.100	44.320	39.890	60.786	50.786	-16.466	-10.896	L2
0.423	46.140	43.160	0.100	46.240	43.260	57.389	47.389	-11.149	-4.129	L2
0.496	45.130	44.030	0.100	45.230	44.130	56.067	46.067	-10.837	-1.937	L2
1.488	42.000	39.860	0.100	42.100	39.960	56.000	46.000	-13.900	-6.040	L2
5.455	29.530	27.400	0.245	29.775	27.645	60.000	50.000	-30.225	-22.355	L2
16.777	26.680	24.460	0.942	27.622	25.402	60.000	50.000	-32.378	-24.598	L2


Remark:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
- 3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
- 4. $L1 = Line \ One \ (Live \ Line) \ / \ L2 = Line \ Two \ (Neutral \ Line)$


Page 67 Rev. 00

Test Plots

Conducted emissions (Line 1)

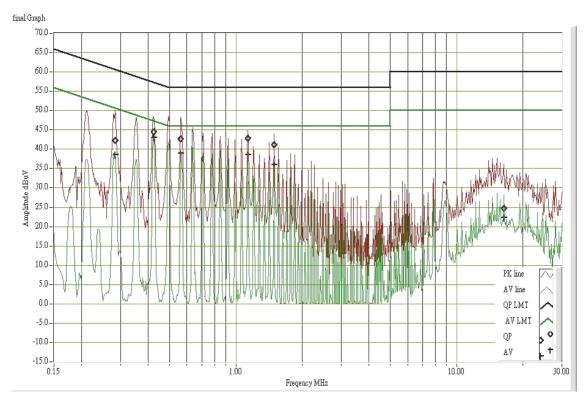

Conducted emissions (Line 2)

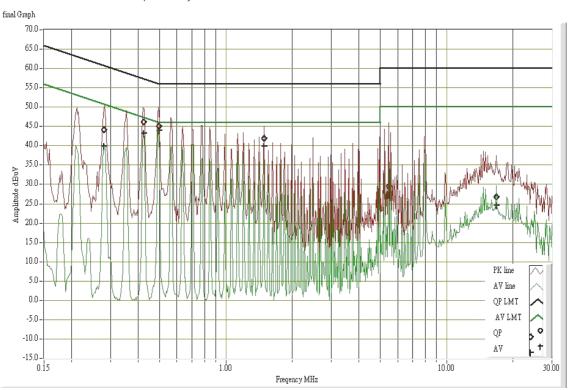

Page 68 Rev. 00

APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

Reference No.: 60517004

Date of Issue: January 15, 2007

EUT Specification

EUT	2.4G OutDoor Device
Frequency band (Operating)	 WLAN: 2.412GHz ~ 2.462GHz WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz WLAN: 5.745GHz ~ 5.825GHz Others
Device category	☐ Portable (<20cm separation) ☐ Mobile (>20cm separation) ☐ Others
Exposure classification	☐ Occupational/Controlled exposure (S = 5mW/cm²) ☐ General Population/Uncontrolled exposure (S=1mW/cm²)
Antenna diversity	☐ Single antenna ☐ Multiple antennas ☐ Tx diversity ☐ Rx diversity ☐ Tx/Rx diversity
Max. output power	IEEE 802.11b: 16.28 dBm (42.46mW) IEEE 802.11g: 16.23 dBm (41.97mW)
Antenna gain (Max)	14 dBi (Numeric gain: 25.11)
Evaluation applied	
 antenna gain.) DTS device is not subject to recompliance. For mobile or fixed location to 	outine RF evaluation; MPE estimate is used to justify the ransmitters, no SAR consideration applied. The maximum even if the calculation indicates that the power density

TEST RESULTS

No non-compliance noted.

Page 69 Rev. 00

Calculation

$$E = \frac{\sqrt{30 \times P \times G}}{d} \& S = \frac{E^2}{3770}$$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

 $S = Power\ density\ in\ milliwatts\ /\ square\ centimeter$

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$$P(mW) = P(W) / 1000 \text{ and}$$

$$d(cm) = d(m) / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$
 Equation 1

Where

d = Distance in cm

P = Power in mW

G = Numeric antenna gain

 $S = Power\ density\ in\ mW/cm^2$

Maximum Permissible Exposure

EUT output power = 42.46mW

Numeric Antenna gain = 25.11

Substituting the MPE safe distance using d = 20 cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where P = Power in mW

G = Numeric antenna gain

 $S = Power\ density\ in\ mW/cm^2$

 \rightarrow Power density = 0.2121 mW/cm²

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.)

> Page 70 Rev. 00

Reference No.: 60517004

Date of Issue: January 15, 2007