

Tel:(86) 755-86170306 Fax:(86) 755-86170310

Test Report

Product Name: Wireless Optical Mouse

FCC ID: UWGSYNAPSISTM8

MODEL NO.: 3015, 3009, 3008, 3009A, 3002, 3006, 3016, 3017, 3028A, 3029, 3034, 3041, 3047, 3048, 3049, 3050,

3051,3052,3053,3055

Applicant:

SYNAPSIS INDUSTRIAL CO., LTD.
Unit 811, 8/F., New Commerce Centre 19 On Sum Street Shatin,
New Territories Hong Kong

Date Received: 07/12/2008

Date Tested: 06/12/2008

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.



Tel:(86) 755-86170306 Fax:(86) 755-86170310

Http:// www. szmost.com Email: szmost@szmost.com

TABLE OF CONTENTS

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.

FCC ID: UWGSYNAPSISTM8

TEST REPORT CONTAINING:

PAGE	1	.TEST EQU	JIPMENT LIS	T		
PAGE	2	.TEST PRO	OCEDURE			
PAGE	3-6	.RADIATI	ON INTERFER	ENCE	TEST	DATA
PAGE	7	.OCCUPIEI	D BANDWIDTH	AND	PLOTS	3

EXHIBIT INCLUDED:

PAGE 1BLOCK DIAGRAM
PAGE 2SCHEMATIC
PAGE 3USERS MANUAL
PAGE 4LABEL SAMPLE
PAGE 5LABEL LOCATION
PAGE 6EXTERNAL PHOTOGRAPHS
PAGE 7INTERNAL PHOTOGRAPHS
PAGE 8OPERATIONAL DESCRIPTION
PAGE 9TEST SET UP PHOTOGRAPHS

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.



Tel:(86) 755-86170306 Fax:(86) 755-86170310

EMC Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.
					Interval
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100492	Apr.05,2008	1 Year
LISN	ROHDE&SCHWARZ	ENV216	100093	Apr.05,2008	1Year
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101202	Apr.05,2008	1 Year
Spectrum Analyzer	ANRITSU	MS2651B		Apr.05,2008	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Apr.05,2008	1 Year
Bilog Antenna	Sunol	JB3	A121206	Apr.05,2008	1 Year
Horn Antenna	EMCO	3115	640201028-0 6	Apr.05,2008	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Apr.05,2008	1 Year
Cable	Resenberger	N/A	NO.1	Apr.05,2008	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Apr.05,2008	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Apr.05,2008	1 Year
Single Phase Power Line Filter	Kikusui	LIN40MA-PC R-L	LM002352	Apr.05,2008	1Year
AC Power Source	Kikusui	AC40MA	LM003232	Apr.05,2008	1Year
Test analyzer	Kikusui	KHA1000	LM003720	Apr.05,2008	1Year
ESD Tester	Kikusui	KES4021	LM003537	Apr.07,2008	1 Year
Signal Generator	IFR	2032	203002/100	Apr.07,2008	1 Year
Amplifier	A&R	150W1000	301584	NCR	NCR
Dual Directional Coupler	A&R	DC6080	301508	Apr.05,2008	1 Year
Power Head	A&R	PH2000	301193	Apr.05,2008	1 Year
Power Meter	A&R	PM2002	302799	Apr.05,2008	1 Year
Field Monitor	A&R	FM5004	300329	Apr.05,2008	1 Year
Field Probe	A&R	FP5000	300221	Apr.05,2008	1 Year
EMCPRO System	EM Test	UCS-500-M4	V064810202 6	Apr.05,2008	1 Year
EMCPRO System	EM Test	UCS-500-M4	V064810202 6	Apr.05,2008	1 Year
Loop Antenna	SCHWARZBECK	HFRAE 5162	9507	May 29,2008	1 Year

Remark:

Test Firm Name: Most Technology Service Co., Ltd.

Test Firm Address:

No. 5, 2nd Langshan Road, North District, Hi-tech Industrial

Park, Nanshan, Shenzhen, Guangdong, China

FCC Registered Test Site Number: 490827

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.



Tel:(86) 755-86170306 Fax:(86) 755-86170310

Http://www.szmost.com Email: szmost@szmost.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of MOST TECHNOLOGY SERVICE CO., LTD. The EUT was transmitting a test signal during the testing.

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a 50 U H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. The ambient temperature of the EUT was 25 with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings were converted to average readings based on the duration of "ON" time.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard $C63.4-2003\ 10.1.7$ with the EUT 40 cm from the vertical ground wall.

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.



Tel:(86) 755-86170306 Fax:(86) 755-86170310

Http://www.szmost.com Email: szmost@szmost.com

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.

FCC ID: UWGSYNAPSISTM8

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.227, 15.209

REQUIREMENTS:

FIELD STRENGTH of

S15.209

Fundamental:

26.96-27.28 MHZ 30 -88 MHz 40 dBuV/m @3M

88 - 216 MHz 43.5

216 - 960 MHz 46

80 dBuV/m @3m ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

REMARK: Emissions attenuated more than 20 dB below the permissible value are not reported.

Fundamental Radiation Interference Data:

Frequency (MHz)	Frequency (MHz) Antenna Polarization		vel (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)		
	1 Glatization	Avg	QP	Peak		
27.045.1MHz						
27.045	Vertical			41.09	80.00	
27.045	Horizontal			40.23	80.00	

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.



Tel:(86) 755-86170306 Fax:(86) 755-86170310

Http://www.szmost.com Email: szmost@szmost.com

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.

FCC ID: UWGSYNAPSISTM8

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.227, 15.209

REQUIREMENTS:

FIELD STRENGTH of S15.209

Fundamental:

26.96-27.28 MHZ 30 -88 MHz 40 dBuV/m @3M

88 - 216 MHz 43.5 216 - 960 MHz 46

80 dBuV/m @3m ABOVE 960 MHz 54 dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

Continued:

General Radiation Interference Data:

Frequency (MHz)	Antenna Polarization	Emission Le	evel (dBuV/m)	FCC 15 Subpart C	
		Avg	QP	Peak	Limit (dBuV/m)
44.55	Horizontal			26.14	40.0
134.76	Horizontal			20.17	43.5
161.92	Horizontal			22.89	43.5
189.08	Horizontal			20.19	43.5
242.43	Horizontal			20.43	46.0
44.55	Vertical			20.57	40.0
56.19	Vertical			18.88	43.5
66.86	Vertical			19.41	43.5
88.20	Vertical			19.27	43.5
161.92	Vertical			21.39	43.5

TEST PROCEDURE: ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector and an appropriate antenna. The resolution bandwidth of spectrum analyzer was 100 kHz below 1 GHz and 1 MHz above 1 GHz. An appropriate sweep speed was used. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.



Tel:(86) 755-86170306 Fax:(86) 755-86170310

Http://www.szmost.com Email: szmost@szmost.com

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.

FCC ID: UWGSYNAPSISTM8

NAME OF TEST: Occupied Bandwidth and Band Edge Compliance

RULES PART NUMBER: 15.227, 15.205

REQUIREMENTS: Emissions from the intentional radiator shall be confined

attenuated at least 26 dB below the level centered on the

operating frequency.

Band edge emissions plots are included on the following pages

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to 10 dB per division.


TEST RESULTS: The unit DOES meet the FCC requirements.

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.



Tel:(86) 755-86170306 Fax:(86) 755-86170310

Http:// www. szmost.com Email: szmost@szmost.com

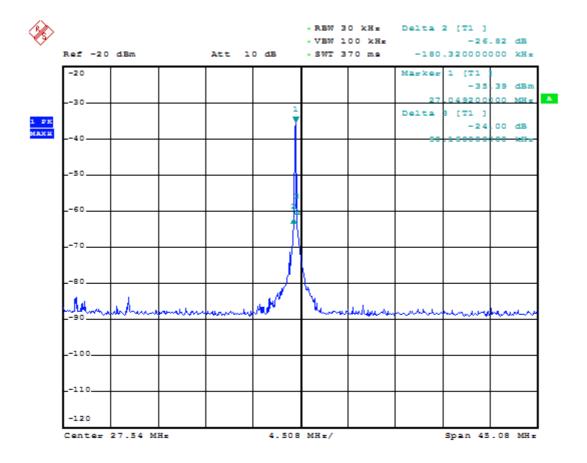


APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.



Tel:(86) 755-86170306 Fax:(86) 755-86170310

Http://www.szmost.com Email: szmost@szmost.com

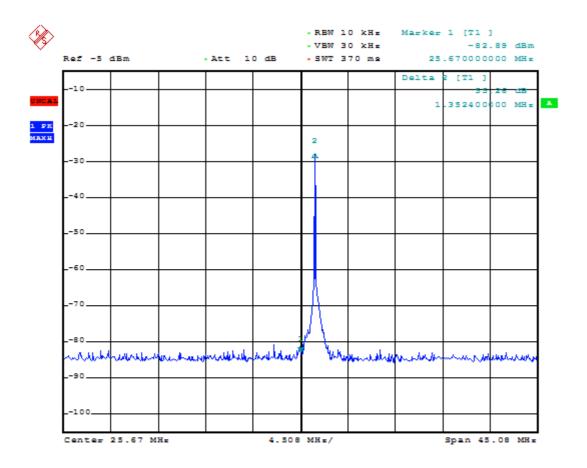

For Restricted Band Frequency 25.67MHz, Test Level is -82.89dBm<10dBm So, the EUT's Restricted Bands test is meet 15.205 request.

APPLICANT: SYNAPSIS INDUSTRIAL CO., LTD.