

Date: 2007-01-18 Page 1 of 20

No.: HM157742

Applicant: Atech Scientific Measurement Limited.

Unit A-C, 18/F., Luk Hop Industry Building,

8 Luk Hop Street, San Po Kong, Kowloon, Hong Kong

Description of Samples: Model name: Wireless Digital Thermometer

Model no.: WS
Brand name: Atech
FCC ID: UWW-WS

Date Samples Received: 2006-11-14, 2007-01-02

Date Tested: 2006-11-17, 2007-01-04

Investigation Requested: FCC Part 15 Subpart C

Conclusions: The submitted product COMPLIED with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remarks: ----

LEE Kam Chuen, EMD
For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-01-18 Page 2 of 20

No.: HM157742

CONTENT:

00.11	ZIVI:	
	Cover Content	Page 1 of 20 Page 2-3 of 20
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 20
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 20
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 20
1.4	Date of Order	Page 5 of 20
1.5	Submitted Sample	Page 5 of 20
1.6	Test Duration	Page 5 of 20
1.7	Country of Origin	Page 5 of 20
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 6 of 20
2.2	Test Standards and Results Summary	Page 6 of 20
<u>3.0</u>	Test Results	
3.1	Emission	Page 7-11 of 20
3.2	Bandwidth Measurement	Page 12-13 of 20



Date: 2007-01-18 Page 3 of 20

No.: HM157742

Appendix A

List of Measurement Equipment Page 14 of 20

Appendix B

Duty Cycle Correction During 100 msec Page 15-16 of 20

Appendix C

Periodic Operation Page 17-18 of 20

Appendix D

Photographs Page 19-20 of 20



Date: 2007-01-18 Page 4 of 20

No.: HM157742

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

1.2 Applicant Details Applicant

Atech Scientific Measurement Limited.
Unit A-C, 18/F., Luk Hop Industry Building,
8 Luk Hop Street, San Po Kong, Kowloon, Hong Kong.

Manufacturer

Atech Scientific Measurement Limited.
Unit A-C, 18/F., Luk Hop Industry Building,
8 Luk Hop Street, San Po Kong, Kowloon, Hong Kong.



Date: 2007-01-18 Page 5 of 20

No.: HM157742

1.3 Equipment Under Test [EUT] Description of Sample

Product: Wireless Digital Thermometer

Manufacturer: Atech Scientific Measurement Limited.

Brand Name: Atech Model Number: WS

Rating: 3Vd.c. ("AAA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is an Atech Scientific Measurement Limited., Wireless Digital Thermometer. The transmitter is a periodic transmitter. It is Pulse transmitter, Modulation by IC; and type is Pulse modulation.

1.4 Date of Order

2006-11-14, 2007-01-02

1.5 Submitted Sample(s):

3 Samples

1.6 Test Duration

2006-11-17, 2007-01-04

1.7 Country of Origin

China



Date: 2007-01-18 Page 6 of 20

No.: HM157742

2.0 Technical Details


2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary									
Test Condition	Test Requirement	Test Method	Class /	Т	est Resu	lt			
			Severity	Pass	Failed	N/A			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.231e	ANSI C63.4:2003	N/A	\boxtimes					
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A						
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	N/A			\boxtimes			

Note: N/A - Not Applicable





Date: 2007-01-18 Page 7 of 20

No.: HM157742

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions


Test Requirement: FCC 47CFR 15.231e
Test Method: ANSI C63.4:2003
Test Date: 2007-01-03
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

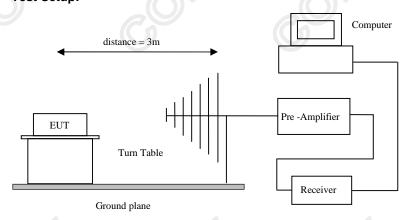



Date: 2007-01-18 Page 8 of 20

No.: HM157742

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.231e]:

Frequency Range of Fundamental	Field Strength of Fundamental Emission [Average]	Field Strength of Fundamental Emission [Average]
[MHz]	[μV/m]	[μV/m]
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500 *	50 to 150 *
174-260	1,500	150
260-470	1,500 to 5,000 *	150 to 500 *
Above 470	5,000	500

Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, mV/m at 3 meters=22.72727(F)-2454.545; for the band 260-470 MHz, mV/m at 3 meters =16.6667(F)-2833.3333. The maximum permissible unwanted emission level is 20dB below the maximum fundamental level.

Results of Transmitter Mode: PASS

Field Strength of Fundamental Emissions Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	Antenna		
	Level @3m	Factor	Strength	Strength	@3m	Polarity		
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m			
433.8	46.2	18.4	64.6	1698.2	43,966.8	Horizontal		

	Field Strength of Spurious Emissions									
	Peak Value									
F	requency	Me	asured	Correction		Field		Field	Limit @3m	Antenna
		Lev	el @3m	Factor	St	trength	S	trength		Polarity
	MHz	d	ΒμV	dB/m	di	BμV/m		μV/m	μV/m	
	867.60	<	1.0	28.0	٧	29.0	<	28.2	4,396.7	Vertical
+	1301.40	<	1.0	29.4	٧	30.4	<	33.1	5,000.0	Vertical
	1735.20	<	1.0	32.2	٧	33.2	<	45.7	4,396.7	Vertical
	2169.00	<	1.0	15.9	٧	16.9	<	7.0	4,396.7	Vertical
	2602.80	<	1.0	17.4	٧	18.4	<	8.3	4,396.7	Vertical
	3036.60	<	1.0	17.2	٧	18.2	<	8.1	4,396.7	Vertical
	3470.40	<	1.0	18.8	٧	19.8	<	9.8	4,396.7	Vertical
+	3904.20	<	1.0	19.7	٧	20.7	<	10.8	5,000.0	Vertical
+	4338.00	<	1.0	20.6	٧	21.6	<	12.0	5,000.0	Vertical



Date: 2007-01-18 Page 9 of 20

No.: HM157742

Results of Transmitter Mode: PASS

Field Strength of Fundamental Emissions Average Value							
Frequency	Measured	Correction	Field	Field	Limit **	Antenna	
	Level @3m	Factor	Strength	Strength	@3m	Polarity	
MHz	dBμV *	dB/m	dBµV/m	μV/m	μV/m	n	
* 433.80	39.9	18.4	58.3	822.2	4,396.7	Horizontal	

Field Strength of Spurious Emissions Average Value									
Frequency	Me	easured	Correction		Field		Field	Limit @3m	Antenna
	Lev	/el @3m	Factor	S	trength	S	trength		Polarity
MHz	(dΒμV	dB/m	d	BµV/m		μV/m	μV/m	
867.60	<	1.0	28.0	٧	29.0	<	28.2	439.7	Vertical
+ 1301.40	<	1.0	29.4	٧	30.4	<	33.1	500.0	Vertical
1735.20	<	1.0	32.2	٧	33.2	<	45.7	439.7	Vertical
2169.00	<	1.0	15.9	٧	16.9	<	7.0	439.7	Vertical
2602.80	<	1.0	17.4	٧	18.4	<	8.3	439.7	Vertical
3036.60	<	1.0	17.2	٧	18.2	<	8.1	439.7	Vertical
3470.40	<	1.0	18.8	٧	19.8	<	9.8	439.7	Vertical
+ 3904.20	<	1.0	19.7	٧	20.7	<	10.8	500.0	Vertical
+ 4338.00	<	1.0	20.6	٧	21.6	<	12.0	500.0	Vertical

Remarks:

- *: Adjusted by Duty Cycle = -6.3dB
- **: According to FCC C47CFR 15.231e,
 - FCC Limit for Average Measurement = $16.6667(433.8MHz)-2833.3333=4,396.7\mu V/m$
- +: Denotes restricted band of operation.
 - Measurements were made using a peak detector. For emissions falling within the restricted bands of FCC Rules Part 15 Section 15.205, the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty = 30MHz to 1GHz ±5.2dB



Date: 2007-01-18 Page 10 of 20

No.: HM157742

Limited for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

Radiated Emissions Quasi-Peak								
Frequency	Measured	Correction	Field	Field	Limit @3m	Antenna		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	dBµV/m	μV/m	μV/m			
EMIS	EMISSIONS DETECTED ARE MORE THAN 20dB BELOW THE FCC LIMITS							

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty = 30MHz to 1GHz ±5.2dB



Date: 2007-01-18 Page 11 of 20

No.: HM157742

3.1.2 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: FCC 47CFR 15.207
ANSI C63.4:2003

Test Date: N/A
Mode of Operation: N/A

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



Date: 2007-01-18 Page 12 of 20

No.: HM157742

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.231e

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2007-01-04 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.



Date: 2007-01-18 Page 13 of 20

No.: HM157742

Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits *
[MHz]	[KHz]	[KHz]
433.8138	83.8	1085


*: FCC Limit for Bandwidth measurement

= (0.25%)(Center Frequency)

=(0.0025)(433.8138)

=1085KHz

20dB Bandwidth of Fundamental Emission

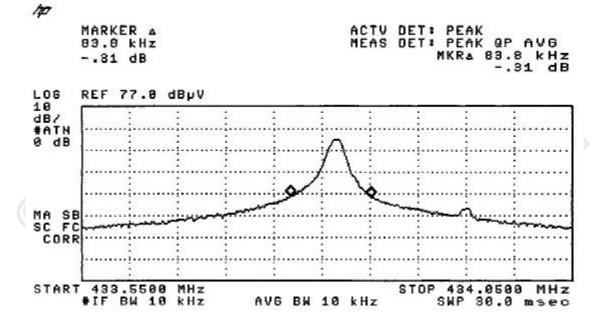



Date: 2007-01-18 Page 14 of 20

No.: HM157742

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262
EM020	HORN ANTENNA	ETS-Linggren	3115	4032
EM022	LOOP ANTENNA	ETS-Linggren	6502	1189-2424
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892
EM083	OPEN AREA TEST SITE	HKSTC	N/A	N/A
EM131	EMC ANALYZER	HEWLETT PACKARD	8595EM	3710A00155
EM145	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS 30	830245/021
EM195	ANTENNA POSITIONING MAST	ETS-Linggren	2075	2368
EM196	MULTI-DEVICE CONTROLLER	ETS-Linggren	2090	1662
EM215	MULTIDEVICE CONTROLER	ETS-Linggren	2090	00024676
EM216	MINI MAST SYSTEM	ETS-Linggren	2075	00026842
EM217	ELECTRIC POWERED TURNTABLE	ETS-Linggren	2088	00029144
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	· ·
EM219	BICONILOG ANTENNA	ETS-Linggren	3142C	00029071
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB40	100248

Line Conducted


EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A
EM119	LISN	ROHDE & SCHWARZ	ESH3-Z5	0831.5518.52
EM127	ISOLATION TRANSFORMER 220 TO 300V	WING SUN	N/A	N/A
EM233	PULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	100314
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057-99A
EM197	LISN	ETS-Linggren	4825/2	1193

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined





Date: 2007-01-18 Page 15 of 20

No.: HM157742

Appendix B


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (80.75msec) never exceeds a series of 3 long (5msec) and 16 short (1.5msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worse case transmit duty cycle would be considered 3x5msec+16x1.5msec per 80.75msec=48.2% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.482) =-6.3dB

The following figures [Figure A to Figure C] showed the characteristics of the pulse train for one of these functions.

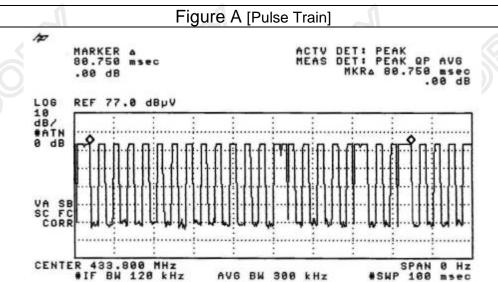

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-01-18 Page 16 of 20

No.: HM157742

Figure B [Long Pulse]


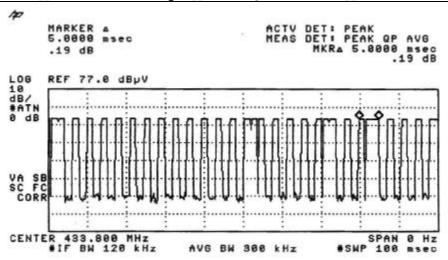


Figure C [Short Pulse]



The Hong Kong Standards and Testing Centre Ltd.

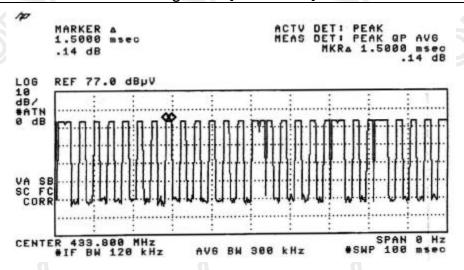

Date: 2007-01-18 Page 17 of 20

No.: HM157742

Appendix C

Periodic Operation [FCC 47CFR 15.231e]


According to FCC 47CFR15.231e. The EUT shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Results:

Since the EUT of each transmission is 900msec, so the silent period must not less than 27 seconds (900msec x 30).

The following figures [Figure D to Figure E] showed the duration of each transmission and silent period.

Figure D [Each transmission]

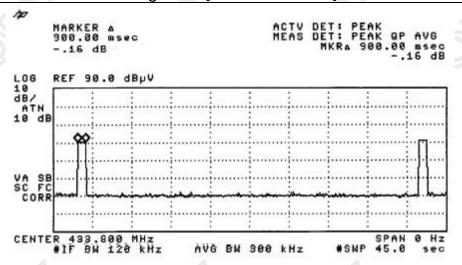




Date: 2007-01-18 Page 18 of 20

No.: HM157742

Periodic operation [FCC 47CFR15.231e] Figure E [Silent Period]

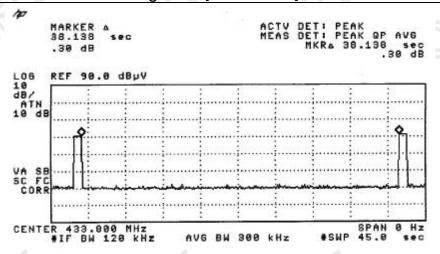

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2007-01-18 Page 19 of 20

No.: HM157742

Appendix D

Photographs of EUT


Front View of the product




Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong


Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2007-01-18 Page 20 of 20

No.: HM157742

Photographs of EUT

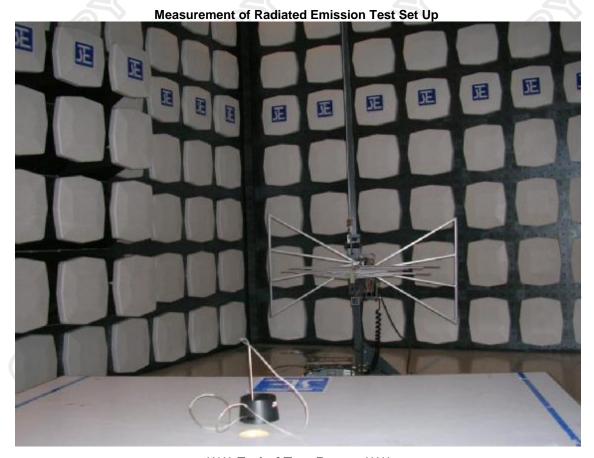

***** End of Test Report *****

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org