



## FCC TEST REPORT

**REPORT NO.:** 061017FIA01

**MODEL NO.:** RC747W-JLM-D

**RECEIVED:** Nov. 2, 2006

**TESTED:** Nov. 2 ~ Nov. 21, 2006

**ISSUED:** Nov. 21, 2006

**APPLICANT:** Winart High Quality manufactory Company

**ADDRESS:** Simple Art Building, Huangtang Road, HuiZhou City, Guangdong, China

**ISSUED BY:** ADT (Shanghai) Corporation

**ADDRESS:** 2F, Building C, No.1618, Yishan rd., 201103, Shanghai, China

This test report consists of 23 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards. This report contains data that were produced under Laboratory ADT (Shanghai) Corporation.

ADT (Shanghai) Corporation.



V 1.0

## Table of Contents

1	CERTIFICATION .....	3
2	SUMMARY OF TEST RESULTS .....	4
2.1	MEASUREMENT UNCERTAINTY .....	4
3	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT .....	5
3.2	DESCRIPTION OF TEST MODES .....	5
3.3	DESCRIPTION OF SUPPORT UNITS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	7
4	EMISSION TEST .....	8
4.1	CONDUCTED EMISSION MEASUREMENT .....	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	8
4.1.2	TEST RESULTS .....	8
4.2	DEACTIVATION TIME .....	9
4.2.1	LIMITS OF DEACTIVATION TIME MEASUREMENT .....	9
4.2.2	TEST INSTRUMENTS .....	9
4.2.3	TEST PROCEDURES .....	9
4.2.4	DEVIATION FROM TEST STANDARD .....	9
4.2.5	TEST SETUP .....	9
4.2.6	TEST RESULTS .....	10
4.3	RADIATED EMISSION MEASUREMENT .....	11
4.3.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	11
4.3.2	TEST INSTRUMENTS .....	13
4.3.3	TEST PROCEDURE .....	14
4.3.4	DEVIATION FROM TEST STANDARD .....	14
4.3.5	TEST SETUP .....	15
4.3.6	EUT OPERATING CONDITIONS .....	15
4.3.7	TEST RESULTS .....	16
4.4	20DB OCCUPIED BANDWIDTH MEASUREMENT .....	21
4.4.1	LIMITS OF BAND EDGES MEASUREMENT .....	21
4.4.2	TEST INSTRUMENTS .....	21
4.4.3	TEST PROCEDURES .....	21
4.4.4	DEVIATION FROM TEST STANDARD .....	21
4.4.5	TEST SETUP .....	21
4.4.6	TEST RESULTS .....	22
5	APPENDIX - INFORMATION ON THE TESTING LABORATORY .....	23



## 1 CERTIFICATION

**PRODUCT:** Remote switching  
**MODEL NO.:** RC747W-JLM-D  
**APPLICANT:** Winart High Quality manufactory Company  
**TESTED:** Nov. 2 ~ Nov. 21, 2006  
**TEST ITEM:** ENGINEERING SAMPLE  
**STANDARDS:** FCC Part 15:2005,  
Subpart C (Section 15.209 and 15.231),  
ANSI C63.4-2003

We, **ADT (Shanghai) Corporation**, declare that the equipment above has been tested in our facility and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

**TECHNICAL  
ACCEPTANCE :**

*Bright Tong*

, **DATE:** NOV. 21, 2006

Bright Tong  
Engineering Supervisor

**APPROVED BY :**

A handwritten signature of Wallace Pan.

, **DATE:** NOV. 21, 2006

Wallace Pan  
Director of Operations

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remarks
15.207	Conducted Emission Test	N/A	
15.231(a)	De-activation Time	PASS	Meet the requirement of limit
15.209 15.231(b)	Radiated Emission Test	PASS	Minimum passing margin is -18.25 dB at 945.00 MHz
15.231(c)	20dB Occupied Bandwidth Measurement	PASS	Meet the requirement of limit

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Value
Conducted emissions	1.8dB
Radiated emissions	3.2dB

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Remote switching
<b>MODEL NO.</b>	RC747W-JLM-D
<b>POWER SUPPLY</b>	12 Vdc from batteries
<b>MODULATION TYPE</b>	ASK
<b>CARRIER FREQUENCY OF EACH CHANNEL</b>	315 MHz
<b>NUMBER OF CHANNEL</b>	1
<b>ANTENNA TYPE</b>	Soldered on PCB
<b>DATA CABLE SUPPLIED</b>	N/A
<b>I/O PORTS</b>	N/A

**NOTE:** The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

#### 3.2 DESCRIPTION OF TEST MODES

One channel is provided to this EUT:

Channel	Frequency
1	315 MHz

Two buttons are provided to this EUT:

No.	Button
1	Up button
2	Down button

### Test Mode Applicability AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to						Description
	PLC	De-a T	RE<1G	RE≥1G	20dB OBM	APM	
A	-	√	√	√	√	-	Continuously transmitting

Where PLC: Power Line Conducted Emission

De-a T: De-activation Time

RE&lt;1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

20dB OBM: 20dB Occupied Bandwidth Measurement

APM: Antenna Port Measurement

#### De-activation Time:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Axis
1	1	ASK	X

#### Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Axis
1	1	ASK	X

#### Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Axis
1	1	ASK	X

#### 20dB Occupied Bandwidth Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Axis
1	1	ASK	X



### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT is a remote switching. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:


**FCC Part 15, Subpart C. (15.231)**

**ANSI C63.4- 2003**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

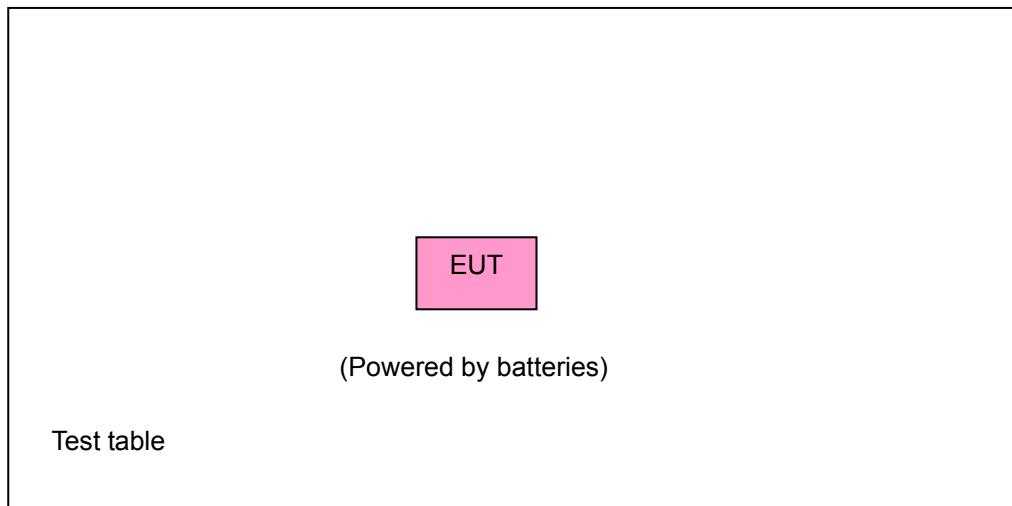

**Note:** When doing the test, fresh batteries were used.

## 4 EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

**NOTES:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST RESULTS

Since the EUT does not AC power port, the test item is not applicable.

## 4.2 DEACTIVATION TIME

### 4.2.1 LIMITS OF DEACTIVATION TIME MEASUREMENT

#### TEST STANDARD:

FCC Part 15: 2005, Subpart C (Section: 15.231(a))

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL ANALYZER Rohde & Schwarz	FSP	E1S1002	Mar. 16, 2007

NOTE: The calibration interval of the above test instruments is 12 months.


### 4.2.3 TEST PROCEDURES

- 1 The EUT was placed on the turning table.
- 2 The signal was coupled to the spectrum analyzer through an antenna.
- 3 The transmission duration was measured and recorded.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.


### 4.2.5 TEST SETUP

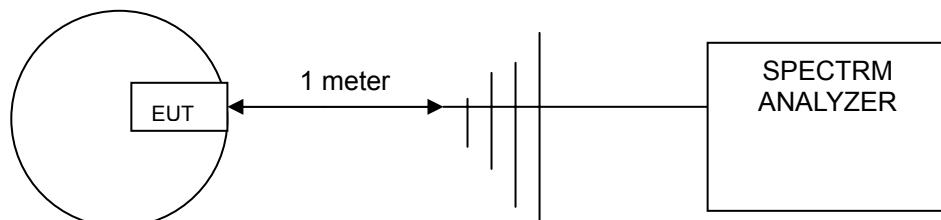

## 4.2.6 TEST RESULTS

Push button	Frequency (MHz)	Transmission duration (sec)	Maximum limit (sec)	Pass / Fail
1	315	0.158	5	PASS

### Button 1

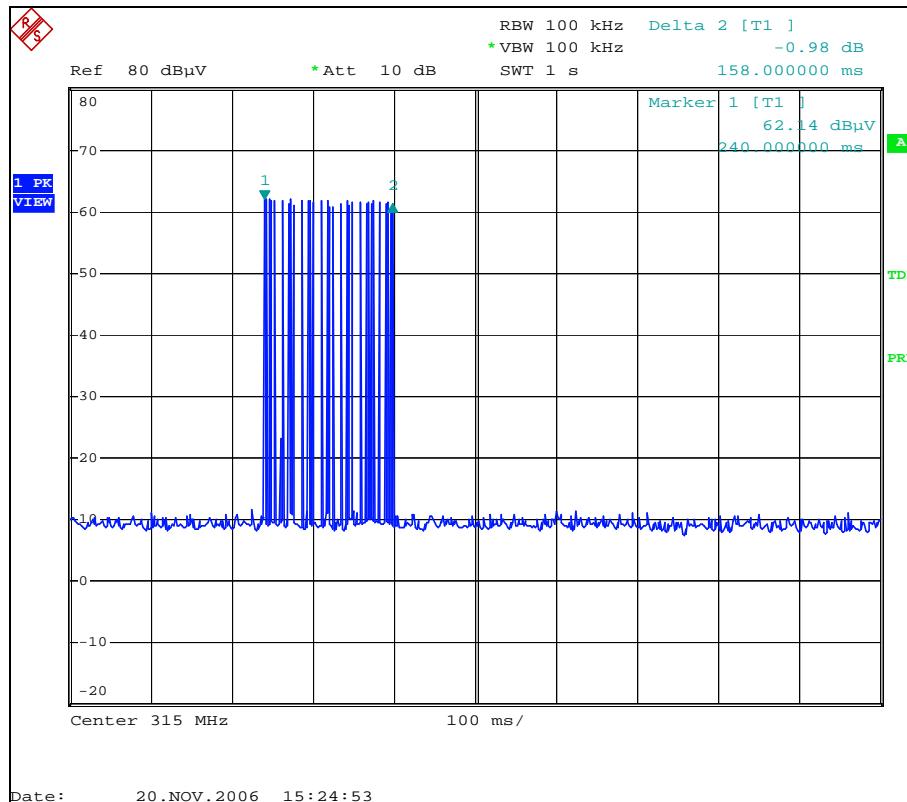

## 4.3 RADIATED EMISSION MEASUREMENT

### 4.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### TEST STANDARD:

FCC Part 15: 2005, Subpart C (Section: 15.205)

FCC Part 15: 2005, Subpart C (Section: 15.209)

FCC Part 15: 2005, Subpart C (Section: 15.231(b))

According to 15.231 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	uV/meter	dBuV/meter	uV/meter	dBuV/meter
40.66 – 40.70	2250	67.04	225	48.04
70 – 130	1250	61.94	125	41.94
130 – 174	1250 to 3750	61.94 to 71.48	125 to 375	41.94 to 51.48
174 – 260	3750	71.48	75	37.50
260 – 470	3750 to 12500	71.48 to 81.94	375 to 1250	51.48 to 61.94
Above 470	12500	81.94	1250	61.94

#### NOTE:

- (1) Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters =  $56.81818(F)-6136.3636$ ; for the band 260-470 MHz, uV/m at 3 meters =  $41.6667(F)-7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.
- (2) The above field strength limits are specified at a distance of 3meters. The tighter limits apply at the band edges.

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### FREQUENCY RANGE OF RADIATED MEASUREMENT

(For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1001	Apr. 19, 2007
BILOG Antenna SCHWARZBECK	VULB9168	E1A1001	Sept. 26, 2007
Preamplifier Agilent	8447D	E1A2001	Jan. 27, 2007
Preamplifier Agilent	8449B	E1A2002	Jan. 27, 2007
Double Ridged Broadband Horn Antenna Schwarzbeck	BBHA 9120D	E1A1002	Feb. 15, 2007
Spectrum Analyzer Agilent	E4403B	E1S1001	Jan. 13, 2007
Signal Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 16, 2007
RF signal cable Woken	RG-402	E1CBH01	May. 30, 2007
RF signal cable Woken	RG-402	E1CBH05	May. 30, 2007
RF signal cable Woken	RG-402	E1CBH07	May. 30, 2007
RF signal cable Woken	RG-412	E1CBL02	May. 30, 2007
RF signal cable Woken	RG-412	E1CBL03	May. 30, 2007
RF signal cable Woken	RG-412	E1CBL04	May. 30, 2007
Software ADT	ADT_Radiated_V7.5	N/A	N/A

**NOTE:**

1. The calibration interval of the above test instruments is 12 months.
2. “\*” = These equipment are used for the final measurement.
3. The horn antenna and Agilent preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The Spectrum Analyzer (model: FSP) and RF signal cable (SERIAL: E1CBH05&E1CBH07) are used only for the measurement of emission frequency above 1GHz if tested.

#### 4.3.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.


**NOTE:**

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP

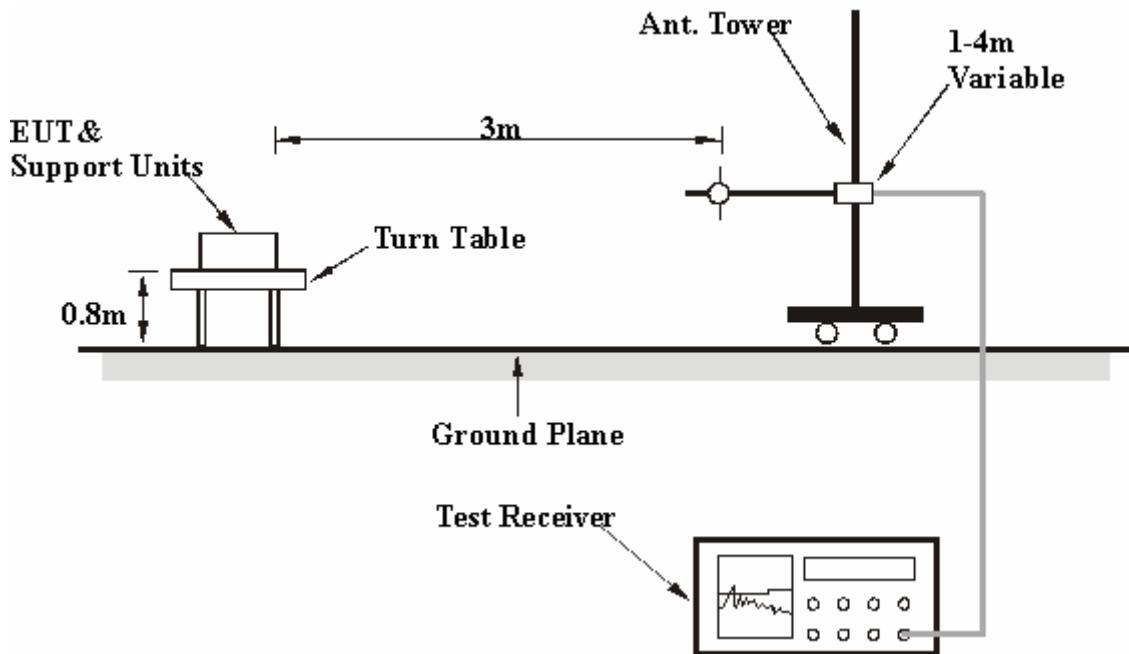

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.6 EUT OPERATING CONDITIONS

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

#### 4.3.7 TEST RESULTS

Below 1GHz Worst-Case Data

<b>EUT</b>	Remote switching	<b>MODEL NO.</b>	RC747W-JLM-D
<b>CHANNEL</b>	Channel 1	<b>FREQUENCY RANGE</b>	30 ~ 1000 MHz
<b>MODULATION TYPE</b>	ASK	<b>INPUT POWER (SYSTEM)</b>	12 Vdc from batteries
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65% RH, 1000 hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak / Peak/ Average
<b>TESTED BY</b>	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	122.15QP	14.9	-10.00	4.9	43.5	-38.6	272	204
2	228.85QP	14.45	-9.98	4.47	46	-41.53	351	271
3*	315.00PK	16.9	38.60	55.5	95.69	-40.19	--	--
3*	315.00AV	16.9	23.11	40.01	75.69	-35.68	--	--
4	330.70QP	17.22	-8.98	8.24	46	-37.76	200	143
5	444.68QP	19.98	-8.87	11.11	46	-34.89	400	334
6	527.12QP	21.46	-8.45	13.01	46	-32.99	400	19
7	630.00PK	23.66	18.93	42.59	75.69	-33.1	--	--
7	630.00AV	23.66	3.44	27.1	55.69	-28.59	--	--
8	859.35QP	26.28	-8.64	17.64	46	-28.36	101	45
9	945.00PK	27.79	21.89	49.68	75.69	-26.01	--	--
<b>9</b>	<b>945.00AV</b>	<b>27.79</b>	<b>6.40</b>	34.19	<b>55.69</b>	-21.5	--	--

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	182.82QP	14.3	-6.07	8.23	43.5	-35.27	101	28
2*	315.00PK	16.9	21.43	38.33	95.69	-57.36	101	0
2*	315.00AV	16.9	5.94	22.84	75.69	-52.85	101	0
3	444.68QP	19.98	-8.12	11.86	46	-34.14	101	222
4	553.80QP	22.15	-8.27	13.88	46	-32.12	101	90
5	667.77QP	24.1	-8.25	15.85	46	-30.15	101	0
6	742.95QP	25.26	-8.31	16.95	46	-29.05	101	156
7	803.58QP	25.9	-8.12	17.78	46	-28.22	101	294

**NOTE:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*” = Fundamental frequency
6. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)

Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{42*0.4\text{ms}}{100\text{ms}} = -15.49\text{dB}$$

please see page 20 for plotted duty

## About 1GHz Worst-Case Data

<b>EUT</b>	Remote switching	<b>MODEL NO.</b>	RC747W-JLM-D
<b>CHANNEL</b>	Channel 1	<b>FREQUENCY RANGE</b>	1 GHz ~ 2 GHz
<b>MODULATION TYPE</b>	ASK	<b>INPUT POWER (SYSTEM)</b>	12 Vdc from batteries
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65% RH, 1000 hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak / Peak/ Average
<b>TESTED BY</b>	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	1260PK	14.65	32.15	46.8	75.69	-28.89	101	19
1	1260AV	14.65	16.66	31.31	55.69	-24.38	101	19
2	1575PK	14.46	30.63	45.09	74	-28.91	101	223
2	1575AV	14.46	15.14	29.6	54	-24.4	101	223
3	1890PK	14.33	31.77	46.1	75.69	-29.59	101	77
3	1890AV	14.33	16.28	30.61	55.69	-25.08	101	77
4	2205PK	14.75	30.64	45.39	74	-28.61	101	48
4	2205AV	14.75	15.15	29.9	54	-24.1	101	48
5	2520PK	15.09	29.45	44.54	75.69	-31.15	101	66
5	2520AV	15.09	13.96	29.05	55.69	-26.64	101	66
6	2835PK	15.05	29.35	44.4	74	-29.6	101	315
6	2835AV	15.05	13.86	28.91	54	-25.09	101	315
7	3150PK	15.14	30.68	45.82	75.69	-29.87	101	48
7	3150AV	15.14	15.19	30.33	55.69	-25.36	101	48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	1260PK	14.65	32.18	46.83	75.69	-28.86	101	77
1	1260AV	14.65	16.69	31.34	55.69	-24.35	101	77
2	1575PK	14.46	31.97	46.43	74	-27.57	101	68
2	1575AV	14.64	16.48	31.12	54	-22.88	101	68
3	1890PK	14.33	31.24	45.57	75.69	-30.12	101	9
3	1890AV	14.33	15.75	30.08	55.69	-25.61	101	9
4	2205PK	14.75	29.35	44.1	74	-29.9	101	47
4	2205AV	14.75	13.86	28.61	54	-25.39	101	47
5	2520PK	15.09	29.82	44.91	75.69	-30.78	101	116
5	2520AV	15.09	14.33	29.42	55.69	-26.27	101	116
6	2835PK	15.05	29.06	44.11	74	-29.89	101	98
6	2835AV	15.05	13.57	28.62	54	-25.38	101	98
7	3150PK	15.14	31.82	46.96	75.69	-28.73	101	76
7	3150AV	15.14	16.33	31.47	55.69	-24.22	101	76



**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)  
Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{42*0.4\text{ms}}{100\text{ms}} = -15.49\text{dB}$$

please see page 20 for plotted duty

FCC ID: UWXRC747W-JLM-D

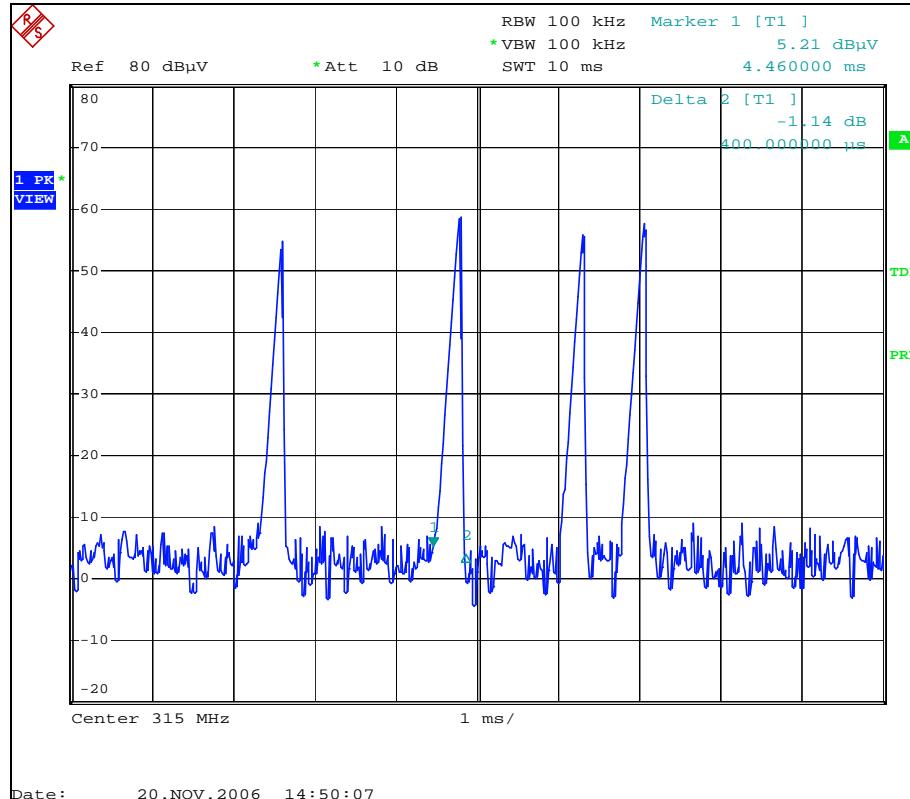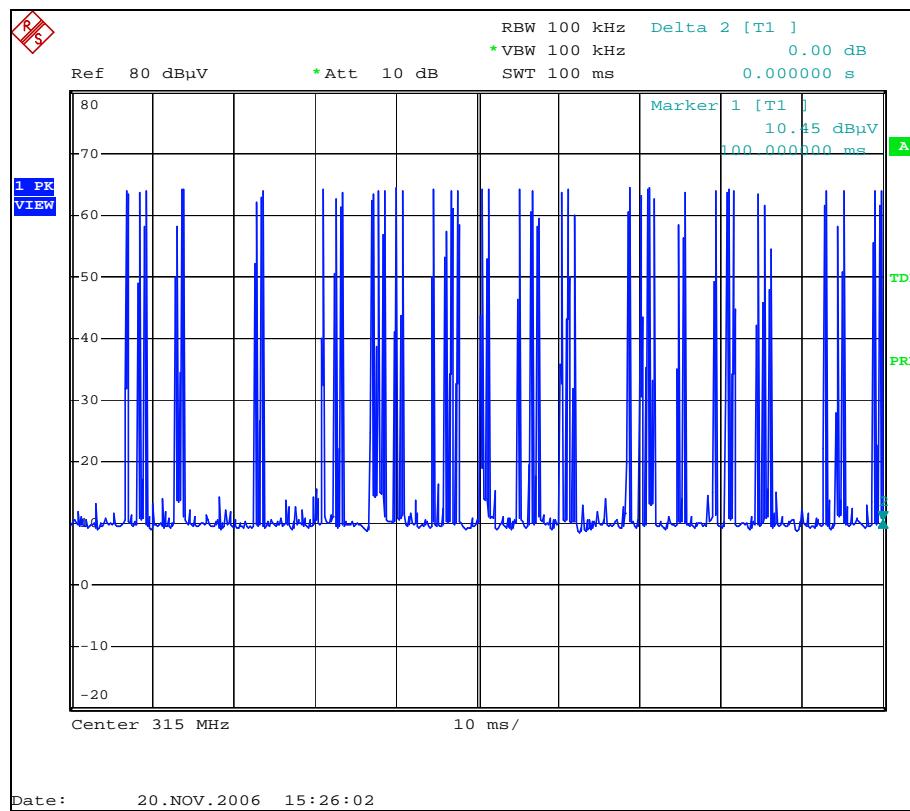

## 4.4 20DB OCCUPIED BANDWIDTH MEASUREMENT

### 4.4.1 LIMITS OF BAND EDGES MEASUREMENT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70 MHz and below 900 MHz.

Fundamental Frequency (MHz)	Limit of 20 dB Bandwidth(kHz)
315	787.5

### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL ANALYZER Rohde & Schwarz	FSP	E1S1002	Mar. 16, 2007

NOTE: The calibration interval of the above test instruments is 12 months.


### 4.4.3 TEST PROCEDURES

1. The EUT was placed on the turning table.
2. The signal was coupled to the spectrum analyzer through an antenna.
3. Set the resolution bandwidth to 100 kHz and video bandwidth to 100 kHz then select Peak function to scan the channel frequency.
4. The 20dB bandwidth was measured and recorded.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.


### 4.4.5 TEST SETUP

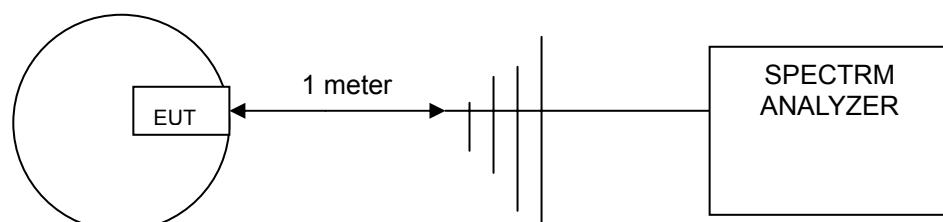

#### 4.4.6 TEST RESULTS

Frequency (MHz)	20 dB bandwidth (kHz)	Maximum limit (kHz)	Pass / Fail
315	460	787.5	PASS

The plot of test result is attached as below.

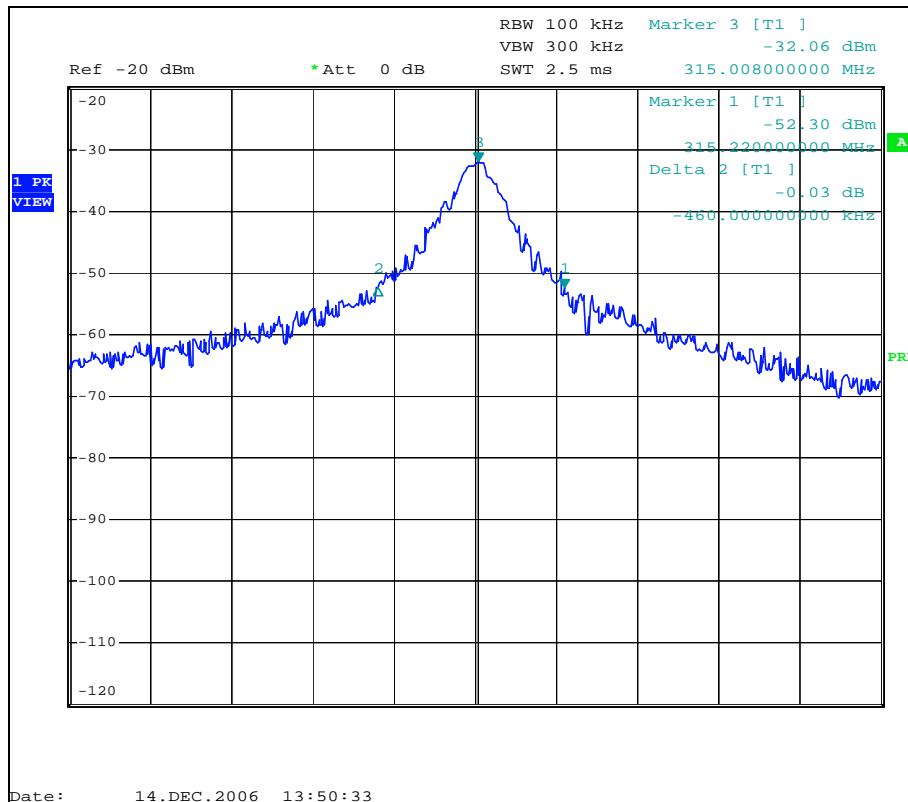



## 5 APPENDIX - INFORMATION ON THE TESTING LABORATORY

We, ADT (Shanghai) Corp., was founded in 2003 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratory is accredited and approved by the following approval agencies according to ISO / IEC 17025 (2005).

The client should not use it to claim product endorsement by CNLS, A2LA, or any government agency.

Japan	VCCI
USA	FCC, A2LA
Norway	DNV
China	CNAS



Copies of accreditation certificates of our laboratory obtained from approval agencies can be downloaded from our web site: [www.cnadt.com](http://www.cnadt.com)

If you have any comments, please feel free to contact us at the following:

### ADT (Shanghai) Corporation

TEL :86-21-6465-9091

Fax : 86-21-6465-9092

Email: [service@adt-sh.com](mailto:service@adt-sh.com)

Web Site: [www.cnadt.com](http://www.cnadt.com)