

Date: 2015-05-30 Page 1 of 44

No.: MH191505

**Applicant:** GP Electronics (HK) Limited.

6/F, Gold Peak Bldg., 30 Kwai Wing Road, Kwai Chung,

New Territories, Hong Kong

**Manufacturer:** GP Electronics (Huizhou) Co., Ltd.

No.76, Hui Feng Si Road, Zhong Kai Hi-Tech Ind. Development Zone, Huizhou, Guangdong, 516006 China

**Description of Sample(s):** Submitted sample(s) said to be

Product: Bluetooth Speaker

Brand Name: KEF
Model Number: MUO
FCC ID: UXD15001

**Date Sample(s) Received:** 2015-05-18

**Date Tested:** 2015-05-23 to 2015-05-26

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014. FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 and ANSI C63.4:2009 for FCC

Certification.

**Conclusion(s):** The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

**Remark(s):** Bluetooth DTS (GFSK)

Dr. LEE Kam Chuen

Authorized Signatory
ElectroMagnetic Compatibility Department

For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2015-05-30 Page 2 of 44

No.: MH191505

CONT	ENT: Cover Content	Page 1 of 44 Page 2 of 44
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 3 of 44
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 44
1.3	Date of Order	Page 3 of 44
1.4	Submitted Sample(s)	Page 3 of 44
1.5	Test Duration	Page 3 of 44
1.6	Country of Origin	Page 3 of 44
1.7	RF Module Details	Page 4 of 44
1.8	Antenna Details	Page 4 of 44
1.9	Channel List	Page 4 of 44
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 5 of 44
2.2	Test Standards and Results Summary	Page 5 of 44
<u>3.0</u>	Test Results	
3.1	Emission	Page 6-39 of 44
	Appendix A	

List of Measurement Equipment

Appendix B

Photographs of EUT

Page 40 of 44

Page 41-44 of 44

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2015-05-30 Page 3 of 44

No.: MH191505

#### 1.0 General Details

#### 1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

# 1.2 Equipment Under Test [EUT] Description of Sample(s)

Product: Bluetooth Speaker

Manufacturer: GP Electronics (Huizhou) Co., Ltd.

No.76, Hui Feng Si Road, Zhong Kai Hi-Tech Ind. Development Zone, Huizhou, Guangdong, 516006 China

Brand Name: KEF Model Number: MUO

Rating: 5.0Vd.c. by adapter / 7.5Vd.c. by battery The AC/DC adaptor was provided by the applicant with following details:

Brand name: DYS; Model no.: APP521-050200U

Input: 100-240Va.c. 50/60Hz 0.45A;

Output: 5.0Vd.c. 2.0A

## 1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Bluetooth Speaker, modulation by IC; and type is frequency hopping speed spectrum Modulation. Transmit continuously with 100% duty cycle.

#### 1.3 Date of Order

2015-05-30

#### 1.4 Submitted Sample(s):

1 Sample

#### 1.5 Test Duration

2015-05-23 to 2015-05-26

#### 1.6 Country of Origin

China

#### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2015-05-30 Page 4 of 44

No.: MH191505

#### 1.7 **RF Module Details**

Module Model Number: JS-BTM8670

Module FCC ID: N/A

Module Transmission Type: Bluetooth DTS

Modulation: **GFSK** Data Rates: 1Mbps

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz-2480MHz

Module Specification (specification provided by manufacturer)

#### 1.8 **Antenna Details**

Antenna Type: Meander line antenna

Antenna Gain: 2.2dBi

#### **Channel List** 1.9

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480



Date: 2015-05-30 Page 5 of 44

No.: MH191505

#### 2.0 **Technical Details**

#### 2.1 **Investigations Requested**

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 Regulations. FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 and ANSI C63.4:2009 for FCC Certification.

#### 2.2 **Test Standards and Results Summary Tables**

EMISSION								
Results Summary								
Test Condition	Test Requirement	Test Method	Class /	Te	Test Result			
			Severity	Pass	Fail	N/A		
Maximum Peak Output Power	FCC 47CFR 15.247(b)(3)	FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02	N/A					
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A					
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.4:2009	N/A					
Power Spectral Density	FCC 47CFR 15.247(e)	FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02	N/A					
6dB Bandwidth	FCC 47CFR 15.247(a)(2)	FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02	N/A					
Band Edge Emissions (Radiated)	FCC 47CFR 15.247(d)	FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02	N/A					
Antenna requirement	FCC 47CFR 15.203	N/A	N/A					
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	$\boxtimes$				

Note: N/A - Not Applicable



Date: 2015-05-30 Page 6 of 44

No.: MH191505

#### 3.0 Test Results

#### 3.1 Emission

#### 3.1.1 Maximum Peak Output Power

Test Requirement: FCC 47CFR 15.247(b)(3)

Test Method: FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02


Test Date: 2015-05-23

Mode of Operation: Bluetooth DTS Tx mode

#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in mW.

#### **Test Setup:**

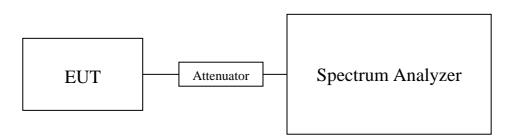



Date: 2015-05-30 Page 7 of 44

No.: MH191505

### Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

Results of BT DTS Tx Mode (2402MHz to 2480MHz) : Pass (TX Unit) (GFSK) Maximum conducted output power					
Channel	Frequency(MHz)	Output Power(Watt)			
0	2402	0.000783			
20	2442	0.000822			
39	2480	0.000817			

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB

> 1GHz to 26GHz 1.7dB




Date: 2015-05-30 Page 8 of 44

No.: MH191505

## Test plot of Maximum Peak Conducted Output Power:

#### Bluetooth Communication mode (BT DTS-GFSK, 2402MHz)

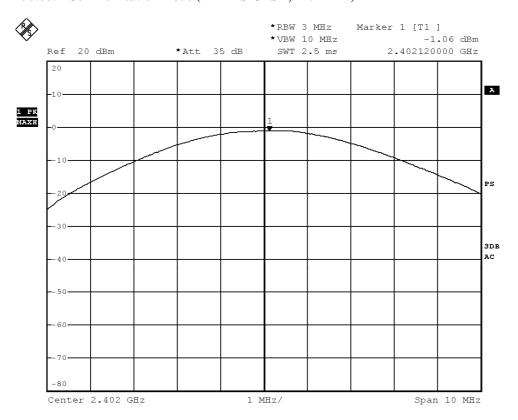

BMP


Date: 23.MAY.2015 09:17:03



Date: 2015-05-30 Page 9 of 44

No.: MH191505

#### Bluetooth Communication mode (BT DTS-GFSK, 2442MHz)

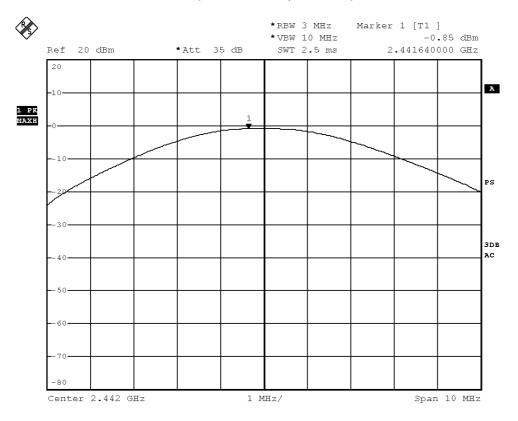

BMP


Date: 23.MAY.2015 09:16:11



Date: 2015-05-30 Page 10 of 44

No.: MH191505

## Bluetooth Communication mode (BT DTS-GFSK, 2480MHz)

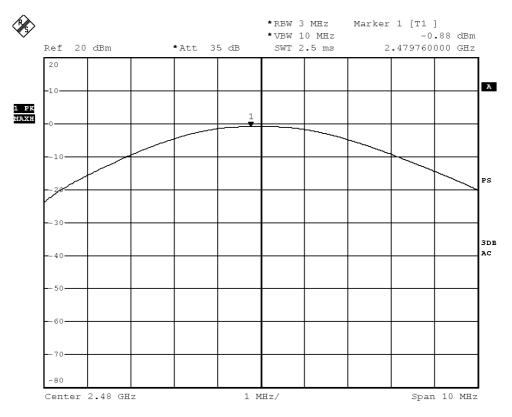

BMP

Date: 23.MAY.2015 09:15:28



Date: 2015-05-30 Page 11 of 44

No.: MH191505

#### 3.1.2 Radiated Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.4:2009

Test Date: 2015-05-21 to 2015-05-26

Mode of Operation: Tx mode / Bluetooth Communication mode/ Bluetooth


Communication+ Charge mode (GFSK)

#### **Test Method:**

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\* Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

#### **Test Setup:**

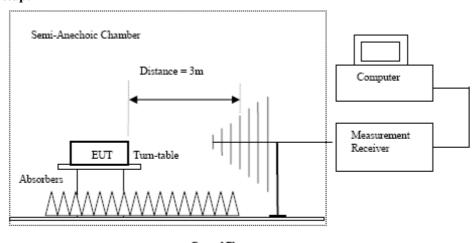

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.



Date: 2015-05-30 Page 12 of 44

No.: MH191505

#### Limits for Radiated Emissions [FCC 47 CFR 15.247 Class B]:

Elilits for Radiated Elilissions [FCC 47 CFR 13:247 Class B].					
Frequency Range	Quasi-Peak Limits				
[MHz]	$[\mu V/m]$				
0.009-0.490	2400/F (kHz)				
0.490-1.705	24000/F (kHz)				
1.705-30	30				
30-88	100				
88-216	150				
216-960	200				
Above960	500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of Bluetooth Communication mode (GFSK) (9kHz - 30MHz): Pass

The Low Frequency, which started from 9KHz to 30MHz, was Pre-scan and the result which was more than 20dB lower than the Limit line.

#### Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\muV/m$	$dB\mu V/m$	dBμV/m		
4804.0	15.2	41.5	56.7	74.0	17.3	Vertical	
4804.0	13.4	42.4	55.8	74.0	18.2	Horizontal	
7206.0	9.9	45.1	55.0	74.0	19.0	Vertical	
7206.0	8.2	46.2	54.4	74.0	19.6	Horizontal	
9608.0	7.6	48.0	55.6	74.0	18.4	Vertical	
9608.0	6.5	48.8	55.3	74.0	18.7	Horizontal	
12010.0	5.0	51.5	56.5	74.0	17.5	Vertical	
12010.0	2.9	52.4	55.3	74.0	18.7	Horizontal	



Date: 2015-05-30 Page 13 of 44

No.: MH191505

	Field Strength of Spurious Emissions							
	Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\muV/m$	$dB\mu V/m$	dBμV/m			
4804.0	0.0	41.5	41.5	54.0	12.5	Vertical		
4804.0	-2.3	42.4	40.1	54.0	13.9	Horizontal		
7206.0	-3.7	45.1	41.4	54.0	12.6	Vertical		
7206.0	-6.0	46.2	40.2	54.0	13.8	Horizontal		
9608.0	-8.0	48.0	40.0	54.0	14.0	Vertical		
9608.0	-8.5	48.8	40.3	54.0	13.7	Horizontal		
12010.0	-10.1	51.5	41.4	54.0	12.6	Vertical		
12010.0	-11.2	52.4	41.2	54.0	12.8	Horizontal		

### Result of Tx mode (2442.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\muV/m$	$dB\mu V/m$	dBμV/m			
4884.0	14.8	41.6	56.4	74.0	17.6	Vertical		
4884.0	13.2	42.5	55.7	74.0	18.3	Horizontal		
7326.0	10.2	45.2	55.4	74.0	18.6	Vertical		
7326.0	9.0	46.3	55.3	74.0	18.7	Horizontal		
9768.0	7.8	48.1	55.9	74.0	18.1	Vertical		
9768.0	6.7	48.9	55.6	74.0	18.4	Horizontal		
12210.0	3.9	51.6	55.5	74.0	18.5	Vertical		
12210.0	3.6	52.5	56.1	74.0	17.9	Horizontal		

Field Strength of Spurious Emissions Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\muV/m$	$dB\mu V/m$	dBμV/m	
4884.0	-0.6	41.6	41.0	54.0	13.0	Vertical
4884.0	-3.2	42.5	39.3	54.0	14.7	Horizontal
7326.0	-4.7	45.2	40.5	54.0	13.5	Vertical
7326.0	-6.2	46.3	40.1	54.0	13.9	Horizontal
9768.0	-6.5	48.1	41.6	54.0	12.4	Vertical
9768.0	-8.4	48.9	40.5	54.0	13.5	Horizontal
12210.0	-11.6	51.6	40.0	54.0	14.0	Vertical
12210.0	-10.7	52.5	41.8	54.0	12.2	Horizontal



Date: 2015-05-30 Page 14 of 44

No.: MH191505

#### Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	$dB\mu V/m$			
4960.0	15.6	41.4	57.0	74.0	17.0	Vertical		
4960.0	13.1	42.7	55.8	74.0	18.2	Horizontal		
7440.0	9.9	45.6	55.5	74.0	18.5	Vertical		
7440.0	8.4	46.5	54.9	74.0	19.1	Horizontal		
9920.0	6.9	48.6	55.5	74.0	18.5	Vertical		
9920.0	5.7	49.7	55.4	74.0	18.6	Horizontal		
12400.0	4.6	51.7	56.3	74.0	17.7	Vertical		
12400.0	3.7	52.7	56.4	74.0	17.6	Horizontal		

	Field Strength of Spurious Emissions Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m	_	Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$			
4960.0	0.3	41.4	41.7	54.0	12.3	Vertical		
4960.0	-1.4	42.7	41.3	54.0	12.7	Horizontal		
7440.0	-5.5	45.6	40.1	54.0	13.9	Vertical		
7440.0	-4.8	46.5	41.7	54.0	12.3	Horizontal		
9920.0	-9.3	48.6	39.3	54.0	14.7	Vertical		
9920.0	-9.4	49.7	40.3	54.0	13.7	Horizontal		
12400.0	-10.6	51.7	41.1	54.0	12.9	Vertical		
12400.0	-11.4	52.7	41.3	54.0	12.7	Horizontal		

#### Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty (9kHz-30MHz): 2.0dB

(30MHz -1GHz): 4.9dB (1GHz -6GHz): 4.02dB (6GHz -26.5GHz): 4.03dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2015-05-30 Page 15 of 44

No.: MH191505


#### Limits for Radiated Emissions [FCC 47 CFR 15,209 Class B]:

Emmes for Radiated Emmessions [1 CC 47 CTR 18:205 Chass D].					
Quasi-Peak Limits					
$[\mu V/m]$					
2400/F (kHz)					
24000/F (kHz)					
30					
100					
150					
200					
500					

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of Bluetooth Communication mode (30MHz - 1GHz): Pass

Please refer to the following table for result details

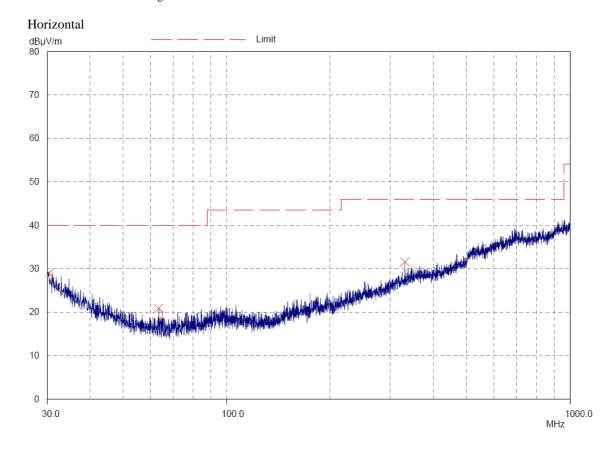

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2015-05-30 Page 16 of 44

No.: MH191505

#### Result of Bluetooth Communication mode (30MHz - 1GHz): Pass

	Radiated Emissions					
	Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit	
Frequency	Polarity	@3m	@3m	@3m	@3m	
MHz		dBμV/m	dBμV/m	μV/m	μV/m	
30.4	Horizontal	29.0	40.0	28.2	100	
63.4	Horizontal	20.8	40.0	11.0	100	
330.6	Horizontal	31.5	46.0	37.6	200	



Date: 2015-05-30 Page 17 of 44

No.: MH191505


#### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

or Class DJ.
Quasi-Peak Limits
$[\mu V/m]$
2400/F (kHz)
24000/F (kHz)
30
100
150
200
500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of Bluetooth Communication mode (30MHz - 1GHz): Pass

Please refer to the following table for result details

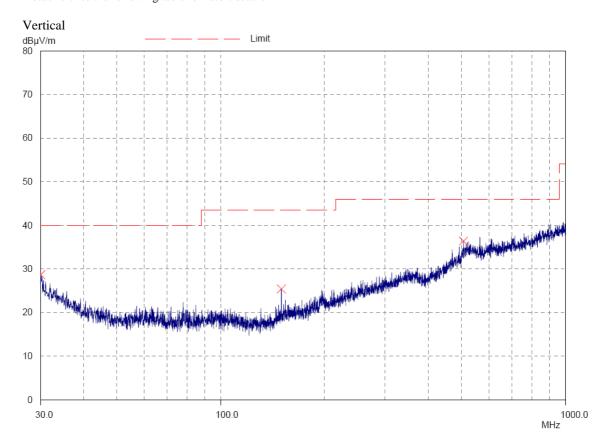

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2015-05-30 Page 18 of 44

No.: MH191505

#### Result of Bluetooth Communication mode (30MHz - 1GHz): Pass

Radiated Emissions						
	Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit	
Frequency	Polarity	@3m	@3m	@3m	@3m	
MHz		dBµV/m	dBμV/m	μV/m	μV/m	
30.1	Vertical	28.7	40.0	27.2	100	
150.0	Vertical	25.4	43.5	18.6	150	
506.3	Vertical	36.4	46.0	66.1	200	



Date: 2015-05-30 Page 19 of 44

No.: MH191505


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emilia for Radiated Emissions [Fee 47 CFR 13:2	os class 2].
Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of Bluetooth Communication+ Charge mode (30MHz - 1GHz): Pass

Please refer to the following table for result details

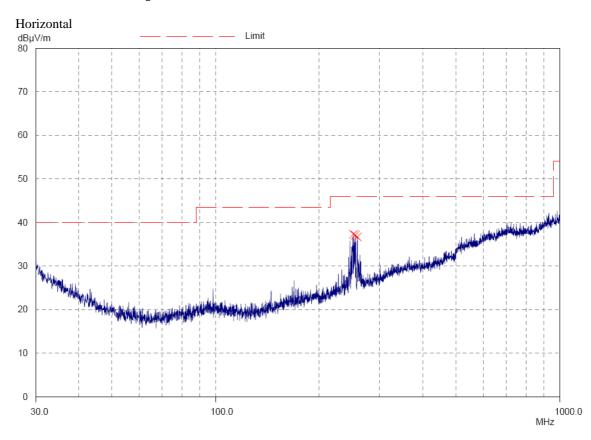

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2015-05-30 Page 20 of 44

No.: MH191505

Result of Bluetooth Communication+ Charge mode (30MHz - 1GHz): Pass

	Radiated Emissions						
		Quasi	-Peak				
Emission	E-Field	Level	Limit	Level	Limit		
Frequency	Polarity	@3m	@3m	@3m	@3m		
MHz		dBμV/m	dBμV/m	μV/m	μV/m		
251.6	Horizontal	37.3	46.0	73.3	200		
254.7	Horizontal	37.1	46.0	71.6	200		
258.3	Horizontal	36.7	46.0	68.4	200		



Date: 2015-05-30 Page 21 of 44

No.: MH191505


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emilia for Radiated Emissions [Fee 47 CFR 13:2	os class 2].
Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of Bluetooth Communication+ Charge mode (30MHz - 1GHz): Pass

Please refer to the following table for result details

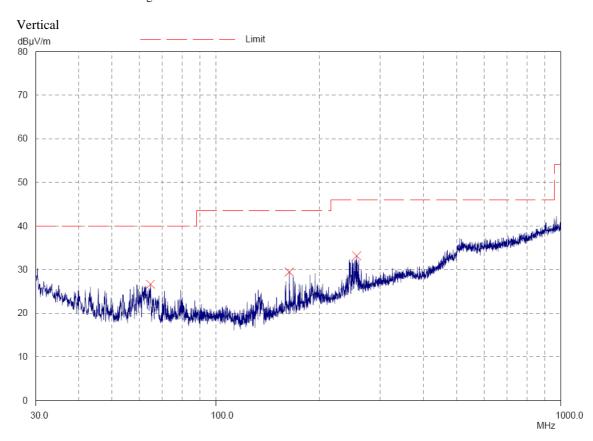

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2015-05-30 Page 22 of 44

No.: MH191505

#### Result of Bluetooth Communication+ Charge mode (30MHz - 1GHz): Pass

	Radiated Emissions Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit	
Frequency	Polarity	@3m	@3m	@3m	@3m	
MHz		dBµV/m	dBμV/m	μV/m	μV/m	
64.6	Vertical	29.6	40.0	30.2	100	
163.4	Vertical	29.4	43.5	29.5	150	
256.1	Vertical	33.1	46.0	45.2	200	

#### Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.9dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2015-05-30 Page 23 of 44

No.: MH191505

#### 3.1.3 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.4:2009 Test Date: 2015-05-22


Mode of Operation: Bluetooth Communication +Charge mode (GFSK)

Test Voltage: 120Va.c., 60Hz

#### **Test Method:**

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### **Test Setup:**

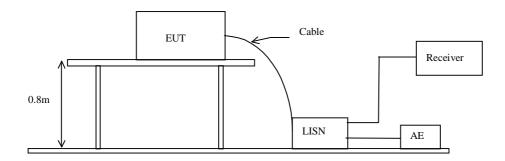



Date: 2015-05-30 Page 24 of 44

No.: MH191505

# Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

#### Result of Bluetooth Communication +Charge mode (L): PASS

Please refer to the following diagram for individual results.

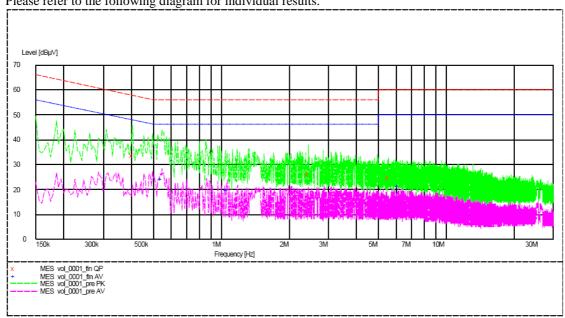

		Quas	i-peak	Ave	rage
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dBμV	dΒμV	dΒμV
Live	0.405	33.6	58.0	_*_	_*_
Live	2.445	26.2	56.0	_*_	_*_
Live	5.575	24.8	60.0	_*_	_*_
Live	0.545	_*_	_*_	24.1	46.0
Live	1.065	_*_	_*_	19.6	46.0
Live	6.145	_*_	_*_	21.1	50.0



Date: 2015-05-30 Page 25 of 44

No.: MH191505

#### Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

#### Result of Bluetooth Communication +Charge mode (N): PASS

Please refer to the following diagram for individual results.

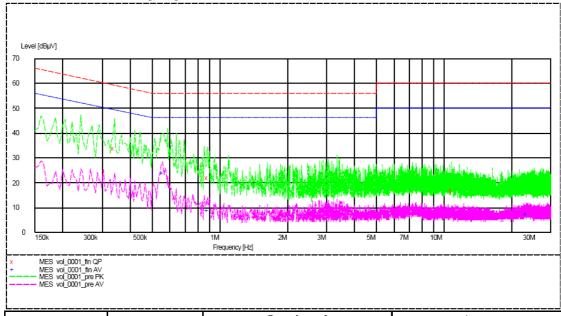

		Quasi-peak		Ave	rage
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dBμV	dΒμV	dBμV	dΒμV
Neutral	0.340	34.0	59.0	_*_	_*_
Neutral	0.885	21.9	56.0	_*_	_*_
Neutral	10.890	16.9	60.0	_*_	_*_
Neutral	0.555	_*_	_*_	23.7	46.0
Neutral	0.885	_*_	_*_	8.7	46.0
Neutral	23.375	_*_	_*_	7.3	50.0

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.25dB

#### The Hong Kong Standards and Testing Centre Ltd.

<sup>-\*-</sup> Emission(s) that is far below the corresponding limit line.



Date: 2015-05-30 Page 26 of 44

No.: MH191505

#### 3.1.4 Power Spectral Density

Test Requirement: FCC 47CFR 15.247(e)

Test Method: FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02

Test Date: 2015-05-23

Mode of Operation: Bluetooth DTS Tx mode

#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=3kHz , VBW= 10 KHz , Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

#### **Test Limit:**

The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.

# Results of Bluetooth DTS Mode (Tx:2402MHz to 2480MHz) : Pass (TX Unit) Maximum power spectral density


Transmitter Frequency	Maximum Power spectral density	Maximum Power spectral density
(MHz)	level / 3kHz band	/ 3kHz band limit
	(dBm)	
2402.0	-14.89	8dBm
2442.0	-14.24	8dBm
2480.0	-14.71	8dBm



Date: 2015-05-30 Page 27 of 44

No.: MH191505

# Bluetooth DTS mode (Tx: 2402MHz to 2480MHz) 2402.0 MHz

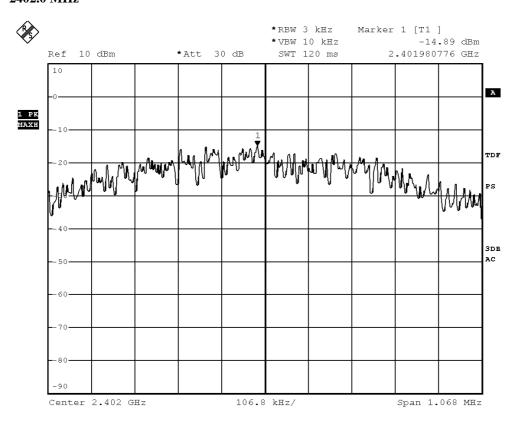

BMP


Date: 23.MAY.2015 09:30:43



Date: 2015-05-30 Page 28 of 44

No.: MH191505

## 2442.0 MHz

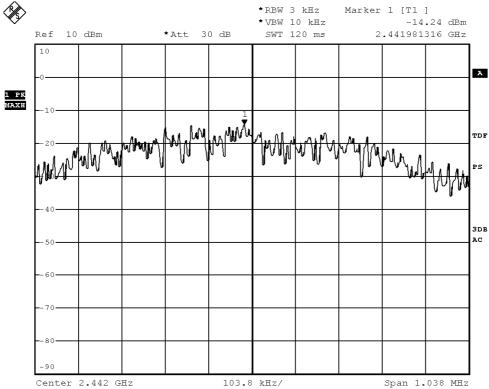

BMP


Date: 23.MAY.2015 09:29:37



Date: 2015-05-30 Page 29 of 44

No.: MH191505

#### 2480.0 MHz

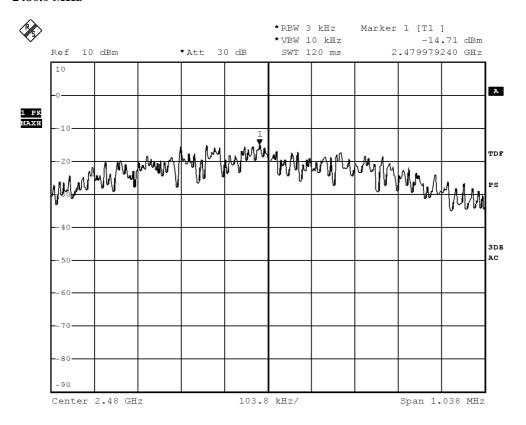

BMP

Date: 23.MAY.2015 09:28:27



Date: 2015-05-30 Page 30 of 44

No.: MH191505

#### 3.1.5 6dB Bandwidth Measurement

Test Requirement: FCC 47CFR 15.247(a)(2)

Test Method: FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02

Test Date: 2015-05-23

Mode of Operation: Bluetooth DTS Tx mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




Date: 2015-05-30 Page 31 of 44

No.: MH191505

#### **Limits for 6dB Bandwidth Measurement:**

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[kHz]	[kHz]
2402.0	712	> 500

#### 6 dB Bandwidth Plot on Configuration Bluetooth DTS (GFSK: 2402MHz)

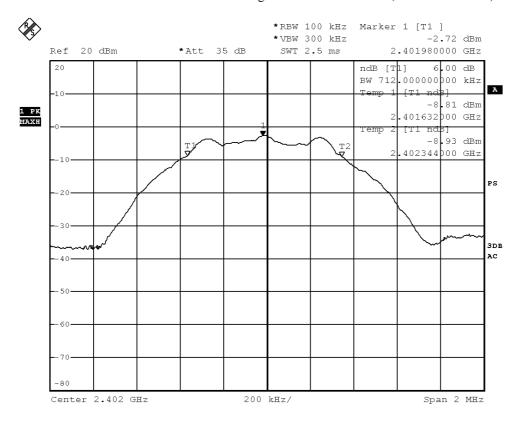

BMP

Date: 23.MAY.2015 09:13:08




Date: 2015-05-30 Page 32 of 44

No.: MH191505

#### **Limits for 6dB Bandwidth Measurement:**

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[kHz]	[kHz]
2442.0	692	> 500

## 6 dB Bandwidth Plot on Configuration Bluetooth DTS (GFSK: 2442MHz)

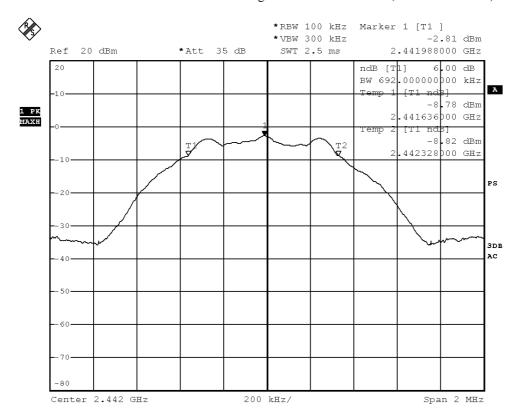

BMP

Date: 23.MAY.2015 09:12:17




Date: 2015-05-30 Page 33 of 44

No.: MH191505

#### **Limits for 6dB Bandwidth Measurement:**

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[kHz]	[kHz]
2480.0	692	> 500

## 6 dB Bandwidth Plot on Configuration Bluetooth DTS (GFSK: 2480MHz)

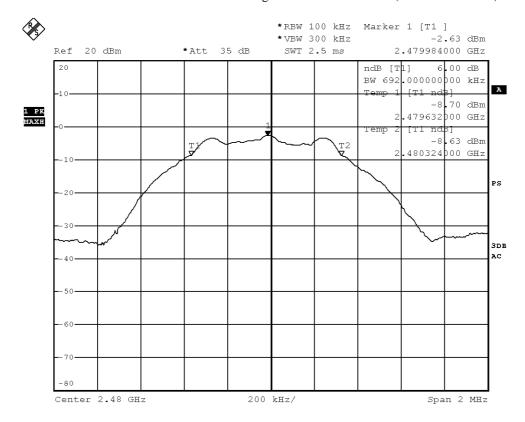

BMP

Date: 23.MAY.2015 09:13:57



Date: 2015-05-30 Page 34 of 44

No.: MH191505

### 3.1.6 Band Edges Measurement

Test Requirement: FCC 47CFR 15.247

Test Method: FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02

Test Date: 2015-05-23

Mode of Operation: Bluetooth DTS Tx mode

#### **Test Method:**

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW and VBW are set to 100kHz for this measurement.

#### **Test Setup:**

As Test Setup of clause 3.1.2 in this test report.



Date: 2015-05-30 Page 35 of 44

No.: MH191505


# **Band-edge Compliance of RF Conducted Emissions Measurement:**

#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	45.58

# Band-edge Compliance of RF Conducted Emissions – Lowest (GFSK: Bluetooth DTS mode 2402MHz)

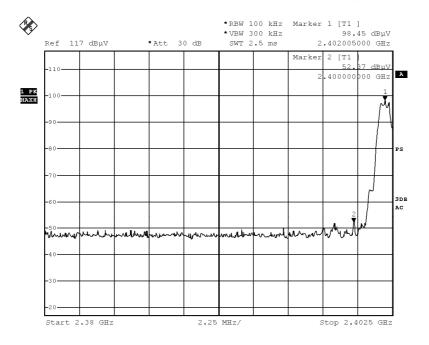

BMP

Date: 23.MAY.2015 09:19:45




Date: 2015-05-30 Page 36 of 44

No.: MH191505

# **Band-edge Compliance of RF Conducted Emissions Measurement:**

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	44.43

# Band-edge Compliance of RF Conducted Emissions – Highest (GFSK: Bluetooth DTS mode 2480MHz)

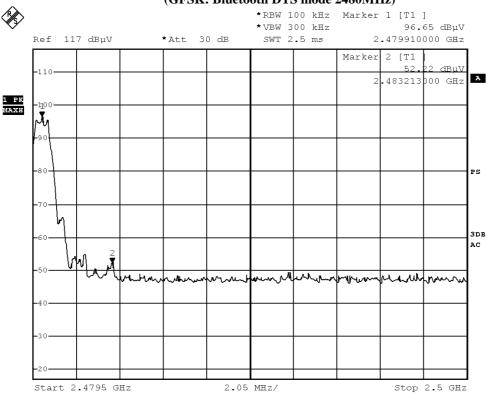

ВМР

Date: 23.MAY.2015 09:21:47



Date: 2015-05-30 Page 37 of 44

No.: MH191505

#### **Band-edge Compliance of RF Radiated Emissions Measurement:**

#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: Band-edge Compliance of RF Radiated Emissions (Lowest)

Field Strength of Band-edge Compliance								
	Peak Value							
Frequency	equency Measured Correction Field Limit Margin E-Field							
	Level @3m Factor Strength @3m Polarity							
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dBμV/m			
2390.0	19.6	36.8	56.4	74.0	17.6	Vertical		

Field Strength of Band-edge Compliance Average Value								
Frequency								
	Level @3m Factor Strength @3m Polari							
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$			
2390.0	5.1	36.8	41.9	54.0	12.1	Vertical		

#### Result: Band-edge Compliance of RF Radiated Emissions (Highest)

Field Strength of Band-edge Compliance							
	Peak Value						
Frequency	cy Measured Correction Field Limit Margin E-Field						
	Level @3m Factor Strength @3m Polar						
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2483.5	18.5	36.4	54.9	74.0	19.1	Horizontal	

Field Strength of Band-edge Compliance Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
Level @3m Factor Strength @3m Polarity						
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	$dB\mu V/m$	
2483.5	3.3	36.4	39.7	54.0	14.3	Horizontal



Date: 2015-05-30 Page 38 of 44

No.: MH191505

#### 3.1.7 Antenna Requirement

Test Requirements: § 15.203

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Test Results:**

This is Meander line antenna. There is no external antenna, the antenna gain = -2.22dBi. All component install on inside of EUT. User unable to remove or changed the Antenna.



Date: 2015-05-30 Page 39 of 44

No.: MH191505

#### 3.1.8 RF Exposure

Test Requirement: FCC 47CFR 15.247(i)

Test Date: 2015-05-23 Mode of Operation: Tx mode

#### **Requirements:**

In 15.247(i), an equipment shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the limits in §§ 1.1310 and 2.1093 of this chapter.

Applications to the Commission for construction permits, licenses to transmit or renewals thereof, equipment authorizations or modifications in existing facilities must contain a statement confirming compliance with the limits unless the facility, operation, or transmitter is categorically excluded, as discussed below. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According to KDB 447498 D01 General RF Exposure Guidance v05, unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition.

#### **Test Results:**

RF Exposure Evaluation

The Maximum conducted output power = 0.822 mW (at frequency = 2.442 GHz)

It's Conducted source-based time-averaging output power = 0.819 mW (at frequency = 2.442 GHz)

Since the SAR test exclusion thresholds for 2450MHz at test separation distances  $\leq 5$  mm = 10mW and the Conducted source-based time-averaging output power is less than 10mW.

Therefore. the SAR evaluation can be exempted.



Date: 2015-05-30 Page 40 of 44

No.: MH191505

# Appendix A

#### List of Measurement Equipment

#### **Radiated Emission**

	Kadiated Elinission								
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL			
EM299	DOUBLE-RIDGED WAVEGUIDE HORN ANTENNA	ETS-LINDGREN	3115	00114120	2014/01/15	2016/01/25			
EM300	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-09	00130130	2014/01/23	2016/01/23			
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A			
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A			
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A			
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3		2014/09/29	2015/09/29			
EM320	BICONILOG ANTENNA	ETS-LINDGREN	3142D	00094856	2014/08/06	2016/08/06			
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2014/01/15	2016/01/15			
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2014/05/26	2015/05/26			
RE01	RF CABLE	N/A	N/A	N/A	2014-9-28	2015-9-27			
RE02	RF CABLE	N/A	N/A	N/A	2014-9-28	2015-9-27			

#### **Line Conducted**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM232	LISN	SCHAFFNER	NNB41	04/100082	2014/12/08	2015/12/08
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2014/05/26	2015/05/26
EM179	IMPULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	357- 8810.52/54	2015/01/14	2016/01/14
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	2012/02/03	2017/02/03

Remarks:-

N/A Not Applicable or Not Available



Date: 2015-05-30 Page 41 of 44

No.: MH191505

Appendix B

**Photographs of EUT** 

Front View of the product




Rear View of the product




**Inside View of the product** 




**Inner Circuit Top View** 



**Inner Circuit Bottom View** 



**Inner Circuit Top View** 



**Photographs of EUT** 

The Hong Kong Standards and Testing Centre Ltd.


10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org




Date: 2015-05-30 Page 42 of 44

No.: MH191505

#### **Inner Circuit Bottom View**




**Inner Circuit Top View** 



**Inner Circuit Top View** 



**Inner Circuit Bottom View** 







Date: 2015-05-30 Page 43 of 44

No.: MH191505

### **Photographs of EUT**

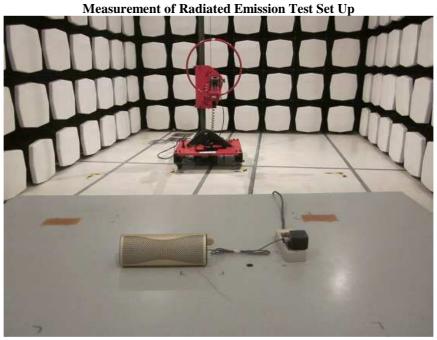

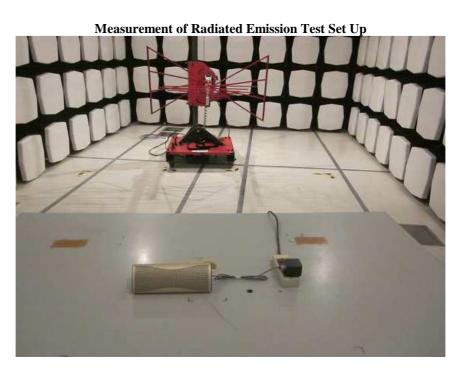

The Hong Kong Standards and Testing Centre Ltd.


10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2015-05-30 Page 44 of 44

No.: MH191505

### **Photographs of EUT**

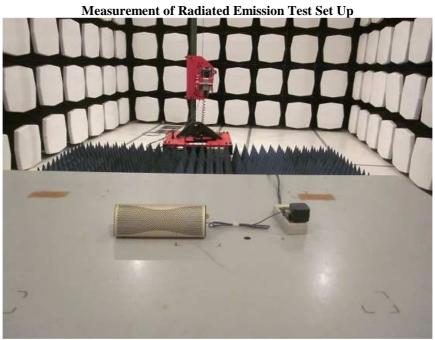

**Measurement of Conducted Emission Test Set Up** 



\*\*\*\*\* End of Test Report \*\*\*\*\*

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org