

TEST REPORT # EMCC-080534JB, 2020-11-17

EQUIPMENT UNDER TEST:

Trade Name: iSYS-5220
Serial Number(s): EUT #1: 000015853
EUT #2: 000015850
Application: 24 GHz Radar
FCC ID: UXS-ISYS-5220
ISED Canada IC: 6902A-ISYS5220
Manufacturer: InnoSenT GmbH
Address: Am Roedertor 30
97499 Donnersdorf
GERMANY

RELEVANT STANDARD(S) :

47 CFR § 15.249
RSS-210 Issue 10
RSS-Gen Issue 5 Amendment 1

MEASUREMENT PROCEDURE: :

ANSI C63.10-2013
KDB 890966 D01 v01r01

TEST REPORT PREPARED BY:

Ludwig Kraft
EMCCCons DR. RAŠEK GmbH & Co. KG
Boelwiese 8
91320 Ebermannstadt
Germany
Phone: +49 9194 7262-333
Fax: +49 9194 7262-199
E-Mail: l.kraft@emcc.de

Tested:



Ludwig Kraft

Approved:



Reinhard Sauerschell

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

CONTENTS	PAGE
0 REVISION HISTORY	3
1 GENERAL INFORMATION	4
1.1 Purpose	4
1.2 Limits and Reservations	4
1.3 Test Laboratory	4
1.4 Customer	4
1.5 Manufacturer	4
1.6 Dates and Test Location	5
1.7 Ordering Information	5
1.8 Climatic Conditions	5
2 PRODUCT DESCRIPTION	6
2.1 Equipment Under Test (EUT)	6
2.2 Intended Use	7
2.3 EUT Peripherals/Simulators	7
2.4 Mode of operation during testing and test setup	7
2.5 Modifications required for compliance	7
3 TEST RESULTS SUMMARY	8
4 DETAILED TEST RESULTS	9
4.1 AC Power Line Conducted Emissions	9
4.2 Occupied Bandwidth	14
4.3 Field Strength of Fundamental	20
4.4 Radiated Emissions	29
5 TEST INSTRUMENTS	81
6 MEASUREMENT UNCERTAINTY	83
7 LIST OF ANNEXES	84

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

0 REVISION HISTORY

Project number	Issue date	Chapter	Description
080534JB	2020-11-17	n.a.	Initial issue

1 GENERAL INFORMATION

1.1 Purpose

The purpose of this report is to show compliance with the 47 CFR § 15.249 and RSS-210 Issue 10 requirements applicable to intentional radiators (subpart C).

1.2 Limits and Reservations

The test results in this report apply only to the particular equipment under test (EUT) as declared in this report. This test report shall not be reproduced except in full without the written permission of EMCCCons DR. RAŠEK GmbH & Co. KG.

1.3 Test Laboratory

Test Laboratory:	EMCCCons DR. RAŠEK GmbH & Co. KG
Accreditation No.:	D-PL-12067-01-03 D-PL-12067-01-04
FCC Test Firm Registration No.:	368753
ISED company number:	3464C
ISED CAB identifier:	DE0002
Address of Labs I, II, III and Head Office:	EMCCCons DR. RAŠEK GmbH & Co. KG Boelwiese 8 91320 Ebermannstadt GERMANY
Address of Labs IV and V:	EMCCCons DR. RAŠEK GmbH & Co. KG Stoernhofer Berg 15 91364 Unterleinleiter GERMANY
Phone:	+49 9194 7262-0
Fax:	+49 9194 7262-199
E-Mail:	info@emcc.de
Web:	www.emcc.de

1.4 Customer

Company Name:	InnoSenT GmbH
Street:	Am Roedertor 30
City:	97499 Donnersdorf
Country:	GERMANY
Name:	Mr Waldemar Hartfelder
Phone:	+49 9528 9518-53
Fax:	+49 9528 9518-99
E-Mail:	waldemar.hartfelder@innosent.de

1.5 Manufacturer

Company Name:	InnoSenT GmbH
Street:	Am Roedertor 30
City:	97499 Donnersdorf
Country:	GERMANY
Phone:	+49 9528 9518-0
E-Mail:	info@innosent.de

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

1.6 Dates and Test Location

Date of receipt of EUT: 2020-03-24, 2020-04-24 (with modification 1),
2020-09-23 (Ethernet cable with modification 2)
Test Date: see dates below
Test Location: Lab IV

1.7 Ordering Information

Purchase Order: B-2020-4740
Date: 2020-01-20
Vendor-Number: 72606

1.8 Climatic Conditions

Date	Temperature	Relative Humidity	Air Pressure	Lab	Customer attended tests
--	°C	%	hPa	--	--
2020-04-02	23	22	972	IV	No
2020-07-15	24	46	973	IV	No
2020-07-17	23	48	979	IV	No
2020-07-20	24	50	976	IV	No
2020-07-21	24	51	979	IV	No
2020-07-22	24	45	981	IV	No
2020-09-24	23	51	968	IV	No
2020-10-01	22	47	965	IV	No
2020-10-02	22	50	957	IV	No
2020-10-08	22	47	979	IV	No

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

2 PRODUCT DESCRIPTION

2.1 Equipment Under Test (EUT)

The following data is based on customer's information.

Manufacturer:	InnoSenT GmbH
Trade Name:	iSYS-5220
Application:	24 GHz Radar
No of variants:	None
Serial No(s):	EUT #1: 000015853 EUT #2: 000015850
FCC ID:	UXS-ISYS-5220
IC:	6902A-ISYS5220
PMN:	ISYS-5220
HVIN:	ISYS-5220
FVIN:	
HMN:	
Highest internal frequency:	24.25 GHz
TX operating frequency range:	24.005 .. 24.25 GHz
Used channels during test:	Flow: 24.07GHz Fmid: 24.154 GHz Fhigh: 24.238 GHz
Power source:	Power over Ethernet (PoE Ultra Injector, 802.3at, 10/100/1000 Mbps, 60 Watt)
Voltage for testing:	42.5 -57 V _{DC} (via PoE device provided by customer)
Ports:	Ethernet connector with PoE (Phonix Contact SACC-CI-M12FS-8CON-L-180-10) RS485 with power supply (not used for testing)
Antenna:	Internal
Remarks:	None

2.2 Intended Use

The following description was taken from product datasheet “iSYS-5220 User Manual Revision 2 – 2019-12-09”

“
The iSYS-5220 is a 24GHz 4D/UHD radar sensor designed and developed for multiple-lane, multiple-target tracking, intersection management and traffic monitoring applications.
The newest member of InnoSenT’s radar fleet is designed for long-range and wide horizontal view to cover up to two slip roads to an intersection with multiple lanes.
“

2.3 EUT Peripherals/Simulators

The EUT was tested being connected via Ethernet cable to a Laptop running the test software Traffic Manager V1.040. The EUT was powered by Power over Ethernet (PoE) injector provided by the customer.

2.4 Mode of operation during testing and test setup

The equipment under test (EUT) was operated during the tests under the following conditions:

Mode: Modulated

This is the normal operation mode of the FMCW Radar. The EUT is sweeping from 24.07 GHz to 24.238 GHz.

This test mode was used for measurement up to 18 GHz.

Mode: Flow, Fmid, Fhigh

This is a test mode only where the EUT is on a fixed frequency in CW mode at Flow = 24.07 GHz, Fmid = 24.154 GHz and Fhigh = 24.238 GHz.

Flow, Fmid and Fhigh was used for the measurements above 18 GHz.

All test modes were configured with the test software Traffic Manager V1.040 provided by the customer.

2.5 Modifications required for compliance

Modification 1 (mod1):

Additional absorbers in the housing were added to EUT #1 and #2. The 24 V DC power input option was removed, the power supply is via PoE only.

All tests, except the Conducted Emission on the AC power line, have been executed with modification 1.

Modification 2 (mod1+2):

A shielded version of the Ethernet cable was used.

The modified cable was used for the test Radiated test from 30 MHz to 1000 MHz, for the radiated test from 18 GHz to 40 GHz, for the occupied bandwidth measurement and for the duty cycle measurements.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

3 TEST RESULTS SUMMARY

Summary of test results for the following EUT:

Manufacturer: InnoSenT GmbH
Type: iSYS-5220
Serial No.: EUT #1: 000015853
EUT #2: 000015850

Requirement	47 CFR Section	RSS Section	Report Section	Tested EUT	Result
AC Power Line Conducted Emissions	§ 15.207	RSS Gen 8.8	4.1	#1	Passed
Occupied Bandwidth	§ 15.215	RSS Gen 6.7 RSS 210 Annex B.10	4.2	#2mod1	Passed
Radiated Field Strength of Fundamental	§ 15.249	RSS 210 Annex B.10	4.3	#2mod1	Passed
Radiated Emissions	§ 15.249, §15.209	RSS 210 Annex B.10	4.4	#2mod1 #2 mod1+2	Passed

N.A. – not applicable; N.T. – Not tested acc. to applicant's order.

The client has made the determination that EUT Condition, Characterization, and Mode of Operation are representative of production units and meet the requirements of the specifications referenced herein.

Consistent with industry practice, measurement and test equipment not directly involved in obtaining measurement results but having an impact on measurements (such as cable loss, antenna factors, etc.) are factored into the "Correction Factor" documented in certain test results. Instrumentation employed for testing meets tolerances consistent with known industry standards and regulations.

The measurements contained in this report were made in accordance with the procedures described in ANSI C63.10-2013 and all applicable Public Notices received prior to the date of testing. All requirements were found to be within the limits outlined in this report.

The test results in this report apply only to the particular equipment under test (EUT) as declared in this report.

Test personnel: Ludwig Kraft
Issuance date: 2020-11-17

4 DETAILED TEST RESULTS

4.1 AC Power Line Conducted Emissions

4.1.1 Regulation

47 CFR § 15.207 Conducted limits

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

RSS-Gen 8.8 AC power-line conducted emissions limits

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5-5	56	46
5-30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

4.1.2 Test Procedures

Testing is performed acc. to ANSI C63.10-2013.

Tabletop and their ancillary devices are placed on a nonconducting table with nominal dimension of 1.0 m by 1.5 m, height 0.8 m above the ground plane. The EUT is centered laterally (left to right facing the tabletop) on the tabletop and its rear is flush with the rear of the table. Accessories or peripherals that are part of a system tested on a tabletop are being placed in a test arrangement on one or both sides of the host with a 10 cm separation between the nearest points of the cabinets.


Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center forming a bundle 30 cm to 40 cm long.

The EUT's DC port was connected to a laboratory DC power supply (EMCC-ID#4721), which was connected to a LISN.

The measurement receiver is connected to the 50 Ω RF port of the LISN.


Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.1.3 Test Setup

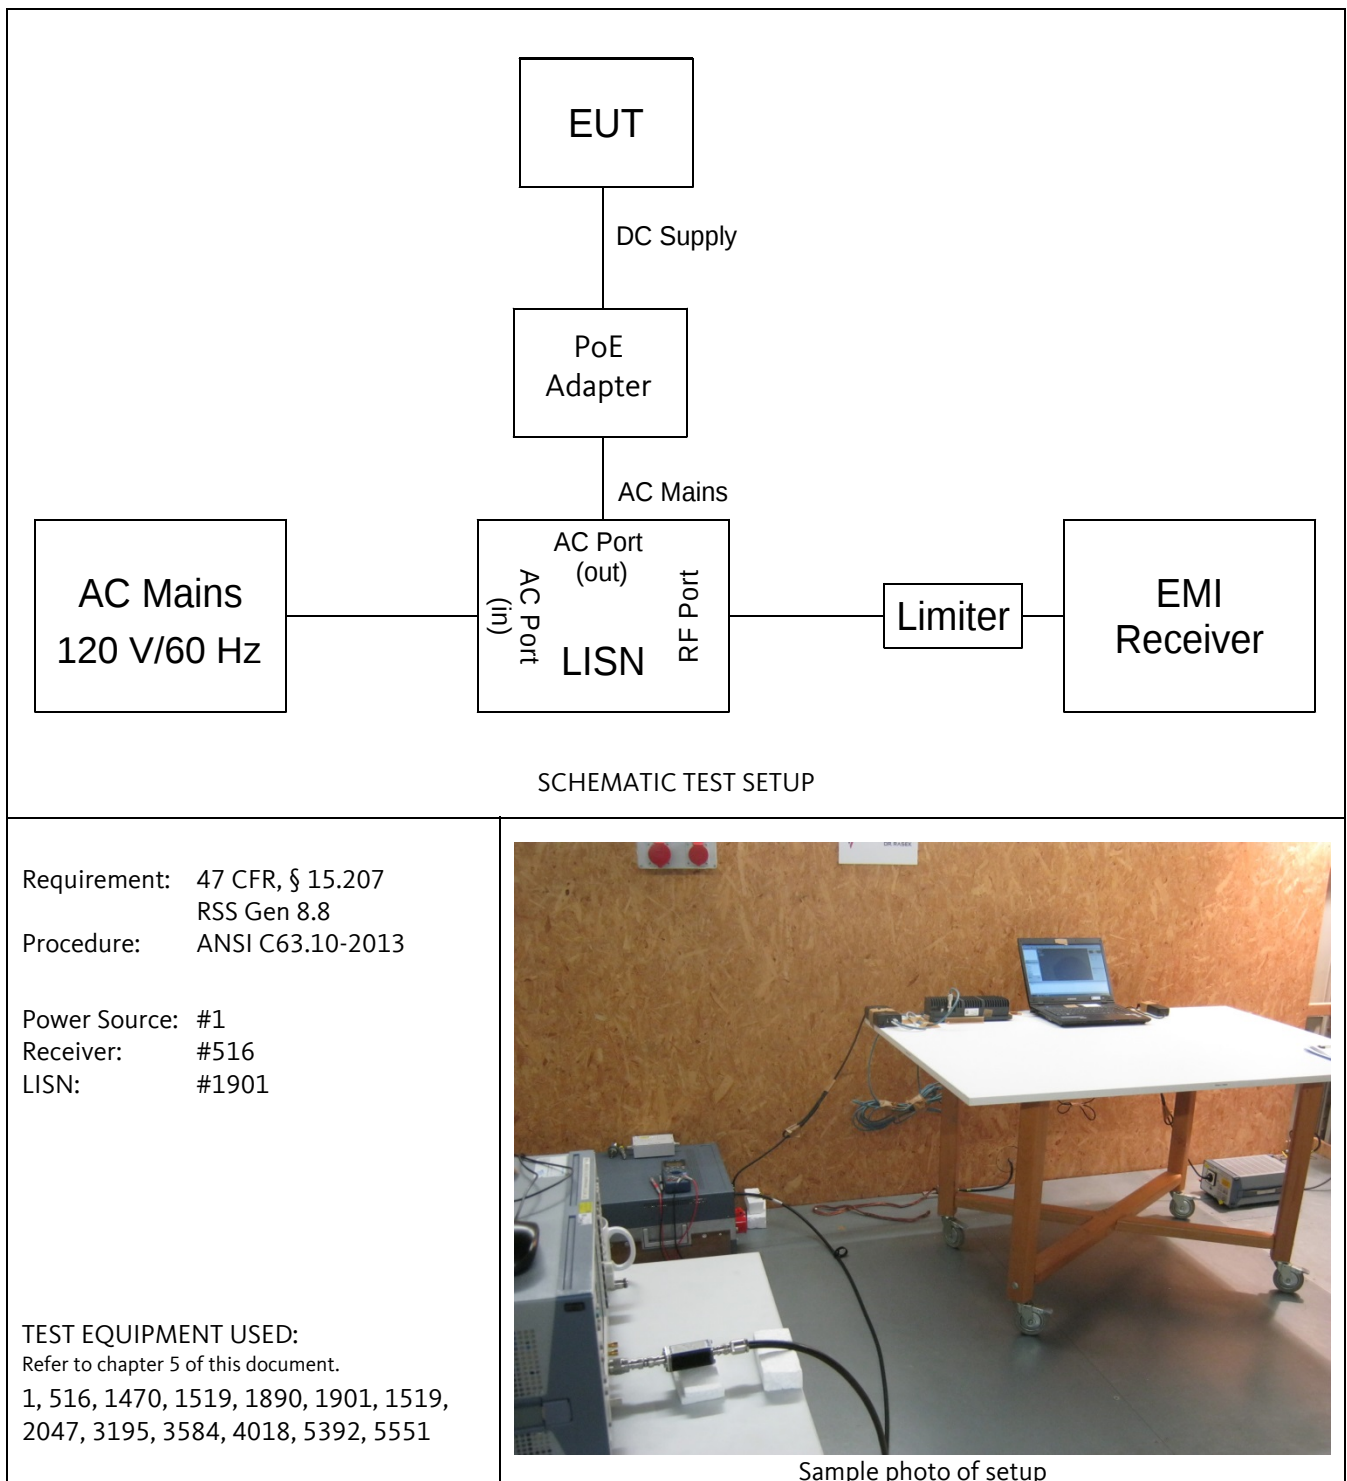

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.1.4 Detailed Test Data

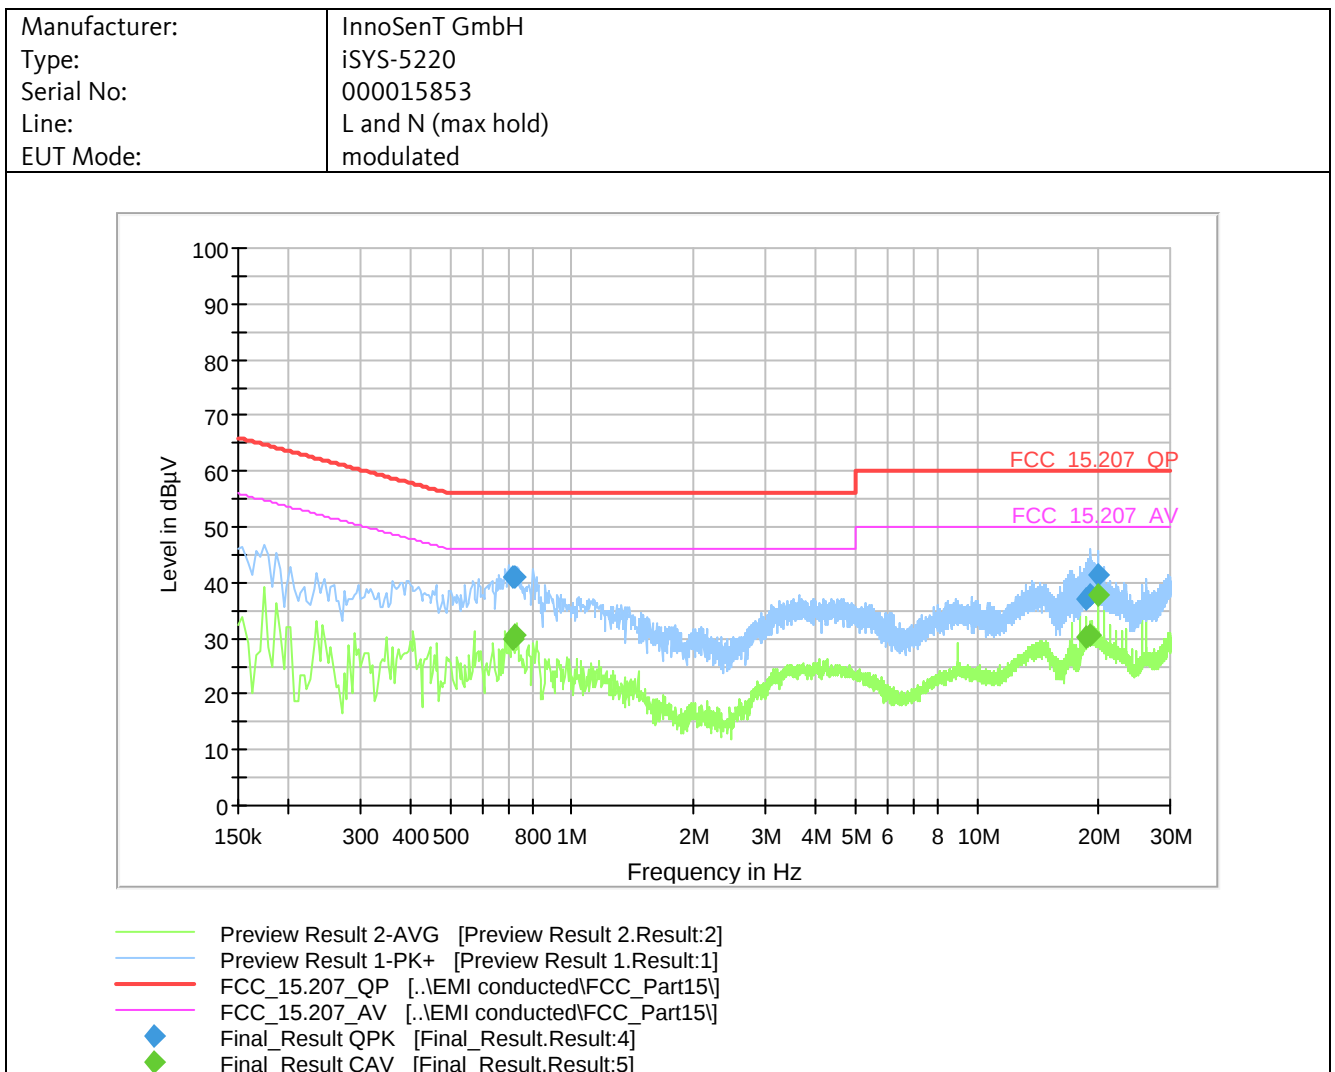

Final Result:

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.71	41.1	---	56.0	14.9	1000	9	N	10
0.71	---	29.7	46.0	16.3	1000	9	N	10
0.73	---	30.5	46.0	15.5	1000	9	N	10
0.73	41.1	---	56.0	14.9	1000	9	N	10
19.09	---	30.7	50.0	19.3	1000	9	L1	10
19.09	37.7	---	60.0	22.3	1000	9	L1	10
20.00	41.3	---	60.0	18.7	1000	9	L1	10
20.00	---	37.6	50.0	12.4	1000	9	L1	10

Worst case results listed, only.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.1.5 Test Result

Manufacturer:	InnoSenT GmbH
Type:	iSYS-5220
Serial No.:	000015853
Test date:	2020-04-02
Test personnel:	Ludwig Kraft

The EUT meets the requirements of this section.

4.2 Occupied Bandwidth

4.2.1 Regulation

47CFR § 15.215 Additional provisions to the general radiated emission limitations.

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

47CFR §15.249 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

RSS-Gen 6.7 Occupied bandwidth (or 99% emission bandwidth) and x dB bandwidth

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

...

RSS-210: B.10 Bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz and 24-24.25 GHz


4.2.2 Test Procedures

Testing is performed acc. to ANSI C63.10-2013.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.2.3 Test Setup

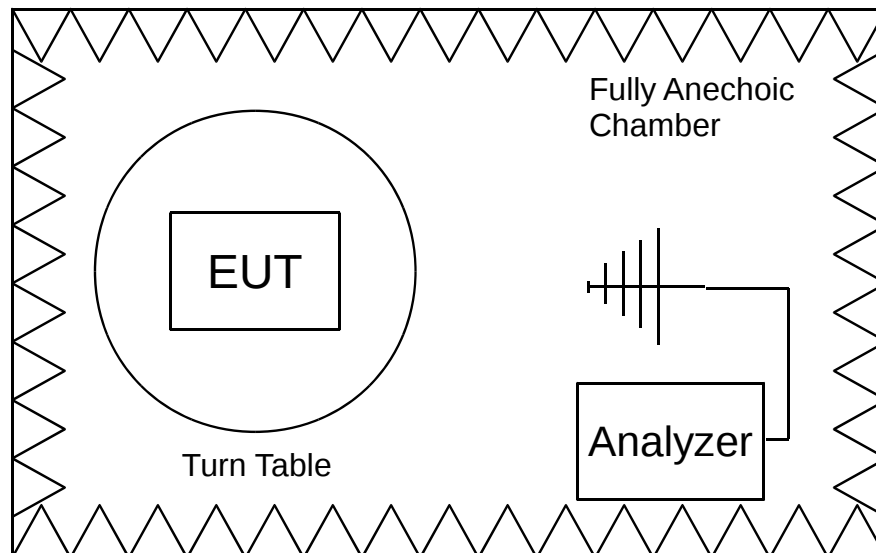


SCHEMATIC TEST SETUP

Requirement: 47 CFR, § 15.215
RSS Gen 6.7,
RSS 210 Annex B.10
Procedure: ANSI C63.10-2013

Receiver: #3831
Antenna: #1300

Test Distance: 1 m

TEST EQUIPMENT USED:
Refer to chapter 5 of this document.
1294, 1300, 1301, 1868, 3831, 4524,
4717, 4721, 5614

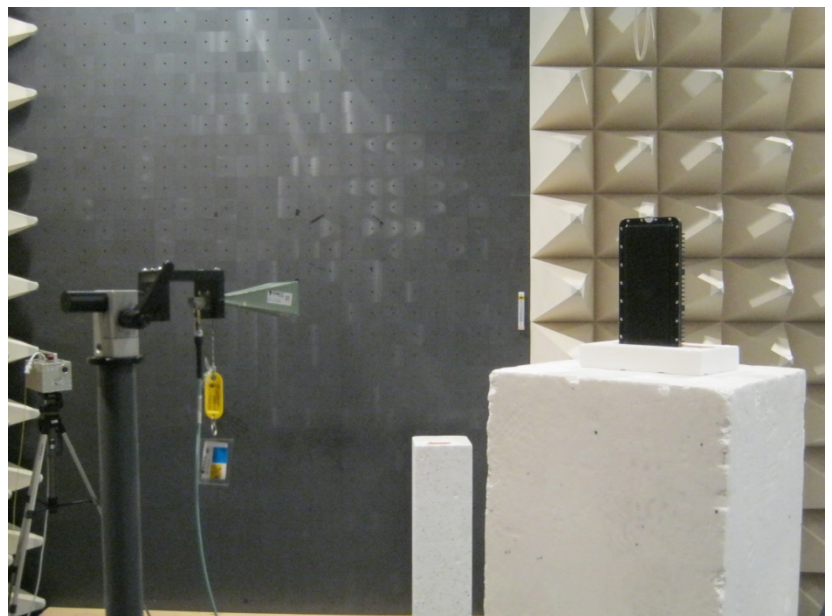


Sample photo of setup

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.2.4 Detailed Test Data

20 dB Bandwidth

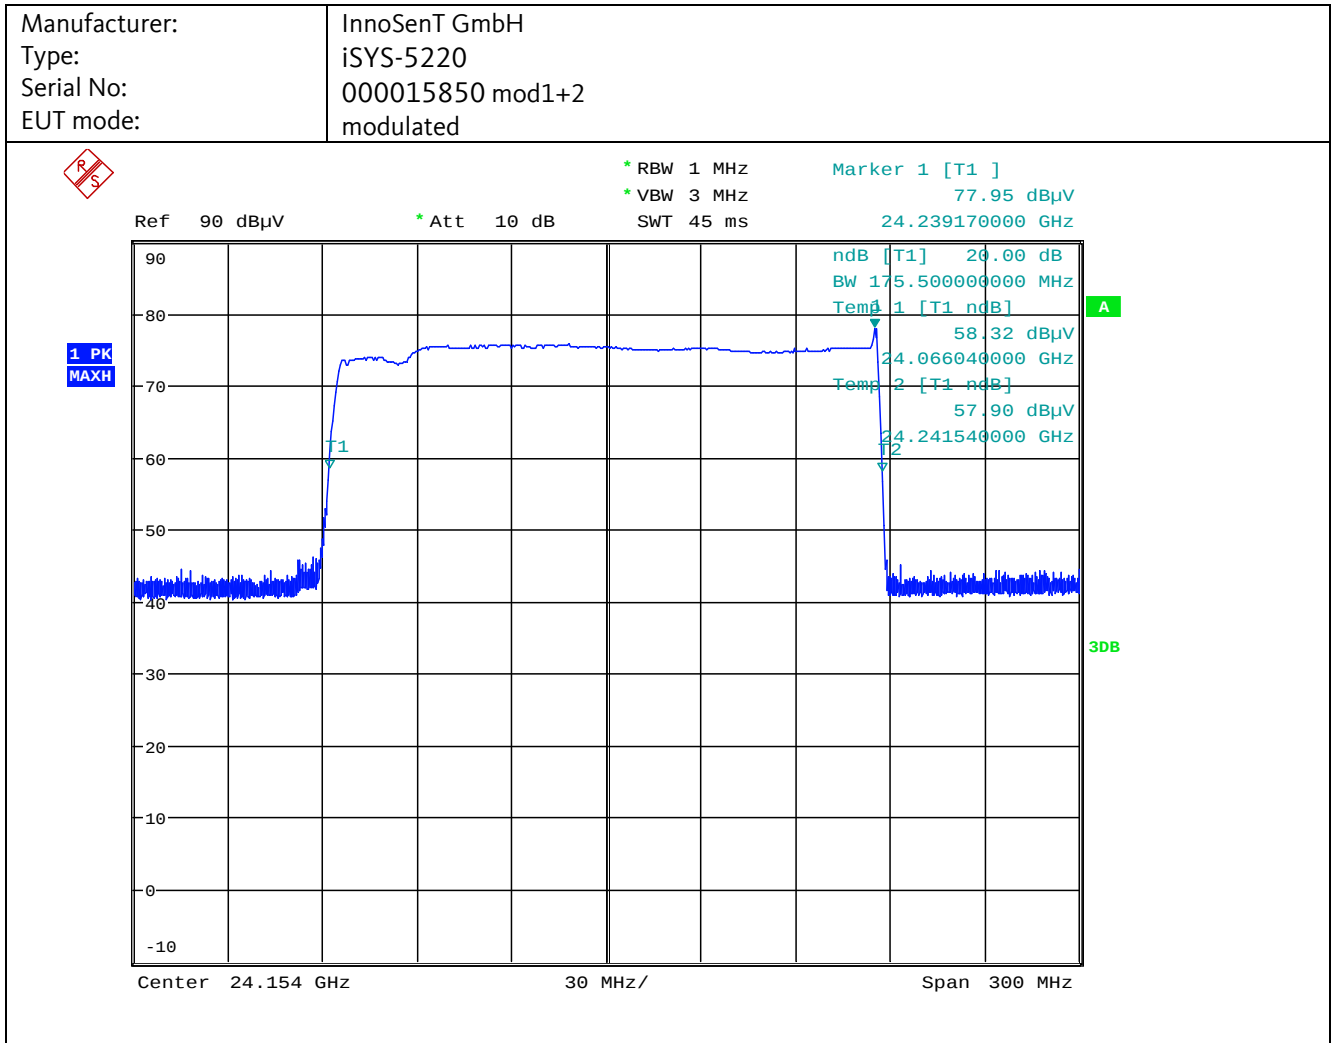


Final Result:

Center Frequency [GHz]	Lower 20 dB Freq. Edge [GHz]	Upper 20 dB Freq. Edge [GHz]	20 dB Bandwidth [MHz]	Limit ---
24.154	24.0660	24.2415	175.5	Within band 24.0-24.25 GHz

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

99% Bandwidth

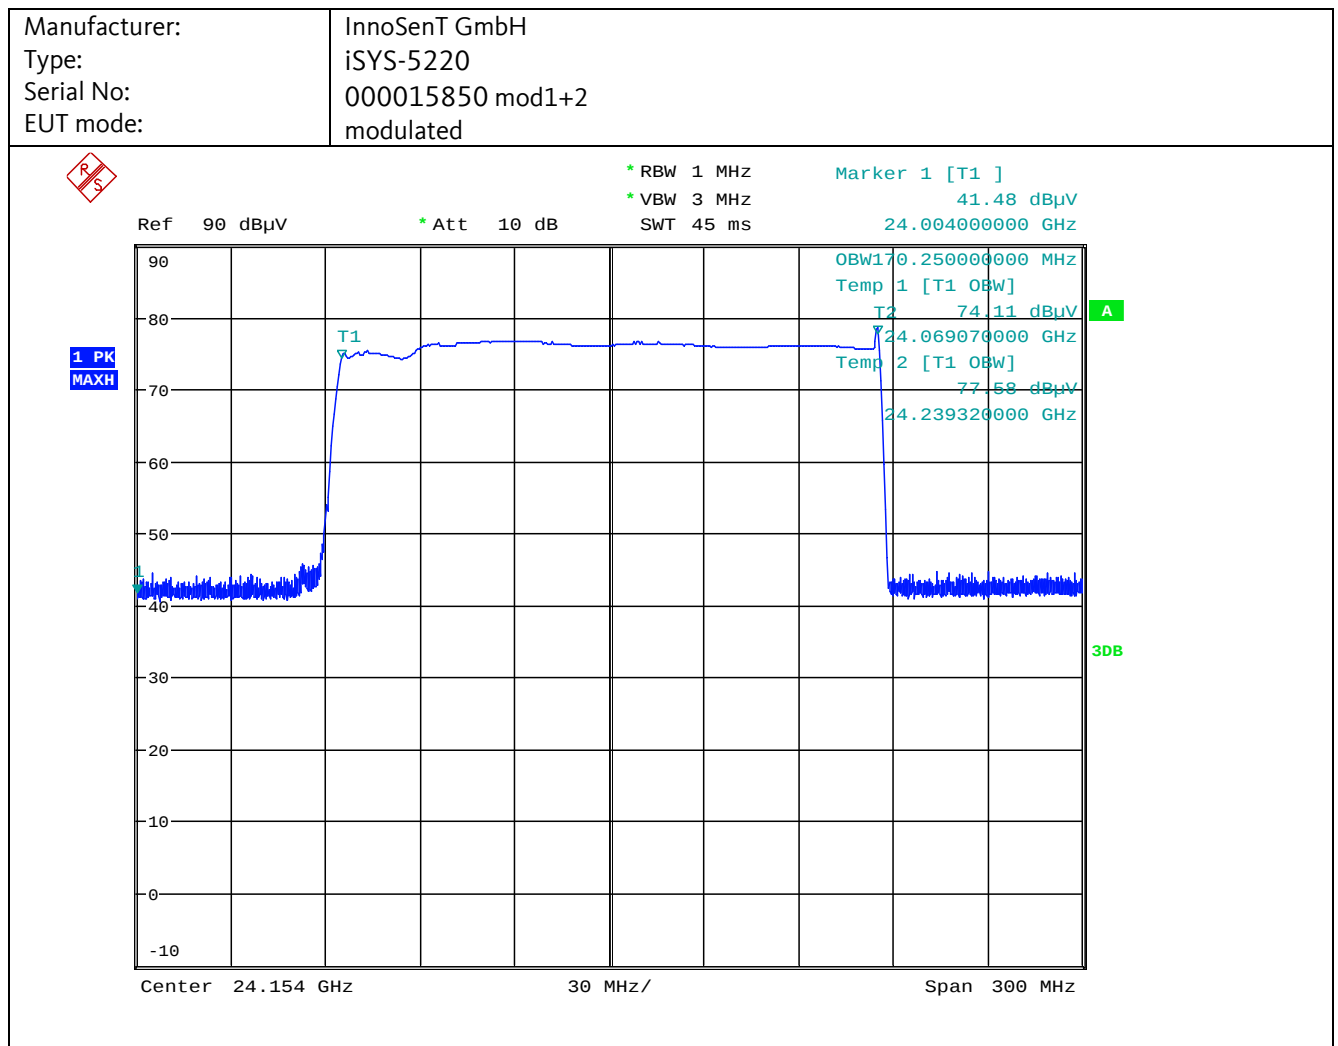

Final Result:

Center Frequency	Lower Freq. Edge	Upper Freq. Edge	99 % Bandwidth	Limit
[GHz]	[GHz]	[GHz]	[MHz]	---
24.154	24.06907	24.23932	170.25	Within band 24.0-24.25 GHz

4.2.5 Test Result

Manufacturer:	InnoSenT GmbH
Type:	iSYS-5220
Serial No.:	000015850 mod1+2
Test date:	2020-10-01
Test personnel:	Ludwig Kraft

The EUT meets the requirements of this section.

4.3 Field Strength of Fundamental

4.3.1 Regulation

47CFR §15.31 Measurement standards.

(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle.
1 to 10 MHz	2	1 near top and 1 near bottom.
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom.

47CFR §15.249 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

...

(c) Field strength limits are specified at a distance of 3 meters.

...

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

RSS-210: B.10 Bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz and 24-24.25 GHz

Devices shall comply with the following requirements:

(a) The field strength of fundamental and harmonic emissions measured at 3 m shall not exceed the limits in table B2.

Table B2 — Field strength limits at various frequencies

Fundamental frequency (MHz)	Field strength (mV/m)	
	Fundamental emission	Harmonics emissions
902-928	50	0.5
2400-2483.5	50	0.5
5725-5875	50	0.5
24000-24250	250	2.5

The field strength shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector.

4.3.2 Test Procedures

ANSI C63.10-2013, 6.6.4.1 General

Subclauses 6.6.4.2 and 6.6.4.3 describe the procedures that shall be used for making exploratory and final radiated emission tests for frequencies above 1 GHz. Measurements may be performed at a distance closer than that specified in the requirements; however, an attempt shall be made to avoid making measurements in the near field of both the measurement antenna and the EUT for final measurements.

In performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity does not provide a noise floor more than 6 dB below the limit, then low-noise preamplifiers, closer test distances, higher gain antennas, or narrower bandwidths might be required. If closer measurement distances are used, then the beamwidth of the measurement antenna versus the size of the EUT shall be taken into account. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used [see item b) of 4.1.3]. The effects of using bandwidths different from those specified shall also be determined (see also 6.3). Any changes from the specific measurement conditions shall be described in the report of the measurements (see also Annex E).

Install an appropriate filter at the input of the measurement system power amplifier. This filter shall attenuate the fundamental emission of the EUT and allow an accurate measurement of the associated harmonics and spurious emissions. The filter shall be characterized, and any attenuation/loss factors shall be accounted for in the measurement results.

Data shall be recorded in peak and average detection upto the highest measurement frequency required (unless stated otherwise in the applicable requirements).

ANSI C63.10-2013, 6.6.4.2 Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

Preliminary tests shall be performed following the procedures in 6.3 on a site meeting the requirements of 5.2. For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

ANSI C63.10-2013, 6.6.4.3 Final radiated emissions measurements

The final measurements are performed on a site meeting the requirements of 5.2. Using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements per 6.6.4.2, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement. The final measurement shall follow all the procedures in 6.3 with the EUT operating on frequencies per 5.6. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

Measurements are performed with the EUT rotated from 0° to 360°; the antenna height scanned in accordance with 6.6.3.1, 6.6.3.2, or 6.6.3.3, as appropriate; and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Variations in cable or wire placement shall be explored to maximize the measured emissions.

The emission signal shall be kept within the illumination area of the 3 dB beamwidth of the antenna so that the maximum emission from the EUT is measured. This may be achieved by either pointing the antenna at an angle toward the source of the emission or by testing the EUT as described in 6.6.3.3. If the emission is pulsed, then refer to Annex C for guidelines on selecting bandwidth and determining pulse desensitization factors, as necessary.

As noted in 6.6.4.1, when performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity is inadequate, then low-noise preamplifiers, closer measurement distances, higher gain antennas, or narrower bandwidths may be used. If closer measurement distances or higher gain antennas are used, then the beamwidth of the measurement antenna versus the physical size of the EUT shall be taken into account, so that the physical sizes of the EUT dimensions are encompassed by the beamwidth of the measurement antenna. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used. The effects on the measured emission value using bandwidths different from those specified shall be determined if such bandwidth changes are made. Any changes from the specific measurement conditions shall be described in the report of the measurements.

Unless specified otherwise by the regulatory authority, the instrumentation, detector functions, and bandwidths specified in 4.1.4.2.1 and 4.1.4.2.2 shall be used. For pulsed emissions, the procedure in 4.1.4.2.4 shall be used

Radiated Emissions Test Characteristics	
Frequency range	24 GHz
Test distance	1 m
Test instrumentation resolution bandwidth	1 MHz
Receive antenna height	1.5 m
Receive antenna polarization	Vertical/Horizontal
Measurement chamber	Fully anechoic chamber (FAC)

4.3.3 Calculation of Field Strength Limits

E. g. radiated emissions field strength limits for the inside the band 24.0- 24.25 GHz:

250 mV/m (=250 000 μ V/m) at 3 meters

Using the equation:

$$E_{\text{dB}\mu\text{V/m}} = 20 \log (E_{\mu\text{V/m}})$$

where

$E_{\text{dB}\mu\text{V/m}}$ = Field Strength in logarithmic units (in dB μ V/m)

$E_{\mu\text{V/m}}$ = Field Strength in linear units (in μ V/m)

A field strength limit of 250 000 μ V/m corresponds with 108 dB μ V/m.

4.3.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF + DF$$

where

FS = Field Strength (in dB μ V/m)

RA = Receiver Amplitude (in dB μ V)

AF = Antenna Factor (in dB (1/m))

CF = Cable Attenuation Factor (in dB)

DF = Distance Extrapolation Factor (in dB)

Assume a receiver reading of 82.6 dB μ V is obtained in a distance of 1m. The Antenna Factor of 37.2 dB(1/m) and a Cable Factor of 2.7 dB and the distance extrapolation factor of 9.5 dB are added, giving a field strength of 122.5 dB μ V/m in the measurement distance. The field strength of 122.5 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$FS = 78.5 + 37.2 + 3.3 = 119.0$$

$$\text{Level (in } \mu\text{V/m)} = \text{Common Antilogarithm } (118.8/20) = 870\,964$$

Distance correction (field strength)

Remark: The preferred method is the correction of the measured field strength instead of limit correction (refer to 4.2.2). Only one correction method shall be applied to a particular measurement..

If a measurement is performed at a different distance other than specified, the field strength at the specified distance can be obtained by the following equation:

$$FS_{\text{Dspecified}} = FS_{\text{Dtest}} + 20 \log (D_{\text{test}}/D_{\text{specified}})$$

where

$FS_{\text{Dspecified}}$ = Field Strength at specified distance $D_{\text{specified}}$ (in dB μ V/m)

FS_{Dtest} = Field Strength at specified distance D_{test} (in dB μ V/m)

D_{test} = Measurement distance where test was performed (in m)

$D_{\text{specified}}$ = Measurement distance as specified by the rules (in m)

Assuming a recorded field strength of 118.8 dB μ V/m in a distance of 1 m. If the rules are specifying a limit in a distance of 3 m, the field strength recorded in 1 m is corrected by the distance. Therefore, the field strength $FS_{\text{Dspecified}}$ is $119.08 + 20 \log (1 / 3) = 109.5$ (in dB μ V/m).

4.3.5 Average Field Strength Calculation

The average values for the test mode Flow, Fmid, Fhigh are calculated based on the measured peak values.

According to the KDB 890966 D01 v01r01 the average power of a FMCW radar is determined by multiplying the max peak power level by the average factor.

Calculation of the average factor:

Average factor [dB] = $20 * \log (TD / \text{cycle time})$

Where:


$$TD = T_S / \Delta F$$

Ts is the signal sweep frequency time in seconds


ΔF is the signal sweep frequency span in MHz

cycle time is the total time for a complete cycle of the signal including retrace and any other latency times

Sweep time measurements on EUT#2:

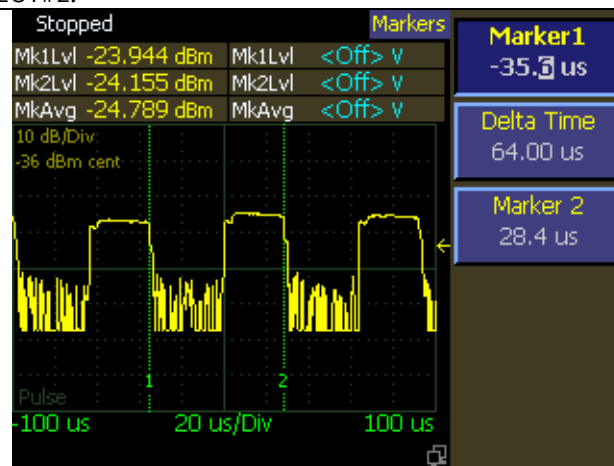


Cycle time of the EUT #2 in modulation (normal operation) mode¹.

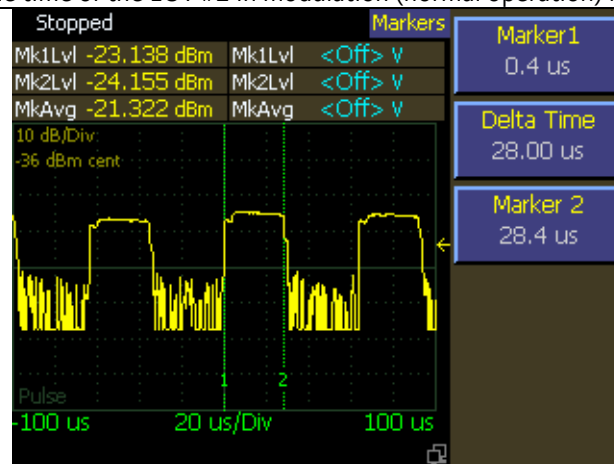

Signal sweep time of EUT #2 in modulation (normal operation) mode¹.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

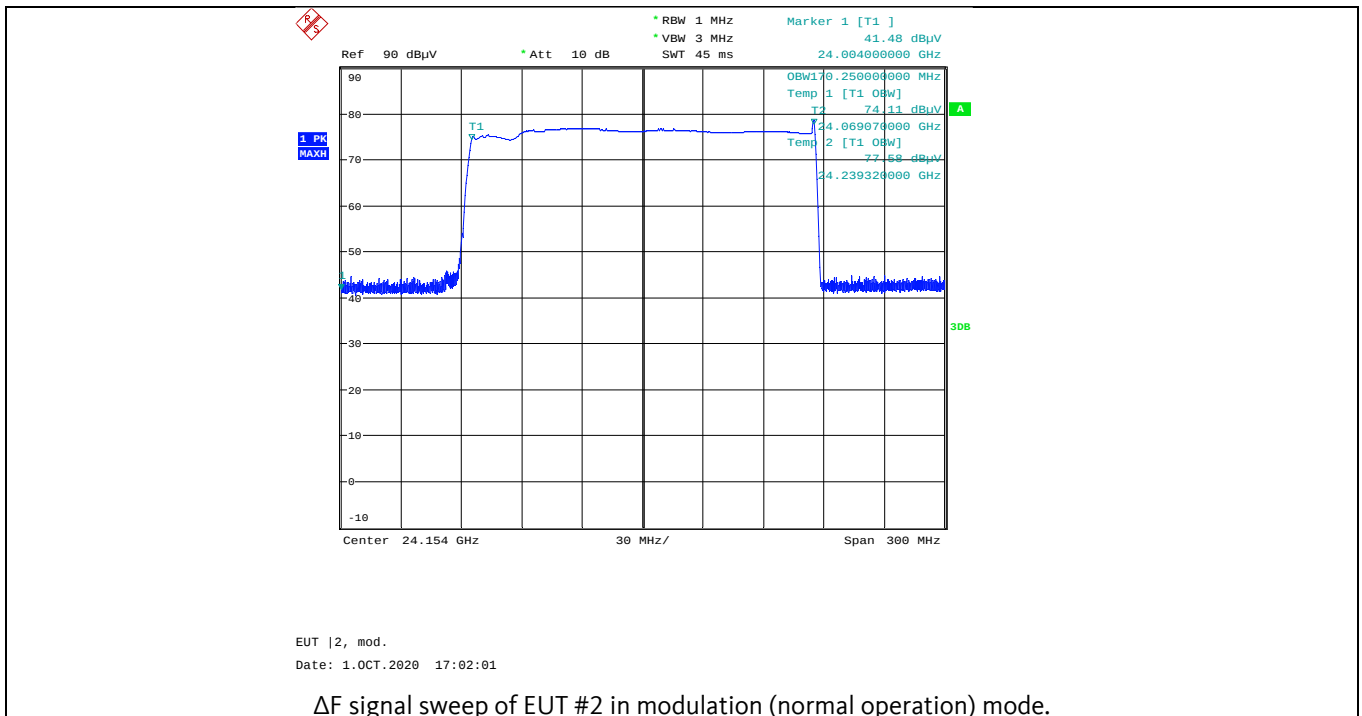


Note 1: Measurement with broadband detector

Average factor of EUT:

$$\text{Average factor} = 20 * \log(T_s / (\Delta F * \text{cycle time})) = 20 * \log(28 \mu\text{s} / (170.3 \text{ MHz} * 64 \mu\text{s})) = -51.8 \text{ dB}$$

4.3.6 Test Setup

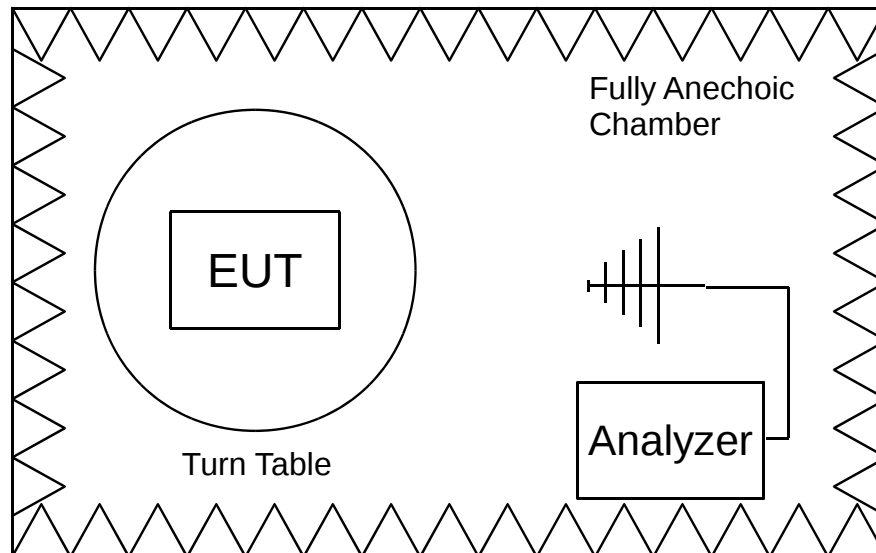


SCHEMATIC TEST SETUP

Requirement: 47 CFR, § 15.249
RSS-210 B.10
Procedure: ANSI C63.10-2013
RSS Gen

Receiver: #3831
Antenna: #1300

Test distance: 1 m


TEST EQUIPMENT USED:
Refer to chapter 5 of this document.
1, 1294, 1300, 1301, 1868, 3061, 3201,
3831, 3857, 4018, 4697, 4717

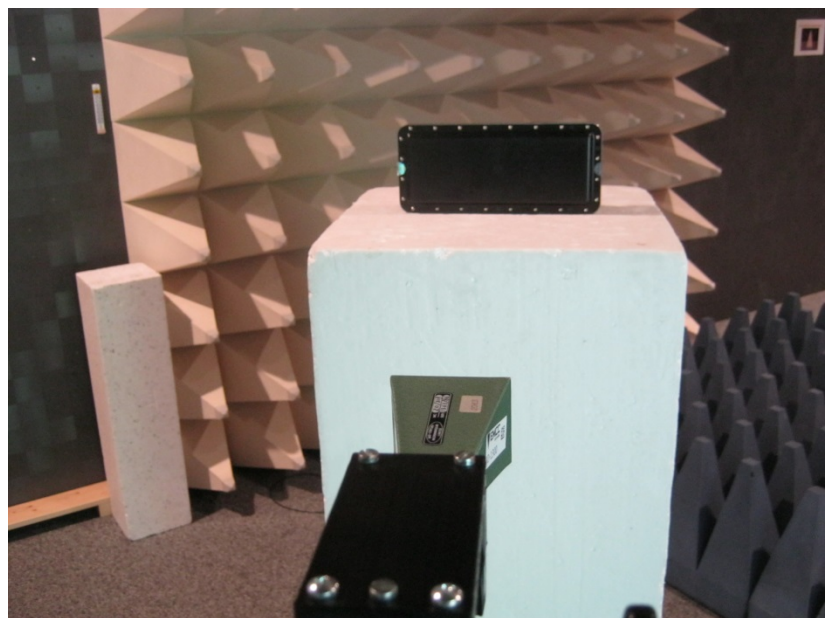


Sample photo of setup

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.3.7 Detailed Test Data

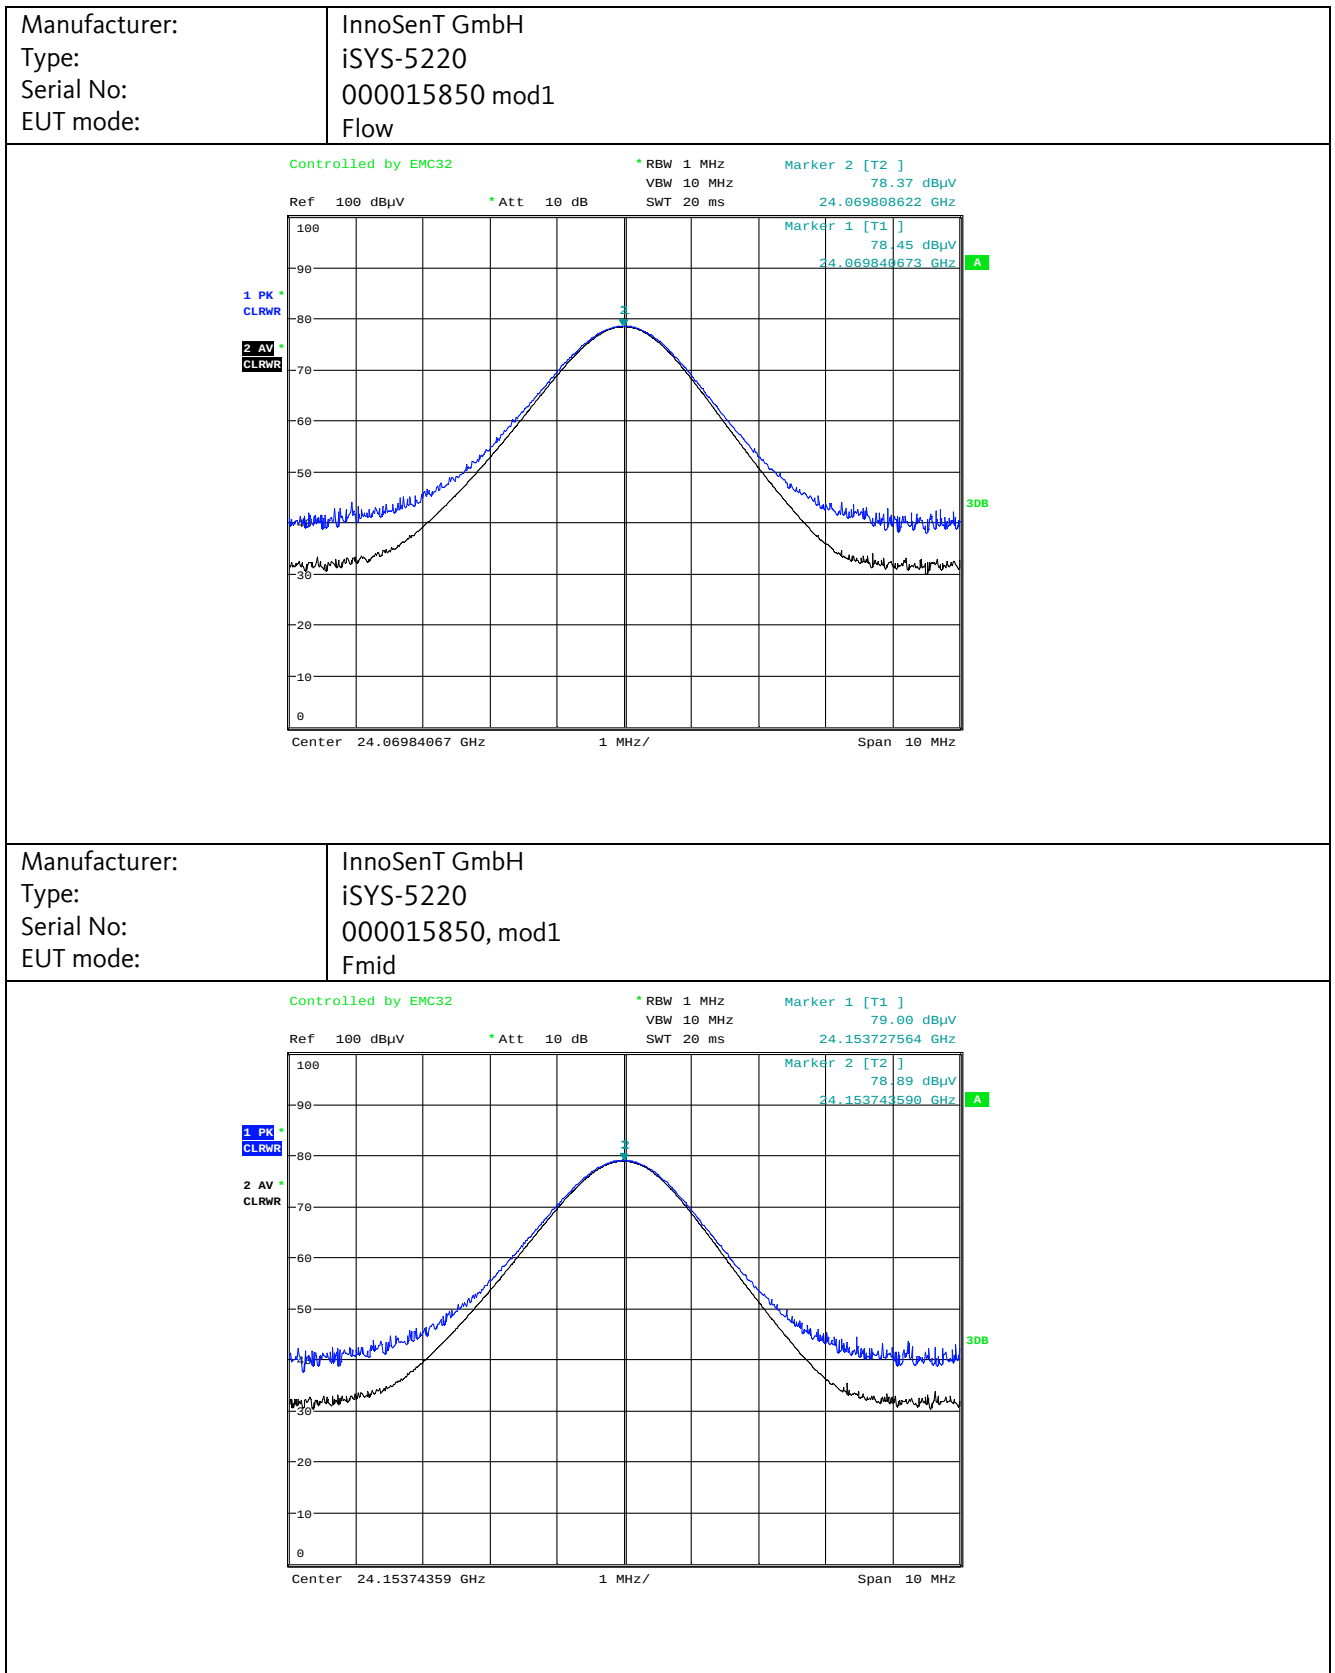

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

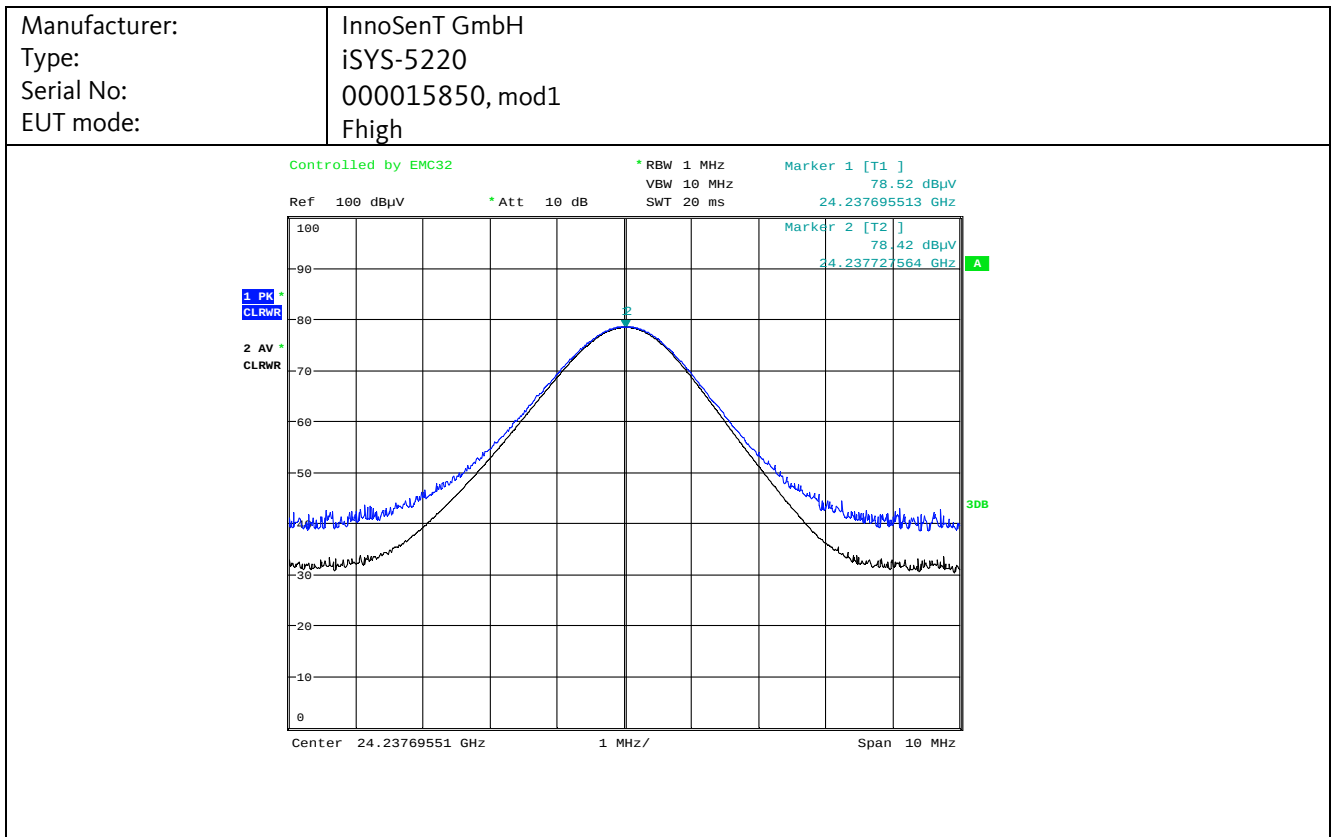

Note: The plot is showing the raw measurement data without correction factors applied.

Final Result:

Frequency	PK-Reading	Distance correction	Cable Loss	Antenna Factor	Pk Result @ 3m	Pk-Limit	AV Result @ 3m calculated	AV-Limit
[GHz]	[dBμV]	[dB]	[dB]	[dB/m]	[dBμV/m]	[dBμV/m]	[dBμV/m]	[dBμV/m]
24.07	78.5	-9.5	3.3	37.2	109.5	128.0	57.7	108.0
24.154	79.0	-9.5	3.3	37.2	110.0	128.0	58.2	108.0
24.238	78.5	-9.5	3.3	37.2	109.5	128.0	57.7	108.0

Note: The AV result is calculated from the Pk result with an average factor of -51.8 dB, according to chapter 4.3.5.

4.3.8 Test Result

Manufacturer: InnoSenT GmbH
 Type: iSYS-5220
 Serial No.: 000015850 mod1
 Test date: 2020-07-20, 2020-10-02
 Test personnel: Ludwig Kraft

The EUT meets the requirements of this section.

4.4 Radiated Emissions

4.4.1 Regulation

47CFR §15.31 Measurement standards.

(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle.
1 to 10 MHz	2	1 near top and 1 near bottom.
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom.

47CFR § 15.33 Frequency range of radiated measurements

(a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1) through (a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

47 CFR § 15.35 Measurement detector functions and bandwidths.

(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrumentation using the CISPR quasi-peak detector can be found in ANSI C63.4-2014, clause 4 (incorporated by reference, see §15.38). As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function as long as the same bandwidth as indicated for CISPR quasi-peak measurements are employed.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

47 CFR § 15.209 Radiated emission limits; general requirements.

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

(e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

47CFR §15.249 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

...

(c) Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

RSS-210: B.10 Bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz and 24-24.25 GHz

Devices shall comply with the following requirements:

(a) The field strength of fundamental and harmonic emissions measured at 3 m shall not exceed the limits in table B2.

Table B2 — Field strength limits at various frequencies

Fundamental frequency (MHz)	Field strength (mV/m)	
	Fundamental emission	Harmonics emissions
902-928	50	0.5
2400-2483.5	50	0.5
5725-5875	50	0.5
24000-24250	250	2.5

The field strength shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector.

(b) Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

RSS-Gen: 8.9 Transmitter emission limits

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength (μV/m at 3m)
30 - 88	100
88 – 216	150
216 - 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz	6.37/F (F in kHz)	300
490 – 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Note 2: Equivalent electrical field strength according to ANSI C63.10-2013 chapter 4.3.2:

“For the United States, the regulatory limits below 30 MHz are in terms of μV/m. By convention, magnetic field strength is converted to an electric field strength based on free-space impedance.”

4.4.2 Calculation of Field Strength Limits

E.g. radiated emissions field strength limits for the frequency band 30 - 88 MHz:

100 $\mu\text{V/m}$ at 3 meters

Using the equation:

$$E_{\text{dB}\mu\text{V/m}} = 20 \log (E_{\mu\text{V/m}})$$

where

$E_{\text{dB}\mu\text{V/m}}$ = Field Strength in logarithmic units (in dB $\mu\text{V/m}$)

$E_{\mu\text{V/m}}$ = Field Strength in linear units (in $\mu\text{V/m}$)

A field strength limit of 100 $\mu\text{V/m}$ corresponds with 40.0 dB $\mu\text{V/m}$.

Distance correction (limit)

Remark: The preferred method is the correction of the measured field strength (refer to 4.2.3) instead of limit correction. Only one correction method shall be applied to a particular measurement.

In case of testing being performed in a distance other than specified, the limit may be adjusted by a Distance Extrapolation Factor DF of 20 dB per decade, which is calculated by the following equation:

$$\text{DF} = 20 \log (D_{\text{test}}/D_{\text{specification}})$$

where

DF = Distance Extrapolation Factor (in dB)

D_{test} = Distance, where measurement was performed (in m)

$D_{\text{specification}}$ = Distance acc. to specification (in m)

Example: Assume a limit specified in 3 m and a measurement performed at 1 m: The distance correction factor is $20 \log (3 / 1) = 9.5$. This factor is mathematically added to the limit by the following equation:

$$E_{\text{dB}\mu\text{V/m_new}} = E_{\text{dB}\mu\text{V/m}} + \text{DF}$$

where

$E_{\text{dB}\mu\text{V/m}}$ = Field Strength limit in logarithmic units (in dB $\mu\text{V/m}$)

$E_{\text{dB}\mu\text{V/m_new}}$ = Corrected Field Strength limit in logarithmic units (in dB $\mu\text{V/m}$)

DF = Distance Extrapolation Factor (in dB)

Example: Assume a limit of 40.0 dB $\mu\text{V/m}$ specified in 3 m distance and the measurement performed at 1 m. The limit is adjusted by the distance correction factor of 9.5 dB to the new limit of 49.5 dB $\mu\text{V/m}$.

4.4.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where

FS = Field Strength (in dB μ V/m)

RA = Receiver Amplitude (in dB μ V)

AF = Antenna Factor (in dB (1/m))

CF = Cable Attenuation Factor (in dB)

Assume a receiver reading of 30 dB μ V is obtained. The Antenna Factor of 10 dB(1/m) and a Cable Factor of 1.2 dB are added, giving a field strength of 41.2 dB μ V/m in the measurement distance. The field strength of 41.2 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$FS = 30 + 10 + 1.2 = 41.2$$

$$\text{Level (in } \mu\text{V/m)} = \text{Common Antilogarithm } (41.2/20) = 114.8$$

Distance correction (field strength)

Remark: The preferred method is the correction of the measured field strength instead of limit correction (refer to 4.2.2). Only one correction method shall be applied to a particular measurement..

If a measurement is performed at a different distance other than specified, the field strength at the specified distance can be obtained by the following equation:

$$FS_{\text{Dspecified}} = FS_{\text{Dtest}} + 20 \log (D_{\text{test}}/D_{\text{specified}})$$

where

$FS_{\text{Dspecified}}$ = Field Strength at specified distance $D_{\text{specified}}$ (in dB μ V/m)

FS_{Dtest} = Field Strength at specified distance D_{test} (in dB μ V/m)

D_{test} = Measurement distance where test was performed (in m)

$D_{\text{specified}}$ = Measurement distance as specified by the rules (in m)

Assuming a recorded field strength of 41.2 dB μ V/m in a distance of 1 m. If the rules are specifying a limit in a distance of 3 m, the field strength recorded in 1 m is corrected by the distance. Therefore, the field strength $FS_{\text{Dspecified}}$ is $41.2 + 20 \log (1 / 3) = 31.7$ (in dB μ V/m).

Remark: Using EMC32 software corrections are combined in the Corr. Factor as listed in the results' table.

"Result" represents the FS Result, "Corr." is the combined correction factor.

4.4.4 Radiated Emissions 9 kHz – 30 MHz

4.4.4.1 Test Procedures

ANSI C63.10-2013, 6.4.3 Measuring antenna selection, location, and test distance

Radiated emission tests shall be performed in the frequency range of 9 kHz to 30 MHz, using a calibrated loop antenna as specified in 4.3.2, at a suitable site and measurement distance as specified in 5.3. This method is applicable for measuring radiated RF emissions from all units, cables, power cords, and interconnect cabling or wiring of the EUT, by applying the guidance provided in 5.10 along with guidance provided subsequently.

ANSI C63.10-2013, 6.4.6 Exploratory radiated emission tests

The tests shall be performed in the frequency range specified in 5.5 and 5.6, using the procedures in Clause 5, applying the appropriate modulating signal to the EUT, to determine cable or wire positions of the EUT system that produce the emission with the highest amplitude relative to the limit.

Exploratory measurements below 30 MHz are useful in determining the maximum level of emissions while manipulating and rotating the EUT; however, exploratory and final measurements may be made concurrently, provided care is taken to determine the maximum level of emissions for all configurations and orientations.

The test arrangement, measuring antenna guidelines and operational configurations in 6.3.1 and 6.3.2, shall be followed. The measurement antenna shall be positioned with its plane perpendicular to the ground at the specified distance. When perpendicular to the ground plane, the lowest height of the magnetic antenna shall be 1 m above the ground and shall be positioned at the specified distance from the EUT. When the EUT contains a loop antenna that can only be placed in a vertical axis, normal measurements shall be made aligning the measurement antenna along the site axis, and then orthogonal to the axis. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. When the EUT contains a loop antenna that can be placed in a horizontal or vertical axis, normal measurements shall be made aligning the measurement antenna along the site axis, orthogonal to the axis, and then with the measurement antenna horizontal. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. The report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB, then the following statement shall be made: “all emissions were greater than 20 dB below the limit.”

ANSI C63.10-2013, 6.4.7 Final radiated emission tests

Using the orientation and equipment arrangement of the EUT determined in 6.4.6, and applying the appropriate modulating signal to the EUT, perform final radiated emission measurements on the fundamental and highest spurious emissions.

Unless otherwise specified by the regulatory authority, the instrumentation, detector functions, and bandwidths specified in 4.1.4.2.1 shall be used. For pulsed emissions, the procedure in 4.1.4.2.4 shall be used.


Radiated Emissions Test Characteristics	
Frequency range	9 kHz – 30 MHz
Test distance	3 m
Test instrumentation resolution bandwidth	200 Hz (< 150 kHz) 9 kHz (≥ 150 kHz)
Receive antenna height	1 m
Receive antenna orientations	2
Measurement chamber	Semi anechoic chamber (SAC)

Following the test procedure described in KDB 414788, an open field measurement has to be performed in addition to the measurements performed in a semi anechoic chamber to evaluate a correction of the open field measurement to the semi-anechoic chamber measurement.

Since laboratory experience has shown, that the correction factor is always negative, resulting in a lower level at the open field, these open field measurements are omitted, if there are all measurement emissions more than 20 dB below the limit.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.4.2 Test Setup

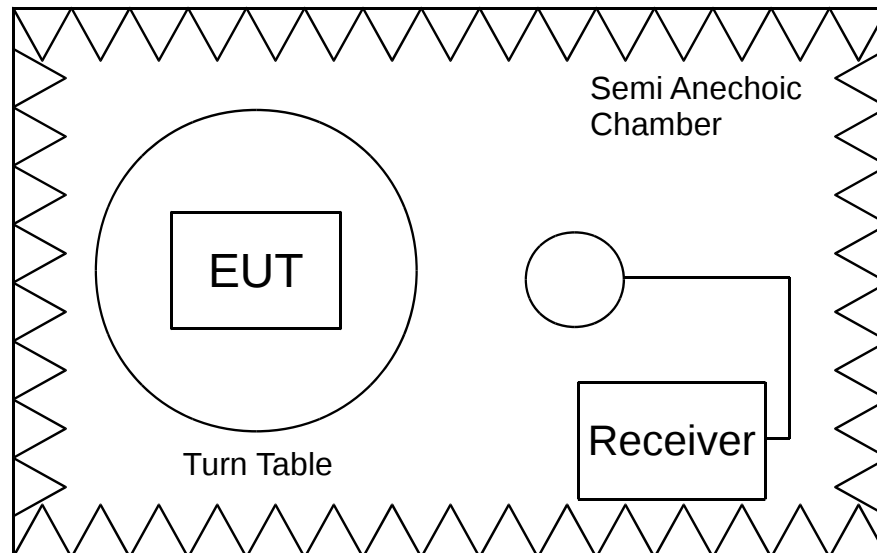


SCHEMATIC TEST SETUP

Requirement: 47 CFR § 15.209
RSS-Gen 8.9
Procedure: ANSI C63.10-2013

Receiver: #516
Antenna: #374

Test distance: 3 m


TEST EQUIPMENT USED:
Refer to chapter 5 of this document.
1, 374, 516, 553, 554, 1292, 1889,
2048, 4717, 5392

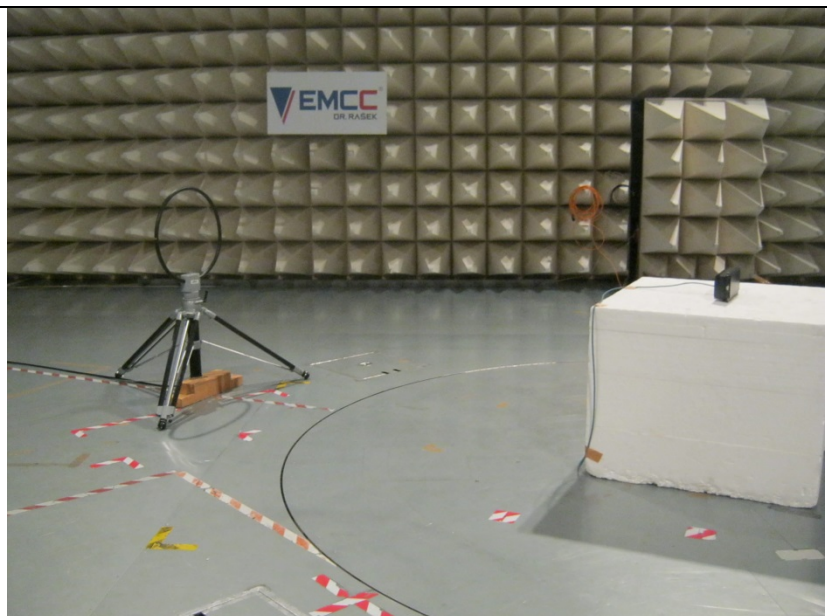



Sample photo of setup

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.4.3 Detailed Test Data

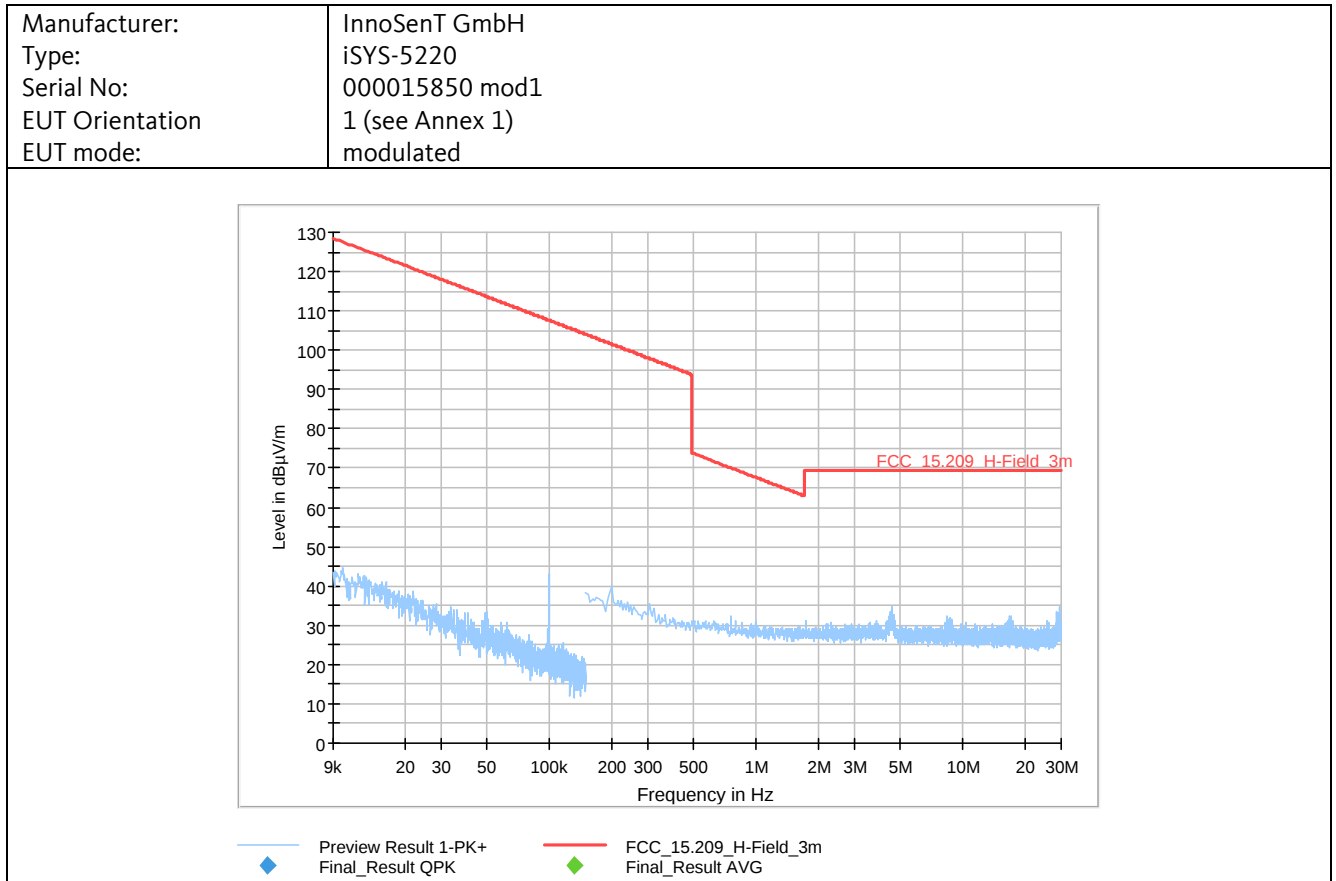

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

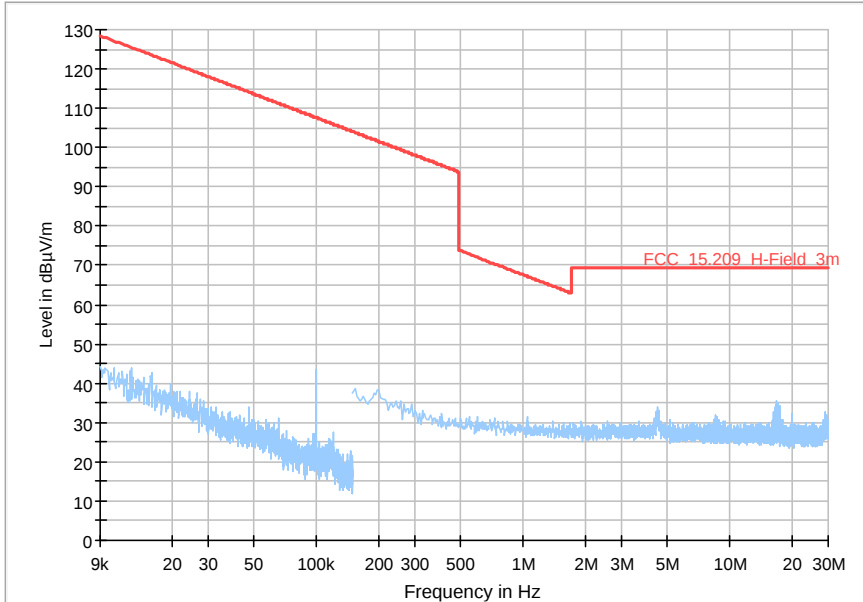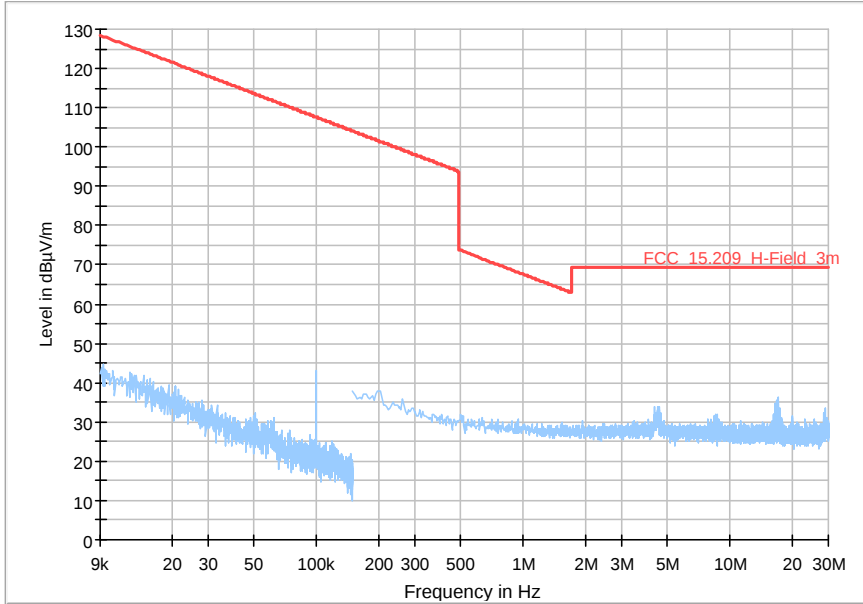Manufacturer: Type: Serial No: EUT Orientation: EUT mode	InnoSenT GmbH iSYS-5220 000015850 mod1 2 (see Annex 1) modulated
  Preview Result 1-PK+ Final_Result QPK  FCC_15.209_H-Field_3m Final_Result AVG	
Manufacturer: Type: Serial No: EUT Orientation: EUT mode:	InnoSenT GmbH iSYS-5220 000015850 mod1 3 (see Annex 1) modulated
  Preview Result 1-PK+ Final_Result QPK  FCC_15.209_H-Field_3m Final_Result AVG	

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

Final Result:

Frequency MHz	QuasiPeak dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Bandwidth Hz	Height cm	Pol --	Azimuth deg	Corr. dB/m
		All emissions were greater than 20 dB below the limit. Therefore, no final measurement performed.							

All tests performed at the distance denoted in chapter 4.4.4.1. The limit was adjusted to correspond with the test distance.

The table above contains worst-case emissions, only. For further details refer to the pre-scan test plot above.

4.4.4.4 Test Result

Manufacturer: InnoSenT GmbH
 Type: iSYS-5220
 Serial No.: 000015850 mod1
 Test date: 2020-07-17
 Test personnel: Ludwig Kraft

The EUT meets the requirements of this section.

4.4.5 Radiated Emissions 30 MHz – 1000 MHz

4.4.5.1 Test Procedures

ANSI C63.10-2013 6.5 Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz

This subclause specifies conditions for compliance testing in the frequency range above 30 MHz and below 1 GHz. The following subclauses describe the procedures that shall be used for making exploratory and final radiated emission tests for frequencies between 30 MHz and 1000 MHz. Measurements may be performed at a distance closer than that specified in the requirements, provided the measuring antenna is beyond its near-field range as determined by the Rayleigh criteria.

ANSI C63.10-2013, 6.5.3 Exploratory radiated emission tests

Exploratory measurements are used to identify the frequencies and amplitudes of the emissions while manipulating and rotating the EUT.

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. Exploratory measurements shall be made on a test site per 5.2. Shielded rooms, not treated with RF absorption material, shall not be used for exploratory measurements.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

ANSI C63.10-2013, 6.5.4 Final radiated emission tests

Using the orientation and equipment arrangement of the EUT, and based on the measurement results found during the exploratory measurement in 6.5.3, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement. The final measurement shall follow all the procedures in 6.3 with the EUT operating on frequencies per 5.6. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable) and the frequency and amplitude of the six highest spurious emissions relative to the limit; emissions more than 20 dB below the limit do not need to be reported.

Measurements are performed with the EUT rotated from 0° to 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Variations in cable or wire placement shall be explored to maximize the measured emissions.

Unless specified otherwise by the regulatory authority, the instrumentation, detector functions, and bandwidths specified in 4.1.4.2.1 and 4.1.4.2.2 shall be used. For pulsed emissions, the procedure in 4.1.4.2.4 shall be used.

Radiated Emissions Test Characteristics	
Frequency range	30 MHz – 1000 MHz
Test distance	3 m
Test instrumentation resolution bandwidth	120 kHz
Receive antenna height	1 m - 4 m
Angular steps size during prescan:	90 °
Receive antenna polarization	Vertical/Horizontal
Measurement location	Semi Anechoic Chamber (SAC)

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.5.2 Test Setup

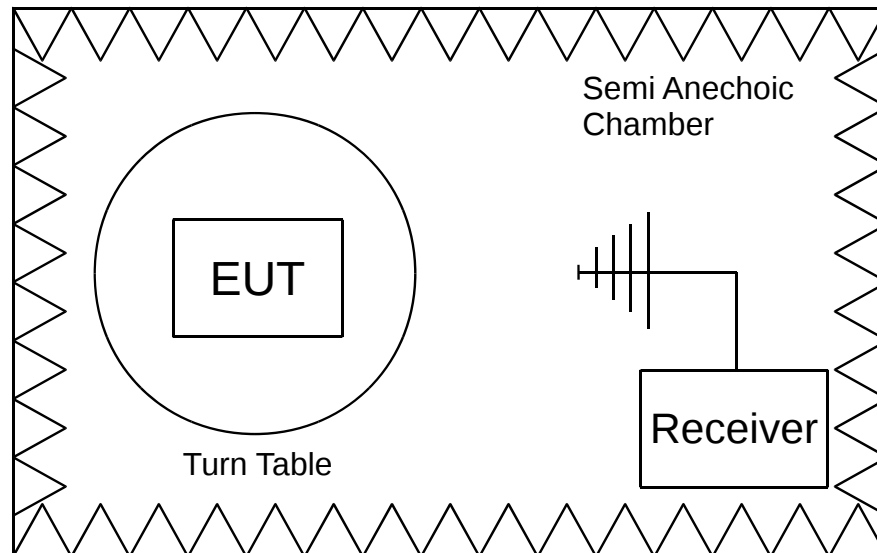


SCHEMATIC TEST SETUP

Requirement: 47 CFR § 15.209
RSS-Gen 8.9
Procedure: ANSI C63.10-2013

Receiver: #3846
Antenna: #6041

Test distance: 3 m


TEST EQUIPMENT USED:
Refer to chapter 5 of this document.
1, 55, 553, 554, 1291, 1292, 1889,
2048, 2724, 3846, 4075, 4717, 5392,
6041

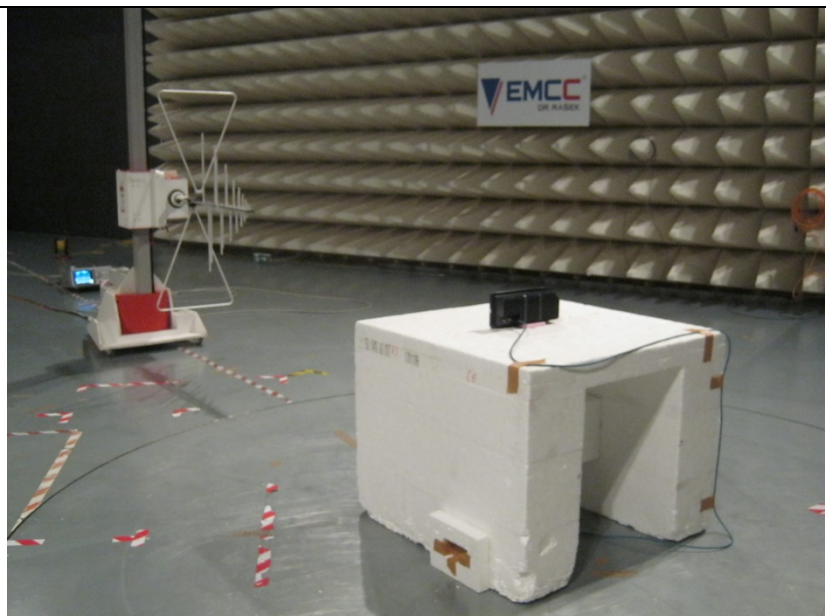

Sample photo of setup

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.5.3 Detailed Test Data

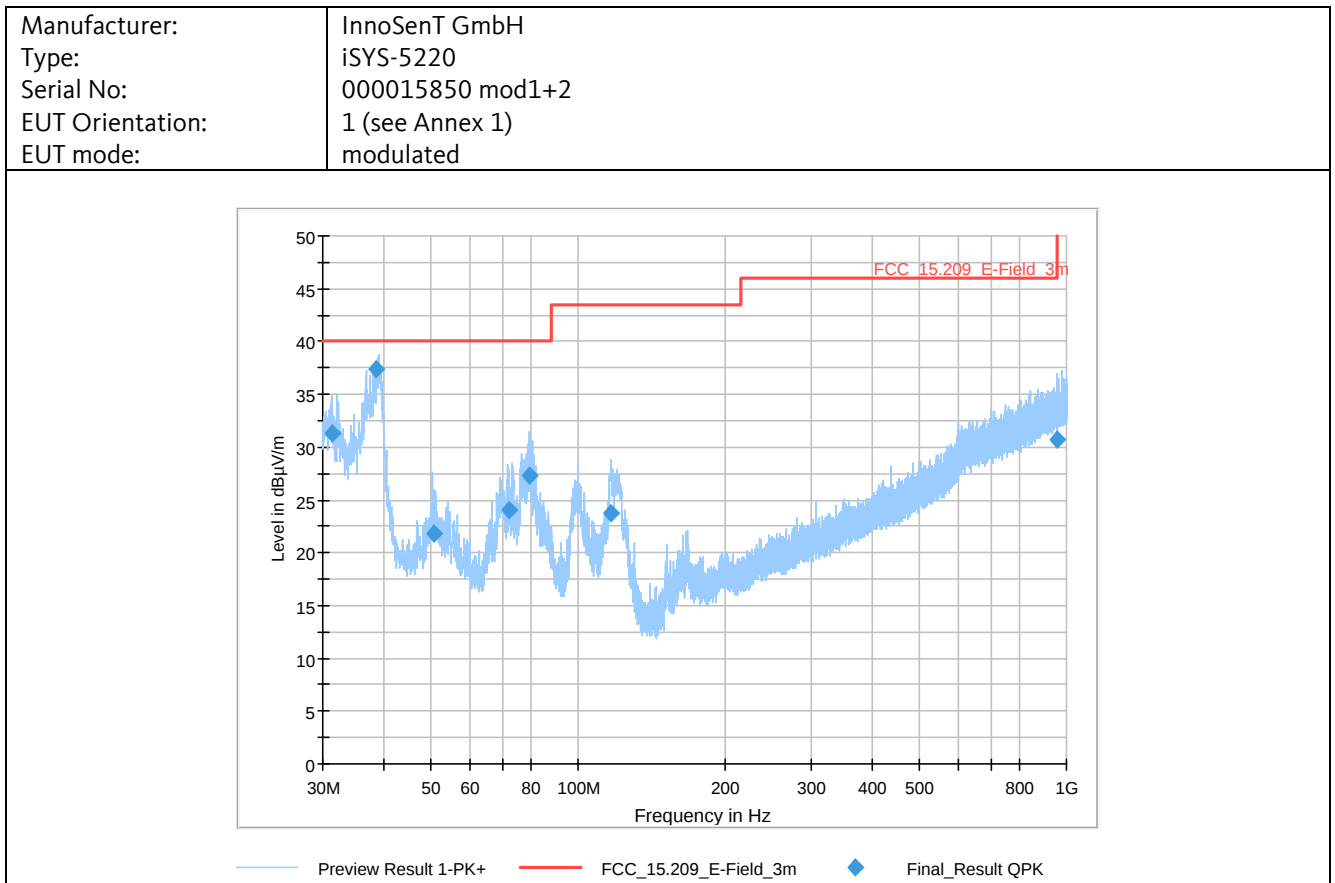


Final Result:

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth Hz	Height cm	Pol --	Azimuth deg	Corr. dB/m
31.26	31.4	40.0	8.7	1000	120.0	114.0	V	178	16.5
38.62	37.4	40.0	2.6	1000	120.0	108.0	V	158	18.4
50.70	21.8	40.0	18.2	1000	120.0	186.0	V	180	19.7
72.38	24.0	40.0	16.0	1000	120.0	104.0	V	139	14.5
79.26	27.2	40.0	12.8	1000	120.0	103.0	V	180	13.6
955.38	30.7	46.0	15.3	1000	120.0	286.0	V	-136	31.3

All tests performed at the distance denoted in chapter 4.4.5.1. The limit was adjusted to correspond with the test distance.

The table above contains worst-case emissions, only. For further details refer to the pre-scan test plot above.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

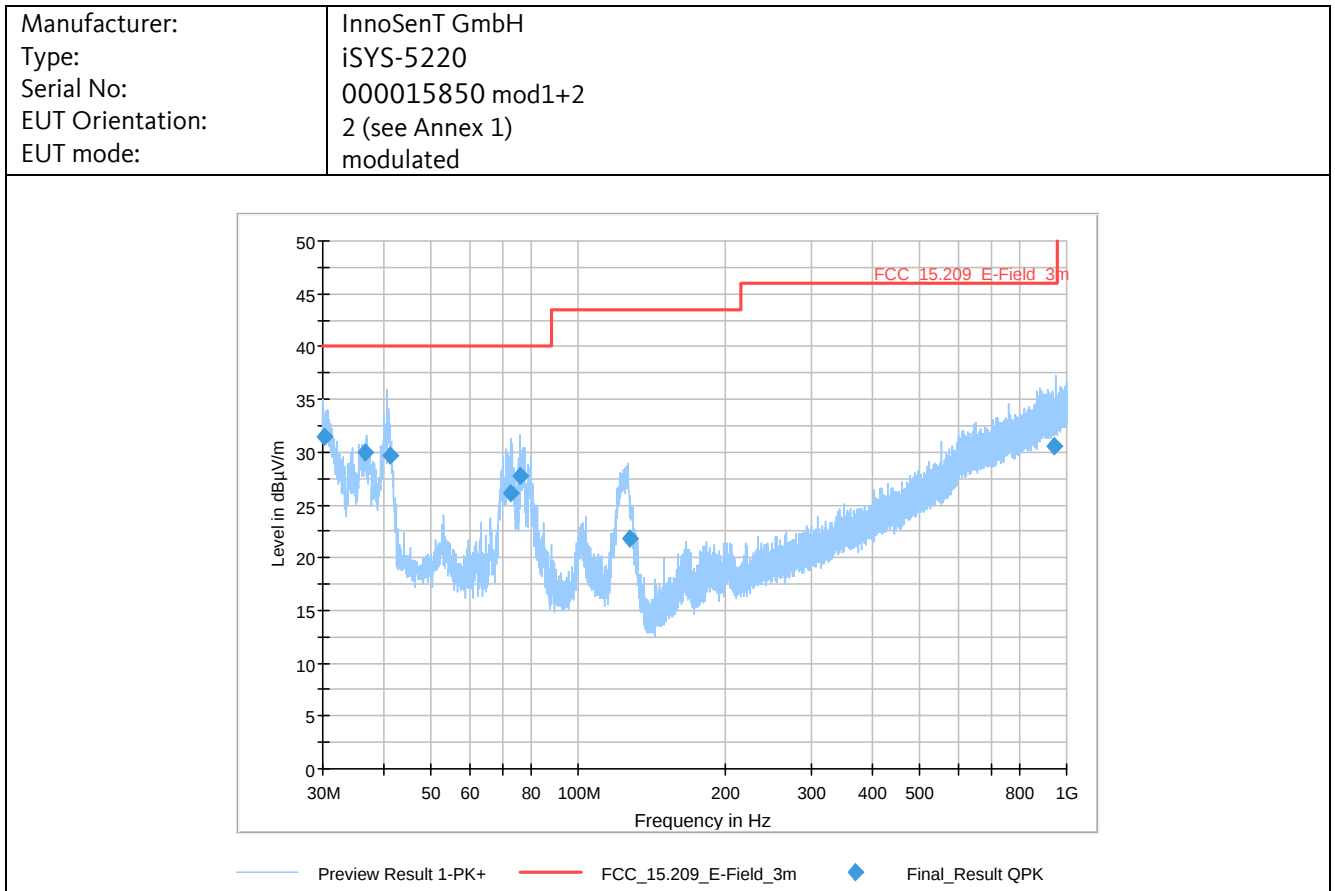


Final Result:

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth Hz	Height cm	Pol --	Azimuth deg	Corr. dB/m
30.14	31.4	40.0	8.6	1000	120.0	100.0	V	-105	16.8
36.66	30.0	40.0	10.0	1000	120.0	101.0	V	170	17.7
41.14	29.7	40.0	10.3	1000	120.0	104.0	V	80	19.1
72.58	26.1	40.0	13.9	1000	120.0	130.0	V	-108	14.5
76.30	27.8	40.0	12.2	1000	120.0	149.0	V	-101	13.6
946.10	30.5	46.0	15.5	1000	120.0	352.0	H	2	31.2

All tests performed at the distance denoted in chapter 4.4.5.1. The limit was adjusted to correspond with the test distance.

The table above contains worst-case emissions, only. For further details refer to the pre-scan test plot above.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

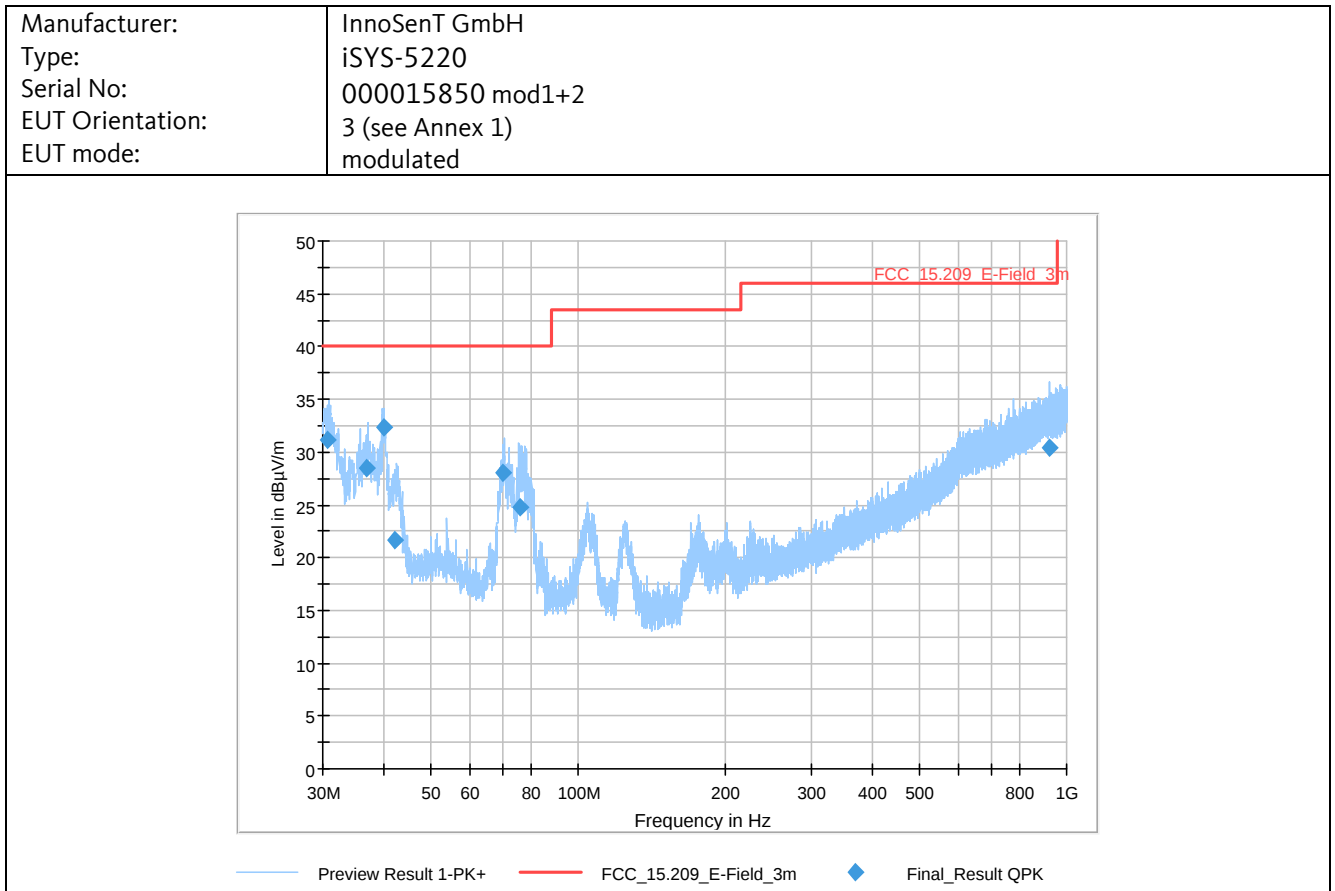

Final Result:

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth Hz	Height cm	Pol --	Azimuth deg	Corr. dB/m
30.66	31.1	40.0	8.9	1000	120.0	108.0	V	-61	16.6
37.02	28.5	40.0	11.5	1000	120.0	123.0	V	180	17.9
40.10	32.3	40.0	7.7	1000	120.0	122.0	V	-166	18.7
42.06	21.7	40.0	18.3	1000	120.0	145.0	V	64	19.4
70.26	28.0	40.0	12.0	1000	120.0	100.0	V	-111	15.4
75.86	24.8	40.0	15.2	1000	120.0	171.0	V	-115	13.6

All tests performed at the distance denoted in chapter 4.4.5.1. The limit was adjusted to correspond with the test distance.
The table above contains worst-case emissions, only. For further details refer to the pre-scan test plot above.

4.4.5.4 Test Result

Manufacturer: InnoSenT GmbH
Type: iSYS-5220
Serial No.: 000015850 mod1+2
Test date: 2020-09-24
Test personnel: Ludwig Kraft

The EUT meets the requirements of this section.

4.4.6 Radiated Emissions 1 – 6 GHz

4.4.6.1 Test Procedures

ANSI C63.10-2013, 6.6.4.1 General

Subclauses 6.6.4.2 and 6.6.4.3 describe the procedures that shall be used for making exploratory and final radiated emission tests for frequencies above 1 GHz. Measurements may be performed at a distance closer than that specified in the requirements; however, an attempt shall be made to avoid making measurements in the near field of both the measurement antenna and the EUT for final measurements.

In performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity does not provide a noise floor more than 6 dB below the limit, then low-noise preamplifiers, closer test distances, higher gain antennas, or narrower bandwidths might be required. If closer measurement distances are used, then the beamwidth of the measurement antenna versus the size of the EUT shall be taken into account. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used [see item b) of 4.1.3]. The effects of using bandwidths different from those specified shall also be determined (see also 6.3). Any changes from the specific measurement conditions shall be described in the report of the measurements (see also Annex E).

Install an appropriate filter at the input of the measurement system power amplifier. This filter shall attenuate the fundamental emission of the EUT and allow an accurate measurement of the associated harmonics and spurious emissions. The filter shall be characterized, and any attenuation/loss factors shall be accounted for in the measurement results.

Data shall be recorded in peak and average detection up to the highest measurement frequency required (unless stated otherwise in the applicable requirements).

ANSI C63.10-2013, 6.6.4.2 Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

Preliminary tests shall be performed following the procedures in 6.3 on a site meeting the requirements of 5.2. For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

ANSI C63.10-2013, 6.6.4.3 Final radiated emissions measurements

The final measurements are performed on a site meeting the requirements of 5.2. Using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements per 6.6.4.2, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement. The final measurement shall follow all the procedures in 6.3 with the EUT operating on frequencies per 5.6. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

Measurements are performed with the EUT rotated from 0° to 360°; the antenna height scanned in accordance with 6.6.3.1, 6.6.3.2, or 6.6.3.3, as appropriate; and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Variations in cable or wire placement shall be explored to maximize the measured emissions.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

The emission signal shall be kept within the illumination area of the 3 dB beamwidth of the antenna so that the maximum emission from the EUT is measured. This may be achieved by either pointing the antenna at an angle toward the source of the emission or by testing the EUT as described in 6.6.3.3.

If the emission is pulsed, then refer to Annex C for guidelines on selecting bandwidth and determining pulse desensitization factors, as necessary.


As noted in 6.6.4.1, when performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity is inadequate, then low-noise preamplifiers, closer measurement distances, higher gain antennas, or narrower bandwidths may be used. If closer measurement distances or higher gain antennas are used, then the beamwidth of the measurement antenna versus the physical size of the EUT shall be taken into account, so that the physical sizes of the EUT dimensions are encompassed by the beamwidth of the measurement antenna. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used. The effects on the measured emission value using bandwidths different from those specified shall be determined if such bandwidth changes are made. Any changes from the specific measurement conditions shall be described in the report of the measurements.

Unless specified otherwise by the regulatory authority, the instrumentation, detector functions, and bandwidths specified in 4.1.4.2.1 and 4.1.4.2.2 shall be used. For pulsed emissions, the procedure in 4.1.4.2.4 shall be used.

Radiated Emissions Test Characteristics	
Frequency range	1 GHz – 6 GHz
Test distance	3 m
Test instrumentation resolution bandwidth	1 MHz
Receive antenna height	1 m – 4 m
Receive antenna polarization	Vertical/Horizontal
Measurement chamber	Semi anechoic chamber (SAC) with rf absorbers on the floor

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.6.2 Test Setup

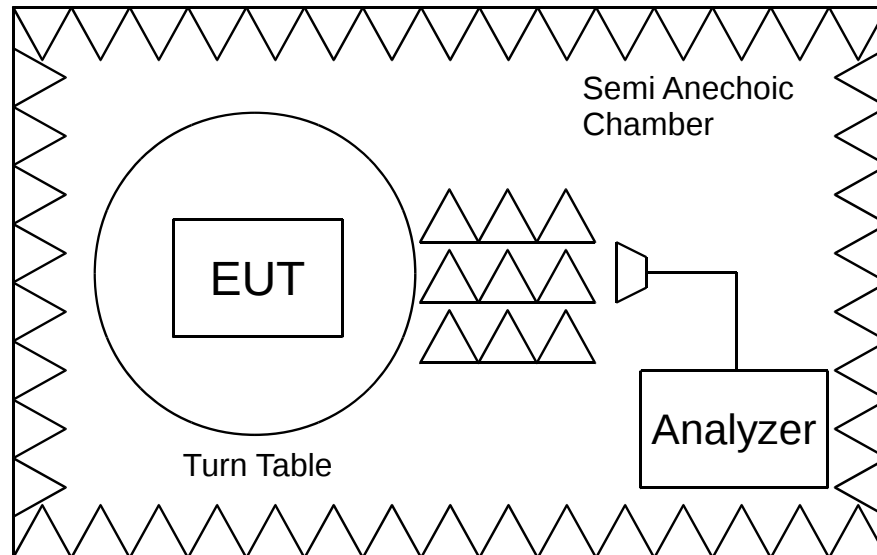

SCHEMATIC TEST SETUP

Requirement: 47 CFR § 15.209
RSS-Gen 8.9
Procedure: ANSI C63.10-2013


Receiver: #3846
Antenna: #3235

Test distance: 3 m

TEST EQUIPMENT USED:

Refer to chapter 5 of this document.


1, 553, 554, 1889, 2048, 2720, 3235,
3846, 4075, 4717, 5392, 5535, 5536,
5544, 5545, 5616

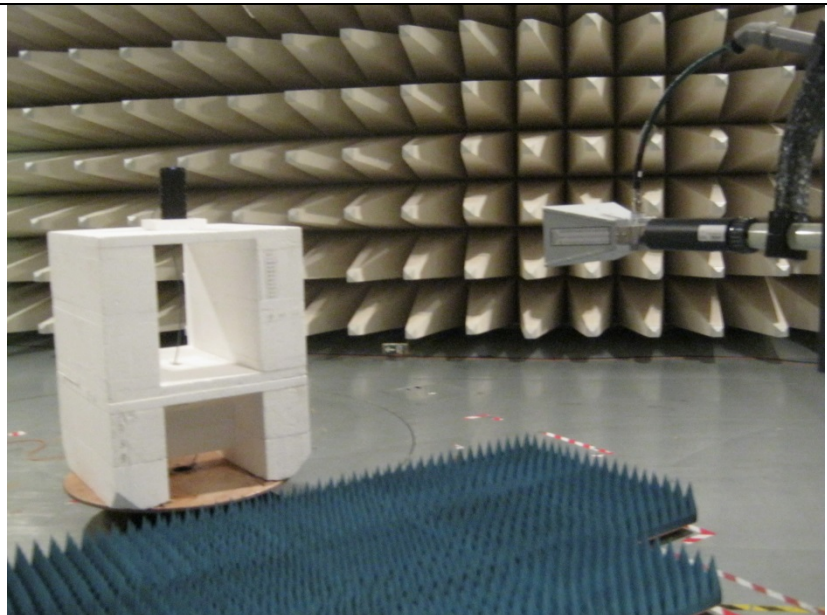



Sample photo of setup

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.6.3 Detailed Test Data

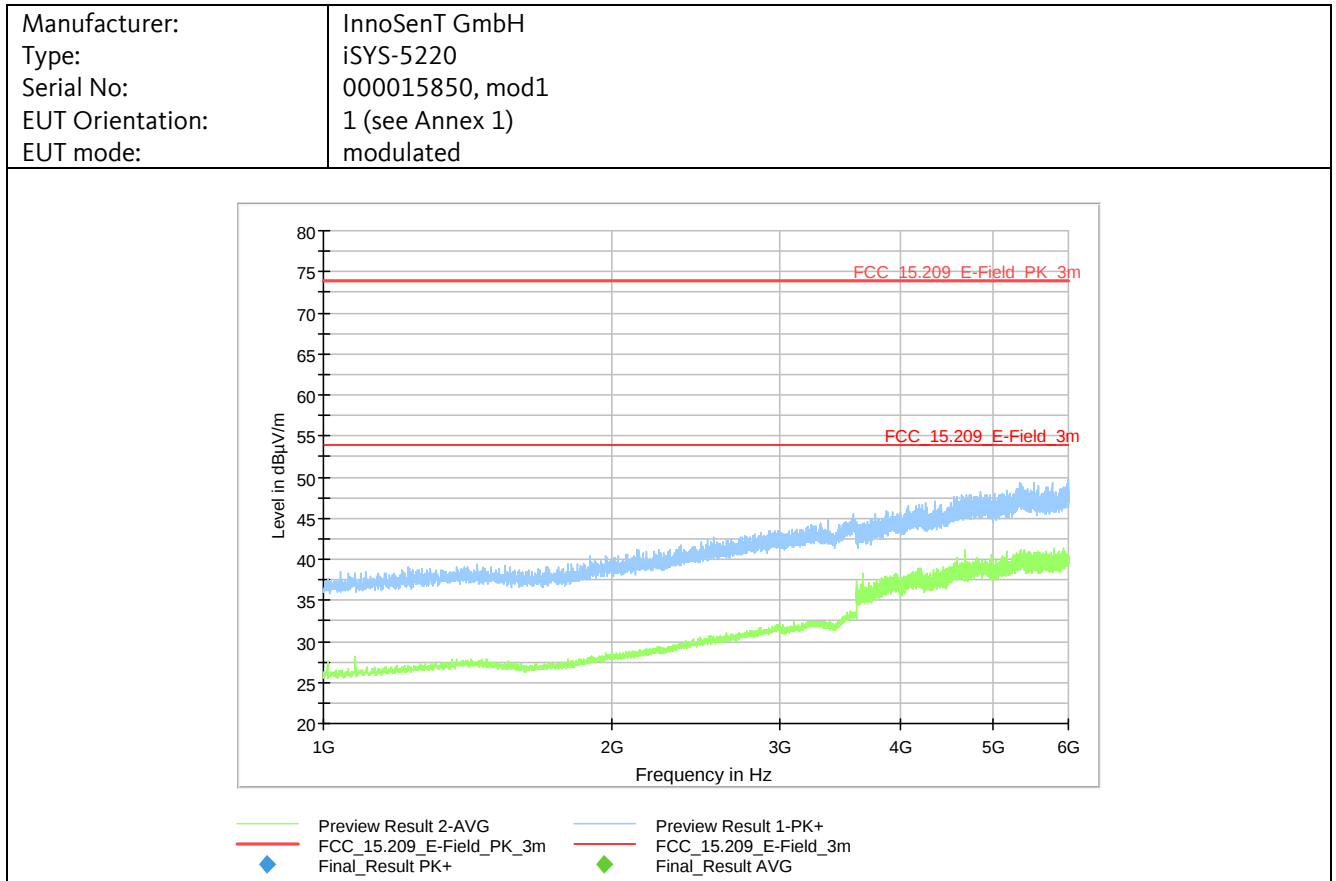

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

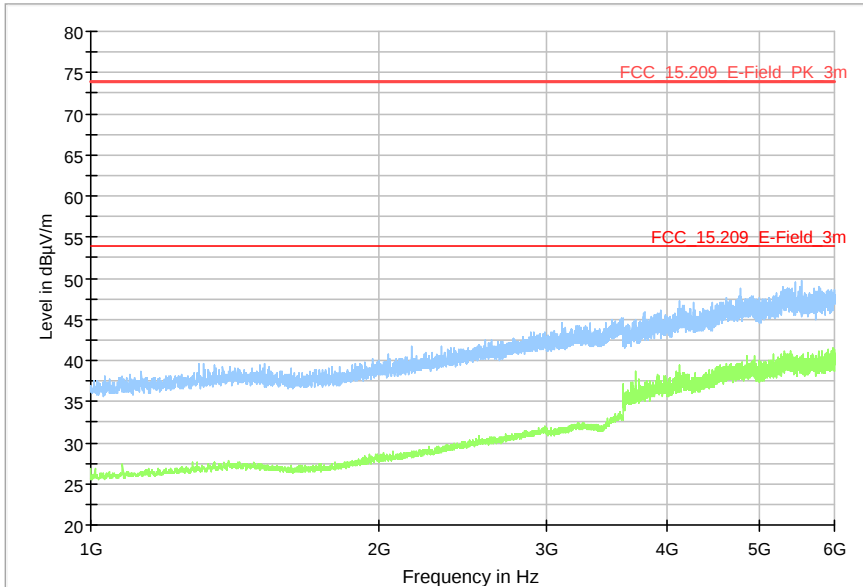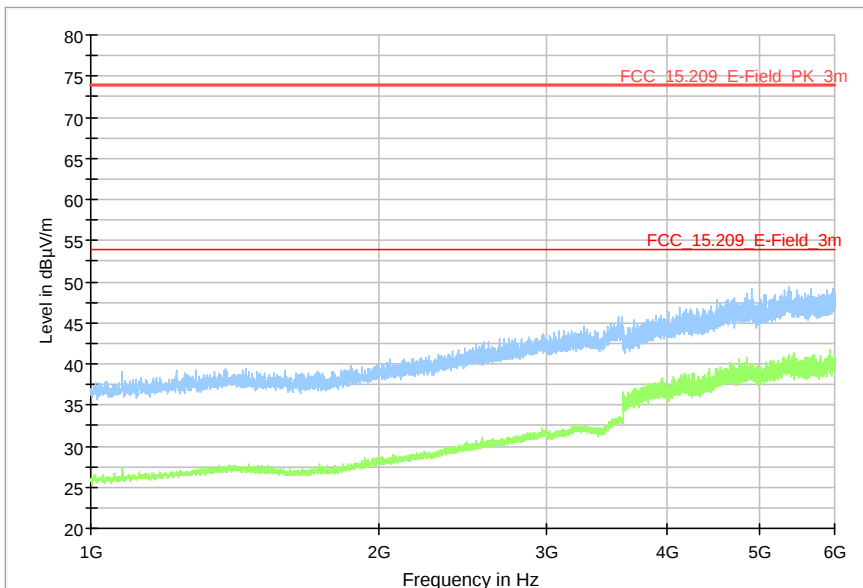Manufacturer: Type: Serial No: EUT Orientation: EUT mode:	InnoSenT GmbH iSYS-5220 000015850 mod1 2 (see Annex 1) modulated
  Preview Result 2-AVG  Preview Result 1-PK+  FCC_15.209_E-Field_PK_3m  FCC_15.209_E-Field_3m  Final_Result PK+  Final_Result AVG	
Manufacturer: Type: Serial No: EUT Orientation: EUT mode:	InnoSenT GmbH iSYS-5220 000015850 mod1 3 (see Annex 1) modulated
  Preview Result 2-AVG  Preview Result 1-PK+  FCC_15.209_E-Field_PK_3m  FCC_15.209_E-Field_3m  Final_Result PK+  Final_Result AVG	

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

Final Result:

Frequency MHz	MaxPeak dBμV/m	Average dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol --	Azimuth deg	Corr. dB/m
			All peak emissions were below the average limit. Therefore, no final measurement performed.							

All tests performed at the distance denoted in chapter 4.4.6.1. The limit was adjusted to correspond with the test distance.

The table above contains worst-case emissions, only. For further details refer to the pre-scan test plot above.

4.4.6.4 Test Result

Manufacturer: InnoSenT GmbH
Type: iSYS-5220
Serial No.: 000015850 mod1
Test date: 2020-07-15/17
Test personnel: Ludwig Kraft

The EUT meets the requirements of this section.

4.4.7 Radiated Emissions 6 – 18 GHz

4.4.7.1 Test Procedures

ANSI C63.10-2013, 6.6.4.1 General

Subclauses 6.6.4.2 and 6.6.4.3 describe the procedures that shall be used for making exploratory and final radiated emission tests for frequencies above 1 GHz. Measurements may be performed at a distance closer than that specified in the requirements; however, an attempt shall be made to avoid making measurements in the near field of both the measurement antenna and the EUT for final measurements.

In performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity does not provide a noise floor more than 6 dB below the limit, then low-noise preamplifiers, closer test distances, higher gain antennas, or narrower bandwidths might be required. If closer measurement distances are used, then the beamwidth of the measurement antenna versus the size of the EUT shall be taken into account. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used [see item b) of 4.1.3]. The effects of using bandwidths different from those specified shall also be determined (see also 6.3). Any changes from the specific measurement conditions shall be described in the report of the measurements (see also Annex E).

Install an appropriate filter at the input of the measurement system power amplifier. This filter shall attenuate the fundamental emission of the EUT and allow an accurate measurement of the associated harmonics and spurious emissions. The filter shall be characterized, and any attenuation/loss factors shall be accounted for in the measurement results.

Data shall be recorded in peak and average detection up to the highest measurement frequency required (unless stated otherwise in the applicable requirements).

ANSI C63.10-2013, 6.6.4.2 Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

Preliminary tests shall be performed following the procedures in 6.3 on a site meeting the requirements of 5.2. For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

ANSI C63.10-2013, 6.6.4.3 Final radiated emissions measurements

The final measurements are performed on a site meeting the requirements of 5.2. Using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements per 6.6.4.2, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement. The final measurement shall follow all the procedures in 6.3 with the EUT operating on frequencies per 5.6. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

Measurements are performed with the EUT rotated from 0° to 360°; the antenna height scanned in accordance with 6.6.3.1, 6.6.3.2, or 6.6.3.3, as appropriate; and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Variations in cable or wire placement shall be explored to maximize the measured emissions.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

The emission signal shall be kept within the illumination area of the 3 dB beamwidth of the antenna so that the maximum emission from the EUT is measured. This may be achieved by either pointing the antenna at an angle toward the source of the emission or by testing the EUT as described in 6.6.3.3.


If the emission is pulsed, then refer to Annex C for guidelines on selecting bandwidth and determining pulse desensitization factors, as necessary.

As noted in 6.6.4.1, when performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity is inadequate, then low-noise preamplifiers, closer measurement distances, higher gain antennas, or narrower bandwidths may be used. If closer measurement distances or higher gain antennas are used, then the beamwidth of the measurement antenna versus the physical size of the EUT shall be taken into account, so that the physical sizes of the EUT dimensions are encompassed by the beamwidth of the measurement antenna. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used. The effects on the measured emission value using bandwidths different from those specified shall be determined if such bandwidth changes are made. Any changes from the specific measurement conditions shall be described in the report of the measurements.

Unless specified otherwise by the regulatory authority, the instrumentation, detector functions, and bandwidths specified in 4.1.4.2.1 and 4.1.4.2.2 shall be used. For pulsed emissions, the procedure in 4.1.4.2.4 shall be used.

Radiated Emissions Test Characteristics	
Frequency range	6 GHz – 18 GHz
Test distance	1 m
Test instrumentation resolution bandwidth	1 MHz
Receive antenna height	1.5 m
Receive antenna polarization	Vertical/Horizontal
Measurement chamber	Semi anechoic chamber (SAC) with rf absorbers on the floor

4.4.7.2 Test Setup

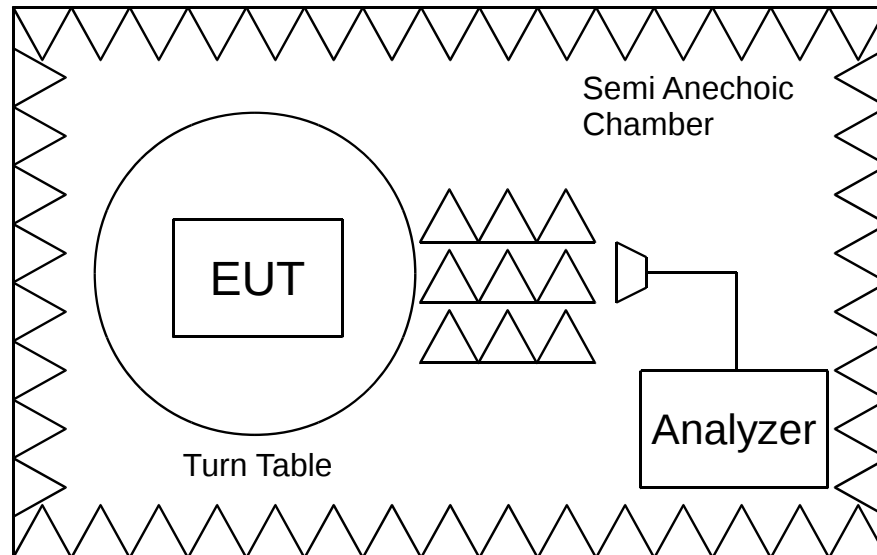

SCHEMATIC TEST SETUP

Requirement: 47 CFR, § 15.209
RSS-Gen 8.9
Procedure: ANSI C63.10-2013


Receiver: #3846
Antenna: #3235

Test distance: 1 m

TEST EQUIPMENT USED:

Refer to chapter 5 of this document.


1, 553, 554, 1889, 2048, 2720, 3235,
3846, 4075, 4717, 5392, 5535, 5536,
5544, 5545, 5620

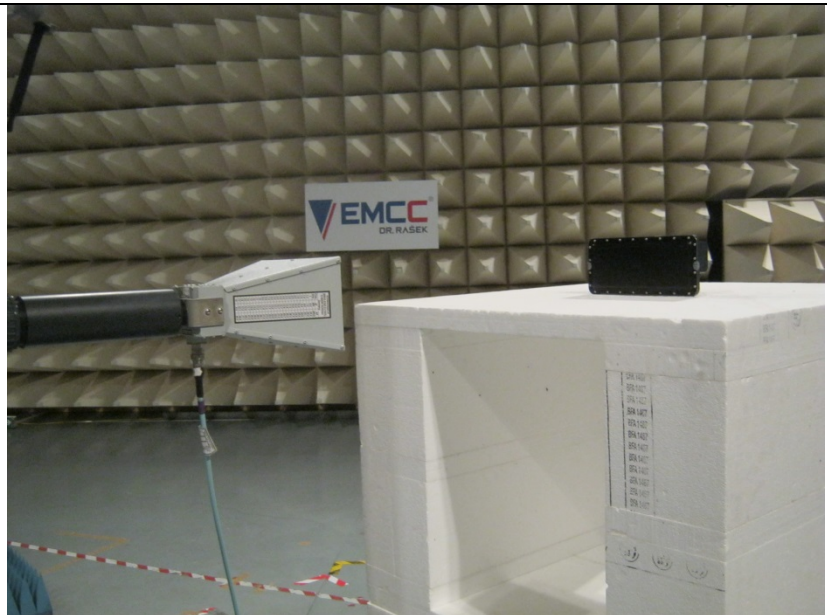



Sample photo of setup

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.7.3 Detailed Test Data

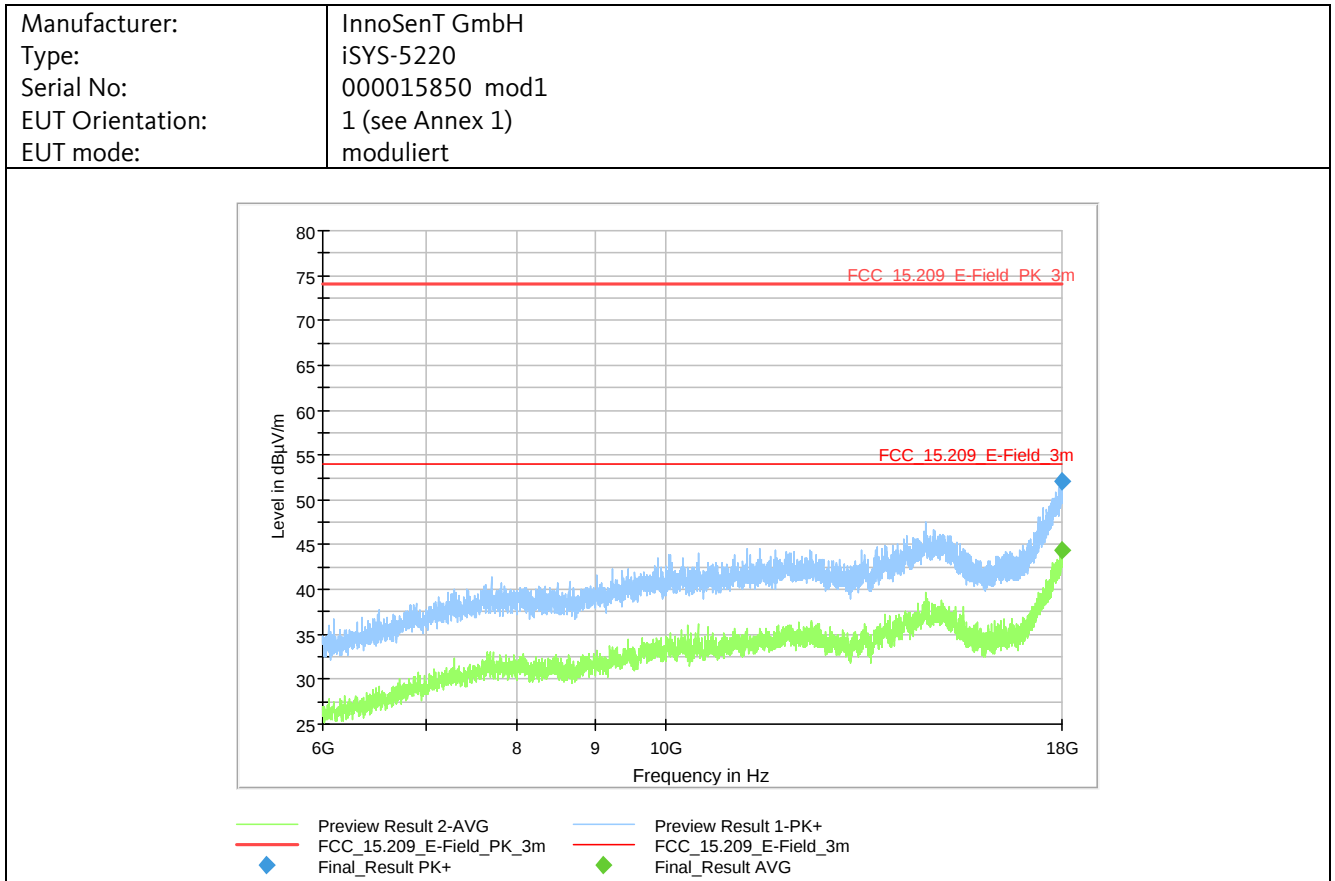

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

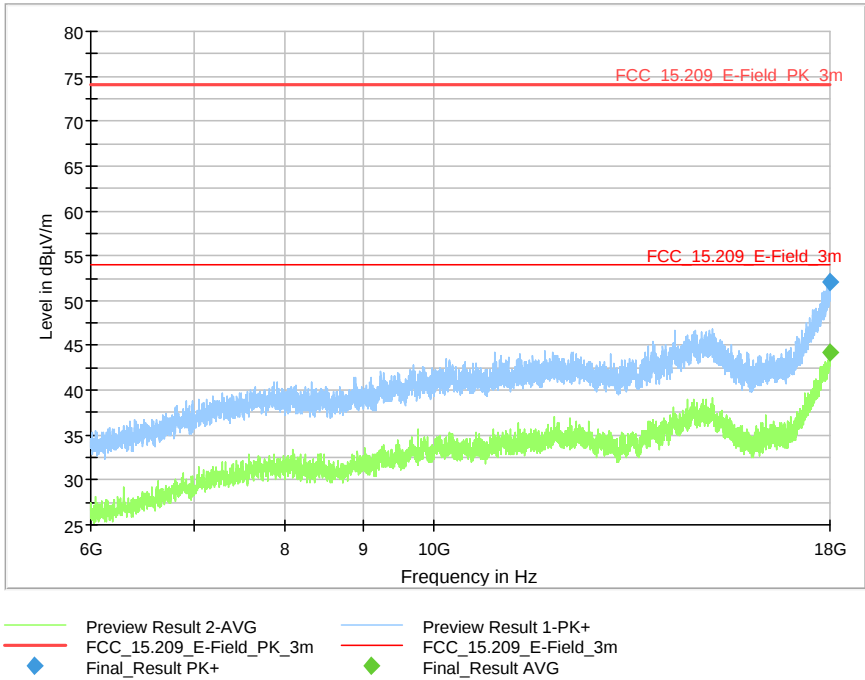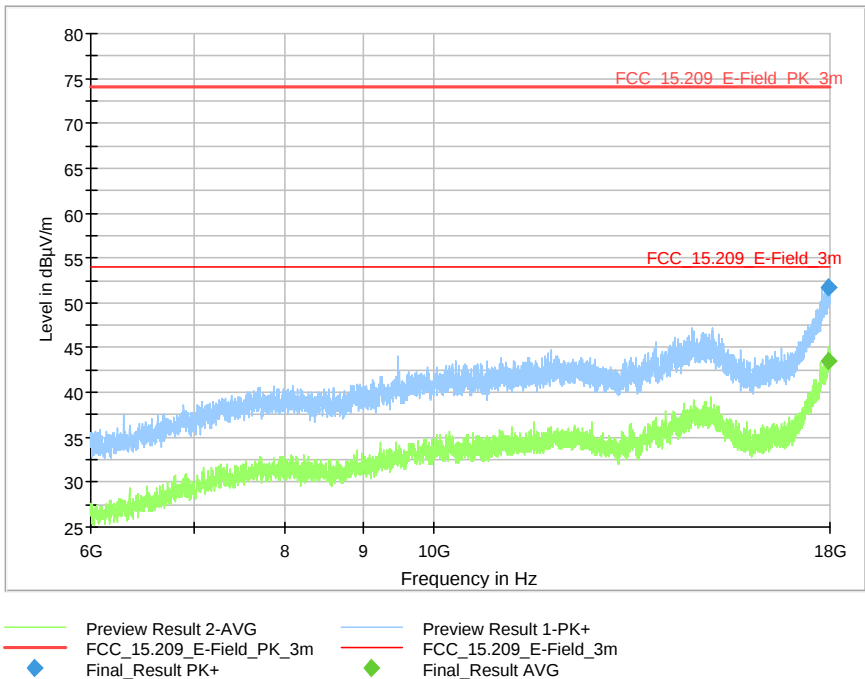Manufacturer: Type: Serial No: EUT Orientation: EUT mode:	InnoSenT GmbH iSYS-5220 000015850 mod1 2 (see Annex 1) moduliert
	
Manufacturer: Type: Serial No: EUT Orientation:	InnoSenT GmbH iSYS-5220 000015850 mod1 3 (see Annex 1)
	

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

Final Result:

Frequency MHz	MaxPeak dBμV/m	Average dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol --	Azimuth deg	Corr. dB/m
			All peak emissions were below the average limit. Therefore, no final measurement performed.							

All tests performed at the distance denoted in chapter 4.4.7.1. The limit was adjusted to correspond with the test distance.
The table above contains worst-case emissions, only. For further details refer to the pre-scan test plot above.

4.4.7.4 Test Result

Manufacturer: InnoSenT GmbH
Type: iSYS-5220
Serial No.: 000015850 mod1
Test date: 2020-07-17
Test personnel: Ludwig Kraft

The EUT meets the requirements of this section.

4.4.8 Radiated Emissions 18 – 50 GHz

4.4.8.1 Test Procedures

ANSI C63.10-2013, 6.6.4.1 General

Subclauses 6.6.4.2 and 6.6.4.3 describe the procedures that shall be used for making exploratory and final radiated emission tests for frequencies above 1 GHz. Measurements may be performed at a distance closer than that specified in the requirements; however, an attempt shall be made to avoid making measurements in the near field of both the measurement antenna and the EUT for final measurements.

In performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity does not provide a noise floor more than 6 dB below the limit, then low-noise preamplifiers, closer test distances, higher gain antennas, or narrower bandwidths might be required. If closer measurement distances are used, then the beamwidth of the measurement antenna versus the size of the EUT shall be taken into account. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used [see item b) of 4.1.3]. The effects of using bandwidths different from those specified shall also be determined (see also 6.3). Any changes from the specific measurement conditions shall be described in the report of the measurements (see also Annex E).

Install an appropriate filter at the input of the measurement system power amplifier. This filter shall attenuate the fundamental emission of the EUT and allow an accurate measurement of the associated harmonics and spurious emissions. The filter shall be characterized, and any attenuation/loss factors shall be accounted for in the measurement results.

Data shall be recorded in peak and average detection up to the highest measurement frequency required (unless stated otherwise in the applicable requirements).

ANSI C63.10-2013, 6.6.4.2 Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

Preliminary tests shall be performed following the procedures in 6.3 on a site meeting the requirements of 5.2. For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

ANSI C63.10-2013, 6.6.4.3 Final radiated emissions measurements

The final measurements are performed on a site meeting the requirements of 5.2. Using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements per 6.6.4.2, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement. The final measurement shall follow all the procedures in 6.3 with the EUT operating on frequencies per 5.6. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

Measurements are performed with the EUT rotated from 0° to 360°; the antenna height scanned in accordance with 6.6.3.1, 6.6.3.2, or 6.6.3.3, as appropriate; and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Variations in cable or wire placement shall be explored to maximize the measured emissions.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

The emission signal shall be kept within the illumination area of the 3 dB beamwidth of the antenna so that the maximum emission from the EUT is measured. This may be achieved by either pointing the antenna at an angle toward the source of the emission or by testing the EUT as described in 6.6.3.3.

If the emission is pulsed, then refer to Annex C for guidelines on selecting bandwidth and determining pulse desensitization factors, as necessary.


As noted in 6.6.4.1, when performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity is inadequate, then low-noise preamplifiers, closer measurement distances, higher gain antennas, or narrower bandwidths may be used. If closer measurement distances or higher gain antennas are used, then the beamwidth of the measurement antenna versus the physical size of the EUT shall be taken into account, so that the physical sizes of the EUT dimensions are encompassed by the beamwidth of the measurement antenna. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used. The effects on the measured emission value using bandwidths different from those specified shall be determined if such bandwidth changes are made. Any changes from the specific measurement conditions shall be described in the report of the measurements.

Unless specified otherwise by the regulatory authority, the instrumentation, detector functions, and bandwidths specified in 4.1.4.2.1 and 4.1.4.2.2 shall be used. For pulsed emissions, the procedure in 4.1.4.2.4 shall be used.

Radiated Emissions Test Characteristics	
Frequency range	18 GHz – 50 GHz
Test distance	1 m (18 – 40 GHz) 0.5 m (40 – 50 GHz)
Test instrumentation resolution bandwidth	1 MHz
Receive antenna height	1.5 m
Receive antenna polarization	Vertical/Horizontal
Measurement chamber	Fully anechoic chamber (FAC)

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.8.2 Test Setup

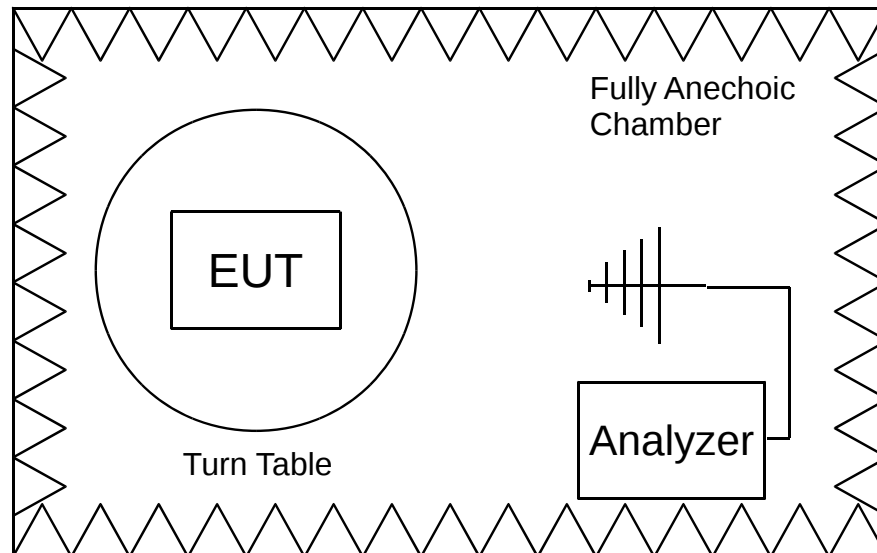


SCHEMATIC TEST SETUP

Requirement: 47 CFR § 15.209
47 CFR § 15.249
RSS-Gen 8.9
RSS-210 Annex B.10
Procedure: ANSI C63.10-2013

Receiver: #3831
Antenna: #1300 (18 – 26.5 GHz)
#1229 (26.5 – 40 GHz)
#2113 (40 – 50 GHz)

TEST EQUIPMENT USED:
Refer to chapter 5 of this document.
1229, 1294, 1300, 1301, 1348, 1868,
2111, 2113, 3195, 3831, 3968, 4524,
4717, 4721, 4914, 5392, 5614

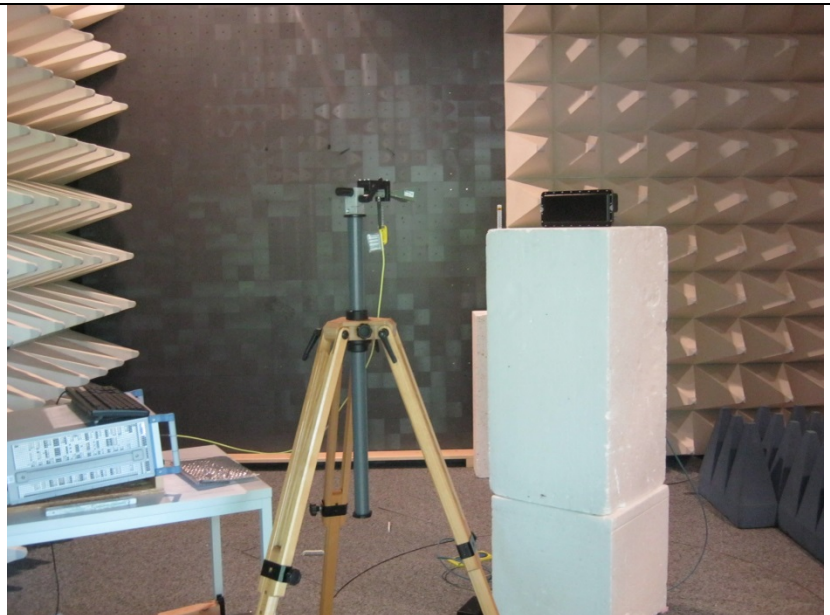


Sample photo of setup 18 -26.5 GHz


Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.8.3 Detailed Test Data

Frequency range 18- 26.6 GHz:

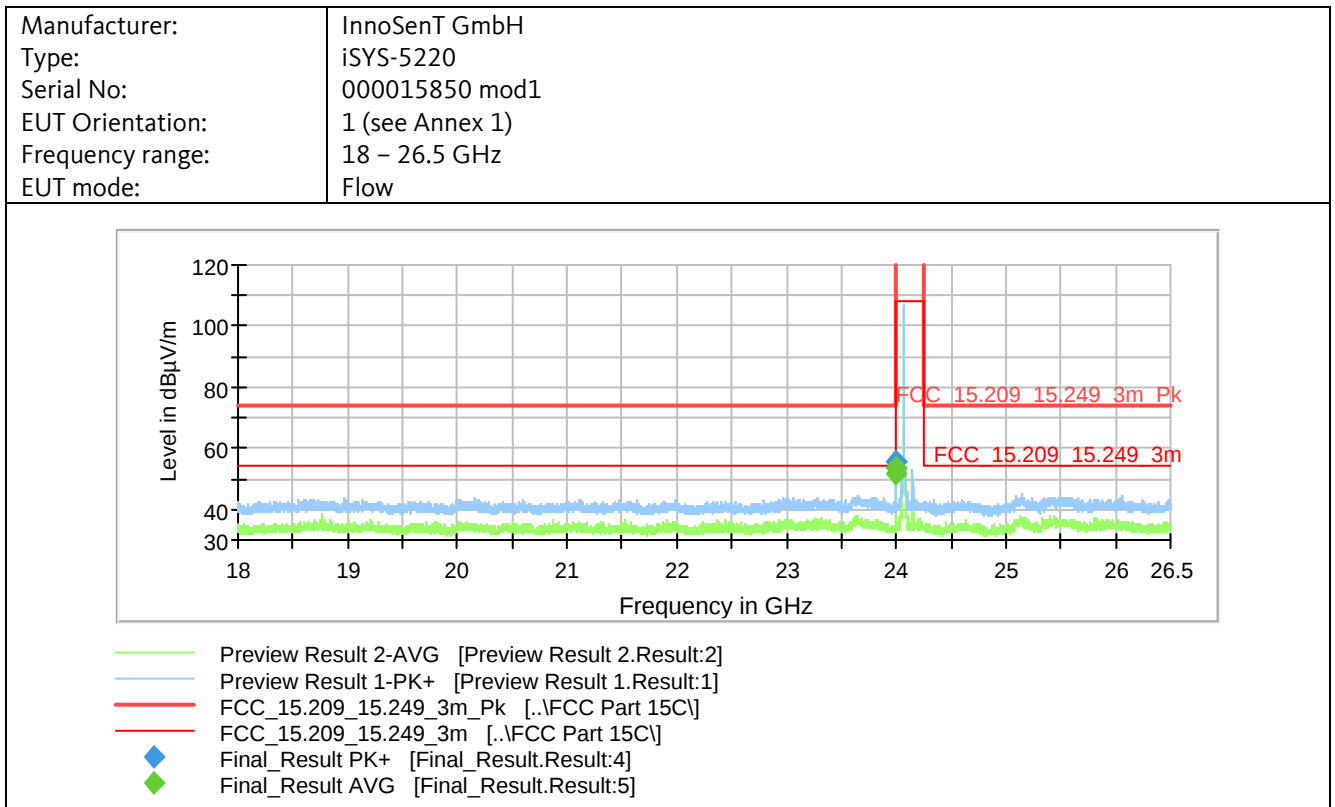


Note: the emission at 24.07 GHz is the carrier frequency

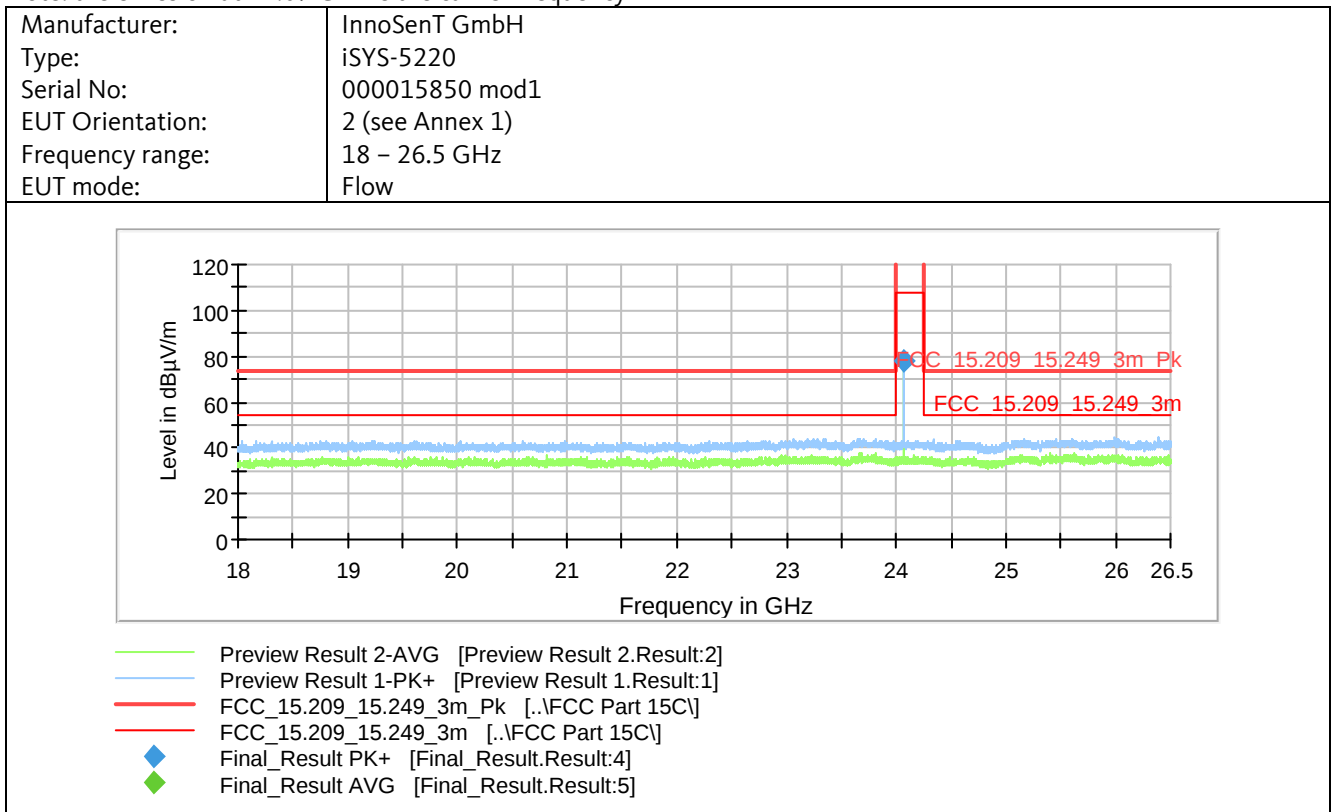


Note: the emission at 24.07 GHz is the carrier frequency.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

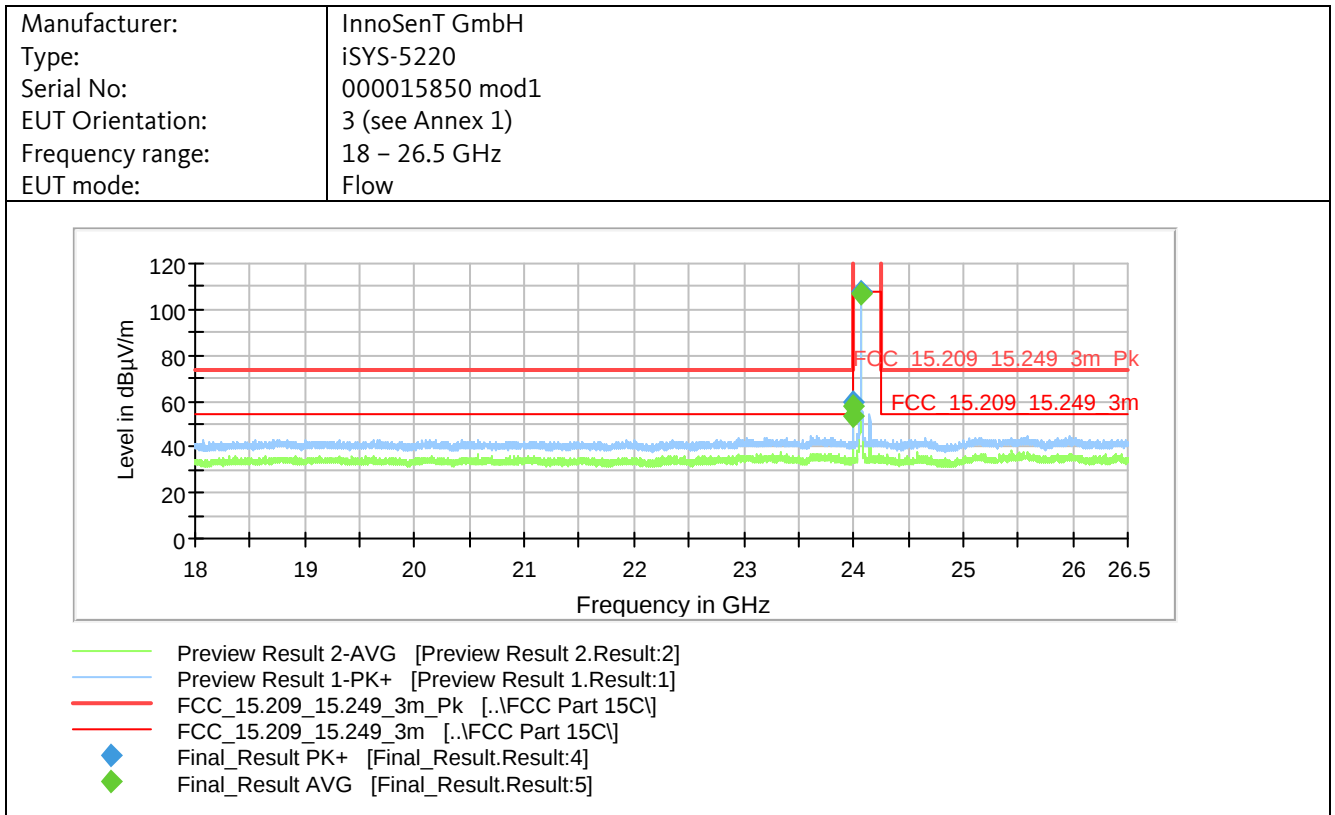


Note: the emission at 24.07 GHz is the carrier frequency.

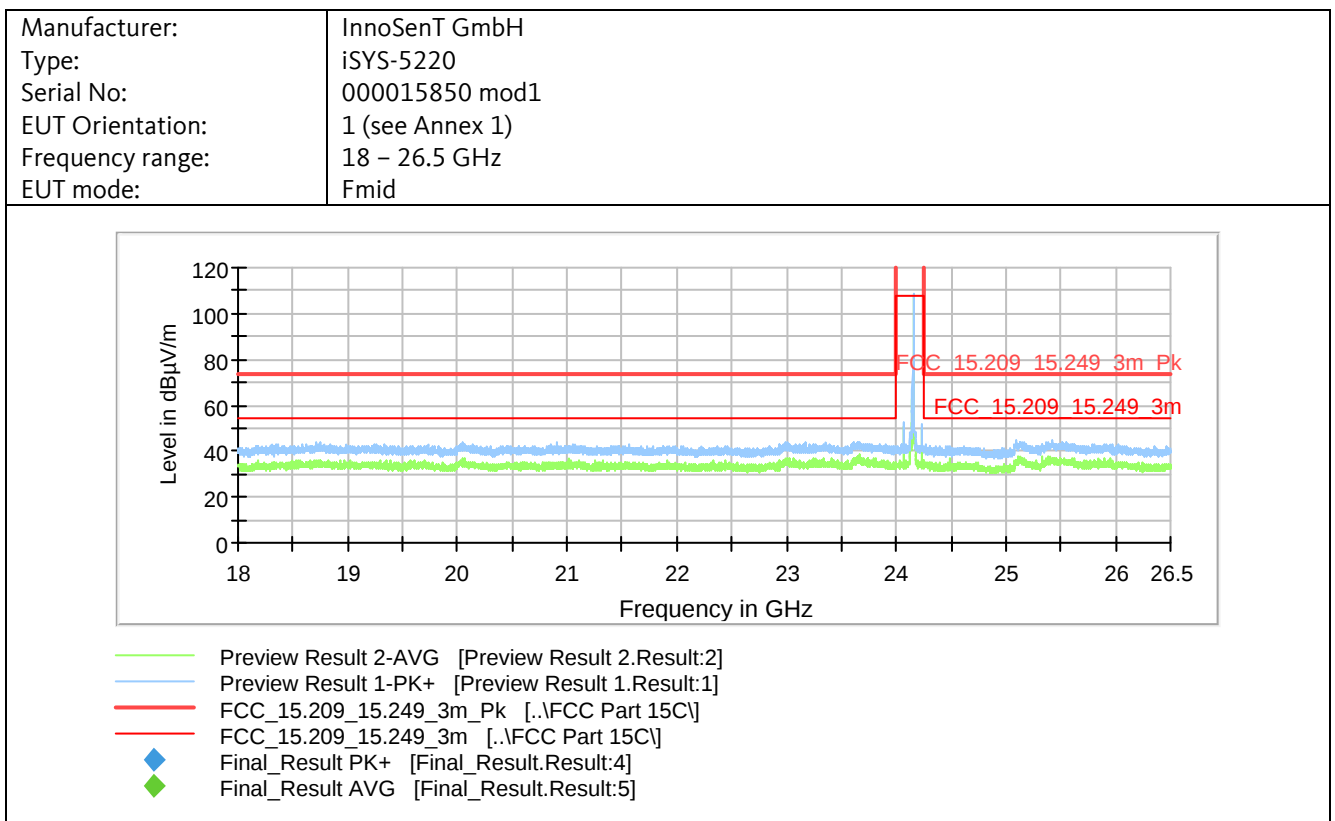


Note: the emission at 24.154 GHz is the carrier frequency.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

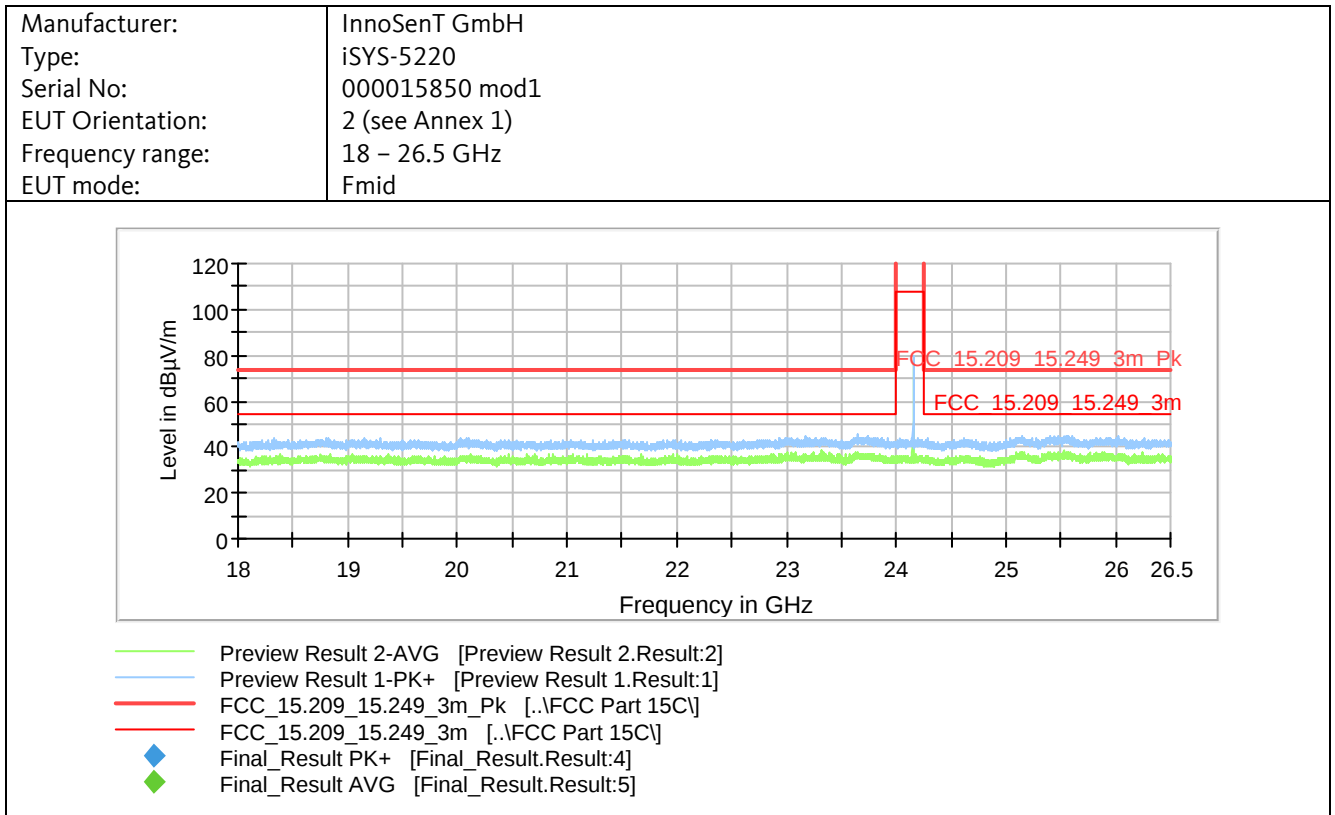


Note: the emission at 24.154 GHz is the carrier frequency.

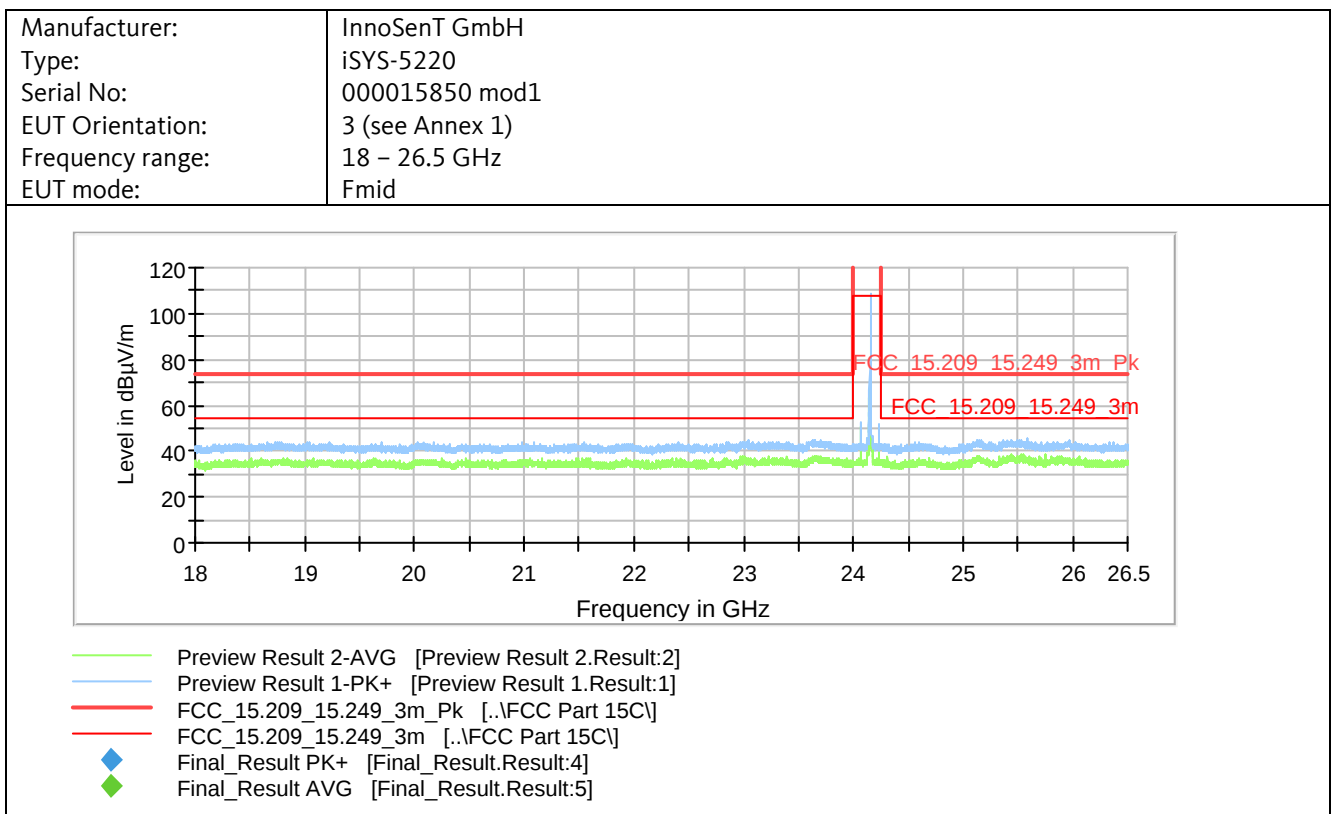


Note: the emission at 24.154 GHz is the carrier frequency.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

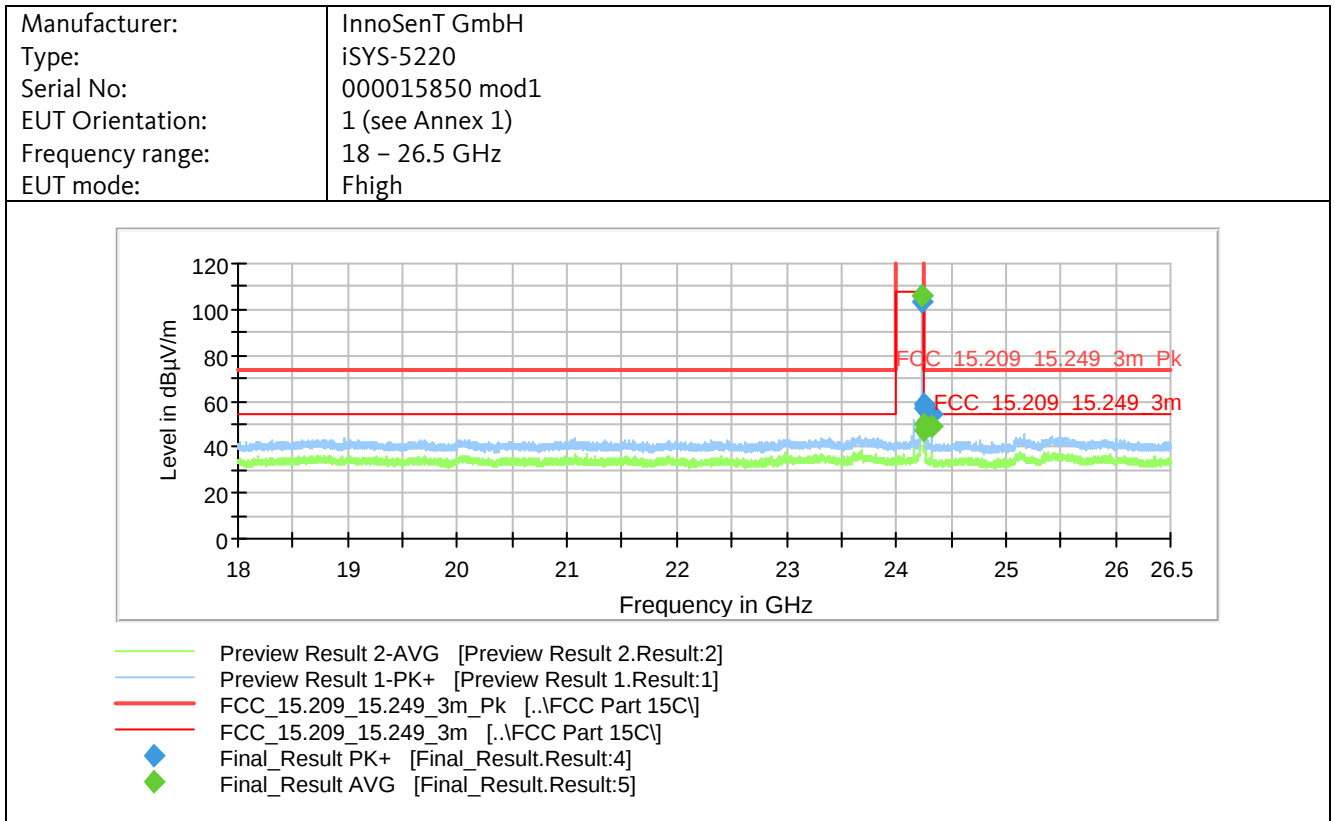


Note: the emission at 24.238 GHz is the carrier frequency.

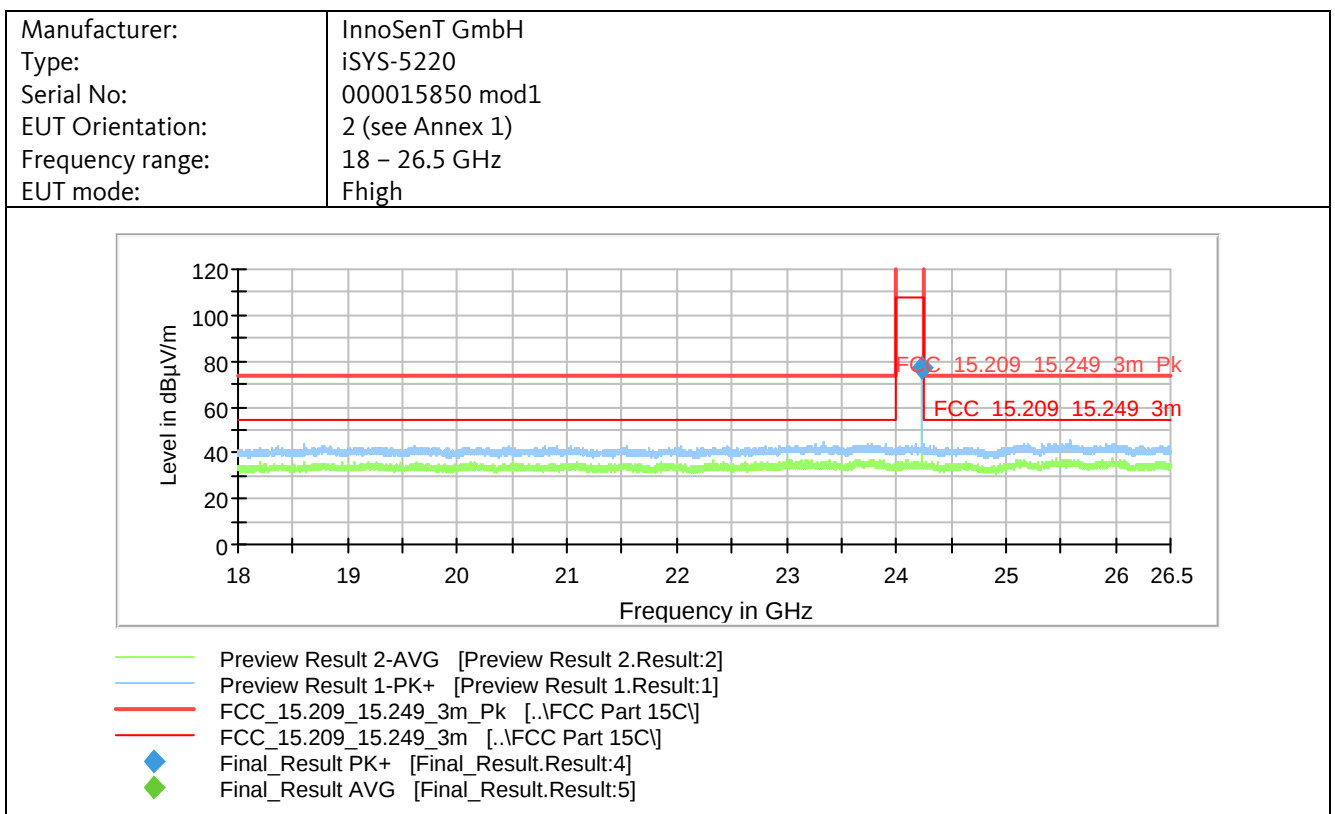

Note: the emission at 24.238 GHz is the carrier frequency.



Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

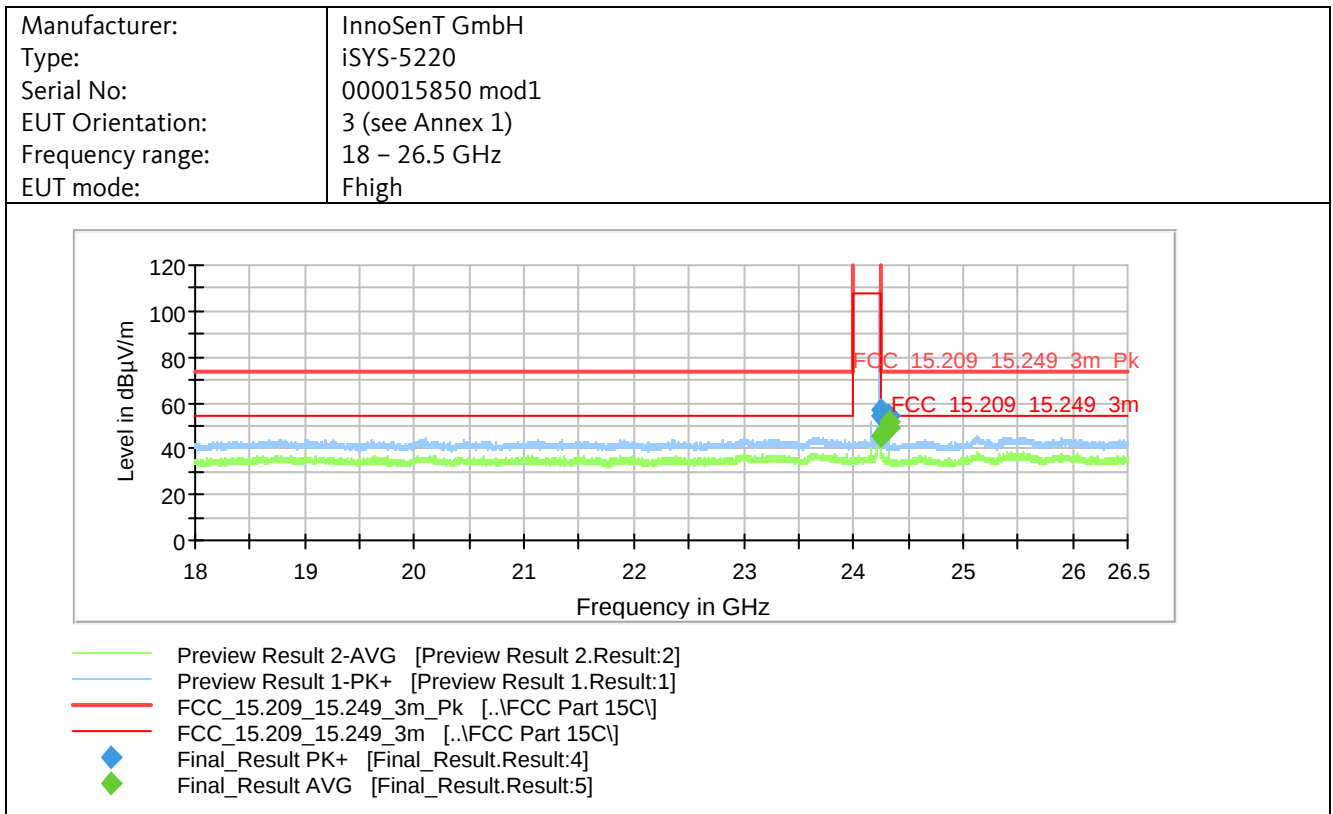

Note: the emission at 24.238 GHz is the carrier frequency.


Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

Frequency range 26.5 – 40 GHz:

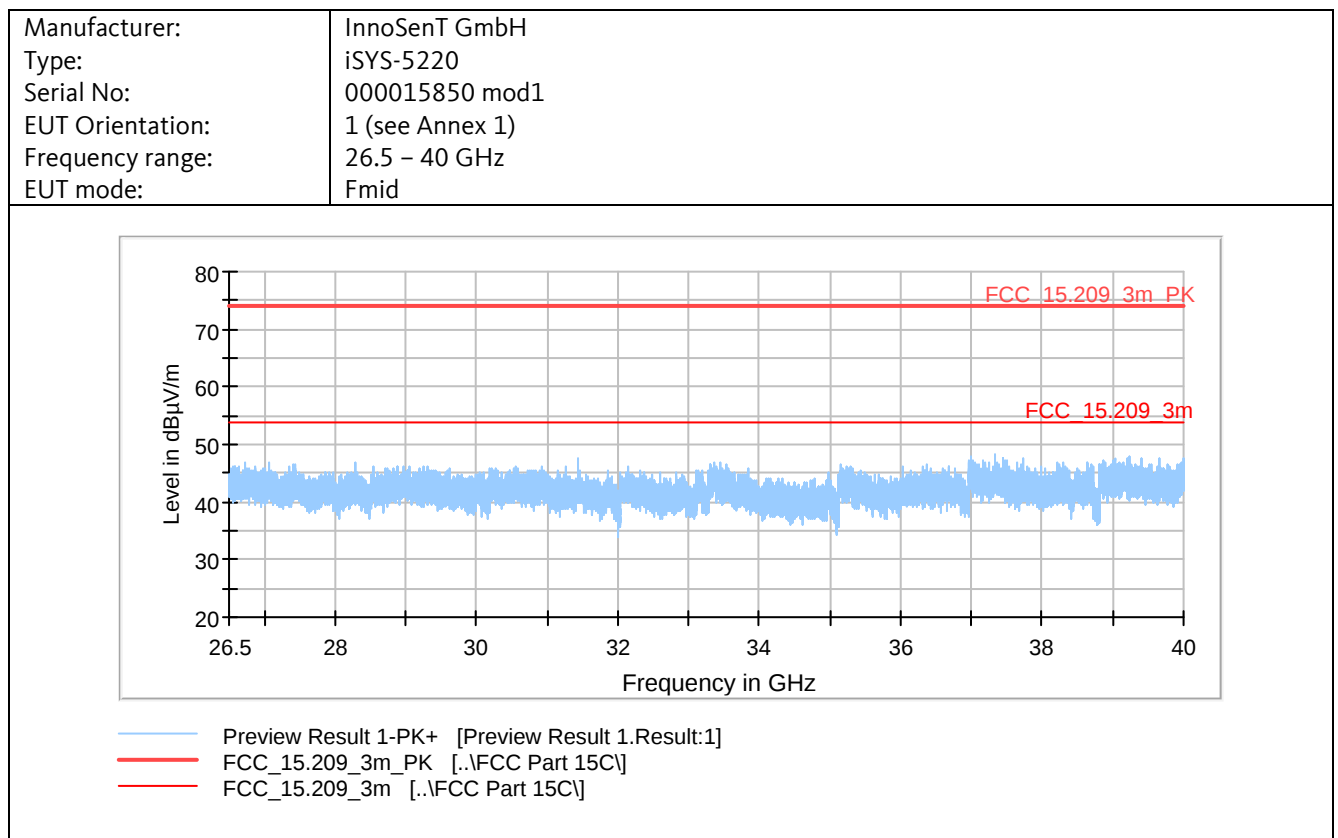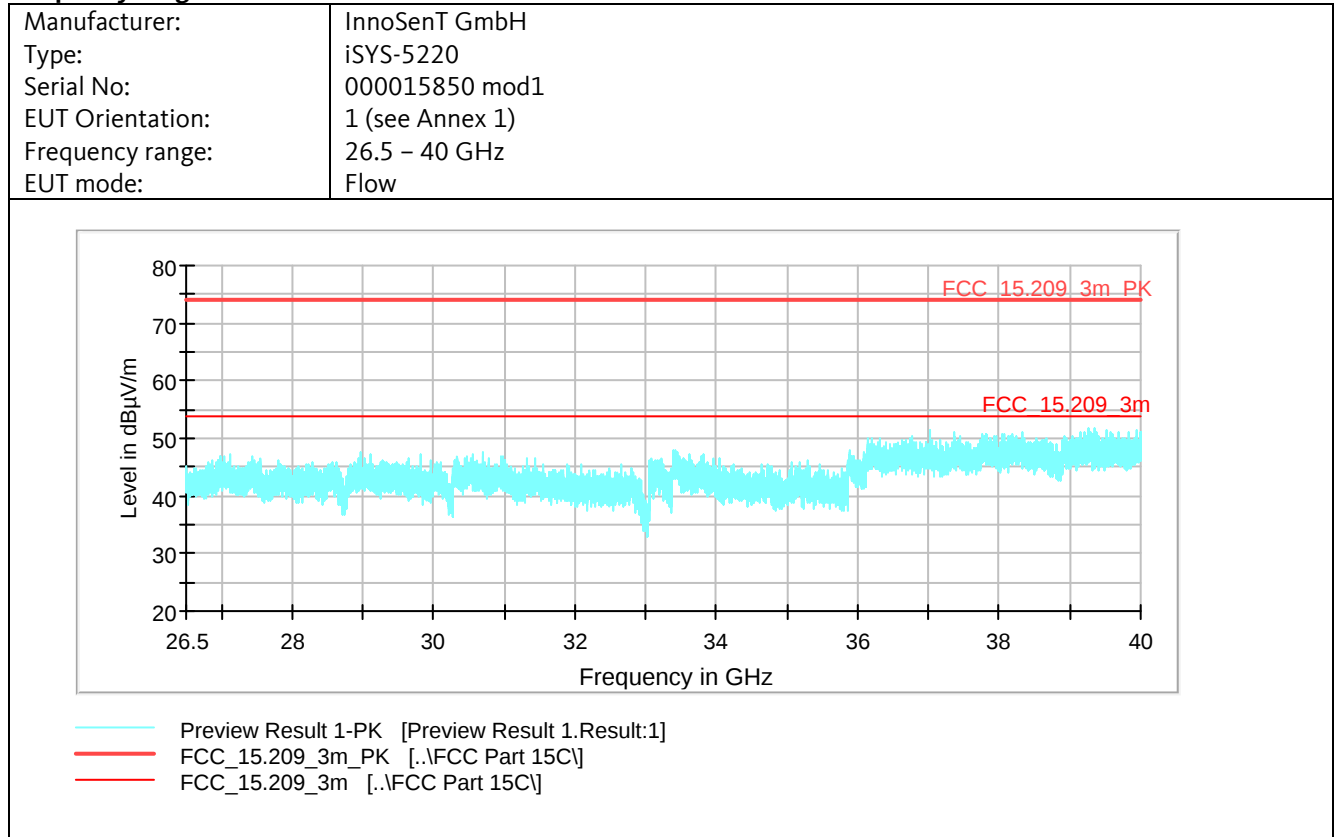


Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

Manufacturer:	InnoSenT GmbH
Type:	iSYS-5220
Serial No:	000015850 mod1
EUT Orientation:	1 (see Annex 1)
Frequency range:	26.5 – 40 GHz
EUT mode:	Fhigh

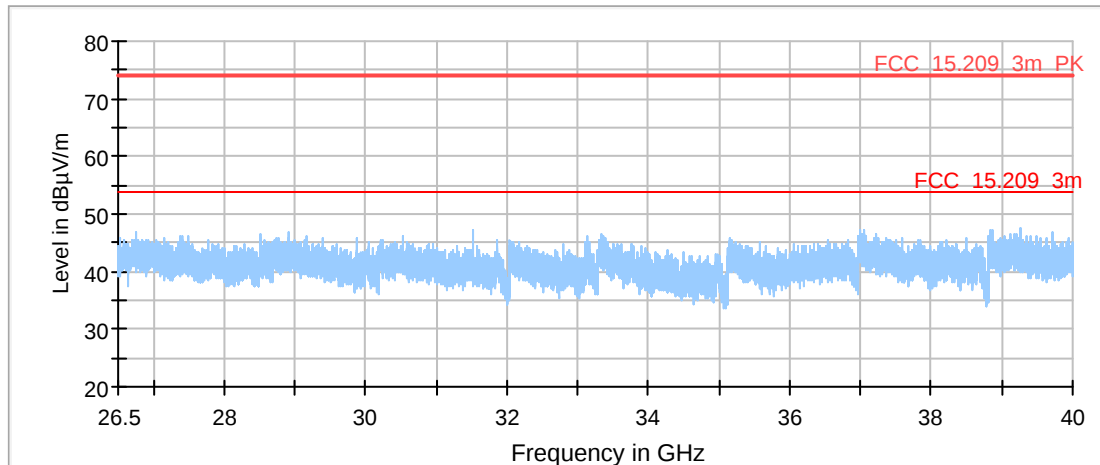



- Preview Result 1-PK+ [Preview Result 1.Result:1]
- FCC_15.209_3m_PK [..\FCC Part 15C\]
- FCC_15.209_3m [..\FCC Part 15C\]

Manufacturer:	InnoSenT GmbH
Type:	iSYS-5220
Serial No:	000015850 mod1+2
EUT Orientation:	2 (see Annex 1)
Frequency range:	26.5 – 40 GHz
EUT mode:	Flow


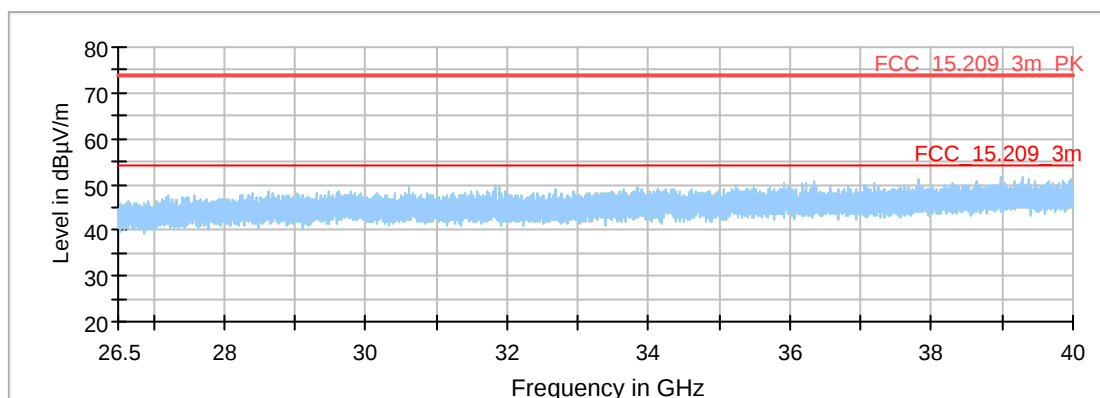


- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- FCC_15.209_3m_PK [..\FCC Part 15C\]
- FCC_15.209_3m [..\FCC Part 15C\]
- ◆ Final_Result PK+ [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]


Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

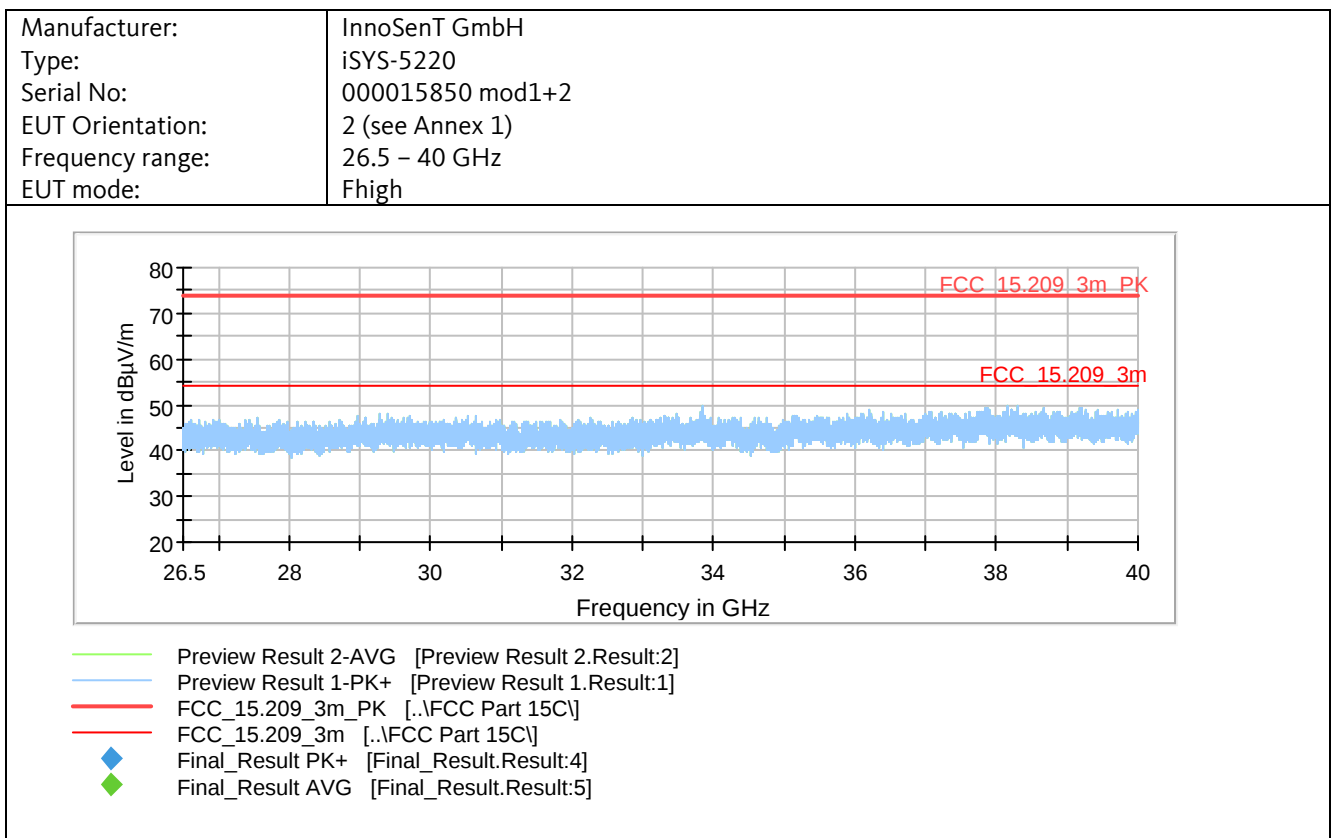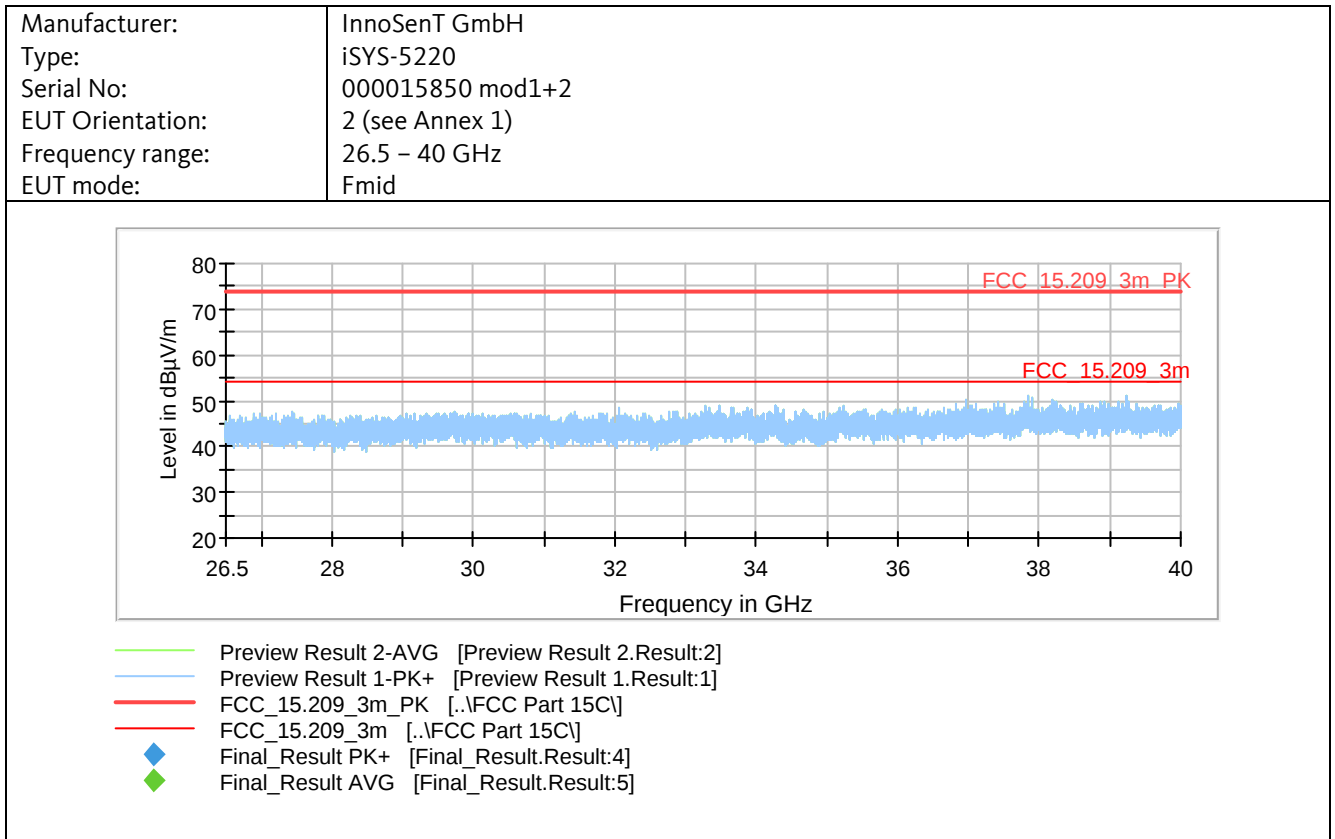

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

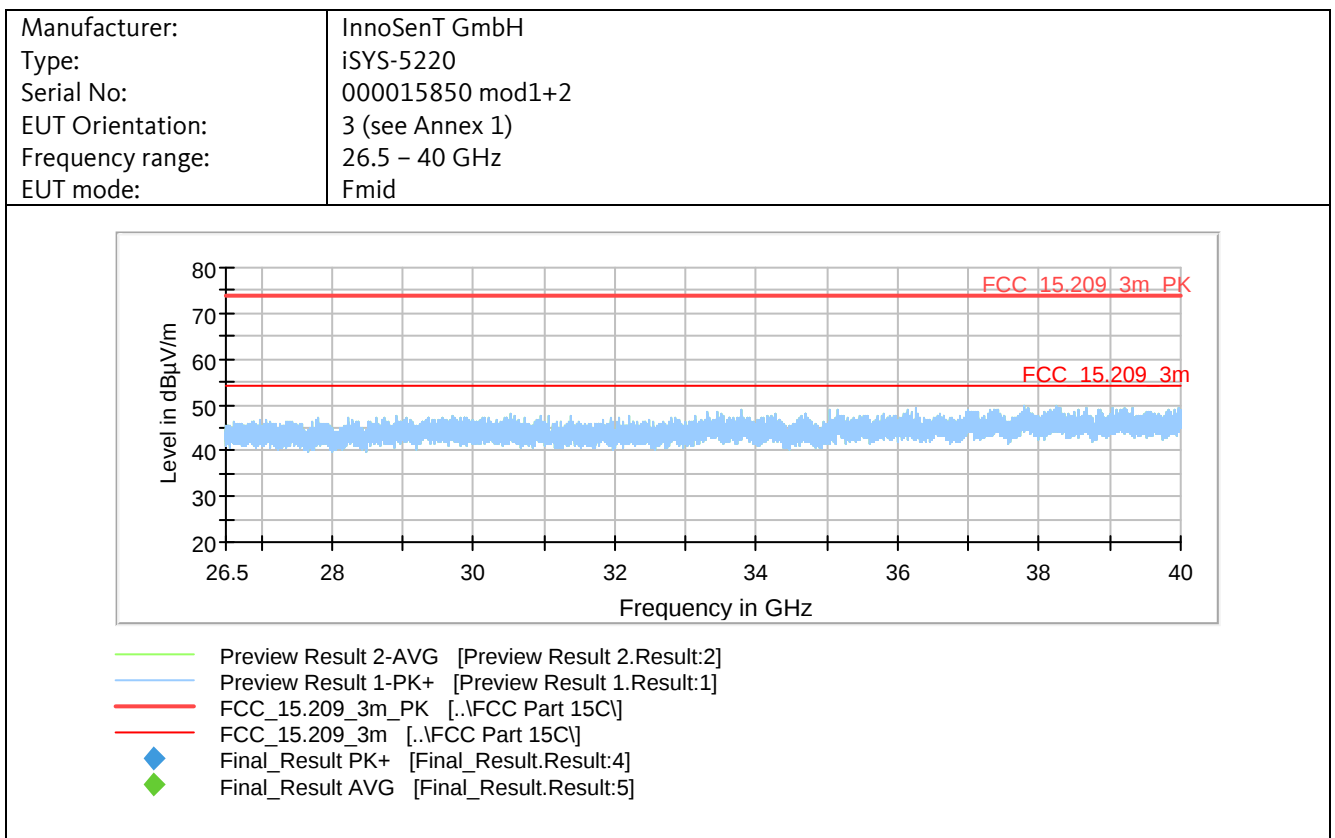
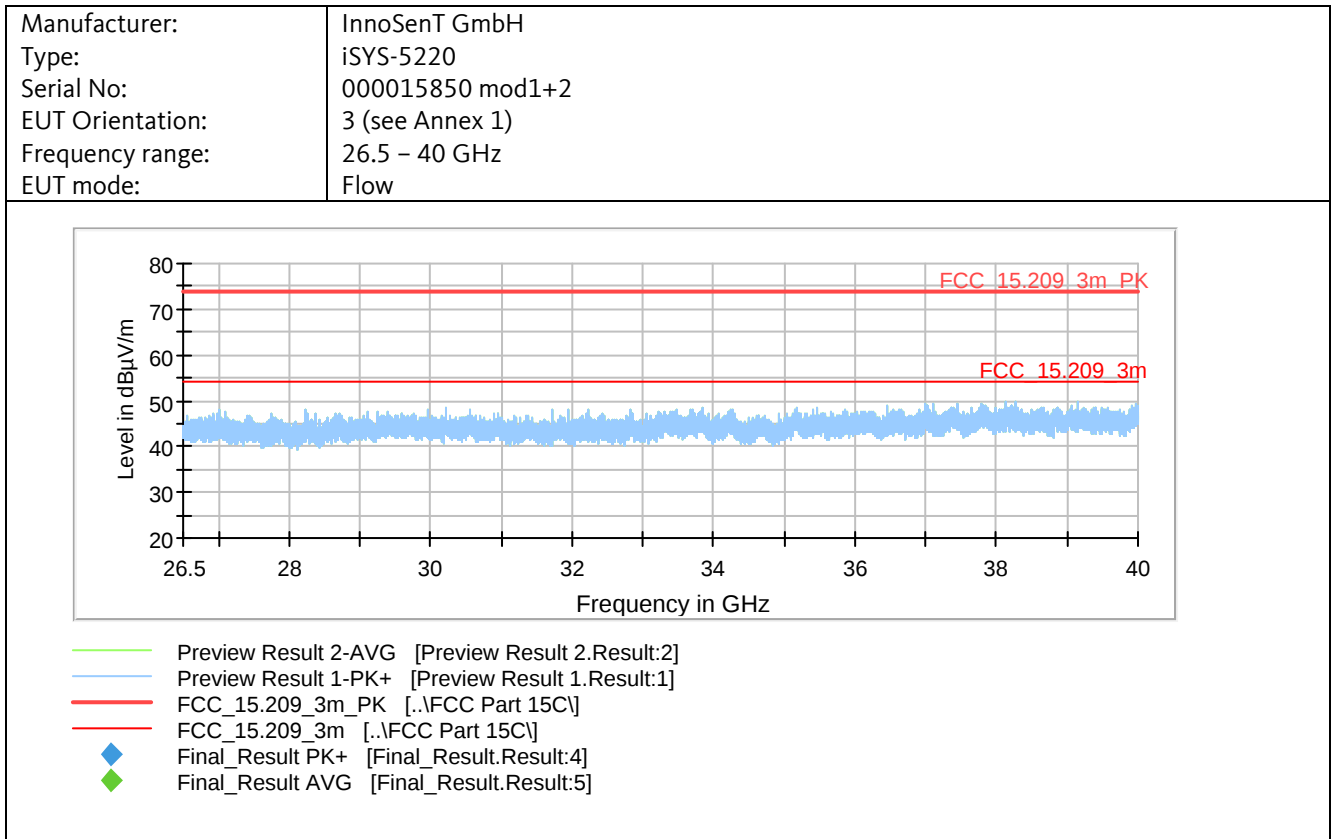


Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10


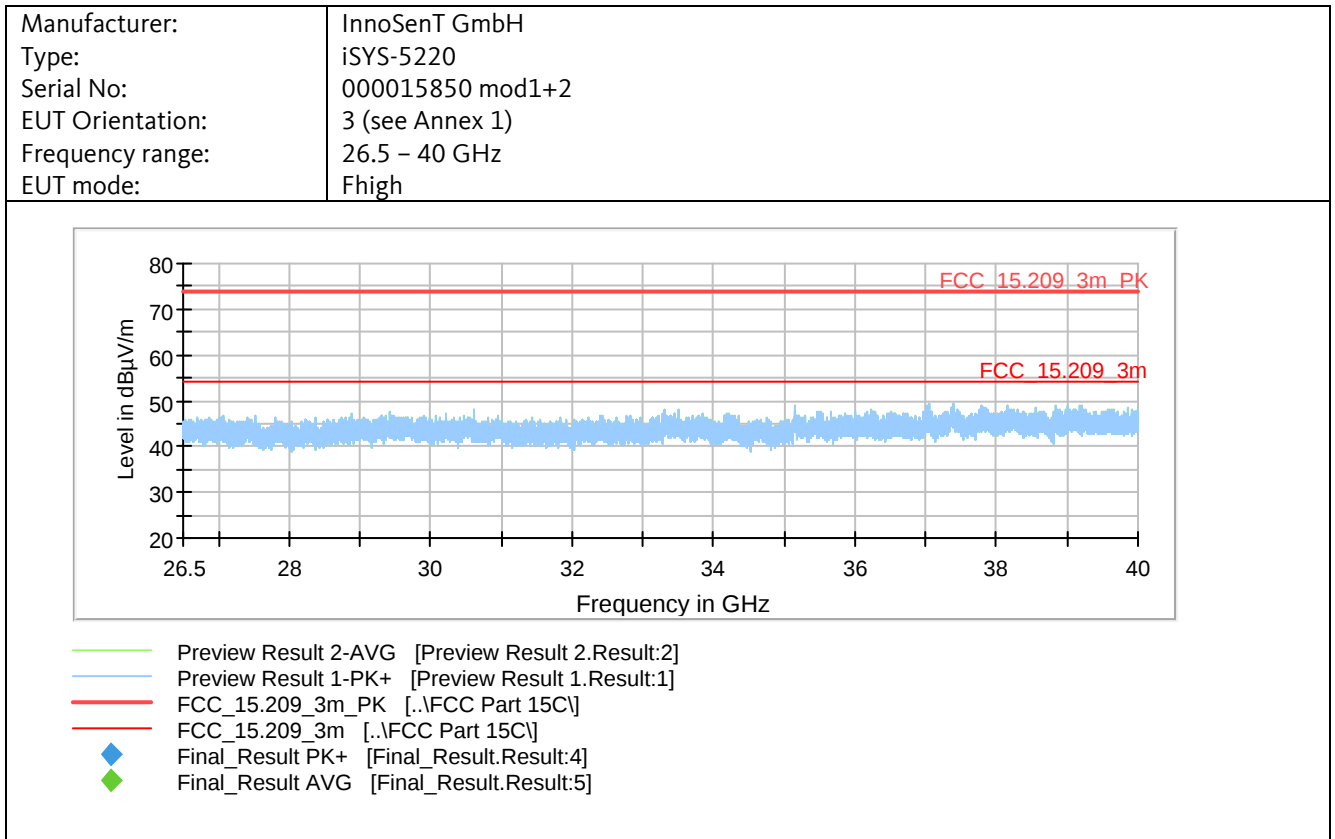


Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10



Frequency range 40 – 50 GHz:

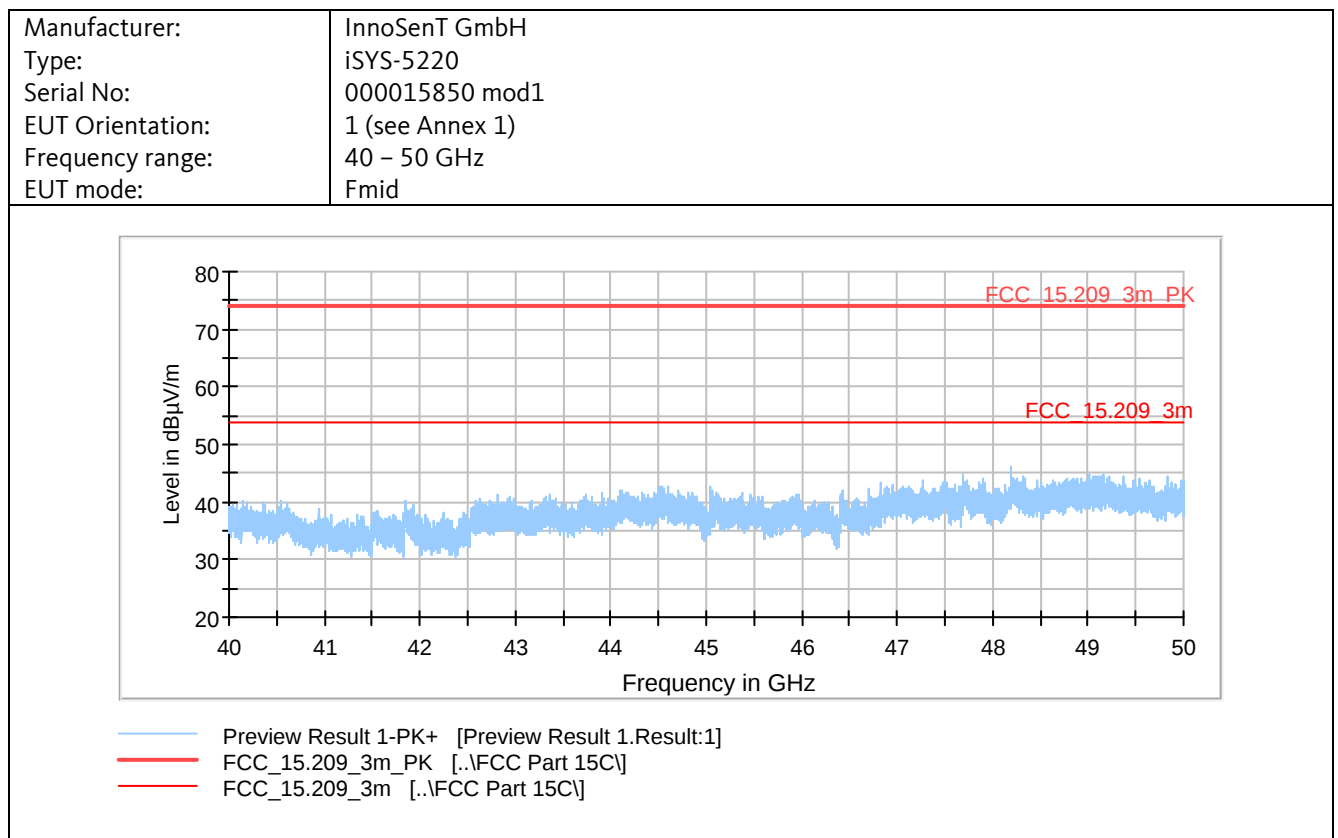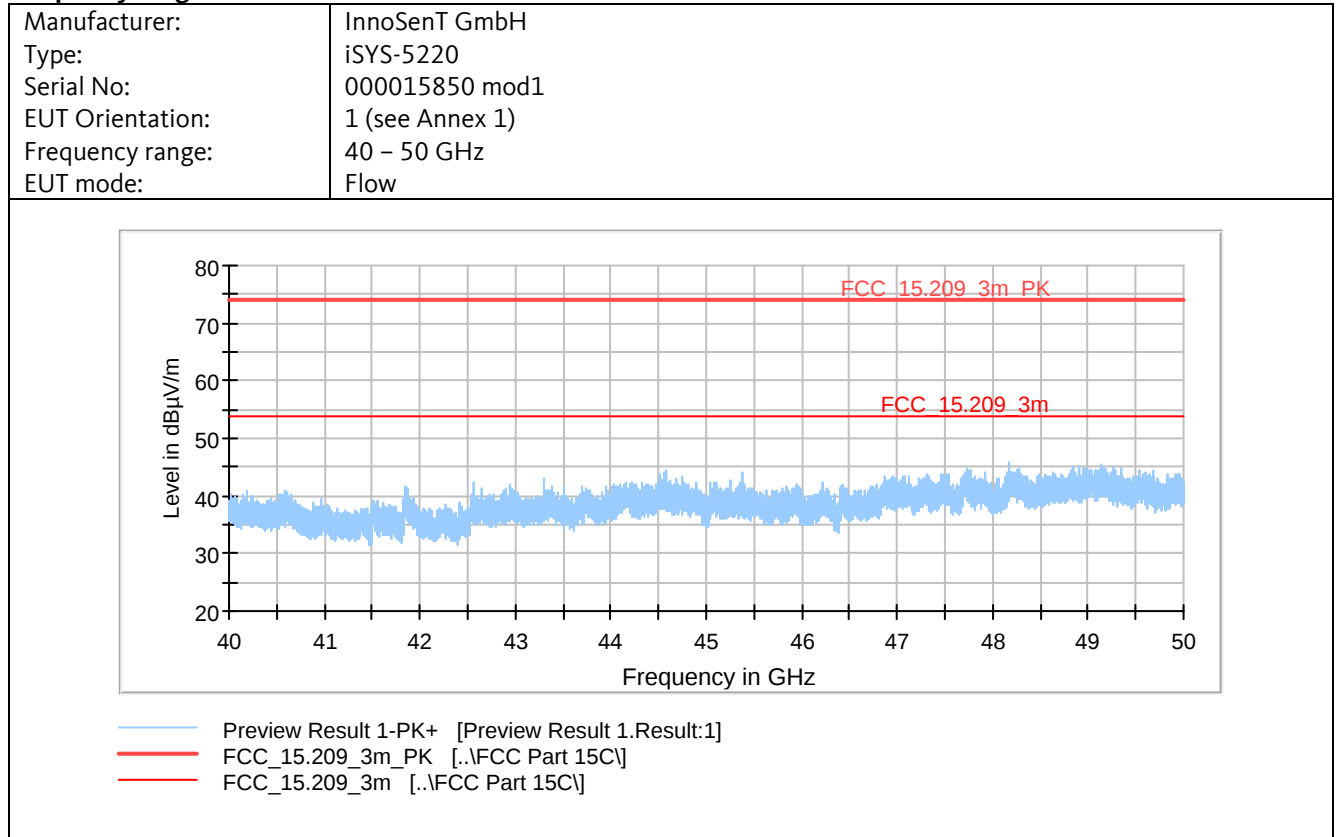



Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

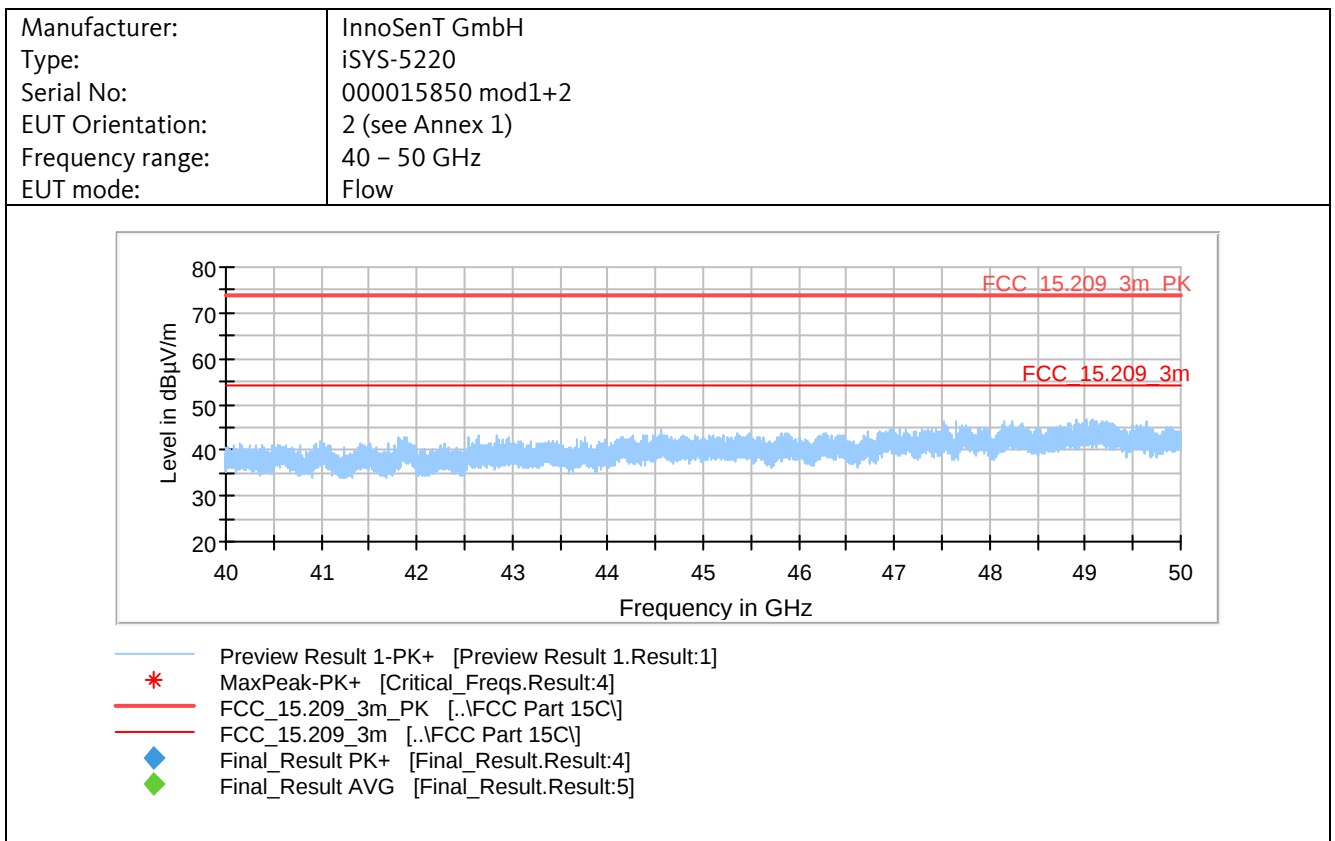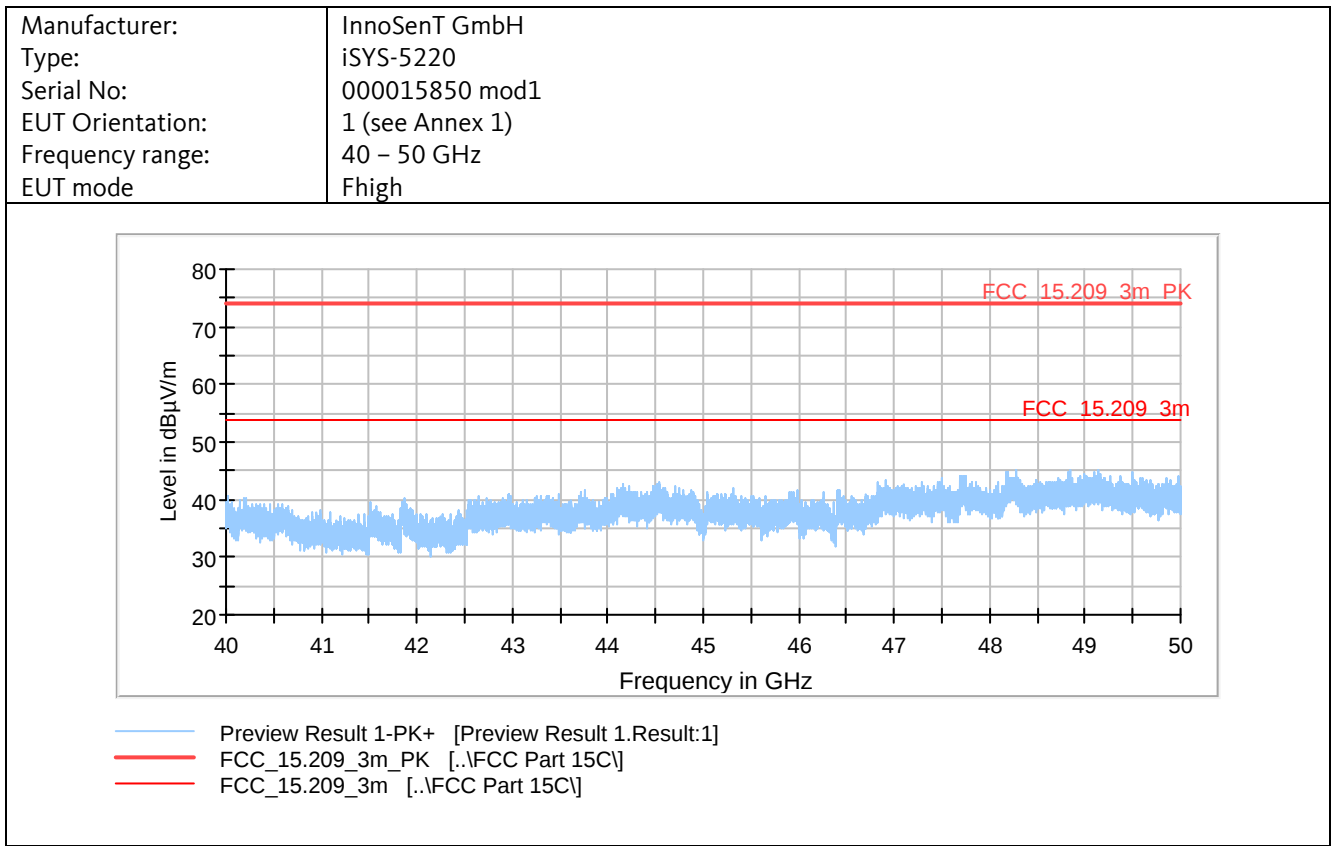


Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

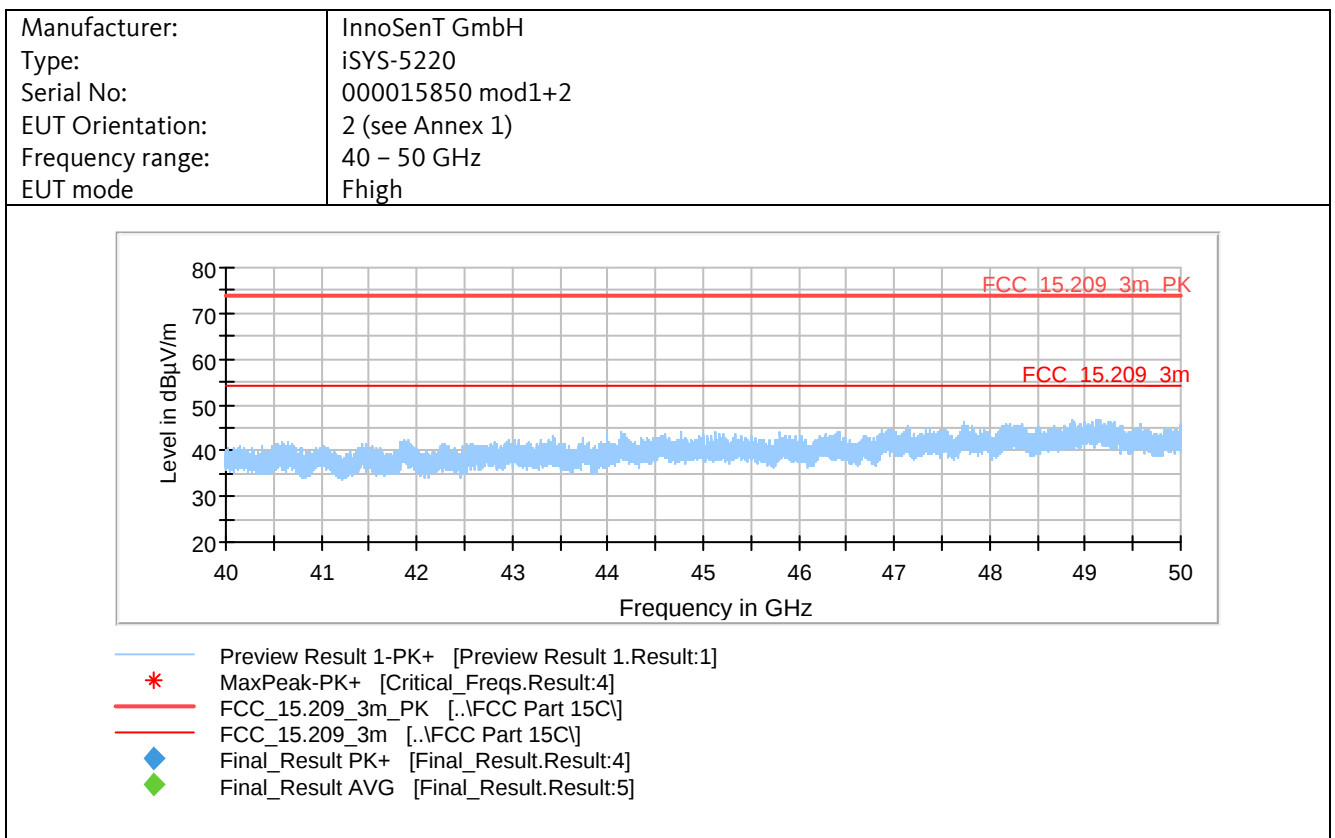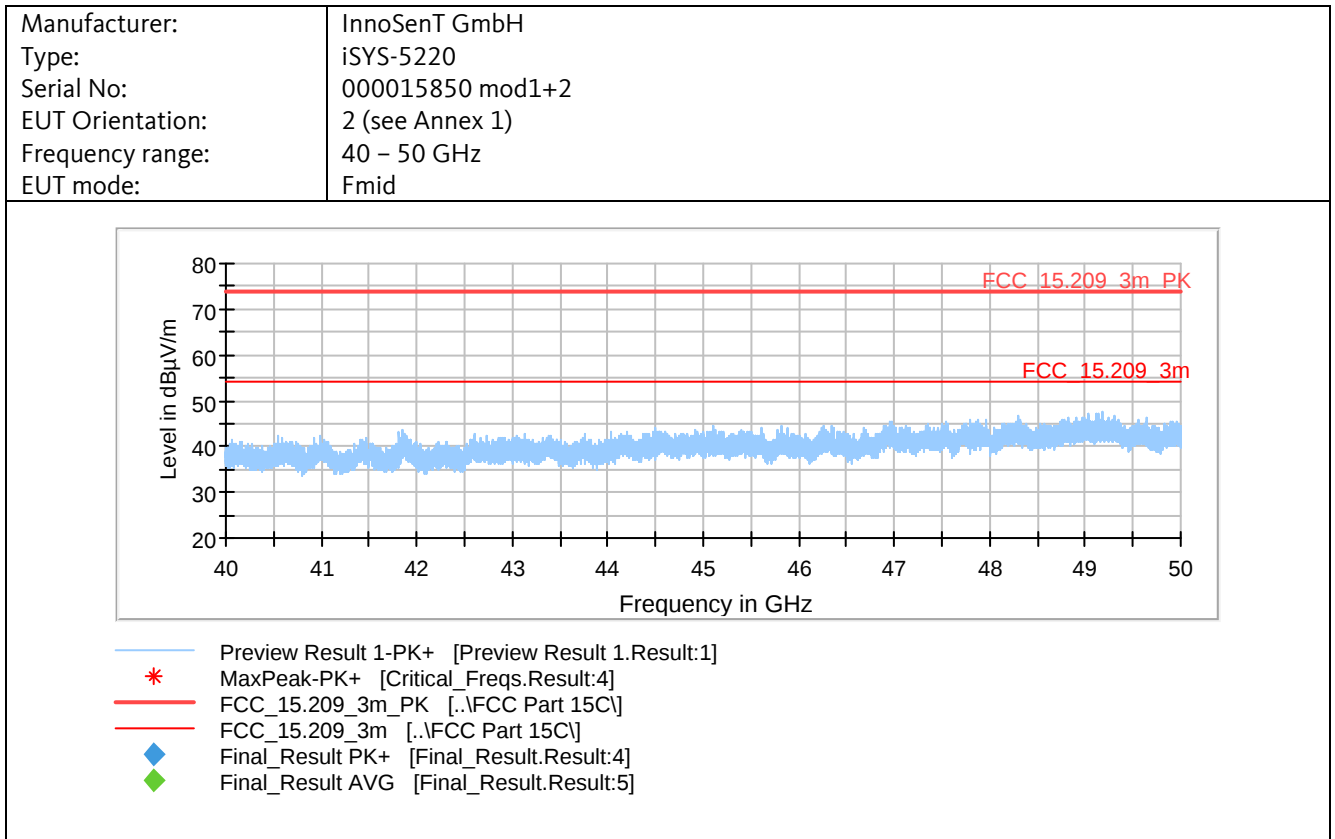

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

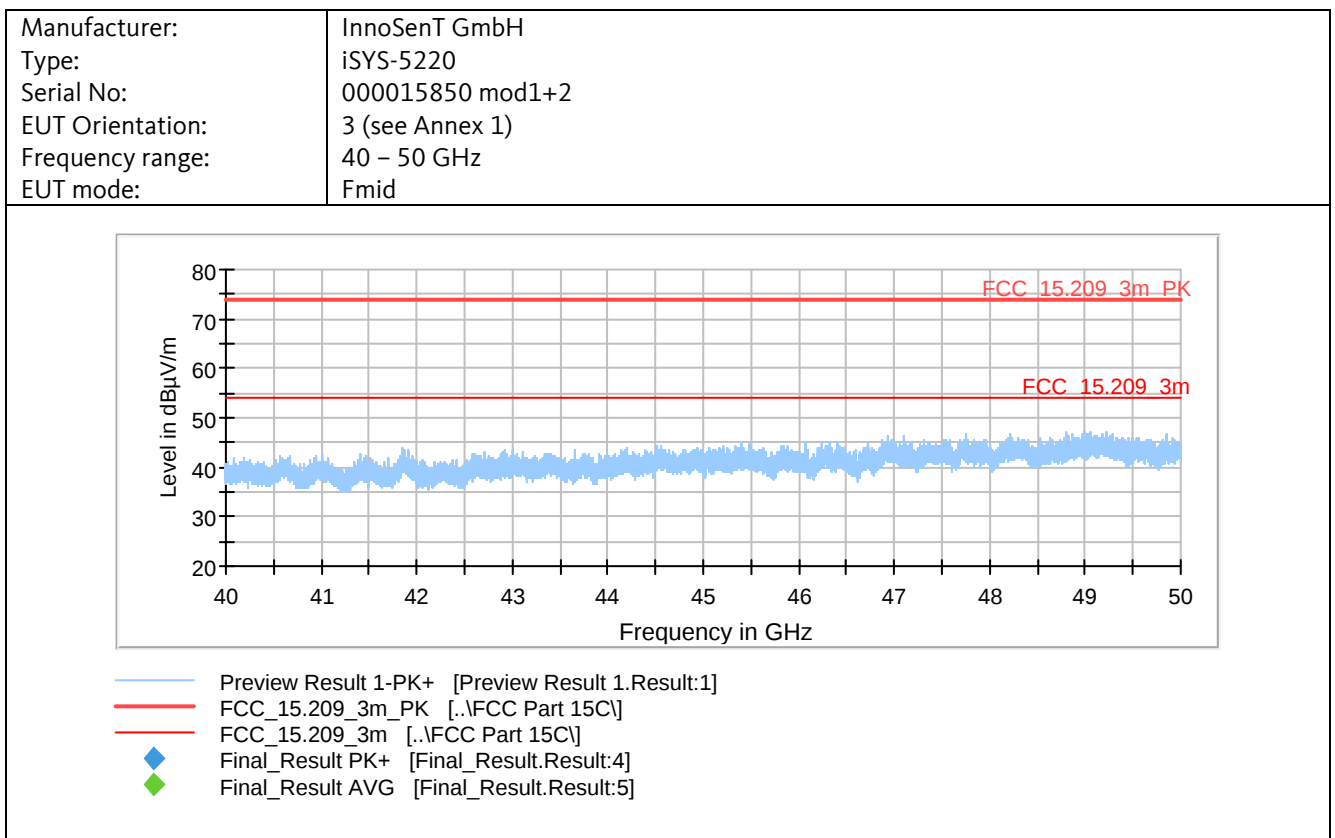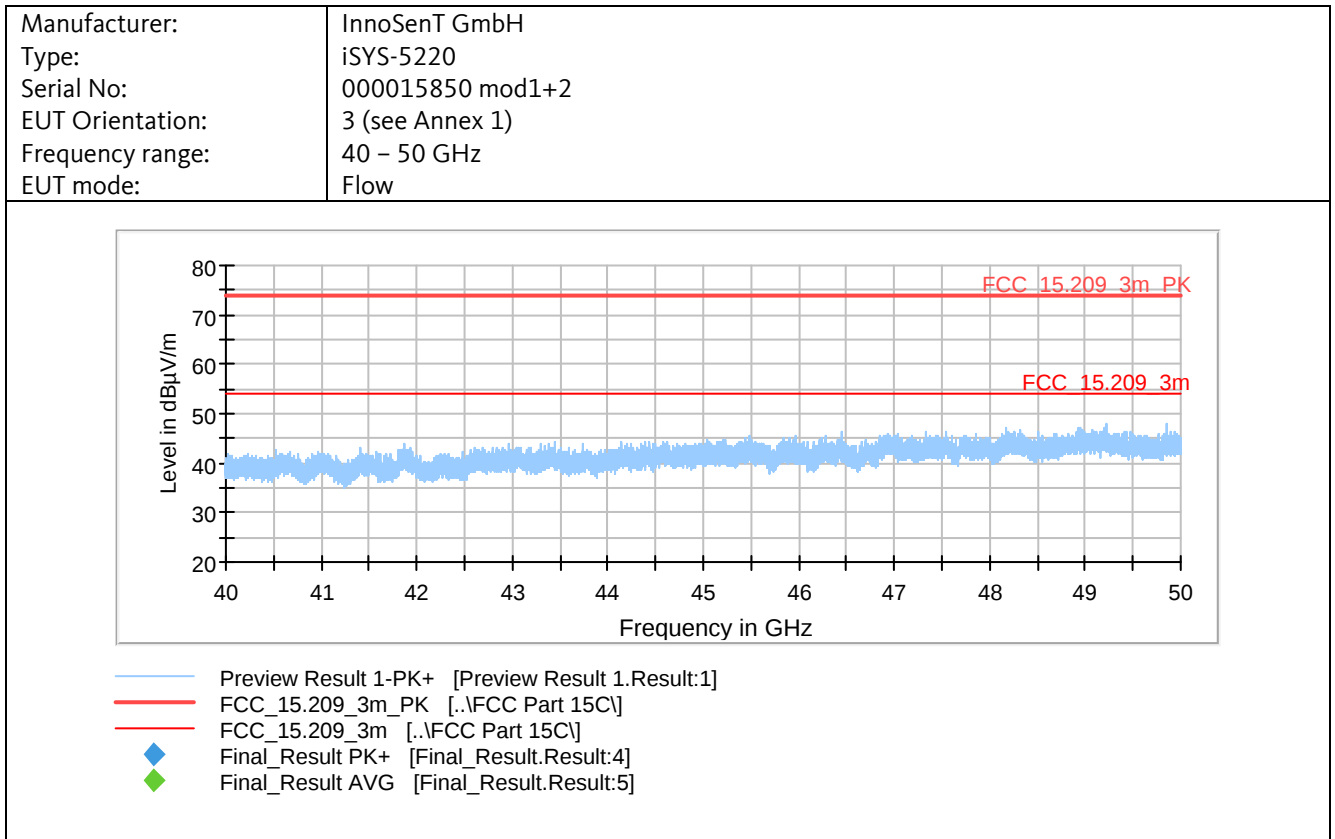

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

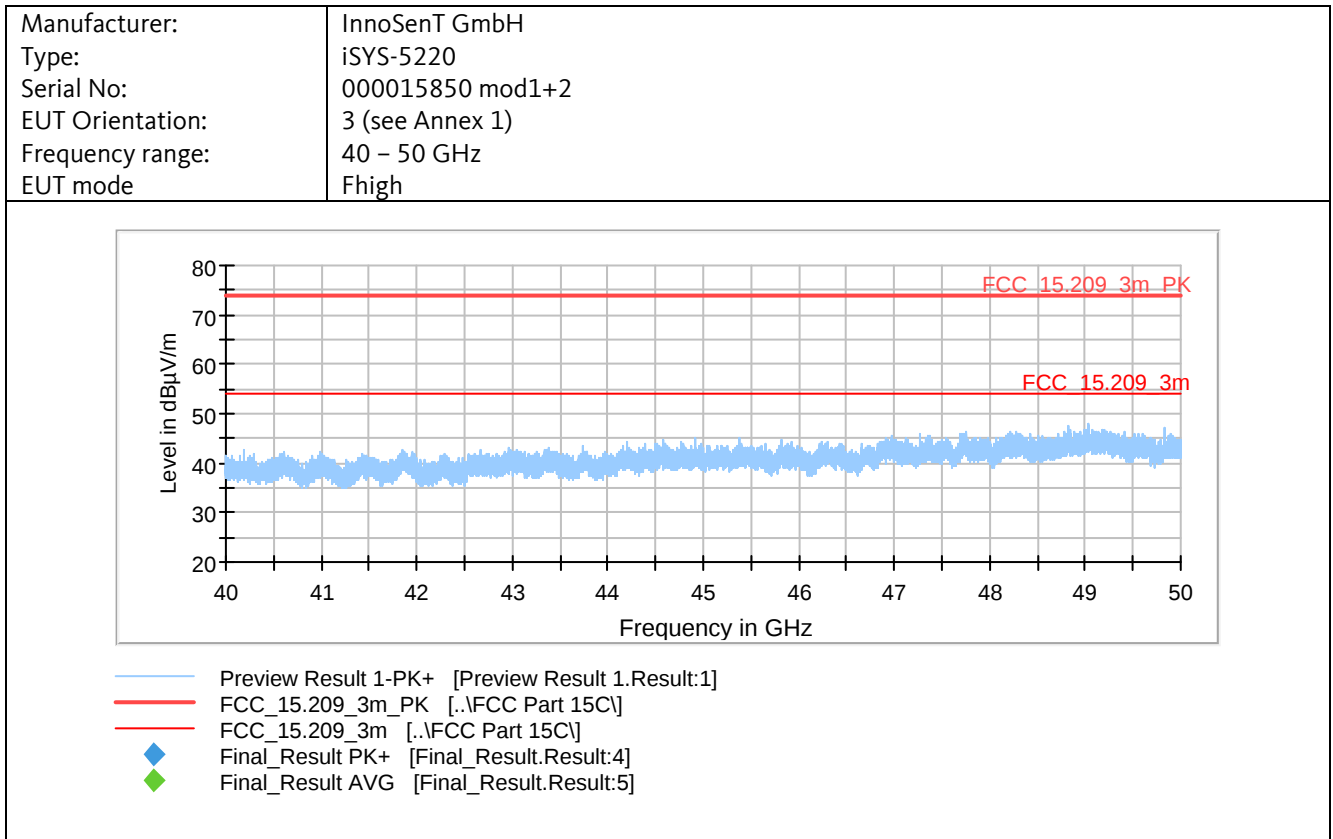

Final Result:

Frequency	MaxPeak	PK Limit	Average calculated ¹	Average Limit	Meas. Time	Bandwidth	Height	Pol	Azimuth	Corr.
MHz	dBμV/m	dBμV/m	dBμV/m	dBμV/m	ms	kHz	cm	--	deg	dB/m
24251.75	54.6	74	2.8	54	100	1000	155	H	-235	31.0
24317.58	54.5	74	2.8	54	100	1000	155	H	-35	31.0
23989.75	59.4	74	7.6	54	100	1000	175	H	-116	31.0
23989.65	55.8	74	4.0	54	100	1000	155	V	-46	31.0
24250.05	59.1	74	7.3	54	100	1000	155	V	-84	31.0

All tests performed at the distance denoted in chapter 4.4.8.1. The limit was adjusted to correspond with the test distance.

The table above contains worst-case emissions, only. For further details refer to the pre-scan test plot above.

Note 1: The average result is calculated from the Pk result with an average factor of -51.8 dB, according to chapter 4.3.4.

4.4.8.4 Test Result

Manufacturer: InnoSenT GmbH
Type: iSYS-5220
Serial No.: 000015850 mod1 / mod1+2
Test date: 2020-07-20/21, 2020-10-08
Test personnel: Ludwig Kraft

The EUT meets the requirements of this section.

4.4.9 Radiated Emissions 50 – 110 GHz

4.4.9.1 Test Procedures

ANSI C63.10-2013, 6.6.4.1 General

Subclauses 6.6.4.2 and 6.6.4.3 describe the procedures that shall be used for making exploratory and final radiated emission tests for frequencies above 1 GHz. Measurements may be performed at a distance closer than that specified in the requirements; however, an attempt shall be made to avoid making measurements in the near field of both the measurement antenna and the EUT for final measurements.

In performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity does not provide a noise floor more than 6 dB below the limit, then low-noise preamplifiers, closer test distances, higher gain antennas, or narrower bandwidths might be required. If closer measurement distances are used, then the beamwidth of the measurement antenna versus the size of the EUT shall be taken into account. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used [see item b) of 4.1.3]. The effects of using bandwidths different from those specified shall also be determined (see also 6.3). Any changes from the specific measurement conditions shall be described in the report of the measurements (see also Annex E).

Install an appropriate filter at the input of the measurement system power amplifier. This filter shall attenuate the fundamental emission of the EUT and allow an accurate measurement of the associated harmonics and spurious emissions. The filter shall be characterized, and any attenuation/loss factors shall be accounted for in the measurement results.

Data shall be recorded in peak and average detection up to the highest measurement frequency required (unless stated otherwise in the applicable requirements).

ANSI C63.10-2013, 6.6.4.2 Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

Preliminary tests shall be performed following the procedures in 6.3 on a site meeting the requirements of 5.2. For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

ANSI C63.10-2013, 6.6.4.3 Final radiated emissions measurements

The final measurements are performed on a site meeting the requirements of 5.2. Using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements per 6.6.4.2, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement. The final measurement shall follow all the procedures in 6.3 with the EUT operating on frequencies per 5.6. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

Measurements are performed with the EUT rotated from 0° to 360°; the antenna height scanned in accordance with 6.6.3.1, 6.6.3.2, or 6.6.3.3, as appropriate; and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Variations in cable or wire placement shall be explored to maximize the measured emissions.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

The emission signal shall be kept within the illumination area of the 3 dB beamwidth of the antenna so that the maximum emission from the EUT is measured. This may be achieved by either pointing the antenna at an angle toward the source of the emission or by testing the EUT as described in 6.6.3.3.

If the emission is pulsed, then refer to Annex C for guidelines on selecting bandwidth and determining pulse desensitization factors, as necessary.


As noted in 6.6.4.1, when performing these measurements, the sensitivity of the complete measurement system relative to the limit shall be determined before the test. If the overall measurement sensitivity is inadequate, then low-noise preamplifiers, closer measurement distances, higher gain antennas, or narrower bandwidths may be used. If closer measurement distances or higher gain antennas are used, then the beamwidth of the measurement antenna versus the physical size of the EUT shall be taken into account, so that the physical sizes of the EUT dimensions are encompassed by the beamwidth of the measurement antenna. Also, measurement system overload protection shall be determined to be adequate when preamplifiers are used. The effects on the measured emission value using bandwidths different from those specified shall be determined if such bandwidth changes are made. Any changes from the specific measurement conditions shall be described in the report of the measurements.

Unless specified otherwise by the regulatory authority, the instrumentation, detector functions, and bandwidths specified in 4.1.4.2.1 and 4.1.4.2.2 shall be used. For pulsed emissions, the procedure in 4.1.4.2.4 shall be used.

Radiated Emissions Test Characteristics	
Frequency range	50 GHz – 110 GHz
Test distance	Explorative measurement in close distance
Test instrumentation resolution bandwidth	1 MHz
Receive antenna height	1.5 m
Receive antenna polarization	Vertical/Horizontal
Measurement chamber	Fully anechoic chamber (FAC)

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.9.2 Test Setup

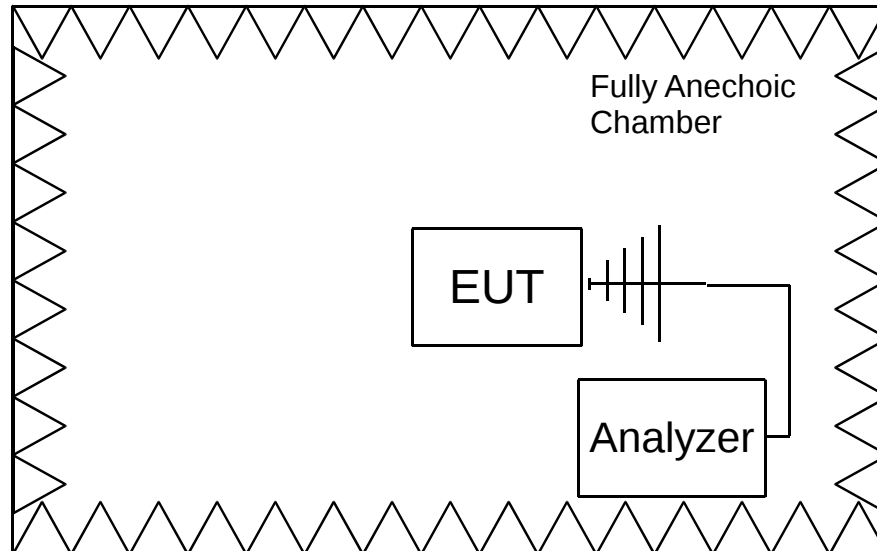

SCHEMATIC TEST SETUP

Requirement: 47 CFR, § 15.209
RSS-Gen 8.9
Procedure: ANSI C63.10-2013

Receiver: #3831
Antenna: #2591 (50 – 75 GHz)
#2600 (75 – 110 GHz)

Test distance: n/a


TEST EQUIPMENT USED:
Refer to chapter 5 of this document.
1441, 1546, 1548, 1798, 1799, 1800,
1868, 2112, 2114, 2591, 2594, 2597,
2600, 2696, 3831, 4717, 4721




Sample photo of setup

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

4.4.9.3 Detailed Test Data

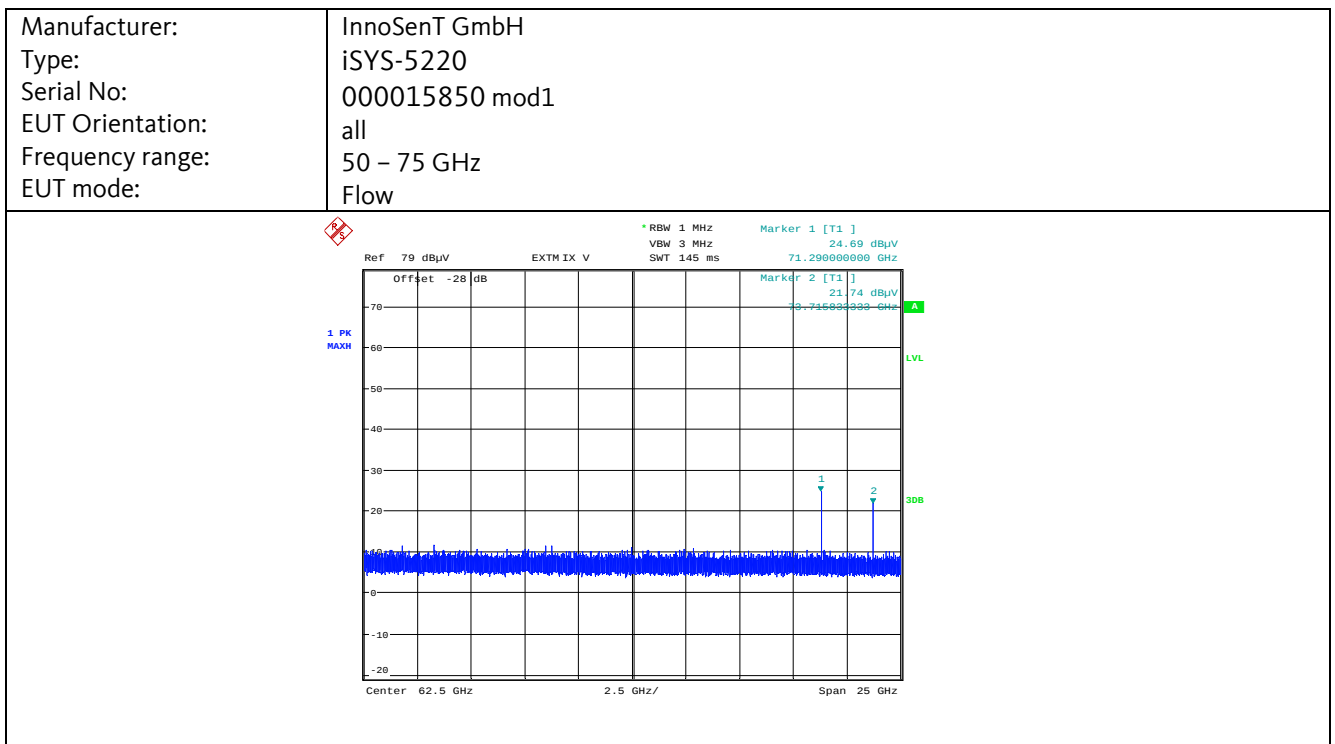


Note: prescan plot above is showing the measurement receiver's reading, only, without any transducer/correction factors applied. All emission detected were investigated use of SignalID-function to prove their validity. Both emission in the plot above were found to be measurement instrument mixing product and not caused by the EUT.

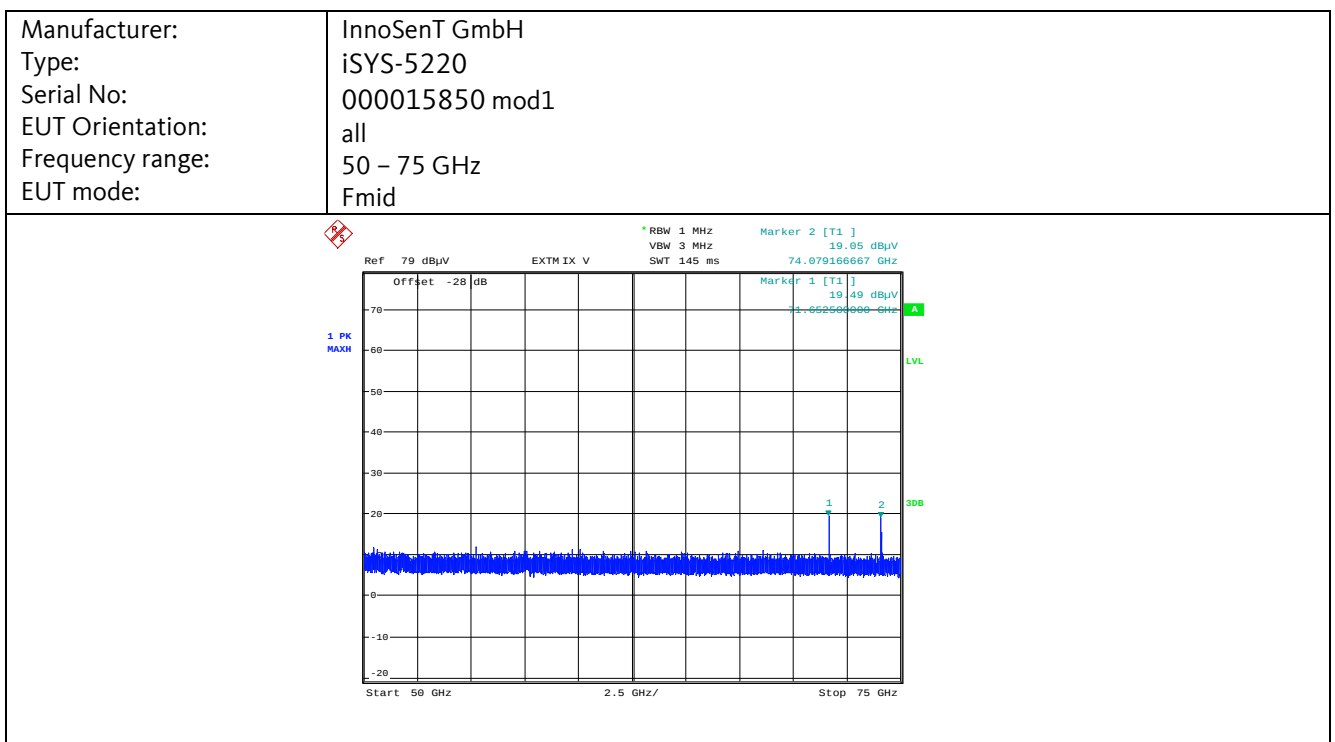


Note: prescan plot above is showing the measurement receiver's reading, only, without any transducer/correction factors applied. All emission detected were investigated use of SignalID-function to prove their validity. Both emission in the plot above were found to be measurement instrument mixing product and not caused by the EUT.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

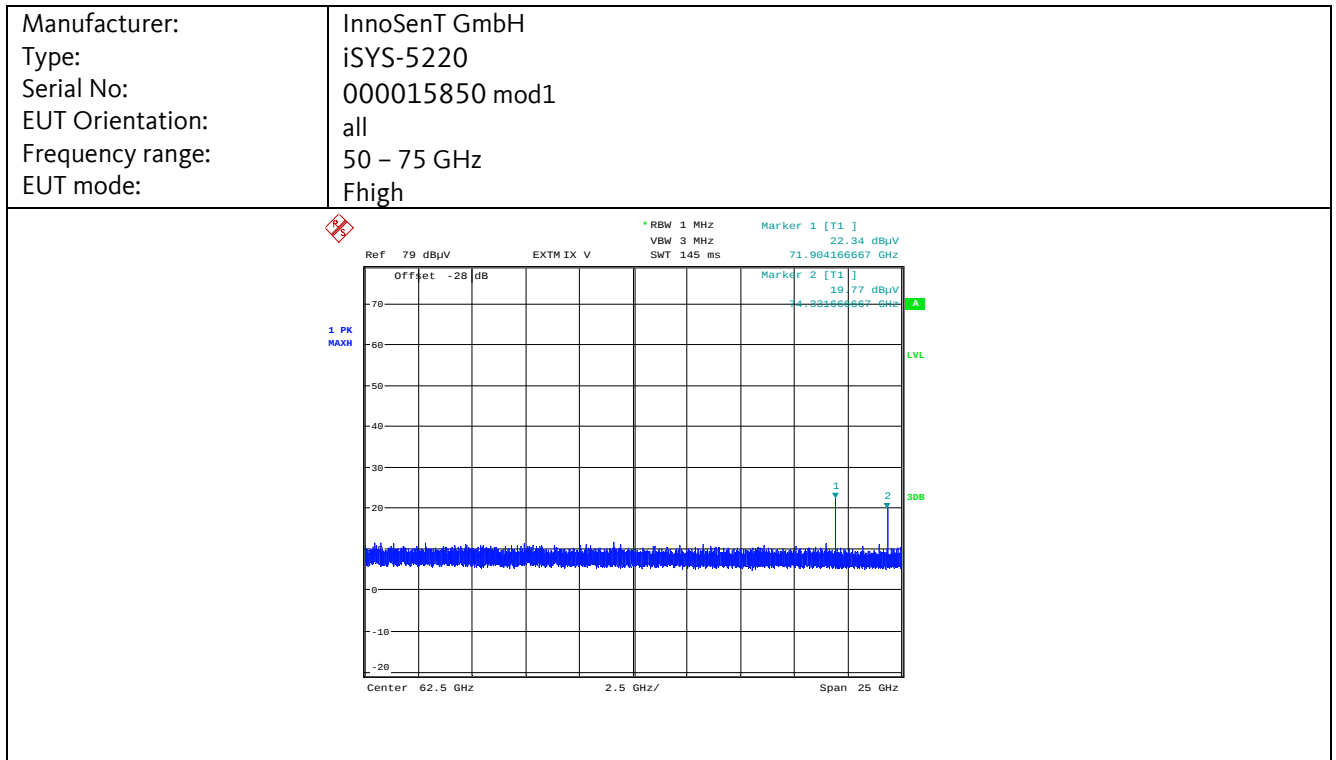


Note: prescan plot above is showing the measurement receiver's reading, only, without any transducer/correction factors applied. All emission detected were investigated use of SignalID-function to prove their validity. Both emission in the plot above were found to be measurement instrument mixing product and not caused by the EUT.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

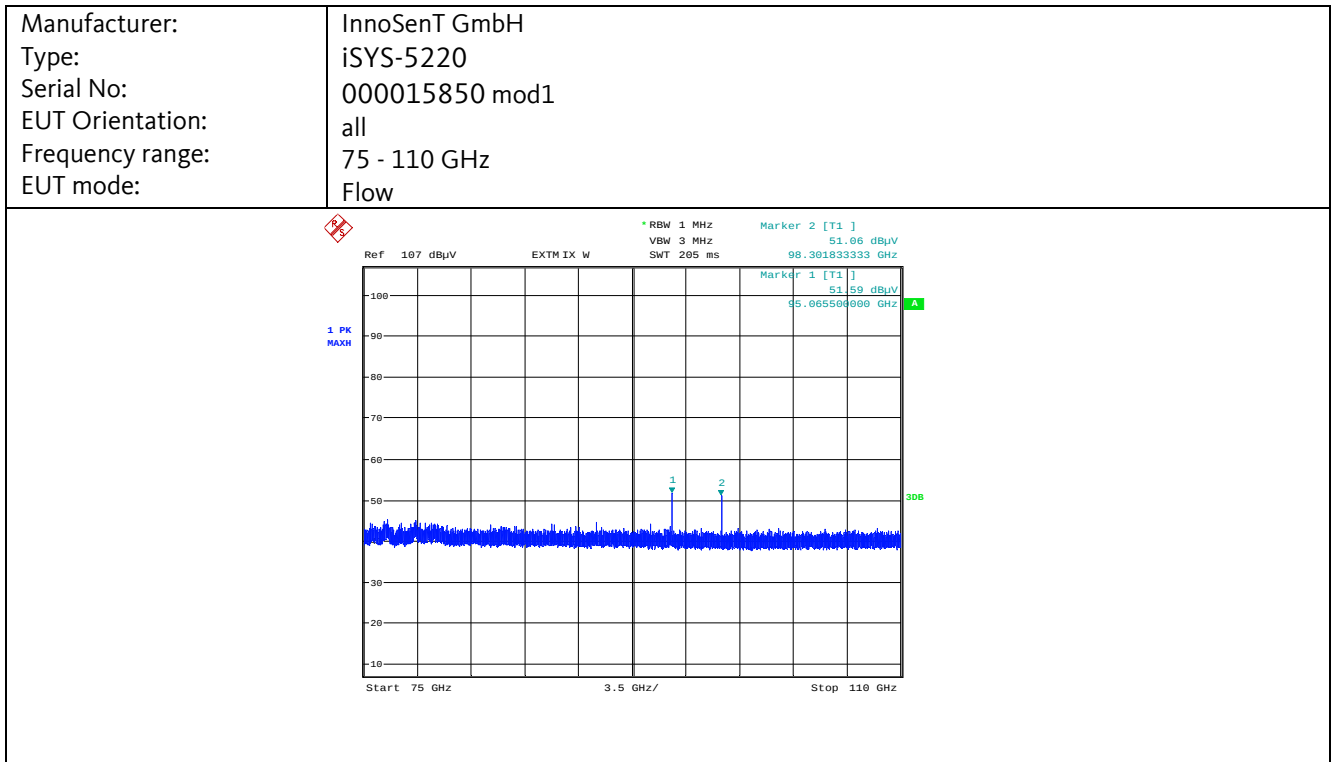


Note: prescan plot above is showing the measurement receiver's reading, only, without any transducer/correction factors applied. All emission detected were investigated use of SignalID-function to prove their validity. Both emission in the plot above were found to be measurement instrument mixing product and not caused by the EUT.

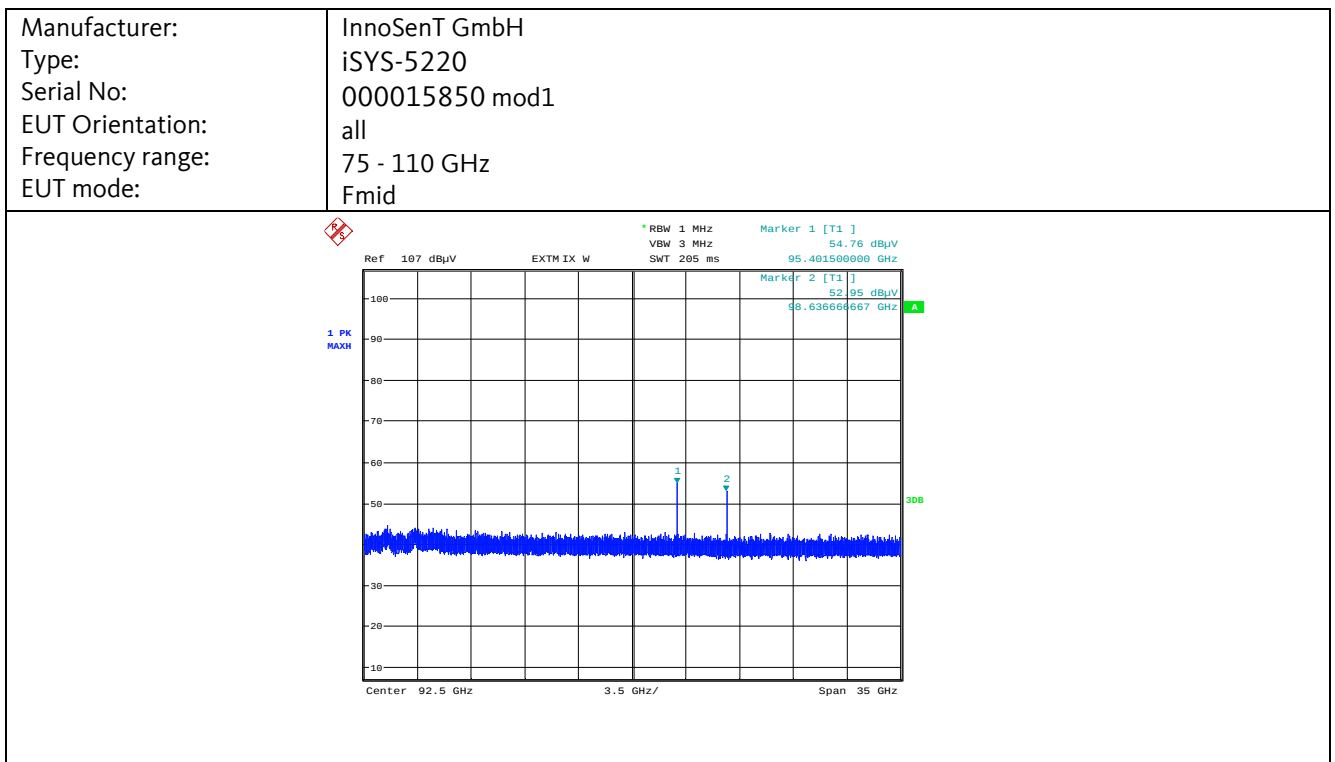

Note: prescan plot above is showing the measurement receiver's reading, only, without any transducer/correction factors applied. All emission detected were investigated use of SignalID-function to prove their validity. Both emission in the plot above were found to be measurement instrument mixing product and not caused by the EUT.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

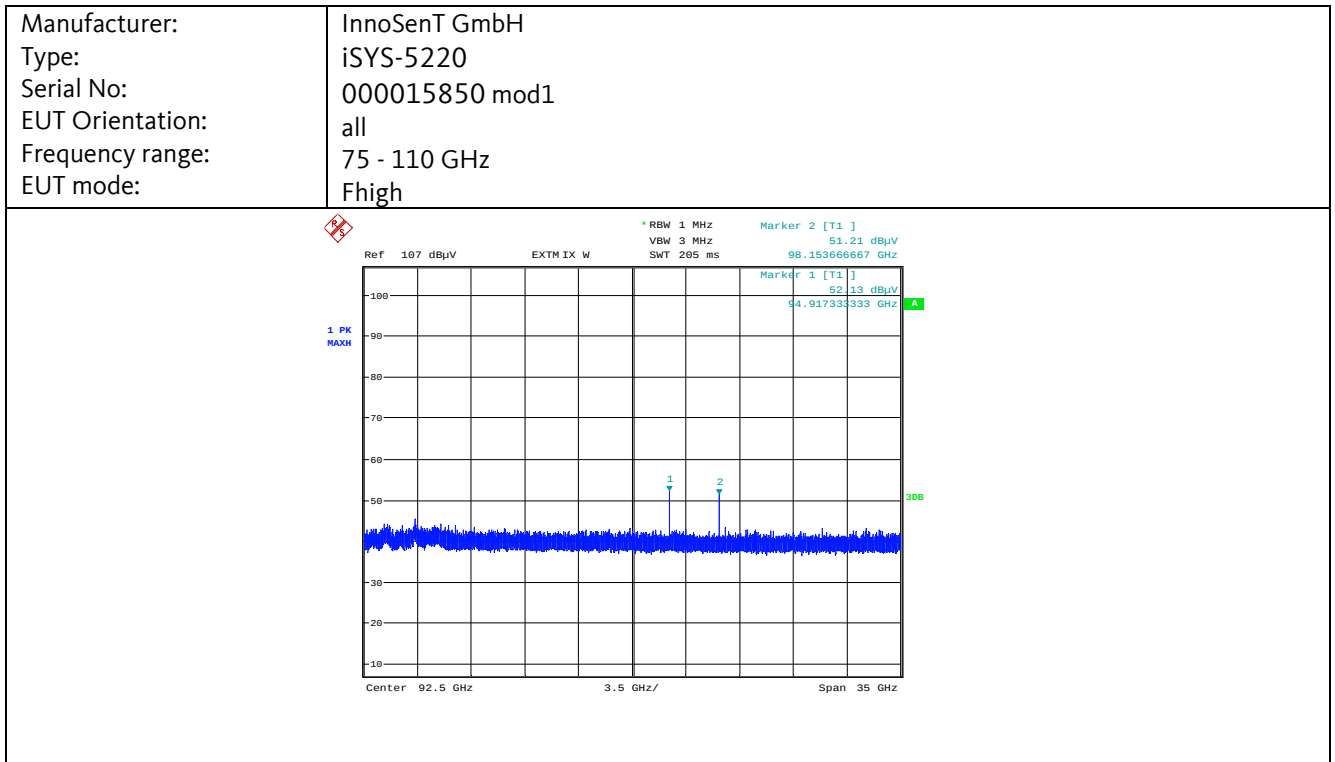

Note: prescan plot above is showing the measurement receiver's reading, only, without any transducer/correction factors applied. All emission detected were investigated use of SignalID-function to prove their validity. Both emission in the plot above were found to be measurement instrument mixing product and not caused by the EUT.

Final Result:

Frequency MHz	MaxPeak dBμV/m	Average dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol --	Azimuth deg	Corr. dB/m
No emission identified at exploratory radiated measurement. Therefore, no final measurement performed.										

The peak level of the noise of the exploratory prescan plots above is below the average limit..

4.4.9.4 Test Result

Manufacturer: InnoSenT GmbH
Type: iSYS-5220
Serial No.: 000015850 mod1
Test date: 2020-07-21/22
Test personnel: Ludwig Kraft

The EUT meets the requirements of this section.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

5 TEST INSTRUMENTS

EMCC ID #	Instrument	Manufacturer	Type	Last Cal.	Cal. valid until
1	60-Hz-Converter	AEG	DAMK4/DAGK4	n/a	n/a
55	N-Cable N/50	Rohde & Schwarz	HFU2-Z4	2020-10	2021-10
374	Loop Antenna	Rohde & Schwarz	HFH 2-Z2	2018-11	2021-02
516	EMI Test Receiver	Rohde & Schwarz	ESIB40	2019-04	2021-04
553	GPiB-140A	National Instruments	186135C-31	n/a	n/a
554	GPiB-140A	National Instruments	186135C-31	n/a	n/a
1229	Standard Gain Horn Antenna	Mid Century	MC 22/31B	2014-07	2024-07
1291	Antenna Mast	Frankonia	FAM4	n/a	n/a
1292	Multi Device Controller	Frankonia	FC02	n/a	n/a
1294	Multi Device Controller	Frankonia	FC03	n/a	n/a
1300	Standard Gain Horn Antenna	Mid Century	MC 20/31B	n/a	n/a
1301	Waveguide/SMAf-Adapter	GHz Gardena	K 173	n/a	n/a
1348	Wav./Kf/SMAf-Adap., R-band	fmi/pro nova	22093-KF20	n/a	n/a
1441	Precis.Var.Waveg.Attn.	FMI/Singer	2611	n/a	n/a
1470	V-LISN 50 ohms/(50uH+5ohms)	Rohde & Schwarz	ESH3-Z5	2019-10	2021-10
1519	Pulse Limiter	Rohde & Schwarz	ESH3-Z2 357.8810.52	2020-09	2021-09
1546	Waveguide Mixer	Rohde & Schwarz	FS-Z110/WM782W	n/a	n/a
1548	Waveguide Mixer	Rohde & Schwarz	FS-Z75/WM782V	n/a	n/a
1798	Tripler 90...120 GHz	VDI Virginia Diodes	WR9.3x3	n/a	n/a
1799	Tripler 60...90 GHz	Spacek Labs	AE-3X	n/a	n/a
1800	Doubler 40...60 GHz	Spacek Labs	AU-2X	n/a	n/a
1868	SR-ULL-03, Fully Anechoic Chamber (FAC)	EMCC/FRANKONIA		n/a	n/a
1889	SR-ULL-01, Semi-Anechoic Chamber (SAC)	EMCC/FRANK.	SAC-10	n/a	n/a
1890	SR-ULL-05, Absorber-Lined Shielded Chamber	EMCC / SIEM / FRANK	SC2-ULL	n/a	n/a
1901	V-LISN 50 Ohm/(50 uH + 5 Ohm)	Rohde & Schwarz	ESH2-Z5	2019-12	2020-12
2047	USB to GPIB adaptor	National Instruments	0-HS, 187965B-01	n/a	n/a
2048	USB to GPIB adaptor	National Instruments	GPIB-USB-HS, 187965B-01	n/a	n/a
2111	Tapered Transition	FMI/Pro NOVA	23000-24	n/a	n/a
2112	RF Power Meter	Hewlett-Packard	432 A	n/a	n/a
2113	Standard Gain Horn Antenna	FMI/Pro NOVA	2424-25	n/a	n/a
2114	Precis.Var.Waveg.Attn.	FMI/Tho	2411	n/a	n/a
2591	Standard Gain Horn Antenna	Electrof./Tho	WG25-25	n/a	n/a
2594	Precis.Var.Waveg.Attn.	Millitech	DRA-10-R0000	n/a	n/a

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

2597	Thermistor Mount	Millitech	THM-15-RF000	2015-08	2020-08
2600	Standard Gain Horn Antenna	Electrof./Tho	WG27-25	n/a	n/a
2696	Camera w. Change Cassette	Polaroid	600 SE	n/a	n/a
2720	Digital Multimeter	Agilent	U1241A	2019-04	2021-04
2724	5 W Attenuator 6dB	Weinschel	2	2019-07	2021-07
3061	K-Cable K/50	Insulated Wire	KPS-1501-600-KPS	n/a	n/a
3195	Notebook	Samsung	P560	n/a	n/a
3201	Peak Power Sensor	Boonton	57540	2019-06	2021-06
3235	Double Ridged Guide Antenna	Schwarzbeck	BBHA 9120D	2019-11	2021-11
3584	Digital Multimeter	Agilent	U1241A	2020-08	2022-08
3831	Spectrum Analyzer	Rohde & Schwarz	FSU50	2019-10	2020-10
3846	EMI Test Receiver	Rohde & Schwarz	ESU8	2020-03	2021-03
3857	RF Peak Power Meter	Boonton	4542	2020-09	2021-09
3968	50 GHz Cable, 2.4 mm	Insulated Wire	2PS-1401-250-2PS	n/a	n/a
4018	Notebook	Dell	Latitude E6430	n/a	n/a
4075	Workstation	Dell	Optiplex 7010	n/a	n/a
4524	Notebook	Dell	Latitude E6430	n/a	n/a
4697	Cable SMAmm	Huber & Suhner	Sucoflex 104	n/a	n/a
4717	Web-Thermo-Hygrobarograph	Wiesemann & Theis GmbH WUT	57613 Web-T/Rh/P	2020-02	2022-02
4721	DC Power Supply	Tektronix	PWS4205	n/a	n/a
4914	Adaptor, Waveguide to Coax	FLANN	23093-TF30 UG-383/U	n/a	n/a
5392	EMC Measurement Software V10.35.02	Rohde & Schwarz	EMC32	n/a	n/a
5535	Positioning controller	Rohde & Schwarz	HCC	n/a	n/a
5536	Rotary table	Rohde & Schwarz	HCT12	n/a	n/a
5544	Antenna Mast	innco systems GmbH	MA 5000-XPET	n/a	n/a
5545	Antenna Mast Controller	innco systems GmbH	CO 3000-1D	n/a	n/a
5551	BNC cable	EMCC	BNC003m0	n/a	n/a
5614	RF cable assembly	Rosenberger	LU8-002-1000	n/a	n/a
5616	RF cable assembly	Rosenberger	LA2-025-7000	n/a	n/a
5620	RF cable assembly	Rosenberger	LA2-001-2000	n/a	n/a
6041	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	2019-10	2021-10

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

6 MEASUREMENT UNCERTAINTY

Measurement	Measurement Uncertainty
Conducted Emissions, AC mains (150 kHz – 30 MHz)	±3.5 dB
Radiated Emissions below 1000 MHz	±5.6 dB
Radiated Emissions above 1000 MHz	±4.6 dB

The reported uncertainty values are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of 95%.

The given values have been calculated on the basis of the following documents:

CISPR 16-4-2:2011+A1:2014, Specification for radio disturbance and immunity measuring apparatus and methods - Part 4-2: Uncertainties, statistics and limit modeling - Measurement instrumentation uncertainty.

JCGM 100:2008, Evaluation of measurement data - Guide to the expression of uncertainty in measurement.

Test on InnoSenT GmbH iSYS-5220 to 47 CFR § 15.249 and RSS-210 Issue 10

7 LIST OF ANNEXES

The following annexes are separated parts from this test report.

Description	Pages
Annex 1: Photographs of test setup	8
Annex 2: External photographs of equipment under test	5
Annex 3: Photographs of ancillary equipment	4
Annex 4: RF Exposure evaluation	4