



|                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                |                                                           |                           |                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------|---------------------------|------------------------------------------------|
| <b>Test Report No.</b><br><i>Prüfbericht-Nr.:</i>                                                                                                                                                                                                                                                                                                                                                                                                          | <b>US245QTK.001 Rev.01</b>                                                     | <b>Order No.</b><br><i>Auftrags-Nr.:</i>                  | P01233817<br>234208189-20 | <b>Page 1 of 104</b><br><i>Seite 1 von 104</i> |
| <b>Client Reference No.:</b><br><i>Kunden-Referenz-Nr.:</i>                                                                                                                                                                                                                                                                                                                                                                                                | 2218280                                                                        | <b>Order date:</b><br><i>Auftragsdatum:</i>               | 2023-09-29                |                                                |
| <b>Client:</b><br><i>Auftraggeber:</i>                                                                                                                                                                                                                                                                                                                                                                                                                     | Hunter Douglas Window Fashions, Inc.<br>1 Duette Way<br>Broomfield CO 80020    |                                                           |                           |                                                |
| <b>Identification/ Type No.:</b><br><i>Bezeichnung / Typ-Nr</i>                                                                                                                                                                                                                                                                                                                                                                                            | Silent Curtain Motor/HD60G-PV                                                  |                                                           |                           |                                                |
| <b>Order content:</b><br><i>Auftrags-Inhalt:</i>                                                                                                                                                                                                                                                                                                                                                                                                           | Compliance Test Report<br>FCC ID: UXUMOTG3K & IC: 7316A-MOTG3K                 |                                                           |                           |                                                |
| <b>Test specification:</b><br><i>Prüfgrundlage</i>                                                                                                                                                                                                                                                                                                                                                                                                         | CFR 15.247<br>RSS-247 Issue 3                                                  |                                                           |                           |                                                |
| <b>Date of sample receipt:</b><br><i>Wareneingangsdatum:</i>                                                                                                                                                                                                                                                                                                                                                                                               | 6/21/2024                                                                      |                                                           |                           |                                                |
| <b>Test sample No:</b><br><i>Prüfmuster-Nr.:</i>                                                                                                                                                                                                                                                                                                                                                                                                           | SN: 010001/010027                                                              |                                                           |                           |                                                |
| <b>Testing period:</b><br><i>Prüfzeitraum</i>                                                                                                                                                                                                                                                                                                                                                                                                              | 6/24/2024 - 6/26/2024                                                          |                                                           |                           |                                                |
| <b>Place of testing:</b><br><i>Ort der Prüfung:</i>                                                                                                                                                                                                                                                                                                                                                                                                        | TUV Rheinland of North America Inc.<br>5015 Brandin Ct<br>Fremont CA 94538 USA |                                                           |                           |                                                |
| <b>Testing laboratory:</b><br><i>Prüflaboratorium</i>                                                                                                                                                                                                                                                                                                                                                                                                      | TUV Rheinland of North America, Inc.                                           |                                                           |                           |                                                |
| <b>Test result*:</b><br><i>Prüfergebnis*:</i>                                                                                                                                                                                                                                                                                                                                                                                                              | Pass                                                                           |                                                           |                           |                                                |
| <b>Tested by:</b><br><i>geprüft von:</i>                                                                                                                                                                                                                                                                                                                                                                                                                   | Isaac Aguilar                                                                  | <b>Authorized by:</b><br><i>genehmigt von:</i>            | Oswaldo Casorla           |                                                |
| <b>Date:</b> 10/2/2024<br><i>Datum:</i>                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                | <b>Issue Date:</b> 10/2/2024<br><i>Ausstellungsdatum:</i> |                           |                                                |
| <b>Position / Stellung:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                | Test Engineer                                                                  | <b>Position / Stellung:</b>                               | Expert                    |                                                |
| <b>Others /</b><br><i>Sonstiges:</i>                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                |                                                           |                           |                                                |
| <b>Condition of the test item at delivery:</b><br><i>Zustand des Prüfgegenstandes bei Anlieferung:</i>                                                                                                                                                                                                                                                                                                                                                     |                                                                                |                                                           |                           |                                                |
| <b>* Legend:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                           | P(ass) = passed a.m. test specification(s)                                     | F(ail) = failed a.m. test specification(s)                | N/A = not applicable      | N/T = not tested                               |
| <b>* Legende:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                          | P(ass) = entspricht o.g. Prüfgrundlage(n)                                      | F(ail) = entspricht nicht o.g. Prüfgrundlage(n)           | N/A = nicht anwendbar     | N/T = nicht getestet                           |
| <b>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</b><br><i>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</i> |                                                                                |                                                           |                           |                                                |

TÜV Rheinland of North America, Inc., 5015 Brandin Ct., Fremont, CA 94538, USA

Mail: info@us.tuv.com · Web: www.tuv.com/us

**Test report no.:** US245QTK.001 Rev.01  
**Prüfbericht-Nr.:**

Page 2 of 104  
 Seite 2 von 104

**Remarks**  
*Anmerkungen*

|   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | <p>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</p> <p>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</p> <p><i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</i></p> <p><i>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i></p>                                                           |
| 2 | <p>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</p> <p><i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</i></p> |
| 3 | <p>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</p> <p>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</p> <p><i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</i></p> <p><i>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 4 | <p>Electromagnetic Compatibility Test Report.</p> <p>The above product was found to be Compliant to the above test standard(s).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

**Test report no.:** US245QTK.001 Rev.01  
**Prüfbericht-Nr.:**

Page 3 of 104  
 Seite 3 von 104

**Product description**  
*Produktbeschreibung*

|   |                                                                   |                                                                                                                                           |
|---|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | <b>Product details:</b><br><i>Produktdetails:</i>                 | Bluetooth Low Energy wireless connected motor drive for windows shades                                                                    |
| 2 | <b>Dimensions / Weight:</b><br><i>Maße / Gewicht:</i>             | 10.16 x 6.35 x 30.48 cm <sup>3</sup>                                                                                                      |
| 3 | <b>Operating elements:</b><br><i>Bedienelemente:</i>              | 100 – 240 VAC/50 – 60 Hz; 1.6A                                                                                                            |
| 4 | <b>Equipment / Accessories:</b><br><i>Ausstattung / Zubehör:</i>  | --                                                                                                                                        |
| 5 | <b>Used materials:</b><br><i>Verwendete Materialien:</i>          | --                                                                                                                                        |
| 6 | <b>Other:</b><br><i>Sonstiges:</i>                                | Test sample(s), as well sample information, description, product details and intended usage was provided by customer.                     |
| 7 | <b>Test sample obtaining:</b><br><i>Prüfmusterbereitstellung:</i> | <input type="checkbox"/> Sending by customer <input type="checkbox"/> Sampling by TÜV Rheinland Group<br><input type="checkbox"/> others: |

[illegible]

Note: Latest revision report will replace all previous reports.

## Table of Contents

|          |                                                                           |           |
|----------|---------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Executive Summary.....</b>                                             | <b>10</b> |
| 1.1      | Scope.....                                                                | 10        |
| 1.2      | Purpose.....                                                              | 10        |
| 1.3      | Summary of Test Results.....                                              | 11        |
| 1.4      | Special Accessories.....                                                  | 11        |
| 1.5      | Equipment Modifications.....                                              | 11        |
| <b>2</b> | <b>Laboratory Information.....</b>                                        | <b>12</b> |
| 2.1.1    | US Federal Communications Commission, US1131 .....                        | 12        |
| 2.1.2    | NIST / A2LA, Testing Cert #3331.02.....                                   | 12        |
| 2.1.3    | Canada – Innovation, Science and Economic Development (ISED), 2932D ..... | 12        |
| 2.1.4    | Japan – VCCI.....                                                         | 12        |
| 2.1.5    | Acceptance by Mutual Recognition Arrangement.....                         | 12        |
| 2.1.6    | BSMI .....                                                                | 13        |
| 2.1.7    | Korea .....                                                               | 13        |
| 2.2      | Test Facilities.....                                                      | 13        |
| 2.2.1    | Emission Test Facility .....                                              | 13        |
| 2.3      | Measurement Uncertainty.....                                              | 13        |
| 2.3.1    | Sample Calculation – radiated & conducted emissions .....                 | 14        |
| 2.3.2    | Measurement Uncertainty.....                                              | 14        |
| 2.3.3    | Measurement Uncertainty Immunity .....                                    | 15        |
| 2.4      | Calibration Traceability.....                                             | 15        |
| <b>3</b> | <b>EMC Test Plan.....</b>                                                 | <b>16</b> |
| 3.1      | Introduction.....                                                         | 16        |
| 3.2      | Customer Information.....                                                 | 16        |
| 3.3      | Equipment Under Test (EUT) .....                                          | 17        |
| <b>4</b> | <b>Product Information.....</b>                                           | <b>19</b> |
| 4.1      | Product Description .....                                                 | 19        |
| 4.2      | Equipment Configuration .....                                             | 19        |
| 4.3      | Operating Mode .....                                                      | 19        |
| 4.4      | Unique Antenna Connector.....                                             | 19        |
| 4.4.1    | Results .....                                                             | 19        |
| 4.4.2    | Duty Cycle .....                                                          | 20        |
| 4.4.3    | Results .....                                                             | 20        |
| <b>5</b> | <b>Emissions .....</b>                                                    | <b>21</b> |
| 5.1      | Output Power Requirements .....                                           | 21        |
| 5.1.1    | Test Method .....                                                         | 21        |
| 5.1.2    | Results .....                                                             | 22        |
| 5.1.3    | Analyzer Data .....                                                       | 23        |

|            |                                                                                        |           |
|------------|----------------------------------------------------------------------------------------|-----------|
| 5.1.3.1    | Output Power .....                                                                     | 23        |
| <b>5.2</b> | <b>Occupied Bandwidth (Emission Bandwidth) and DTS Bandwidth (X dB bandwidth).....</b> | <b>26</b> |
| 5.2.1      | Test Method .....                                                                      | 26        |
| 5.2.2      | Results .....                                                                          | 27        |
| 5.2.3      | Analyzer Data .....                                                                    | 28        |
| 5.2.3.1    | 6 dB Occupied Bandwidth: 1 Mbps .....                                                  | 28        |
| 5.2.3.2    | 99% Occupied Bandwidth: 1 Mbps .....                                                   | 29        |
| 5.2.3.3    | 6 dB Occupied Bandwidth: 2 Mbps .....                                                  | 31        |
| 5.2.3.4    | 99% Occupied Bandwidth: 2 Mbps .....                                                   | 32        |
| <b>5.3</b> | <b>Peak Power Spectral Density .....</b>                                               | <b>34</b> |
| 5.3.1      | Test Method .....                                                                      | 34        |
| 5.3.2      | Results .....                                                                          | 35        |
| 5.3.3      | Analyzer Data .....                                                                    | 36        |
| 5.3.3.1    | Power Spectral Density: 1 Mbps .....                                                   | 36        |
| 5.3.3.2    | Power Spectral Density: 2 Mbps .....                                                   | 37        |
| <b>5.4</b> | <b>Out of Band Emissions: Non-Restricted Band .....</b>                                | <b>39</b> |
| 5.4.1      | Test Method .....                                                                      | 39        |
| 5.4.2      | Results .....                                                                          | 40        |
| 5.4.3      | Analyzer Data .....                                                                    | 41        |
| 5.4.3.1    | Conducted Bandedge: 1 Mbps .....                                                       | 41        |
| 5.4.3.2    | Conducted Bandedge: 2 Mbps .....                                                       | 42        |
| 5.4.3.3    | Conducted Spurious Emission: 1 Mbps .....                                              | 43        |
| 5.4.3.4    | Conducted Spurious Emission: 2 Mbps .....                                              | 44        |
| <b>5.5</b> | <b>Transmit Spurious Emissions .....</b>                                               | <b>46</b> |
| 5.5.1      | Test Methodology .....                                                                 | 46        |
| 5.5.1.1    | Preliminary Test .....                                                                 | 46        |
| 5.5.1.2    | Final Test .....                                                                       | 46        |
| 5.5.1.3    | Deviations .....                                                                       | 46        |
| 5.5.2      | Transmitter Spurious Emission Limit .....                                              | 47        |
| 5.5.3      | Test Results .....                                                                     | 47        |
| 5.5.3.1    | Bandedge Data .....                                                                    | 48        |
| 5.5.3.2    | Bandedge Data .....                                                                    | 49        |
| 5.5.3.3    | Transmitter Spurious Emissions: 9 kHz – 30 MHz .....                                   | 50        |
| 5.5.3.4    | Transmitter Spurious Emissions: 30 MHz – 1000 MHz .....                                | 51        |
| 5.5.3.5    | Transmitter Spurious Emissions: 1 GHz – 18 GHz .....                                   | 57        |
| 5.5.3.6    | Transmitter Spurious Emissions: 18 GHz – 26.5 GHz .....                                | 63        |
| 5.5.4      | Analyzer Data .....                                                                    | 65        |
| 5.5.4.1    | Restricted Band 2310 – 2390 MHz – Bandedge .....                                       | 65        |
| 5.5.4.2    | Restricted Band 2483.5 – 2500 MHz – Bandedge .....                                     | 66        |
| 5.5.4.3    | Spurious Emissions 9 kHz to 30 MHz .....                                               | 67        |
| 5.5.4.4    | Spurious Emissions 30 MHz to 1000 MHz .....                                            | 68        |
| 5.5.4.5    | Spurious Emissions 1 GHz to 18 GHz .....                                               | 71        |
| 5.5.4.6    | Spurious Emissions 18 GHz to 26.5 GHz .....                                            | 74        |
| <b>5.6</b> | <b>AC Conducted Emissions .....</b>                                                    | <b>76</b> |
| 5.6.1      | Test Methodology .....                                                                 | 76        |
| 5.6.2      | Deviations .....                                                                       | 76        |
| 5.6.3      | Test Results .....                                                                     | 76        |
| 5.6.4      | Test Data .....                                                                        | 77        |

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 7 of 104  
Seite 7 von 104

|          |                                                            |           |
|----------|------------------------------------------------------------|-----------|
| 5.6.4.1  | Conducted Emissions – 1 Mbps .....                         | 77        |
| 5.6.5    | Analyzer Data .....                                        | 79        |
| 5.6.5.1  | Conducted Emissions – 1 Mbps .....                         | 79        |
| <b>6</b> | <b>Test Equipment List.....</b>                            | <b>80</b> |
| 6.1      | Equipment List.....                                        | 80        |
| 6.2      | Testing Software.....                                      | 80        |
| <b>7</b> | <b>Appendix: Test Setup Photos.....</b>                    | <b>82</b> |
| 7.1      | Conducted Tests.....                                       | 82        |
| 7.2      | Radiated Emissions .....                                   | 82        |
| 7.3      | AC Conducted Emissions .....                               | 86        |
| <b>8</b> | <b>Appendix: Equipment Under Test (EUT) Photos.....</b>    | <b>88</b> |
| <b>9</b> | <b>Appendix: Equipment Under Test Internal Photos.....</b> | <b>93</b> |

|                                                                                     |    |
|-------------------------------------------------------------------------------------|----|
| <b>Table 1:</b> Summary of Test Results .....                                       | 11 |
| <b>Table 2:</b> Customer Information .....                                          | 16 |
| <b>Table 3:</b> Technical Contact Information .....                                 | 16 |
| <b>Table 4:</b> EUT Specifications .....                                            | 17 |
| <b>Table 5:</b> EUT Test Samples .....                                              | 18 |
| <b>Table 6:</b> Power Setting/Specification .....                                   | 18 |
| <b>Table 7:</b> General Product Information .....                                   | 18 |
| <b>Table 8:</b> Electrical Power Type .....                                         | 18 |
| <b>Table 9:</b> EUT Interface/Port Specifications .....                             | 18 |
| <b>Table 10:</b> Test Results – Duty Cycle .....                                    | 20 |
| <b>Table 11:</b> Test Results – RF Output Power at the Antenna Port .....           | 22 |
| <b>Table 12:</b> Test Results – Occupied Bandwidth .....                            | 27 |
| <b>Table 13:</b> Test Results – Peak Power Spectral Density .....                   | 35 |
| <b>Table 14:</b> Test Results – Emissions at Antenna Port .....                     | 40 |
| <b>Table 15:</b> Bandedge: Restricted band 2310 MHz to 2390 MHz .....               | 48 |
| <b>Table 16:</b> Bandedge: Restricted band 2483.5MHz to 2500MHz .....               | 49 |
| <b>Table 17:</b> Transmit Spurious Emission 9 kHz – 30 MHz – 2480 MHz, 2 Mbps ..... | 50 |
| <b>Table 18:</b> Transmit Spurious Emission 30 – 1000 MHz – 2402 MHz, 1Mbps .....   | 51 |
| <b>Table 19:</b> Transmit Spurious Emission 30 – 1000 MHz – 2442 MHz, 1 Mbps .....  | 52 |
| <b>Table 20:</b> Transmit Spurious Emission 30 – 1000 MHz – 2480 MHz, 1Mbps .....   | 53 |
| <b>Table 21:</b> Transmit Spurious Emission 30 – 1000 MHz – 2402 MHz, 2 Mbps .....  | 54 |
| <b>Table 22:</b> Transmit Spurious Emission 30 – 1000 MHz – 2442 MHz, 2 Mbps .....  | 55 |
| <b>Table 23:</b> Transmit Spurious Emission 30 – 1000 MHz – 2480 MHz, 2 Mbps .....  | 56 |
| <b>Table 24:</b> Transmit Spurious Emission 1 – 18 GHz – 2402 MHz, 1Mbps .....      | 57 |
| <b>Table 25:</b> Transmit Spurious Emission 1 – 18 GHz – 2442 MHz, 1Mbps .....      | 58 |
| <b>Table 26:</b> Transmit Spurious Emission 1 – 18 GHz – 2480 MHz, 1 Mbps .....     | 59 |
| <b>Table 27:</b> Transmit Spurious Emission 1 – 18 GHz – 2402MHz, 2 Mbps .....      | 60 |
| <b>Table 28:</b> Transmit Spurious Emission 1 – 18 GHz – 2442MHz, 2Mbps .....       | 61 |
| <b>Table 29:</b> Transmit Spurious Emission 1 – 18 GHz – 2480 MHz, 2 Mbps .....     | 62 |
| <b>Table 30:</b> Transmit Spurious Emission 18 – 26.5 GHz – 2480 MHz, 1 Mbps .....  | 63 |
| <b>Table 31:</b> Transmit Spurious Emission 18 – 26.5 GHz – 2480 MHz, 2 Mbps .....  | 64 |

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 9 of 104  
Seite 9 von 104

|                                                               |    |
|---------------------------------------------------------------|----|
| <b>Table 32:</b> Conducted Emission – 2480 MHz, Line .....    | 77 |
| <b>Table 33:</b> Conducted Emissions – 2402 MHz, Neutral..... | 78 |
| <b>Table 34:</b> Equipment List.....                          | 80 |
| <b>Table 35:</b> Testing Software .....                       | 80 |

## 1 Executive Summary

### 1.1 Scope

This report is intended to document the status of conformance with the requirements of CFR 15.247 & RSS-247 Issue 3, based on the results of testing performed on 6/24/2024 to 6/26/2024 on HD60G-PV manufactured by Hunter Douglas Window Fashions, Inc.. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

### 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 2400 MHz to 2483.5 MHz frequency band is covered in this document.

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 11 of 104  
Seite 11 von 104

### 1.3 Summary of Test Results

Table 1: Summary of Test Results

| Test                                                                                                                                                                                                                                       | Test Method<br>ANSI C63.10: 2013                                             | Worst Case<br>(Measured)      | Result    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|-------------------------------|-----------|
| Spurious Emission in Transmitted Mode                                                                                                                                                                                                      | CFR47 15.209, CFR47 15.247 (d)<br>RSS-Gen section 8.9<br>RSS-247 Section 5.5 | 46.99 dBμV/m<br>@ 7206.74 MHz | Complied  |
| Restricted Bands of Operation                                                                                                                                                                                                              | CFR47 15.205<br>RSS-Gen Section 8.10                                         | 46.99 dBμV/m<br>@ 7206.74 MHz | Complied  |
| AC Power Conducted Emission                                                                                                                                                                                                                | CFR47 15.207<br>RSS-Gen Section 8.8                                          | 28.85 dBμV<br>@ 544.7 kHz     | N/A       |
| Occupied Bandwidth                                                                                                                                                                                                                         | CFR47 15.247 (a)<br>RSS-247 Section 5.2 a)                                   | 0.707MHz<br>@ 2402 MHz        | Complied  |
| Emissions Bandwidth                                                                                                                                                                                                                        | RSS-Gen Section 6.7                                                          | 2.09 MHz<br>@ 2402 MHz        | Complied  |
| Maximum Output Power                                                                                                                                                                                                                       | CFR47 15.247 (b)<br>RSS-247 Section 5.4 d)                                   | 4.48 dBm/2.81mW<br>@ 2480 MHz | Complied  |
| Peak Power Spectral Density                                                                                                                                                                                                                | CFR47 15.247 (e),<br>RSS-247 Section 5.2 (b)                                 | -11.42 dBm/3kHz<br>@ 2402MHz  | Complied  |
| Out of Band Emission                                                                                                                                                                                                                       | CFR47 15.247 (d)<br>RSS-247 Section 5.5                                      | -53.02 dBm<br>@ 25184 MHz     | Complied  |
| RF Exposure                                                                                                                                                                                                                                | CFR47 15.247 (i), 2.1093<br>RSS-102 Issue 6                                  | Note 2, 3                     | Note 2, 3 |
| <b>Note:</b><br>1. This test report covers 2400 MHz to 2483.5 MHz band.<br>2. FCC RF Exposure evaluation is covered in a separate report (US24PCQR 001).<br>3. ISED RF Exposure evaluation is covered in a separate report (US243GEF.001). |                                                                              |                               |           |

### 1.4 Special Accessories

None

### 1.5 Equipment Modifications

None

## 2 Laboratory Information

### 2.1.1 US Federal Communications Commission, US1131



TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont Ca., 94538, are recognized by the Commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Pleasanton Registration No. US1131, Fremont Registration No. US1131). The laboratory Scopes of Accreditation include Title 47 CFR Parts 15, 18 and 90. The accreditations are updated every three years.

### 2.1.2 NIST / A2LA, Testing Cert #3331.02



TUV Rheinland of North America EMC test facilities are accredited by the American Association for Laboratory Accreditation (A2LA). The laboratories have been assessed and accredited by A2LA in accordance with ISO Standard 17025:2017 (Testing Certificate #3331.02). The Scope of Laboratory Accreditation includes emission and immunity testing. The accreditations are updated annually.

### 2.1.3 Canada – Innovation, Science and Economic Development (ISED), 2932D



Innovation, Science and  
Economic Development Canada

Innovation, Sciences et  
Développement économique Canada

The Fremont 10-meter Semi-Anechoic Chamber, Registration No. 2932D, has been accepted by ISED to perform testing to 3 and 10 meters based on the test procedures described in ANSI C63.4-2014.

### 2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct. Fremont Ca., 94538, have been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Fremont: A-409

### 2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TÜV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

## 2.1.6 BSMI

Registration No.: SL2-IN-E-1150R. The BSMI accreditation was obtained by NIST MRA with the BSMI

## 2.1.7 Korea

(Designation No.: US0185). Recognized by National Radio Research Agency (RRA) as an accredited Conformity Assessment Body (CAB) under the terms for Korea Phase I of the APEC TEL.

## 2.2 Test Facilities

Test facilities are located at 5015 Brandin Ct, Fremont, California, 94538, USA and 1279 Quarry Lane, Pleasanton, California 94566, USA (Fremont is the Pleasanton Annex).

### 2.2.1 Emission Test Facility

The Semi-Anechoic Chambers and AC Line Conducted measurement facilities used to collect radiated and conducted emissions data have been constructed in accordance with ANSI C63.7:1992. The Fremont 10-meter semi-anechoic chamber has been measured in accordance with and verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2014 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04), at test distances of 3 and 10 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02). The Pleasanton 5-meter semi-anechoic chamber has been verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2009 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04) at a test distance of 3 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02).

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> Edition, 1995.

*The Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

*The Expanded Uncertainty* defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurement and the fraction may be viewed as the coverage probability or level of confidence of the interval.

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 14 of 104  
Seite 14 von 104

### 2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBμV/m)

$$25 \text{ dB}\mu\text{V/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dB}\mu\text{V/m}$$

### 2.3.2 Measurement Uncertainty

| Per CISPR 16-4-2                               | U <sub>lab</sub> | U <sub>usp</sub> |
|------------------------------------------------|------------------|------------------|
| <b>Radiated Disturbance @ 10 meters</b>        |                  |                  |
| 30 – 1,000 MHz                                 | 2.25 dB          | 4.51 dB          |
| <b>Radiated Disturbance @ 5 meters</b>         |                  |                  |
| 30 – 1,000 MHz                                 | 2.26 dB          | 4.52 dB          |
| 1 – 6 GHz                                      | 2.12 dB          | 4.25 dB          |
| 6 – 18 GHz                                     | 2.47 dB          | 4.93 dB          |
| <b>Conducted Disturbance @ Mains Terminals</b> |                  |                  |
| 150 kHz – 30 MHz                               | 1.09 dB          | 2.18 dB          |
| <b>Disturbance Power</b>                       |                  |                  |
| 30 MHz – 300 MHz                               | 3.92 dB          | 4.3 dB           |

#### Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is ± 5.0%.

Per CISPR 16-4-2  
Methods

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 15 of 104  
Seite 15 von 104

### 2.3.3 Measurement Uncertainty Immunity

|                                                                                                           |                   |
|-----------------------------------------------------------------------------------------------------------|-------------------|
| The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$ .                | Per IEC 61000-4-2 |
| The estimated combined standard uncertainty for radiated immunity measurements is $\pm 4.10$ dB.          | Per IEC 61000-4-3 |
| The estimated combined standard uncertainty for conducted immunity measurements with CDN is $\pm 3.66$ dB | Per IEC 61000-4-6 |
| The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 2.9\%$ .  | Per IEC 61000-4-8 |

#### Thermo KeyTek EMC Pro

|                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------|
| The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 2.6\%$ .         |
| The estimated combined standard uncertainty for surge immunity measurements is $\pm 2.6\%$ .                      |
| The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 1.74\%$ . |

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

### 2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2017. Equipment calibration records are kept on file at the test facility.

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 16 of 104  
Seite 16 von 104

### 3 EMC Test Plan

#### 3.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

#### 3.2 Customer Information

**Table 2:** Customer Information

|                       |                                      |
|-----------------------|--------------------------------------|
| <b>Client</b>         | Hunter Douglas Window Fashions, Inc. |
| <b>Address 1</b>      | 1 Duette Way<br>Broomfield CO 80020  |
| <b>Contact Person</b> | Mike Rockwood                        |
| <b>Telephone</b>      | +1 (720) 778-0205                    |
| <b>Fax</b>            | --                                   |

**Table 3:** Technical Contact Information

|                       |                                 |
|-----------------------|---------------------------------|
| <b>Contact Person</b> | Mike Rockwood                   |
| <b>Telephone</b>      | +1 (720) 778-0205               |
| <b>E-Mail</b>         | mike.rockwood@hunterdouglas.com |

**Test report no.: US245QTK.001 Rev.01**  
Prüfbericht-Nr.:

Page 17 of 104  
Seite 17 von 104

### 3.3 Equipment Under Test (EUT)

**Table 4:** EUT Specifications

| EUT Specifications                                                                                                                                                           |                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions                                                                                                                                                                   | 10.16 x 6.35 x 30.48 cm <sup>3</sup>                                                                                                                                                    |
| Power Input                                                                                                                                                                  | 24 VDC                                                                                                                                                                                  |
| Operating Temperature Range:                                                                                                                                                 | -25 to 65°C                                                                                                                                                                             |
| Multiple Feeds:                                                                                                                                                              | <input type="checkbox"/> Yes,<br><input checked="" type="checkbox"/> No                                                                                                                 |
| Hardware Version/Model                                                                                                                                                       | HD60G-PV                                                                                                                                                                                |
| Firmware Version                                                                                                                                                             | 1                                                                                                                                                                                       |
| RF Software Version                                                                                                                                                          | 1                                                                                                                                                                                       |
| Product Marketing Name                                                                                                                                                       | Silent Curtain Motor                                                                                                                                                                    |
| Operating Mode                                                                                                                                                               | Bluetooth Low Energy                                                                                                                                                                    |
| Transmitter Frequency Band                                                                                                                                                   | BLE: 2402 – 2480 MHz                                                                                                                                                                    |
| Antenna Manufacturer                                                                                                                                                         | YAGEO Group                                                                                                                                                                             |
| Antenna Model                                                                                                                                                                | ANTX1000P011B24003                                                                                                                                                                      |
| Antenna Type                                                                                                                                                                 | Linear Passive PCB Antenna                                                                                                                                                              |
| Antenna Gain                                                                                                                                                                 | +1.5 dBi                                                                                                                                                                                |
| Modulation Type                                                                                                                                                              | GFSK                                                                                                                                                                                    |
| Data Rate                                                                                                                                                                    | 1, 2 Mbps                                                                                                                                                                               |
| Supported Bandwidths                                                                                                                                                         | 1 MHz                                                                                                                                                                                   |
| TX/RX Chain (s)                                                                                                                                                              | 1 Spatial Stream                                                                                                                                                                        |
| Directional Gain Type                                                                                                                                                        | N/A                                                                                                                                                                                     |
| Type of Equipment                                                                                                                                                            | <input type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet<br><input checked="" type="checkbox"/> Other: Indoor/Residential |
| Note:<br>1. All EUT specifications are provided by the manufacturer or the TUV direct customer. Information supplied by the customer and can affect the validity of results. |                                                                                                                                                                                         |

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 18 of 104  
Seite 18 von 104

**Table 5: EUT Test Samples**

| Equipment   | Manufacturer                           | Model    | Serial | Used for           |
|-------------|----------------------------------------|----------|--------|--------------------|
| 1           | Hunter Douglas<br>Window Fashions, Inc | HD60G-PV | 010001 | Conducted testing  |
| 2           | Hunter Douglas<br>Window Fashions, Inc | HD60G-PV | 010027 | Radiated emissions |
| Note: None. |                                        |          |        |                    |

**Table 6: Power Setting/Specification**

| Freq.<br>(MHz) | BLE<br>1Mbps | BLE<br>2Mbps | -- | -- | -- | -- | -- | -- |
|----------------|--------------|--------------|----|----|----|----|----|----|
| 2400-2480      | + 6 dBm      | +6 dBm       | -- | -- | -- | -- | -- | -- |
| Note: None     |              |              |    |    |    |    |    |    |

**Table 7: General Product Information**

|            |         |          |                   |         |         |          |
|------------|---------|----------|-------------------|---------|---------|----------|
| Dimensions | Height: | 10.16 cm | Width:            | 6.35 cm | Length: | 30.48 cm |
| Weight     | 1.36 kg |          | Fork-lift Needed: |         | No      |          |
| Note: None |         |          |                   |         |         |          |

**Table 8: Electrical Power Type**

| Name             | Type                    | Voltage |     | Frequency<br>(Hz) | Current<br>(A) |
|------------------|-------------------------|---------|-----|-------------------|----------------|
|                  |                         | Min     | Max |                   |                |
| AD0481-2401600UB | Class 2 Power<br>Supply | 100     | 240 | 50 – 60           | 1.6            |
| Note: None       |                         |         |     |                   |                |

**Table 9: EUT Interface/Port Specifications**

| EUT Port | Connect To | Location | Length | Shielded/<br>Unshielded |
|----------|------------|----------|--------|-------------------------|
| --       | --         | --       | --     | --                      |

## 4 Product Information

### 4.1 Product Description

The EUT is a Bluetooth Low Energy wireless connected motor drive for windows shades.

### 4.2 Equipment Configuration

A description of the equipment configuration is given in the Equipment Under Test section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst-case radiation for emissions testing.

### 4.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst-case radiation for emissions testing.

### 4.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, 15.221.

#### 4.4.1 Results

The EUT is professionally installed, and the end-user has no access to the antenna in the product.

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 20 of 104  
Seite 20 von 104

#### 4.4.2 Duty Cycle


The duty cycle of the device was determined before testing was performed in order to choose the appropriate test methodology. Duty cycle was measured with a spectrum analyzer in zero span and calculated as the percentage between the transmitters on time over the signal period.

$$\text{Duty cycle \%} = (\text{Transmitter on time} / \text{Signal Period}) * 100$$

#### 4.4.3 Results

Table 10: Test Results – Duty Cycle

|                                |                                  |                           |                       |
|--------------------------------|----------------------------------|---------------------------|-----------------------|
| <b>Test Condition:</b>         | Conducted,<br>Normal Temperature | <b>Date:</b>              | 6/24/2024             |
| <b>Antenna Type:</b>           | Linear Passive PCB Antenna       | <b>Power Level:</b>       | See Table 6           |
| <b>Ambient Temperature:</b>    | 24.7 °C                          | <b>Relative Humidity:</b> | 38 %                  |
| <b>Max. Antenna Gain:</b>      | +1.5 dBi                         | <b>Test Engineer</b>      | Isaac Aguilar         |
| <b>Signal State:</b> Modulated |                                  |                           |                       |
| <b>1Mbps</b>                   |                                  |                           |                       |
| <b>Frequency (MHz)</b>         | <b>On-Time (ms)</b>              | <b>Signal Period (ms)</b> | <b>Duty Cycle (%)</b> |
| 2402                           | 1                                | 1                         | 100                   |
| 2442                           | 1                                | 1                         | 100                   |
| 2480                           | 1                                | 1                         | 100                   |
| <b>2Mbps</b>                   |                                  |                           |                       |
| 2402                           | 1                                | 1                         | 100                   |
| 2442                           | 1                                | 1                         | 100                   |
| 2480                           | 1                                | 1                         | 100                   |
| <b>Note:</b> None              |                                  |                           |                       |

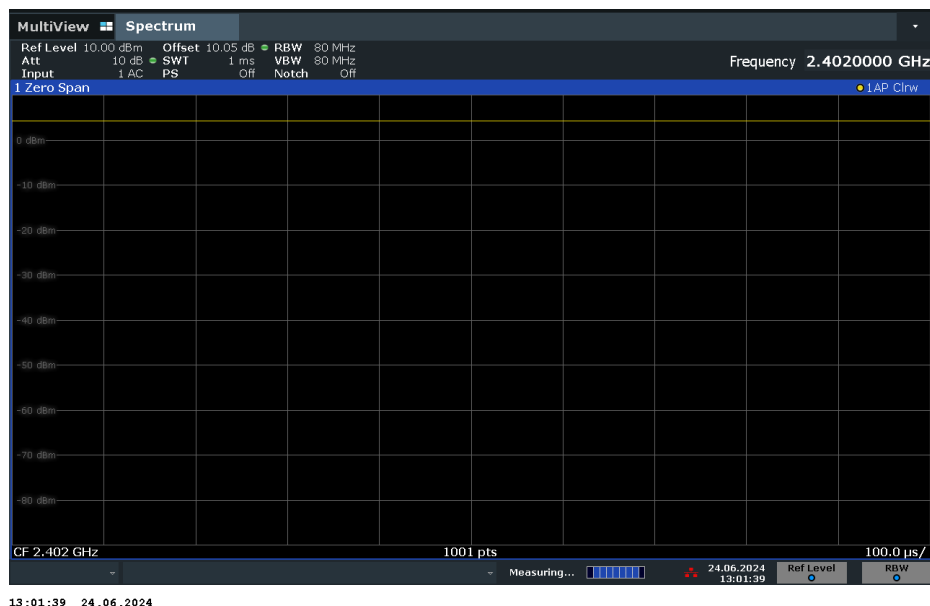

## 5 Emissions

Testing was performed in accordance with CFR 47 Part 15.247/RSS-247 Issue 3. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

### 5.1 Output Power Requirements

*The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.*

*The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b), RSS 247 Sect. 5.4 d.*

*The maximum transmitted powers are:*

*Band 2400-2483.5 MHz: the maximum peak conducted output power shall not exceed 1 W and the E.R.I.P shall not exceed 4 W.*


#### 5.1.1 Test Method

The ANSI C63.10 section 11.9.1.1 conducted method was used to measure the channel power output. The measurements were conducted on 3 channels in each operating range per CFR47 Part 15.247(b): 2017. The device was connected to the spectrum analyzer with the following setting:

1. Span  $\geq 1.5$  times the OBW
2. Sweep Trigger = Free Run
3. RBW = RBW > DTS Bandwidth
4. VBW  $\geq 3 \times$  RBW
5. Detector = Peak
6. Trace Mode = Max Hold
7. Sweep Time = auto couple

The trace was allowed to maximize, and the peak search function was used to determine the maximum power. All measurement system losses have been accounted for and inputted into the analyzer.

Test Setup:

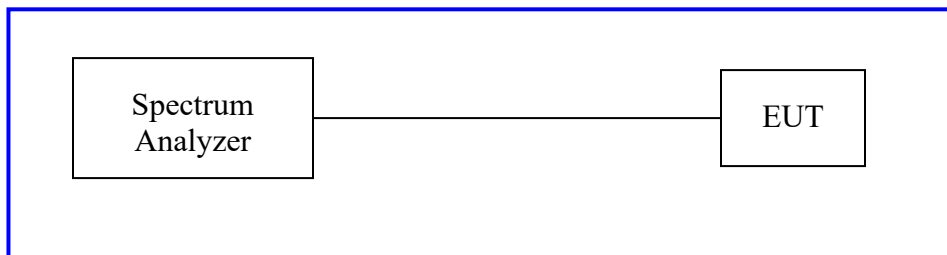

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 22 of 104  
Seite 22 von 104

## 5.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 11:** Test Results – RF Output Power at the Antenna Port

|                                                                                   |                                  |                           |                    |
|-----------------------------------------------------------------------------------|----------------------------------|---------------------------|--------------------|
| <b>Test Condition:</b>                                                            | Conducted,<br>Normal Temperature | <b>Date:</b>              | 6/24/2024          |
| <b>Antenna Type:</b>                                                              | Linear Passive PCB Antenna       | <b>Power Level:</b>       | See Table 6        |
| <b>Ambient Temperature:</b>                                                       | 24.7 °C                          | <b>Relative Humidity:</b> | 37.8 %             |
| <b>Max. Antenna Gain:</b>                                                         | +1.5 dBi                         | <b>Test Engineer</b>      | Isaac Aguilar      |
| <b>Signal State:</b> Modulated                                                    |                                  |                           |                    |
| <b>1Mbps</b>                                                                      |                                  |                           |                    |
| <b>Frequency (MHz)</b>                                                            | <b>Maximum Power (dBm)</b>       | <b>Limit (dBm)</b>        | <b>Margin (dB)</b> |
| 2402                                                                              | 4.24                             | 30                        | 25.76              |
| 2442                                                                              | 4.25                             | 30                        | 25.75              |
| 2480                                                                              | 4.48                             | 30                        | 25.52              |
| <b>2Mbps</b>                                                                      |                                  |                           |                    |
| 2402                                                                              | 4.24                             | 30                        | 25.76              |
| 2442                                                                              | 4.24                             | 30                        | 25.76              |
| 2480                                                                              | 4.47                             | 30                        | 25.53              |
| <b>Note:</b>                                                                      |                                  |                           |                    |
| 1. All insertion loss and corrections are accounted for in the measurement plots. |                                  |                           |                    |

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 23 of 104  
Seite 23 von 104

### 5.1.3 Analyzer Data

#### 5.1.3.1 Output Power



RF Output Power 2402 MHz, 1Mbps



RF Output Power 2442 MHz, 1Mbps

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 24 of 104  
Seite 24 von 104



RF Output Power 2480 MHz, 1Mbps

#### 5.1.3.1.1 Modulation: 2 Mbps



RF Output Power 2402 MHz, 2Mbps

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 25 of 104  
Seite 25 von 104



RF Output Power 2442 MHz, 2Mbps



RF Output Power 2480 MHz, 2Mbps

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 26 of 104  
Seite 26 von 104

## 5.2 Occupied Bandwidth (Emission Bandwidth) and DTS Bandwidth (X dB bandwidth)

*The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.*

*The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.*

*The minimum 6 dB bandwidth shall be at least 500 kHz.*

### 5.2.1 Test Method


The conducted method was used to measure the occupied bandwidth according to ANSI C63.10 section 11.8 The measurement was performed with modulation per CFR47 15.247(a) (2) and RSS-247 section 5.2 on three channels operating between frequency range; 2400 MHz to 2483.5 MHz.

The device was connected to the spectrum analyzer with the following setting:

1. RBW = 100 kHz
2. VBW = 3 x RBW
3. Detector = Peak
4. Sweep = auto couple

The trace was allowed to maximize, and the peak emission was determined. For 99% occupied bandwidth, the spectrum analyzer's internal occupied bandwidth measurement function was used. For 6 dB bandwidth, the bandwidth was measured from the two outermost amplitude points that were attenuated by 6 dB. Emission bandwidth used the analyzer bandwidth function to calculate the bandwidth. All measurement system losses have been accounted for and inputted into the analyzer.

Test Setup:

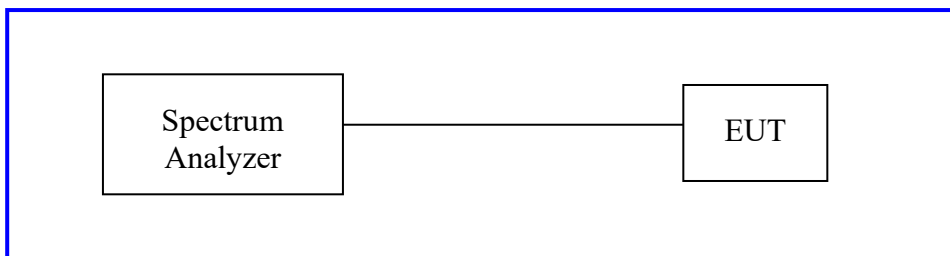

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 27 of 104  
Seite 27 von 104

## 5.2.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 12:** Test Results – Occupied Bandwidth


|                                                                                   |                               |                     |                     |               |
|-----------------------------------------------------------------------------------|-------------------------------|---------------------|---------------------|---------------|
| Test Condition:                                                                   | Conducted, Normal Temperature |                     | Date:               | 6/24/2024     |
| Antenna Type:                                                                     | Linear Passive PCB Antenna    |                     | Power Level:        | See Table 6   |
| Ambient Temperature:                                                              | 24.7 °C                       |                     | Relative Humidity:  | 37.8 %        |
| Max. Antenna Gain:                                                                | +1.5 dBi                      |                     | Test Engineer       | Isaac Aguilar |
| Signal State: Modulated                                                           |                               |                     |                     |               |
| 1Mbps                                                                             |                               |                     |                     |               |
| Frequency (MHz)                                                                   | 6 dB Bandwidth (kHz)          | 99% Bandwidth (MHz) | 6 dB BW Limit (kHz) | Pass/Fail     |
| 2402                                                                              | 0.707                         | 1.06                | 500                 | Pass          |
| 2442                                                                              | 0.752                         | 1.07                | 500                 | Pass          |
| 2480                                                                              | 0.720                         | 1.07                | 500                 | Pass          |
| 2Mbps                                                                             |                               |                     |                     |               |
| Frequency (MHz)                                                                   | 6 dB Bandwidth (kHz)          | 99% Bandwidth (MHz) | 6 dB BW Limit (kHz) | Pass/Fail     |
| 2402                                                                              | 1.29                          | 2.09                | 500                 | Pass          |
| 2442                                                                              | 1.27                          | 2.09                | 500                 | Pass          |
| 2480                                                                              | 1.27                          | 2.07                | 500                 | Pass          |
| Note:                                                                             |                               |                     |                     |               |
| 1. All insertion loss and corrections are accounted for in the measurement plots. |                               |                     |                     |               |

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:


Page 28 of 104  
Seite 28 von 104

## 5.2.3 Analyzer Data

### 5.2.3.1 6 dB Occupied Bandwidth: 1 Mbps

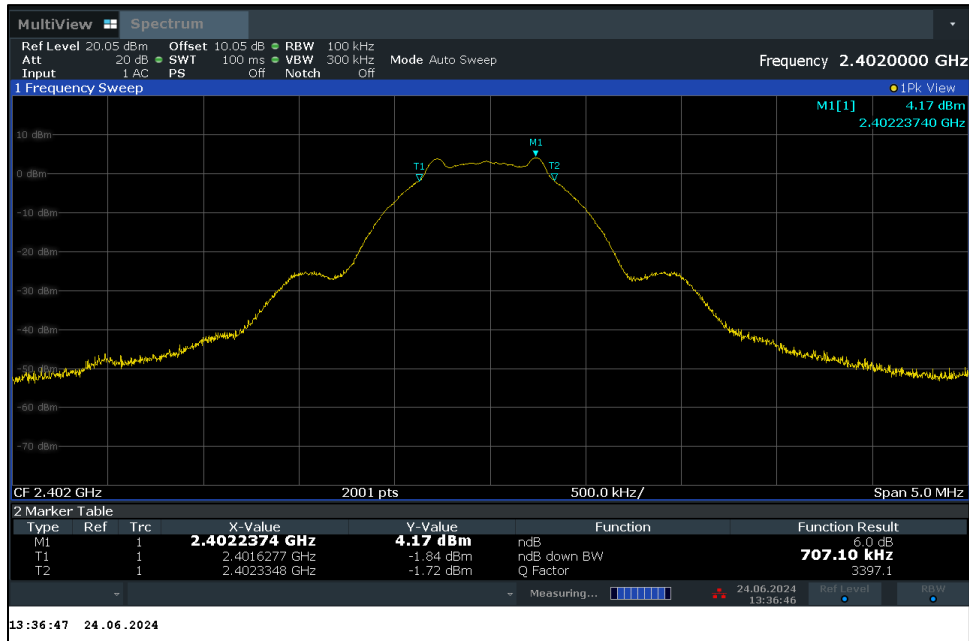


6 dB Bandwidth 2402 MHz, 1Mbps

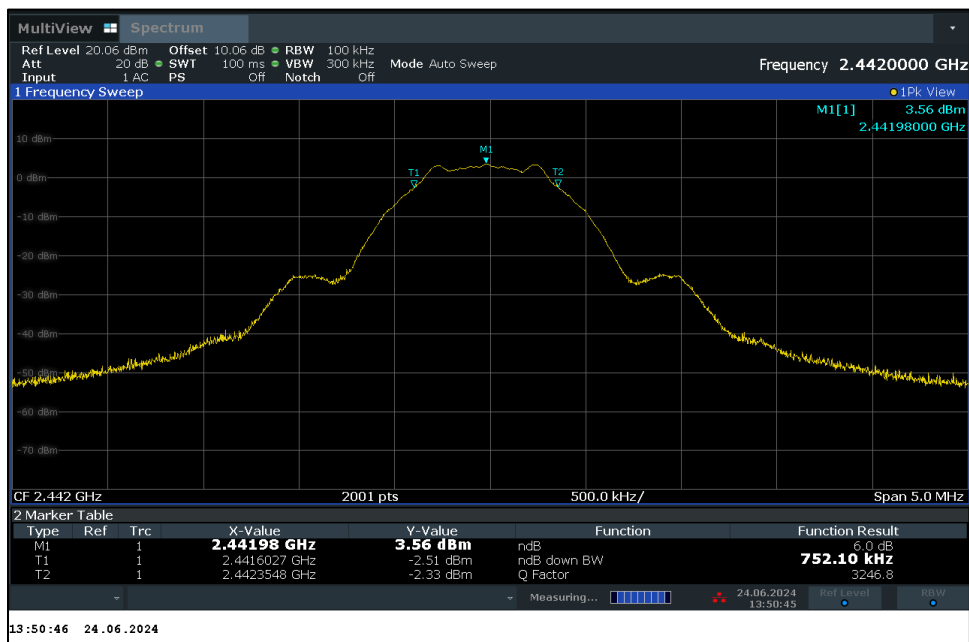

6 dB Bandwidth 2442 MHz, 1Mbps


Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 29 of 104  
Seite 29 von 104

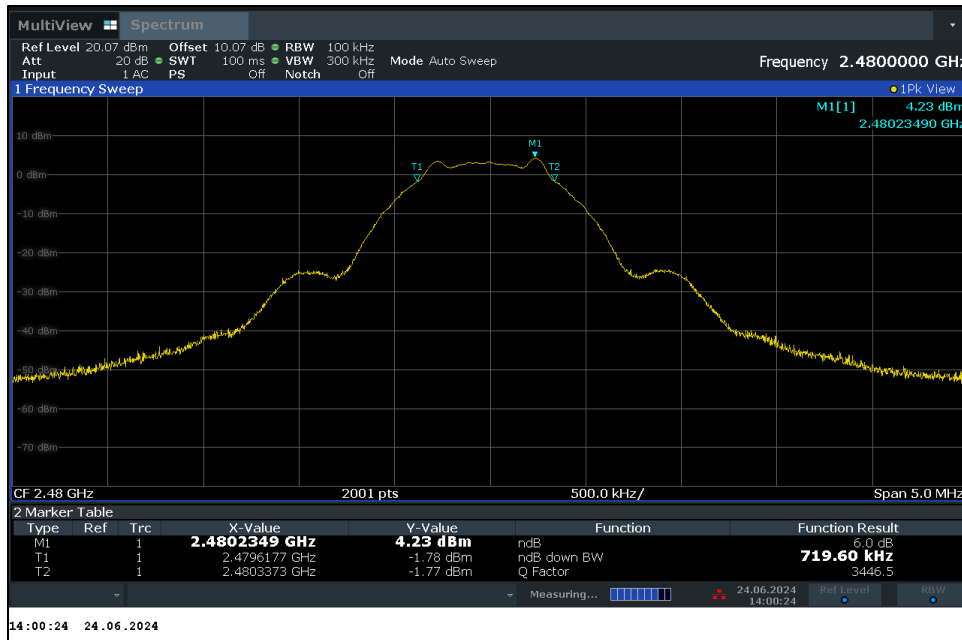

6 dB Bandwidth 2480 MHz, 1 Mbps


### 5.2.3.2 99% Occupied Bandwidth: 1 Mbps

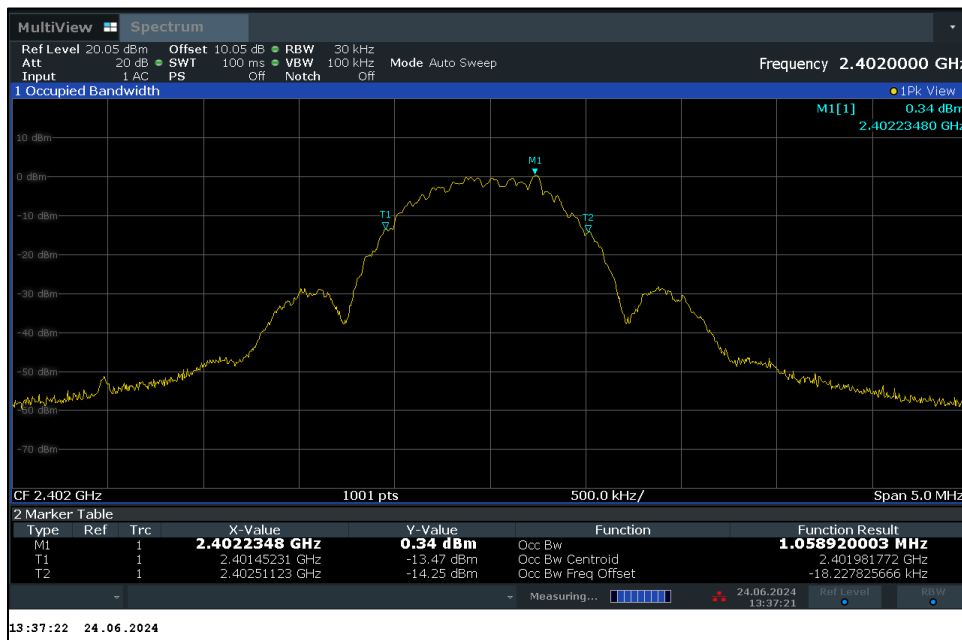


99% Occupied Bandwidth 2402 MHz, 1 Mbps

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 30 of 104  
Seite 30 von 104

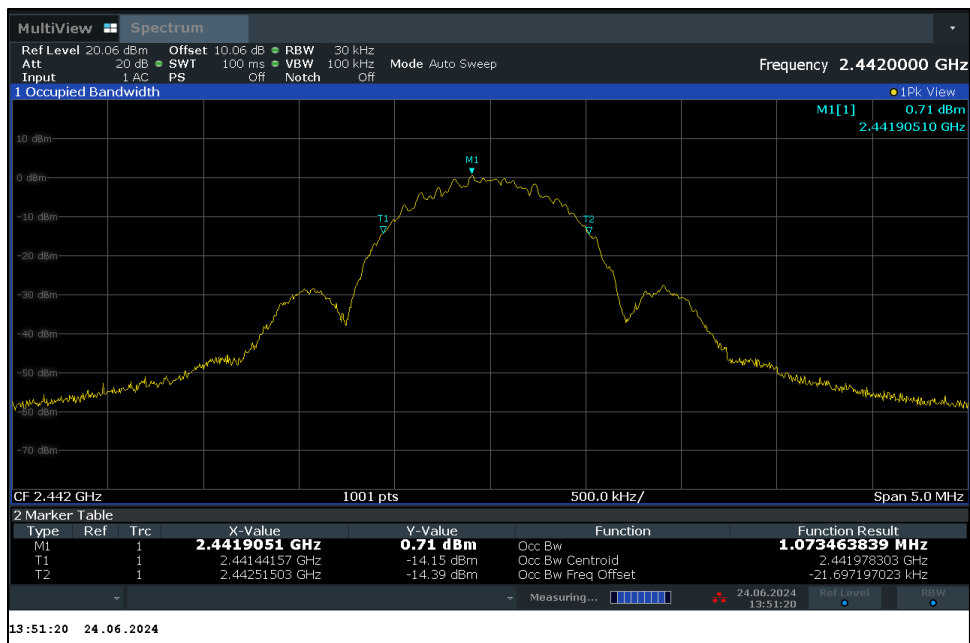

99% Occupied Bandwidth 2442 MHz, 1 Mbps

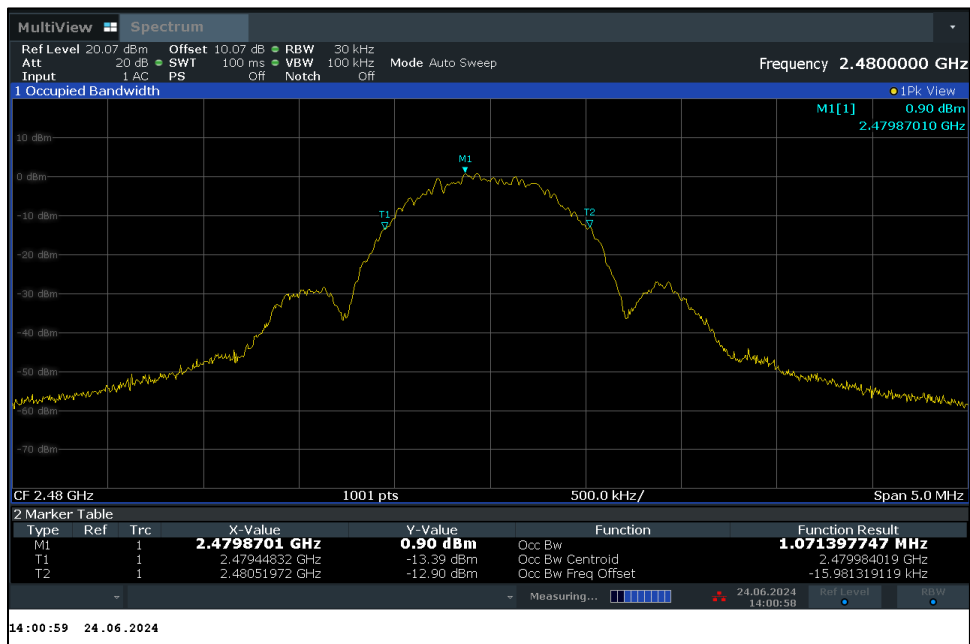


99% Occupied Bandwidth 2480 MHz, 1 Mbps


Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 31 of 104  
Seite 31 von 104

### 5.2.3.3 6 dB Occupied Bandwidth: 2 Mbps

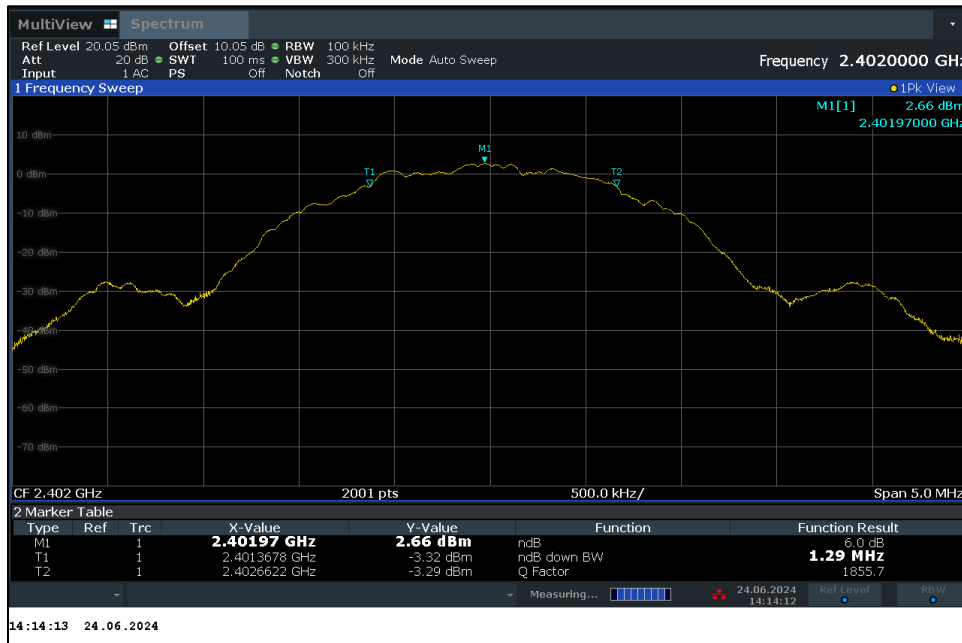


6 dB Bandwidth 2402 MHz, 2 Mbps

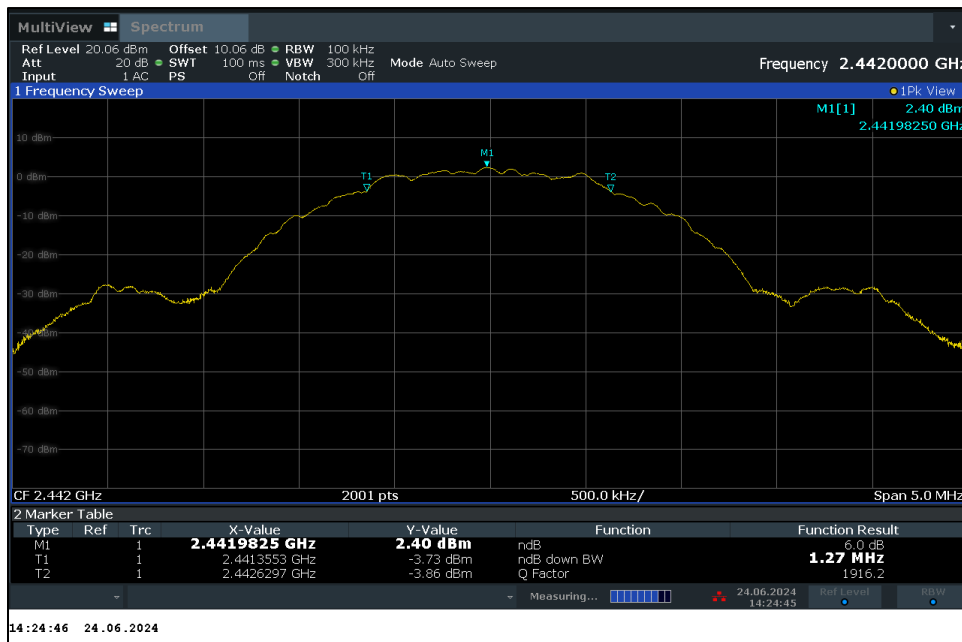

6 dB Bandwidth 2442 MHz, 2 Mbps


Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 32 of 104  
Seite 32 von 104

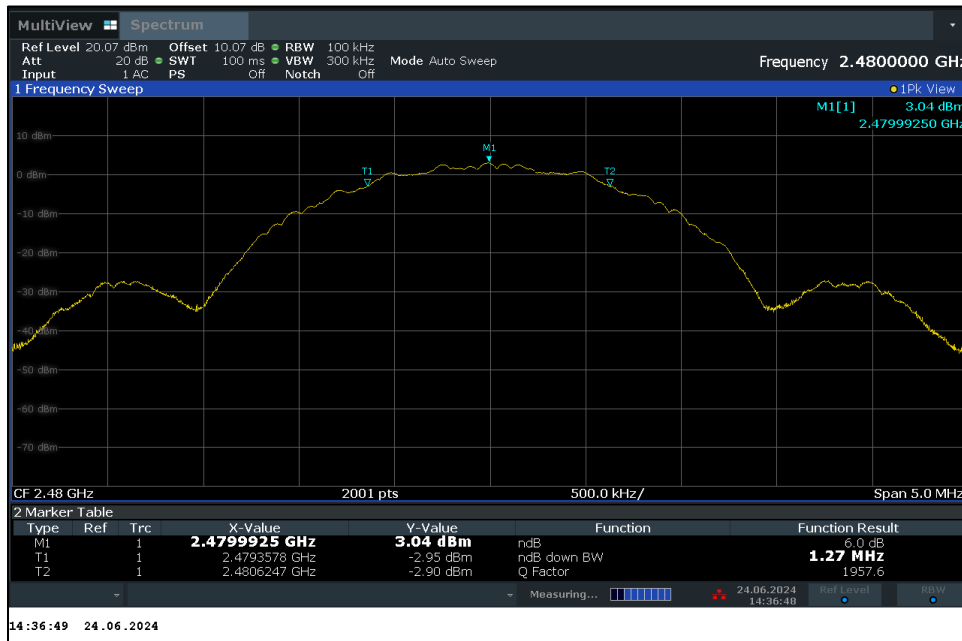

6 dB Bandwidth 2480 MHz, 2 Mbps


### 5.2.3.4 99% Occupied Bandwidth: 2 Mbps

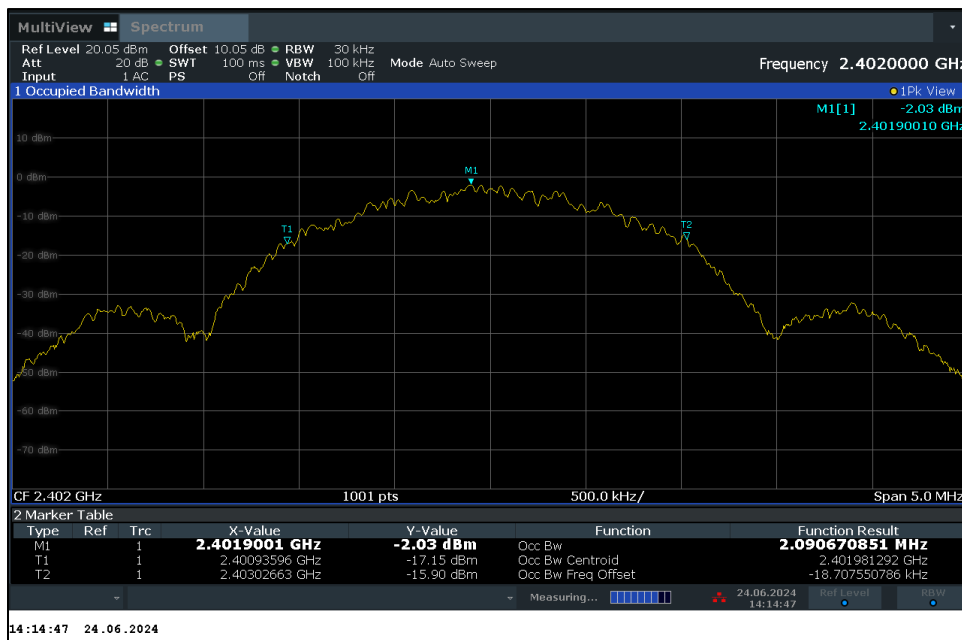


99% Occupied Bandwidth 2402 MHz, 2 Mbps

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 33 of 104  
Seite 33 von 104

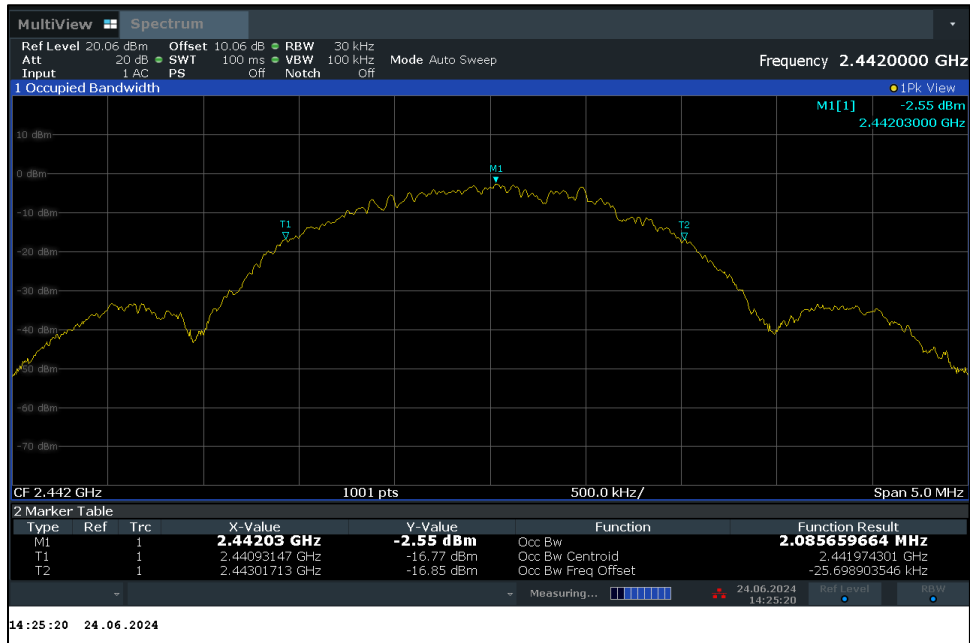

99% Occupied Bandwidth 2442 MHz, 2 Mbps

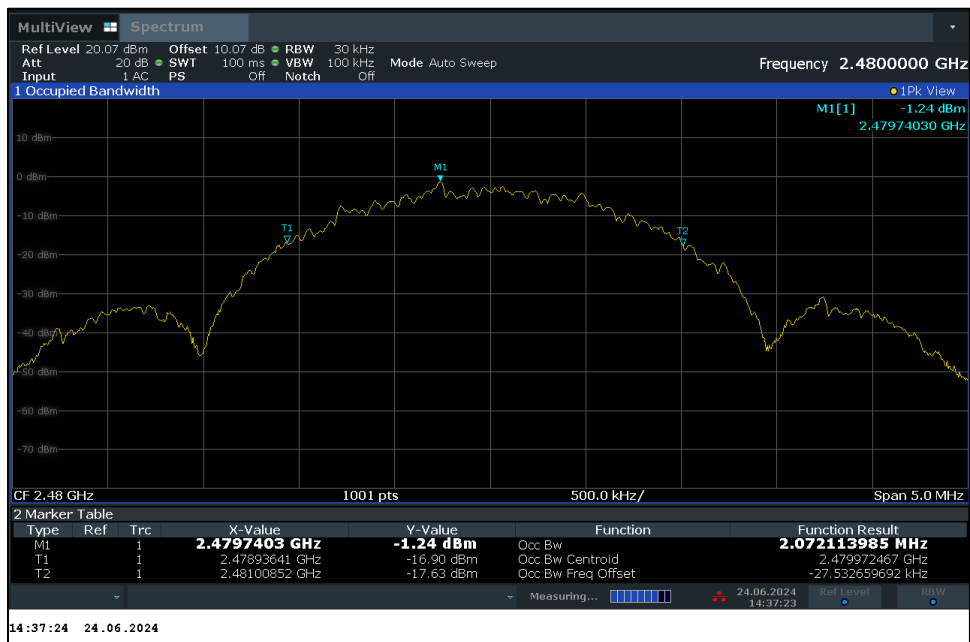

99% Occupied Bandwidth 2480 MHz, 2 Mbps

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 34 of 104  
Seite 34 von 104

### 5.3 Peak Power Spectral Density

*According to the CFR47 Part 15.247 (e) and RSS-247 section 5.2 b) Issue 3, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.*

#### 5.3.1 Test Method


The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.2. The measurement was performed with modulation per CFR47 Part 15.247(e), RSS-247 section 5. The device was connected to the spectrum analyzer with the following setting:

1. Span = 1.5 x DTS Bandwidth
2. RBW = 3 kHz
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Sweep time = auto couple
6. Trace Mode = Max Hold

The trace is allowed to maximize, and the peak marker function is used to find the peak power spectral density.

All measurement system losses have been accounted for and inputted into the analyzer.

Test Setup:

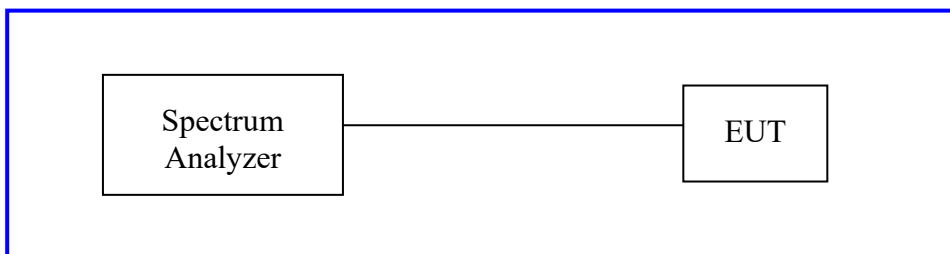

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 35 of 104  
Seite 35 von 104

### 5.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 13:** Test Results – Peak Power Spectral Density


|                                                                                   |                                     |                               |                                   |                  |             |
|-----------------------------------------------------------------------------------|-------------------------------------|-------------------------------|-----------------------------------|------------------|-------------|
| Test Condition:                                                                   |                                     | Conducted, Normal Temperature | Date:                             | 6/24/2024        |             |
| Antenna Type:                                                                     |                                     | Linear Passive PCB Antenna    | Power Level:                      | See Table 6      |             |
| Ambient Temperature:                                                              |                                     | 24.7 °C                       | Relative Humidity:                | 37.8 %           |             |
| Max. Antenna Gain:                                                                |                                     | +1.5 dBi                      | Test Engineer                     | Isaac Aguilar    |             |
| Signal State: Modulated                                                           |                                     |                               |                                   |                  |             |
| 1Mbps                                                                             |                                     |                               |                                   |                  |             |
| Frequency (MHz)                                                                   | Power Spectral Density (dBm/100kHz) | Correction (dB)               | Power Spectral Density (dBm/3kHz) | Limit (dBm/3KHz) | Margin (dB) |
| 2402                                                                              | 4.16                                | -15.23                        | -11.42                            | 8                | 19.42       |
| 2442                                                                              | 3.56                                | -15.23                        | -12.02                            | 8                | 20.02       |
| 2480                                                                              | 4.22                                | -15.23                        | -11.36                            | 8                | 19.36       |
| 2Mbps                                                                             |                                     |                               |                                   |                  |             |
| 2402                                                                              | 2.68                                | -15.23                        | -12.9                             | 8                | 20.9        |
| 2442                                                                              | 2.40                                | -15.23                        | -13.18                            | 8                | 21.18       |
| 2480                                                                              | 3.04                                | -15.23                        | -12.54                            | 8                | 20.54       |
| Note:                                                                             |                                     |                               |                                   |                  |             |
| 1. All insertion loss and corrections are accounted for in the measurement plots. |                                     |                               |                                   |                  |             |

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:


Page 36 of 104  
Seite 36 von 104

### 5.3.3 Analyzer Data

#### 5.3.3.1 Power Spectral Density: 1 Mbps

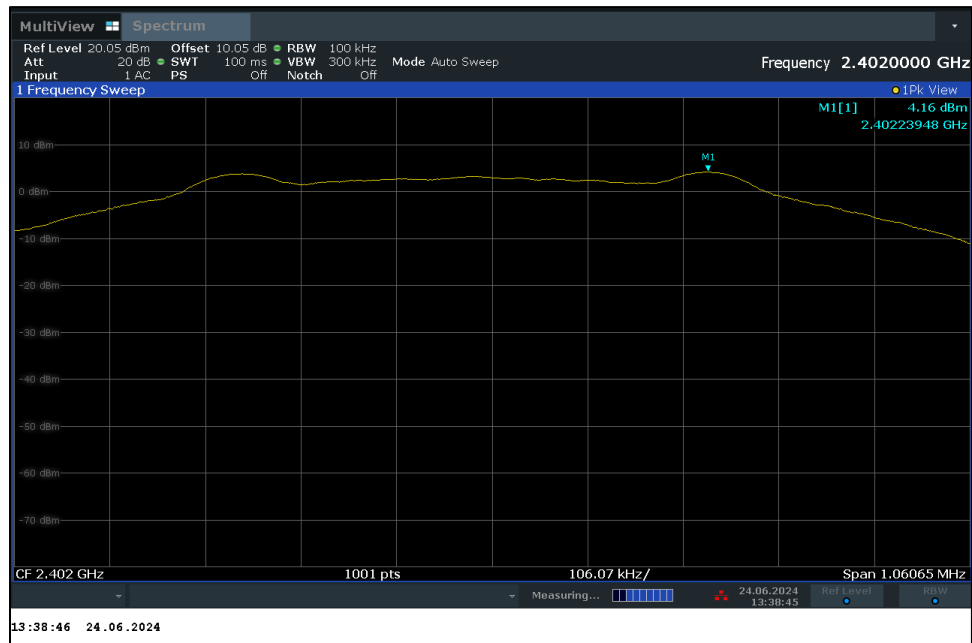


Power Spectral Density 2402 MHz, 1Mbps

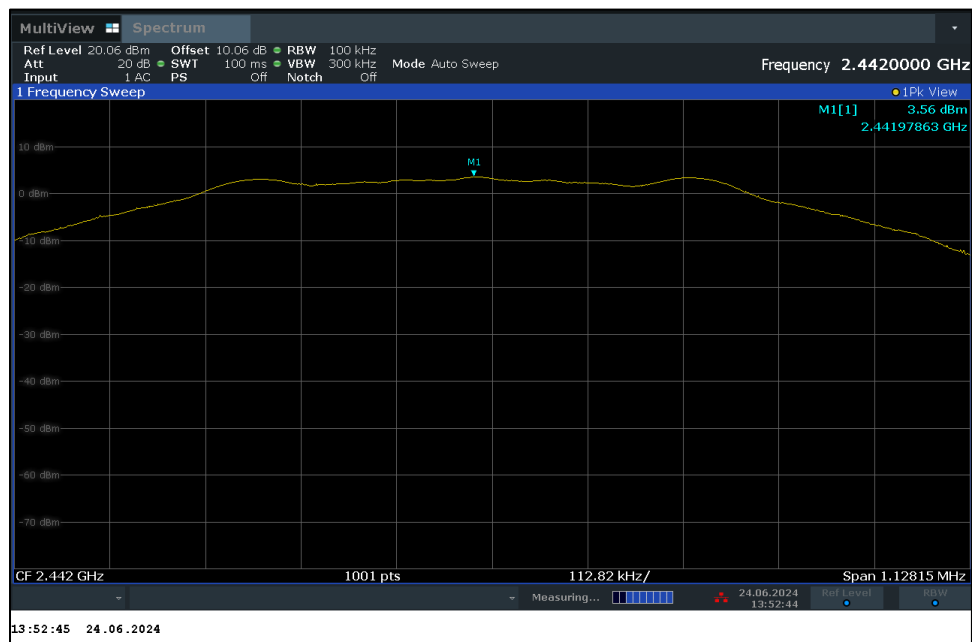

Power Spectral Density 2442 MHz, 1Mbps


Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 37 of 104  
Seite 37 von 104

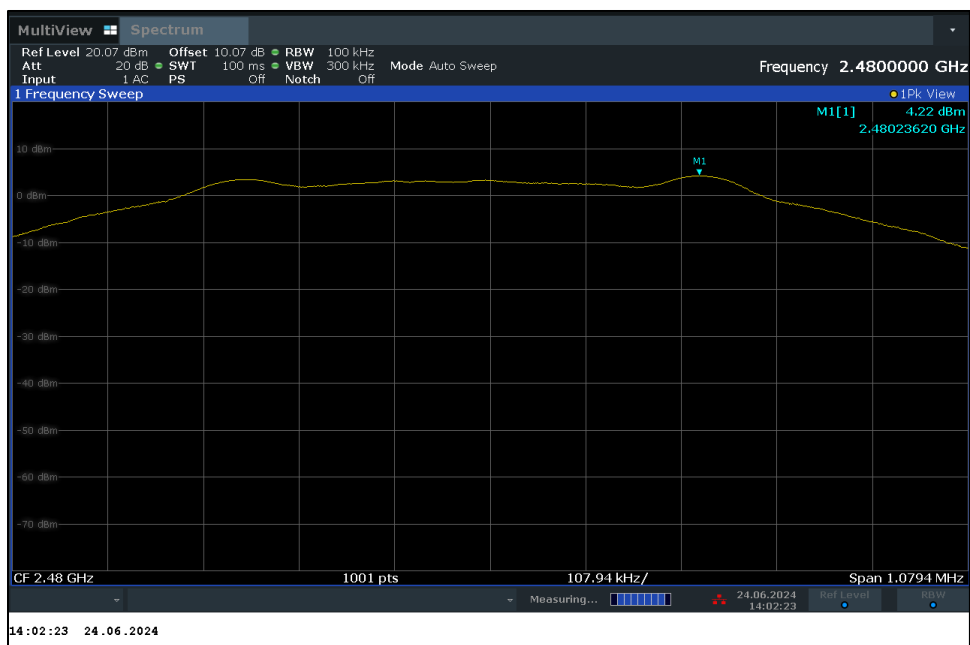

Power Spectral Density 2480 MHz, 1Mbps


### 5.3.3.2 Power Spectral Density: 2 Mbps

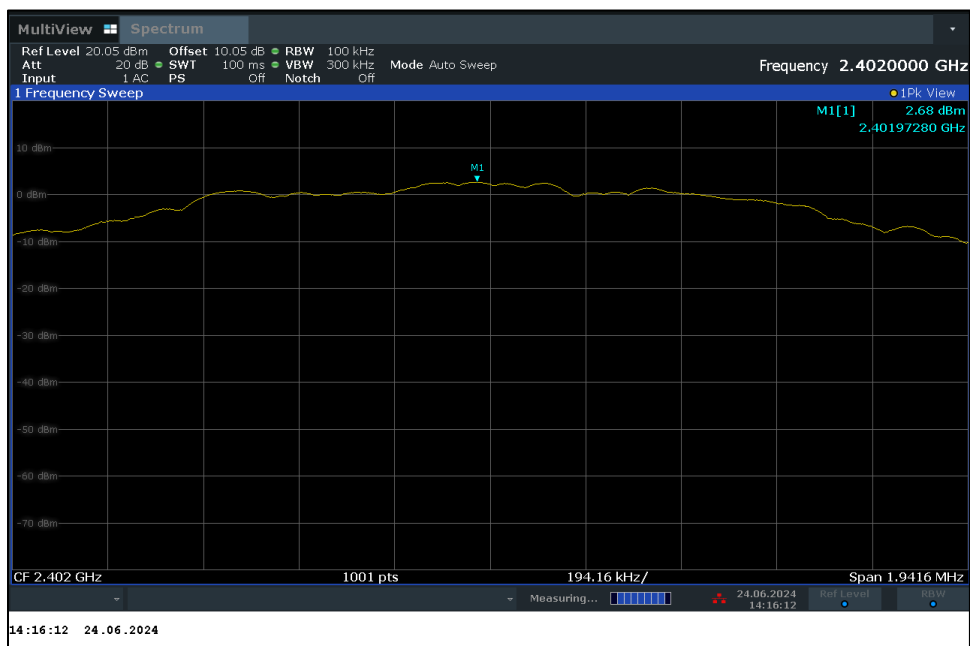


Power Spectral Density 2402 MHz, 2Mbps

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 38 of 104  
Seite 38 von 104

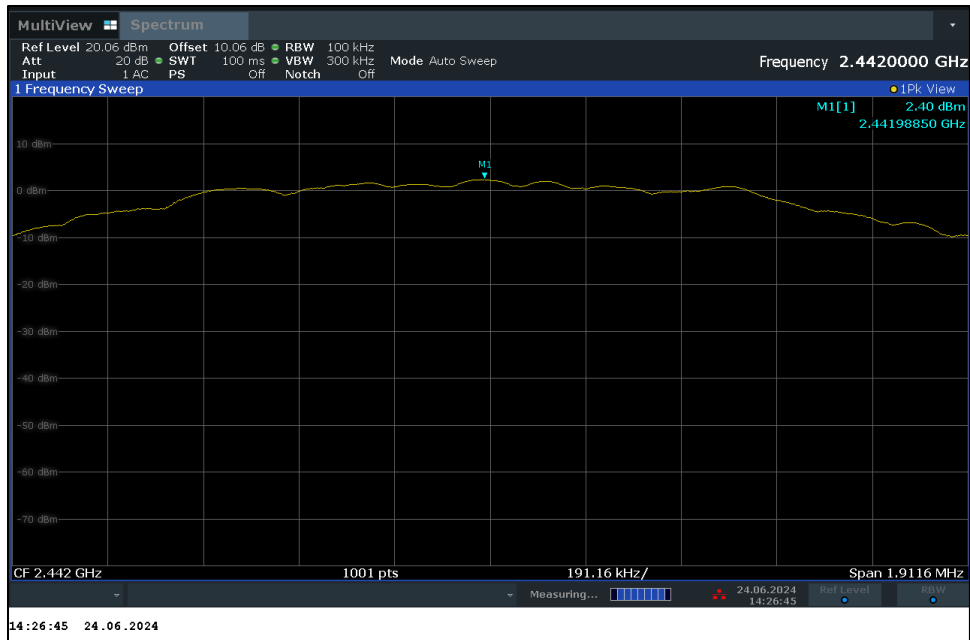

Power Spectral Density 2442 MHz, 2Mbps

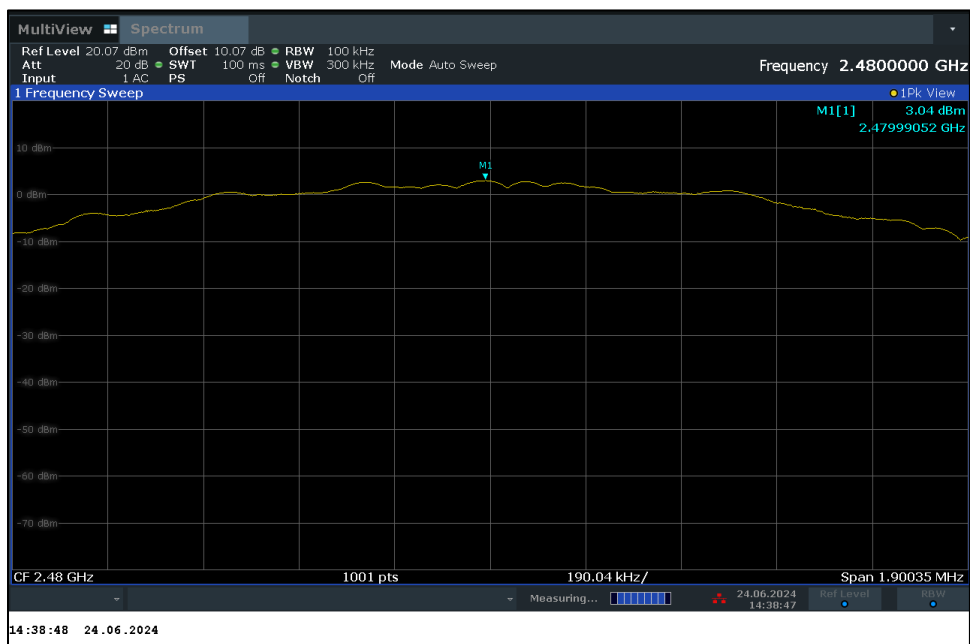

Power Spectral Density 2480 MHz, 2Mbps

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 39 of 104  
Seite 39 von 104

## 5.4 Out of Band Emissions: Non-Restricted Band

*Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 2.1051, 15.247(d), RSS-247 section 5.5.*


### 5.4.1 Test Method

ANSI C63.10 section 11.11 was used. The level (20 dBc or 30 dBc) was determined from the maximum PSD reference level procedure of section 11.11.2 of ANSI C63.10. The device was directly connected to a spectrum analyzer with the following settings:

1. Span set to encompass 30 MHz to the 10<sup>th</sup> harmonic of the fundamental
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector: Peak
5. Sweep Time = auto couple
6. Trace Mode = max hold

The trace was allowed to maximize, and maximum emissions reported. All measurement system losses have been accounted for and inputted into the analyzer.

Test Setup:

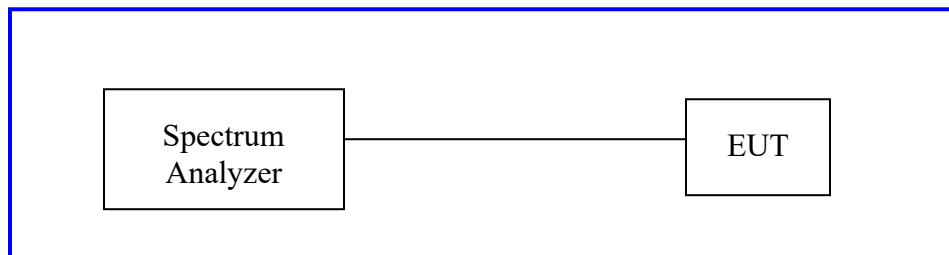

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 40 of 104  
Seite 40 von 104

## 5.4.2 Results

As originally tested, the EUT was found to compliant to the requirements of the test standard(s).

**Table 14:** Test Results – Emissions at Antenna Port


|                                                                                                                                             |             |                               |                           |               |             |
|---------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------------|---------------------------|---------------|-------------|
| <b>Test Condition:</b>                                                                                                                      |             | Conducted, Normal Temperature | <b>Date:</b>              | 6/24/2024     |             |
| <b>Antenna Type:</b>                                                                                                                        |             | Linear Passive PCB Antenna    | <b>Power Level:</b>       | See Table 6   |             |
| <b>Ambient Temperature:</b>                                                                                                                 |             | 24.7 °C                       | <b>Relative Humidity:</b> | 37.8 %        |             |
| <b>Max. Antenna Gain:</b>                                                                                                                   |             | +1.5 dBi                      | <b>Test Engineer</b>      | Isaac Aguilar |             |
| <b>Signal State:</b> Modulated                                                                                                              |             |                               |                           |               |             |
| 1Mbps                                                                                                                                       |             |                               |                           |               |             |
| Test Frequency: 2402 MHz                                                                                                                    |             |                               |                           |               |             |
| Emission (MHz)                                                                                                                              | Power (dBm) | Duty Cycle Correction (dB)    | Corrected Power (dBm)     | Limit (dB)    | Margin (dB) |
| 7440                                                                                                                                        | -58.01      | N/A <sup>4</sup>              | -58.01                    | -25.78        | 32.04       |
| 25184                                                                                                                                       | -53.02      |                               | -53.02                    | -25.78        | 27.24       |
| 26392                                                                                                                                       | -48.43      |                               | -48.43                    | -25.78        | 22.65       |
| 2Mbps                                                                                                                                       |             |                               |                           |               |             |
| Test Frequency: 2480 MHz                                                                                                                    |             |                               |                           |               |             |
| 11257                                                                                                                                       | -57.82      | N/A <sup>4</sup>              | -57.82                    | -25.78        | 32.04       |
| 21411                                                                                                                                       | -54.30      |                               | -54.30                    | -25.78        | 28.52       |
| 26395                                                                                                                                       | -48.34      |                               | -48.34                    | -25.78        | 22.56       |
| <b>Note:</b>                                                                                                                                |             |                               |                           |               |             |
| 1. All insertion loss and corrections are accounted for in the measurement plots.                                                           |             |                               |                           |               |             |
| 2. Limit reflects -30 dBc from highest power spectral density measured in Table 12.                                                         |             |                               |                           |               |             |
| 3. Worst case test frequency for each modulation and its three worst emissions reported in table. All data provided in the section 4.4.2.1. |             |                               |                           |               |             |
| 4. Duty cycle measured was greater than 98% so no correction required.                                                                      |             |                               |                           |               |             |

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:


Page 41 of 104  
Seite 41 von 104

### 5.4.3 Analyzer Data

#### 5.4.3.1 Conducted Bandedge: 1 Mbps

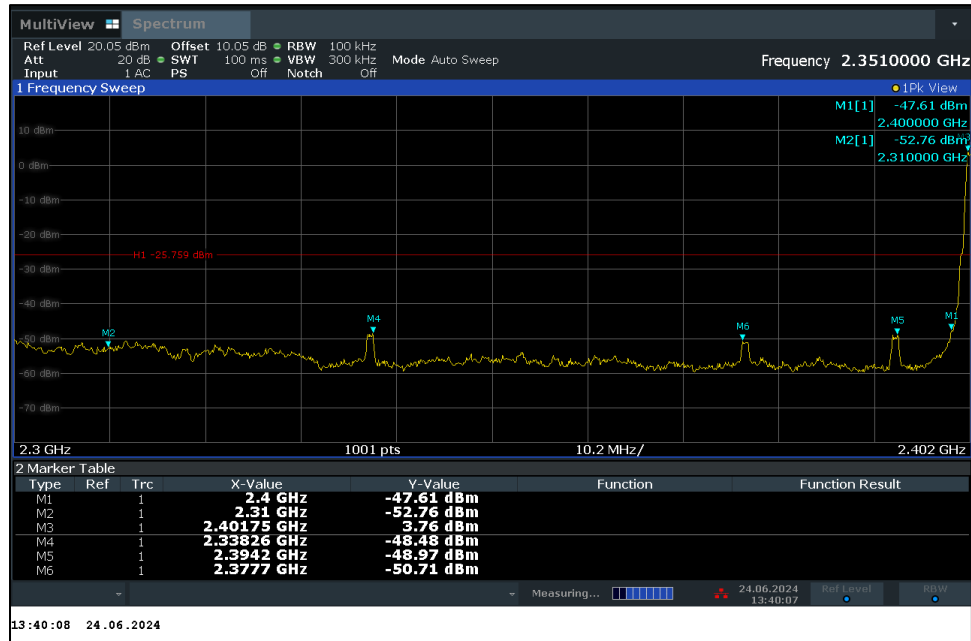

2310 to 2390 MHz Bandedge

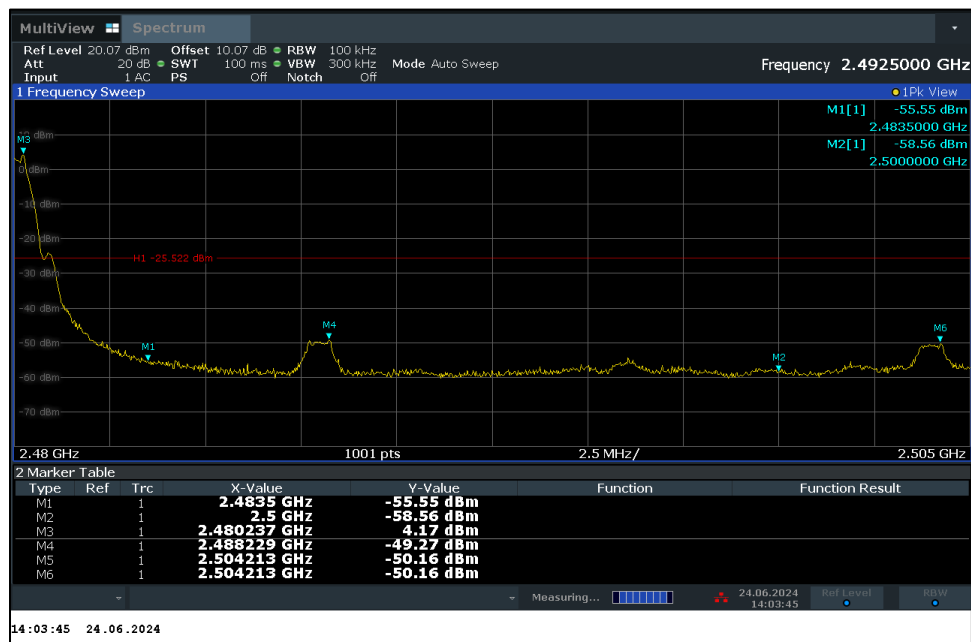


2483.5 to 2500 MHz Bandedge


Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 42 of 104  
Seite 42 von 104

### 5.4.3.2 Conducted Bandedge: 2 Mbps

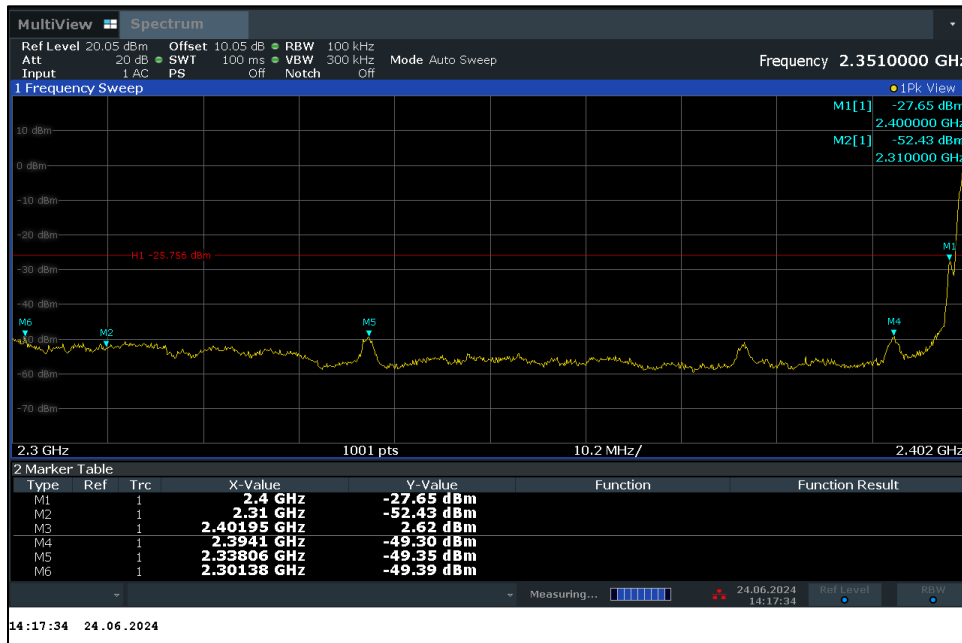

2310 to 2390 MHz Bandedge

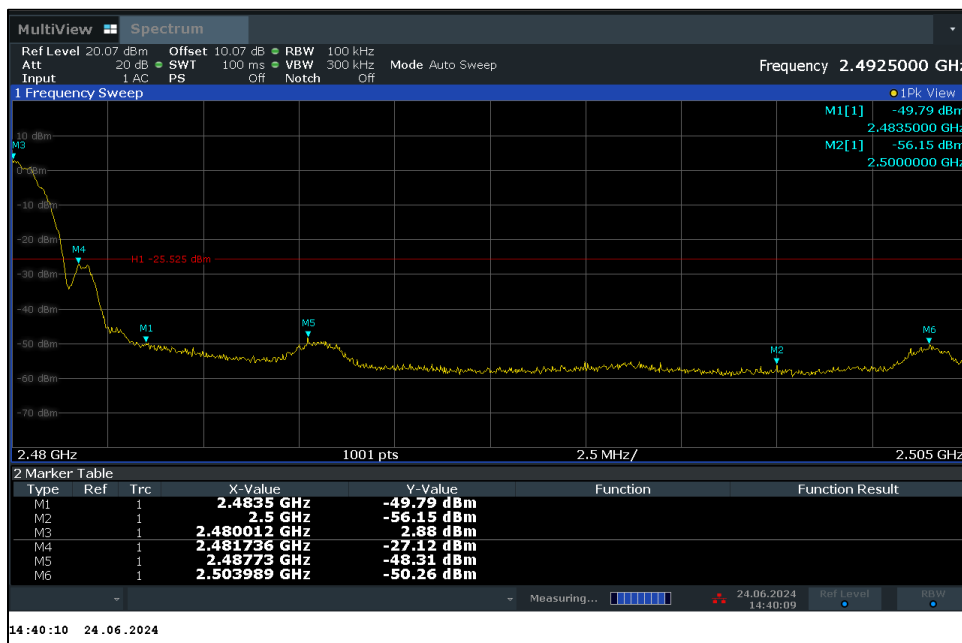


2483.5 to 2500 MHz Bandedge


Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 43 of 104  
Seite 43 von 104

### 5.4.3.3 Conducted Spurious Emission: 1 Mbps

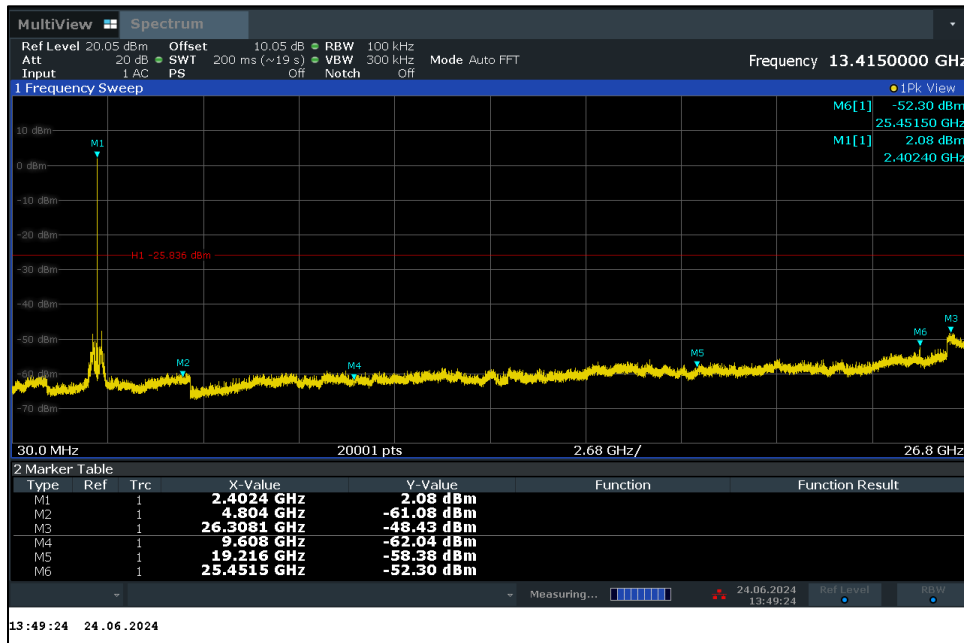


Conducted Emission: Non-Restricted Band 2402 MHz, 1Mbps

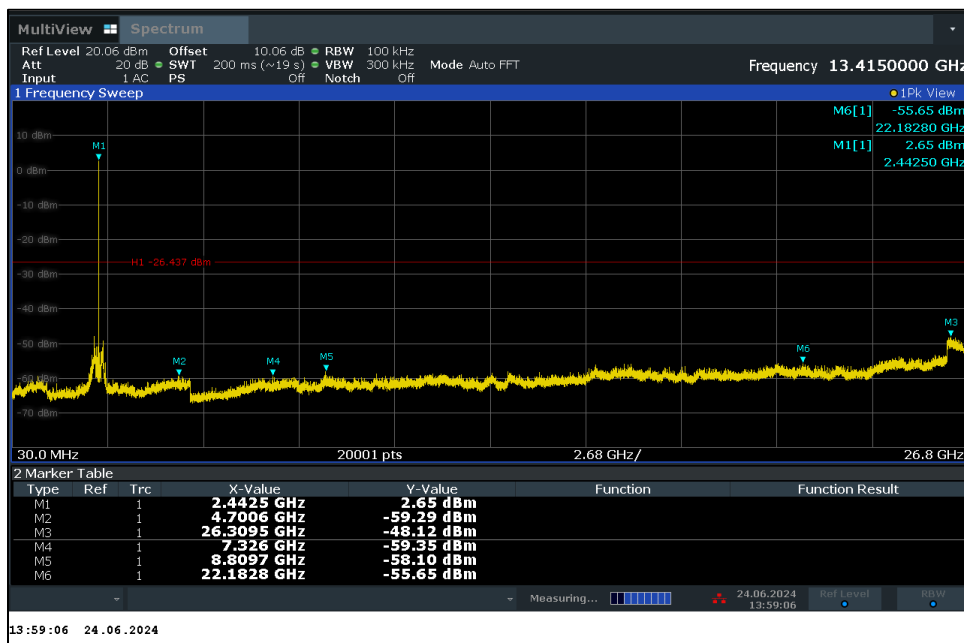

Conducted Emission: Non-Restricted Band 2442 MHz, 1Mbps.


Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 44 of 104  
Seite 44 von 104

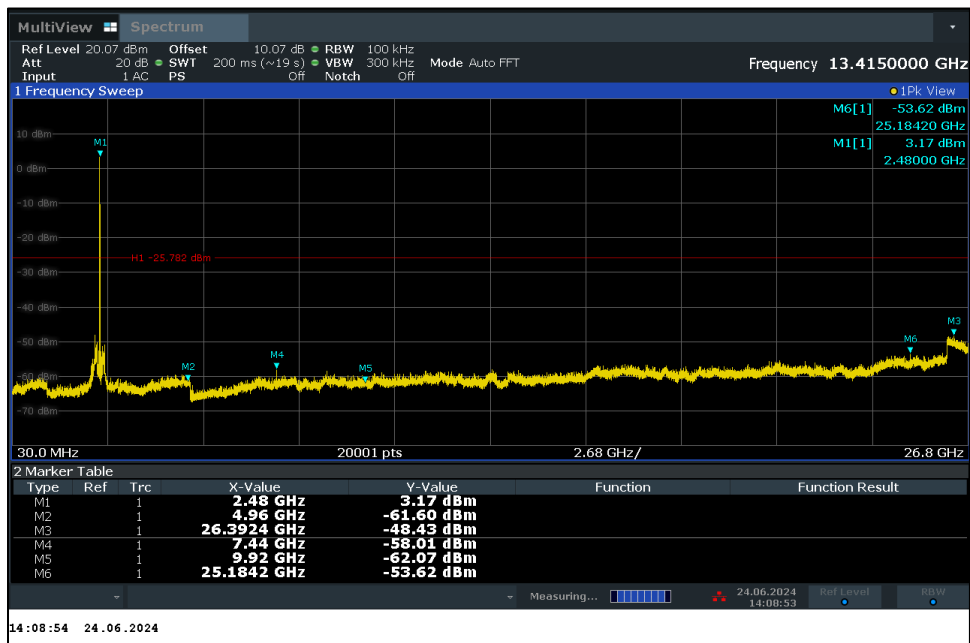

Conducted Emission: Non-Restricted Band 2480 MHz, 1Mbps.


#### 5.4.3.4 Conducted Spurious Emission: 2 Mbps

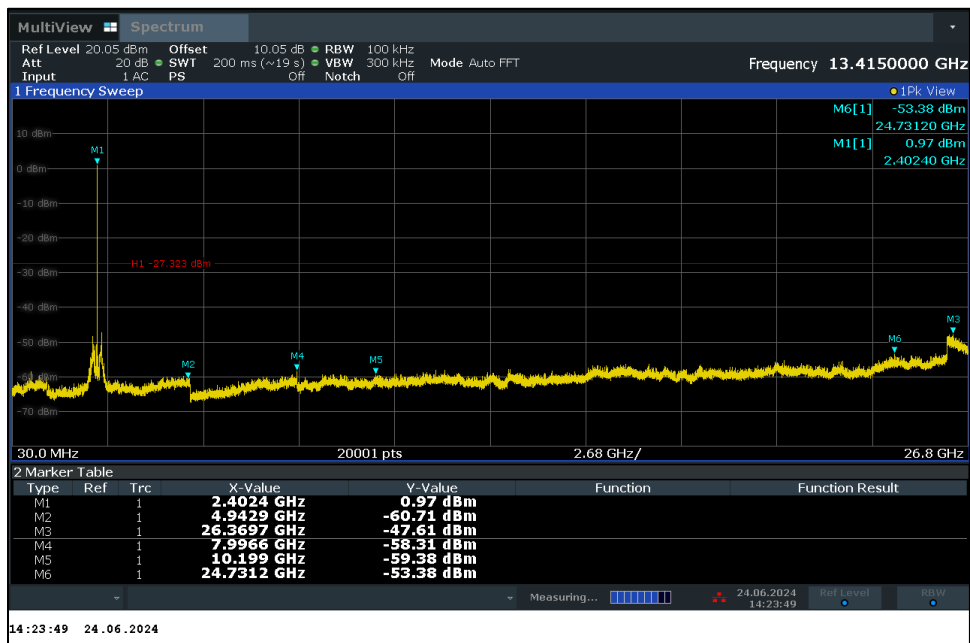


Conducted Emission: Non-Restricted Band 2402 MHz, 2Mbps.

Test report no.: US245QTK.001 Rev.01  
Prüfbericht-Nr.:

Page 45 of 104  
Seite 45 von 104

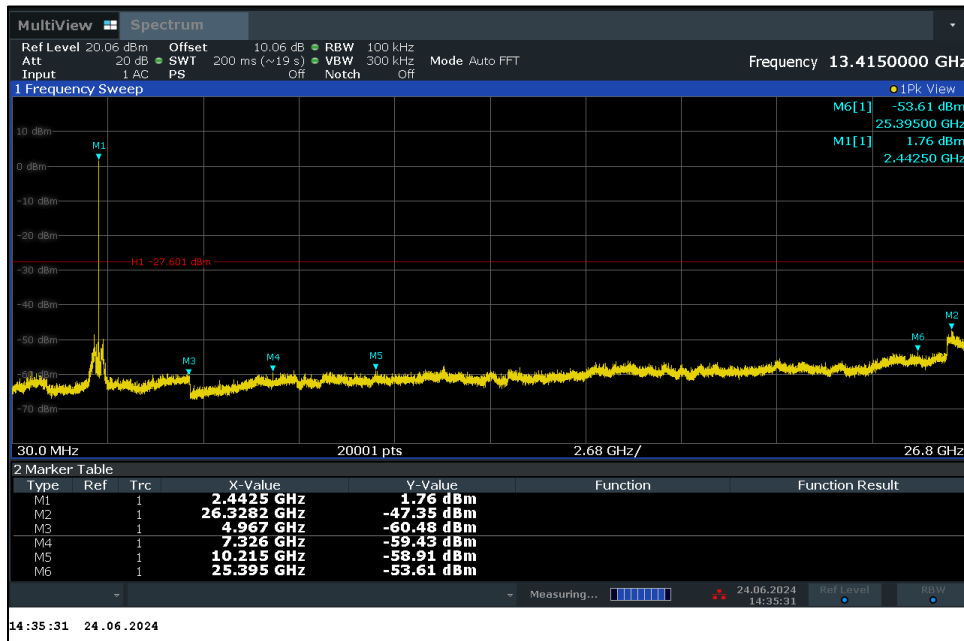

Conducted Emission: Non-Restricted Band 2442 MHz, 2Mbps.

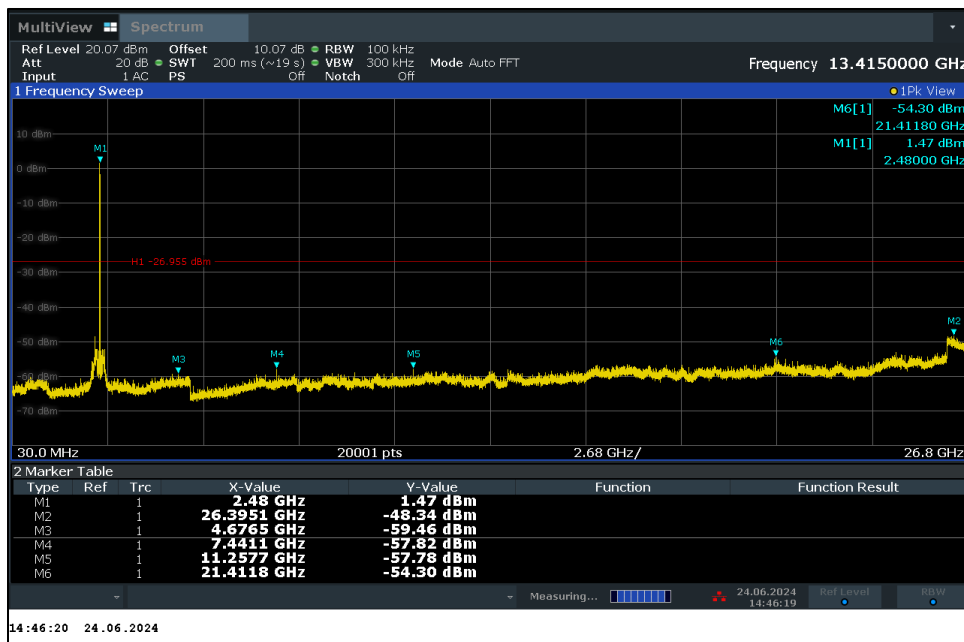

Conducted Emission: Non-Restricted Band 2480 MHz, 2Mbps.