


## Appendix C. Co-location

## 1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	57%
Test Engineer	YC Chen	Test Mode	Mode 1: EUT- IBR600LE2 (LTE 4G band 25 + WiFi)

Horizontal

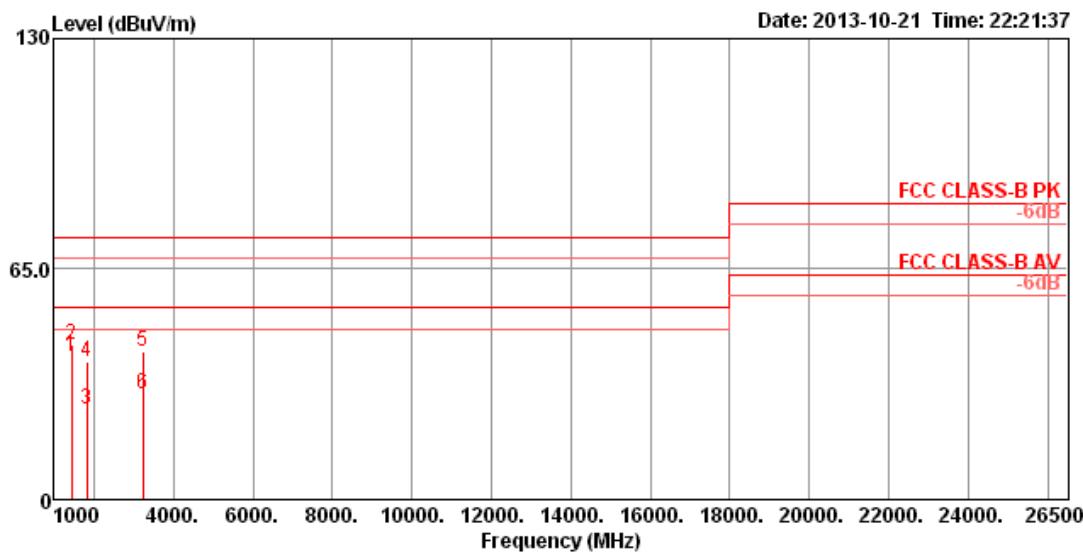

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1439.98	40.44	54.00	-13.56	49.48	2.78	25.48	37.30	137	302	HORIZONTAL Average
2	1439.99	43.88	74.00	-30.12	52.92	2.78	25.48	37.30	137	302	HORIZONTAL Peak
3	1807.80	25.63	54.00	-28.37	32.52	3.23	26.17	36.29	175	77	HORIZONTAL Average
4	1807.95	38.77	74.00	-35.23	45.66	3.23	26.17	36.29	175	77	HORIZONTAL Peak
5	3229.35	41.66	74.00	-32.34	43.21	4.38	30.04	35.97	100	240	HORIZONTAL Peak
6	3229.36	29.86	54.00	-24.14	31.41	4.38	30.04	35.97	100	240	HORIZONTAL Average

## Vertical

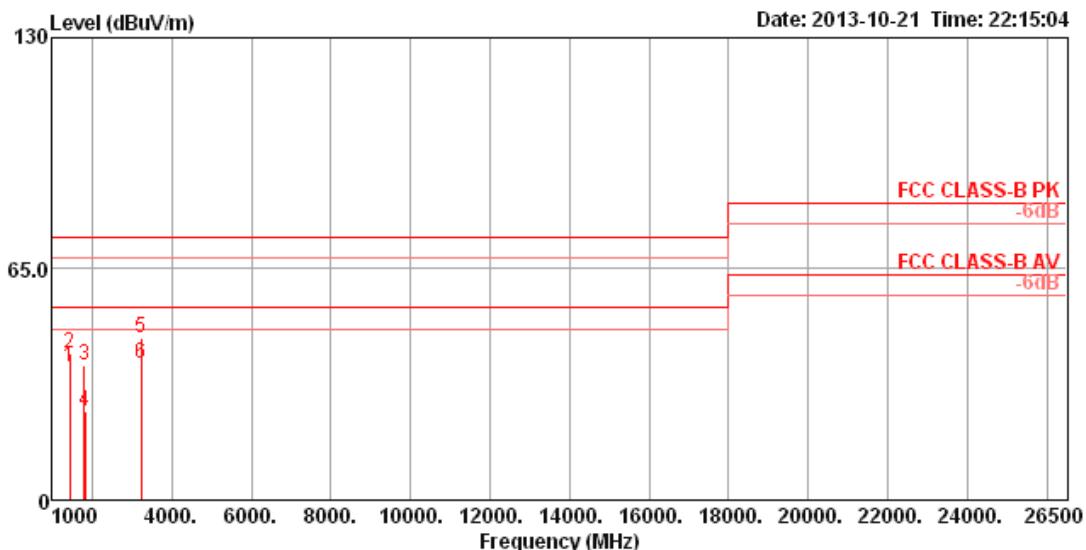

Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
					Line	Limit	Level						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	1440.00	37.58	54.00	-16.42	46.62	2.78	25.48	37.30	100	40	VERTICAL	Average	
2	1440.00	41.32	74.00	-32.68	50.36	2.78	25.48	37.30	100	40	VERTICAL	Peak	
3	1800.95	37.80	74.00	-36.20	44.77	3.22	26.12	36.31	129	352	VERTICAL	Peak	
4	1807.75	24.93	54.00	-29.07	31.82	3.23	26.17	36.29	129	352	VERTICAL	Average	
5	3229.15	45.40	74.00	-28.60	46.95	4.38	30.04	35.97	100	200	VERTICAL	Peak	
6	3229.31	38.50	54.00	-15.50	40.05	4.38	30.04	35.97	100	200	VERTICAL	Average	