


## Appendix C. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	61%
Test Engineer	YC Chen	Configurations	GSM Link + WiFi Link

### Horizontal

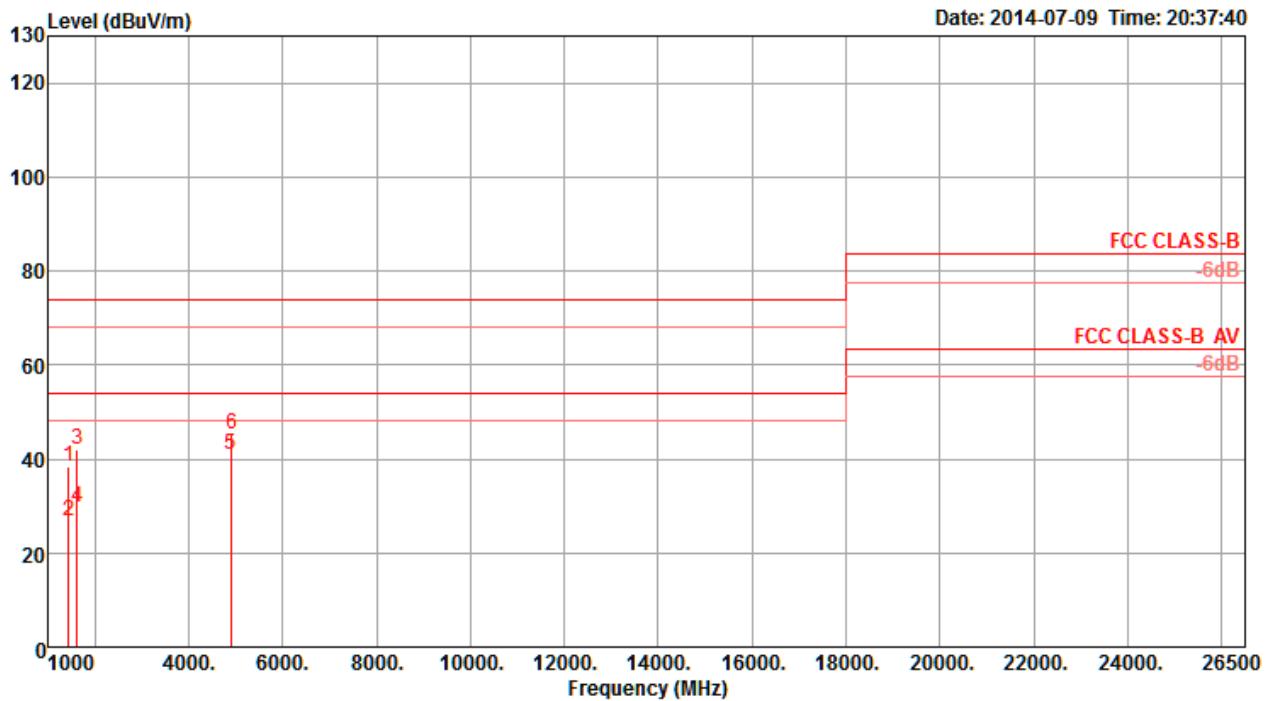

Freq	Level	Limit	Over	Read	Cable			A/Pos	T/Pos	Pol/Phase	Remark
					Line	Limit	Level				
1	1444.64	38.22	74.00	-35.78	45.77	2.21	25.31	35.07	100	279	HORIZONTAL Peak
2	1445.24	26.65	54.00	-27.35	34.20	2.21	25.31	35.07	100	279	HORIZONTAL Average
3	1628.00	41.85	74.00	-32.15	48.06	2.36	26.27	34.84	100	10	HORIZONTAL Peak
4	1628.00	29.74	54.00	-24.26	35.95	2.36	26.27	34.84	100	10	HORIZONTAL Average
5	4904.10	40.77	54.00	-13.23	38.38	4.22	32.73	34.56	100	76	HORIZONTAL Average
6	4920.50	45.10	74.00	-28.90	42.66	4.23	32.76	34.55	100	76	HORIZONTAL Peak

## Vertical

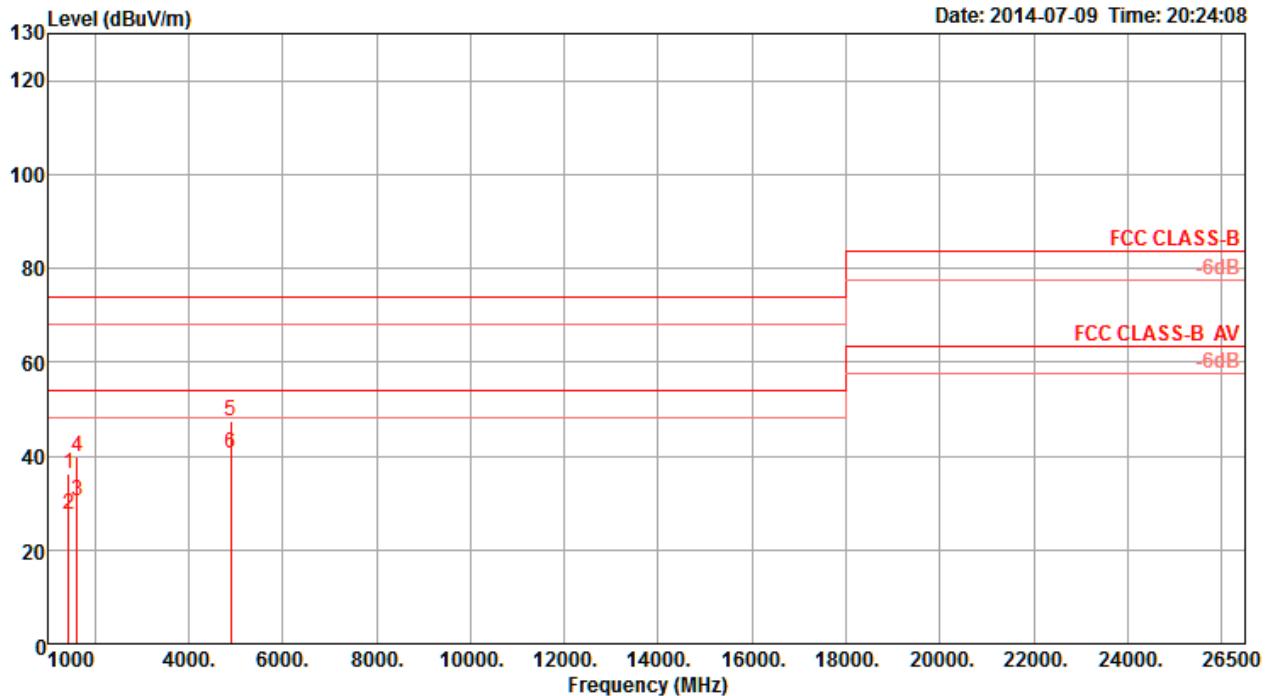

Freq	Level	Limit	Over	Read	Cable			A/Pos	T/Pos	Pol/Phase	Remark
					Line	Limit	Loss				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	Factor	dB	cm	deg	
1	1440.04	36.25	74.00	-37.75	43.80	2.21	25.31	35.07	100	174	VERTICAL Peak
2	1440.08	27.62	54.00	-26.38	35.17	2.21	25.31	35.07	100	174	VERTICAL Average
3	1628.00	30.29	54.00	-23.71	36.50	2.36	26.27	34.84	100	221	VERTICAL Average
4	1632.00	39.74	74.00	-34.26	45.95	2.36	26.27	34.84	100	221	VERTICAL Peak
5	4903.90	47.31	74.00	-26.69	44.92	4.22	32.73	34.56	100	302	VERTICAL Peak
6	4904.00	40.42	54.00	-13.58	38.03	4.22	32.73	34.56	100	302	VERTICAL Average