

## FCC Test Report

**Report No.:** RF150720E02

**FCC ID:** UXX-S4A542A

**Test Model:** S4A543A

**Series Model:** S4A542A

**Received Date:** July 20, 2015

**Test Date:** July 22 to Aug. 06, 2015

**Issued Date:** Aug. 20, 2015

**Applicant:** Cradlepoint, Inc

**Address:** 1111 W. Jefferson Street, Suite 400, Boise, ID 83702 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**Test Location (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**Test Location (3):** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City, Taiwan  
R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	10
3.2.1 Test Mode Applicability and Tested Channel Detail.....	11
3.3 Duty Cycle of Test Signal.....	13
3.4 Description of Support Units.....	14
3.4.1 Configuration of System under Test.....	15
3.5 General Description of Applied Standards.....	18
<b>4 Test Types and Results</b> .....	<b>19</b>
4.1 Radiated Emission and Bandedge Measurement.....	19
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	19
4.1.2 Test Instruments.....	20
4.1.3 Test Procedures.....	22
4.1.4 Deviation from Test Standard.....	22
4.1.5 Test Set Up.....	23
4.1.6 EUT Operating Conditions.....	23
4.1.7 Test Results.....	24
4.2 Conducted Emission Measurement.....	37
4.2.1 Limits of Conducted Emission Measurement.....	37
4.2.2 Test Instruments.....	37
4.2.3 Test Procedures.....	38
4.2.4 Deviation from Test Standard.....	38
4.2.5 Test Setup.....	38
4.2.6 EUT Operating Conditions.....	38
4.2.7 Test Results (Mode 1).....	39
4.2.8 Test Results (Mode 2).....	41
4.2.9 Test Results (Mode 3).....	43
4.2.10 Test Results (Mode 4).....	45
4.3 6dB Bandwidth Measurement.....	47
4.3.1 Limits of 6dB Bandwidth Measurement.....	47
4.3.2 Test Setup.....	47
4.3.3 Test Instruments.....	47
4.3.4 Test Procedure.....	47
4.3.5 Deviation from Test Standard.....	47
4.3.6 EUT Operating Conditions.....	47
4.3.7 Test Result.....	48
4.4 Conducted Output Power Measurement.....	50
4.4.1 Limits of Conducted Output Power Measurement.....	50
4.4.2 Test Setup.....	50
4.4.3 Test Instruments.....	50
4.4.4 Test Procedures.....	50
4.4.5 Deviation from Test Standard.....	50
4.4.6 EUT Operating Conditions.....	50
4.4.7 Test Results.....	51
4.5 Power Spectral Density Measurement.....	53
4.5.1 Limits of Power Spectral Density Measurement.....	53
4.5.2 Test Setup.....	53
4.5.3 Test Instruments.....	53



4.5.4	Test Procedure .....	53
4.5.5	Deviation from Test Standard .....	53
4.5.6	EUT Operating Condition .....	53
4.5.7	Test Results .....	54
4.6	Conducted Out of Band Emission Measurement.....	56
4.6.1	Limits of Conducted Out of Band Emission Measurement .....	56
4.6.2	Test Setup.....	56
4.6.3	Test Instruments .....	56
4.6.4	Test Procedure .....	56
4.6.5	Deviation from Test Standard .....	56
4.6.6	EUT Operating Condition .....	56
4.6.7	Test Results .....	57
<b>5</b>	<b>Pictures of Test Arrangements.....</b>	<b>66</b>
	<b>Appendix – Information on the Testing Laboratories .....</b>	<b>67</b>



### Release Control Record

Issue No.	Description	Date Issued
RF150720E02	Original release.	Aug. 20, 2015



A D T

## 1 Certificate of Conformity

**Product:** Advanced Edge Router

**Brand:** cradlepoint

**Test Model:** S4A543A

**Series Model:** S4A542A

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** Cradlepoint, Inc

**Test Date:** July 22 to Aug. 06, 2015

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** \_\_\_\_\_, **Date:** \_\_\_\_\_  
Claire Kuan / Specialist

**Approved by :** \_\_\_\_\_, **Date:** \_\_\_\_\_  
May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -2.45dB at 0.15922MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz & 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	For WLAN: Antenna connector is i-pex(MHF) not a standard connector.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.37 dB
	200MHz ~ 1000MHz	3.65 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	3.88 dB
	18GHz ~ 40GHz	4.11 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Advanced Edge Router
Brand	cradlepoint
Test Model	S4A543A
Series Model	S4A542A
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	<b>2.4GHz:</b> 2.412GHz ~ 2.462GHz <b>5GHz:</b> 5.18GHz ~ 5.24GHz, 5.745GHz ~ 5.825GHz
Number of Channel	<b>2.4GHz:</b> 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 <b>5GHz:</b> 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	<b>CDD Mode</b> <b>2.4GHz:</b> 802.11b: 710.332mW 802.11g: 643.541mW 802.11n (HT20): 636.651mW 802.11n (HT40): 195.239mW <b>5GHz:</b> 802.11a: 462.954mW 802.11ac (VHT20): 414.506mW 802.11ac (VHT40): 333.183mW 802.11ac (VHT80): 53.35mW <b>Beamforming Mode</b> <b>2.4GHz:</b> 802.11n (HT20): 636.651mW 802.11n (HT40): 195.239mW <b>5GHz:</b> 802.11ac (VHT20): 414.506mW 802.11ac (VHT40): 333.183mW 802.11ac (VHT80): 53.35mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note

Accessory Device	Adapter x 1
Data Cable Supplied	RJ45 cable (1.5m, unshielded) x 1

Note:

- There are WLAN and 3G/LTE technology used for the EUT.
- WLAN/3G/LTE coexistence mode:

Condition	Technology			
1	WLAN(2.4GHz)	WLAN(5GHz)	3G (Model No.: MC7354)	3G (Model No.: MC400LPE)
2	WLAN(2.4GHz)	WLAN(5GHz)	3G (Model No.: MC7354)	LTE (Model No.: MC400LPE)
3	WLAN(2.4GHz)	WLAN(5GHz)	LTE (Model No.: MC7354)	3G (Model No.: MC400LPE)
4	WLAN(2.4GHz)	WLAN(5GHz)	LTE (Model No.: MC7354)	LTE (Model No.: MC400LPE)

**Note:** The emission of the simultaneous operation has been evaluated and no non-compliance was found.

- The EUT has two model names which are identical to each other in all aspects except for the following table: (USB device apply for mobile AP with 4G module, Model No.: MC400LPE test only not sale together)

Model No.	WiFi Function	3G/LTE (3G module: FCC ID: N7NMC7355, Model No.: MC7354)	3G/LTE (with optional 3G USB device: Contains FCC ID: N7NMC7355, Model no.: MC400LPE)
S4A542A	√	-	√
S4A543A	√	√	√

From the above models, model: **S4A543A** was selected as the representative model for the test and its data is recorded in this report.

- The EUT must be supplied with a power adapter and following four different models could be chosen as following table:

No	Brand Name	Model No.	Spec.
1	Ktec	KSAS0361200300D5	Input: 100-240Vac, 50/60Hz, 1.0A Output: 12Vdc, 3000mA DC output cable: 1.8m, unshielded
2	Ktec	KSAS0501200400M2	Input: 100-240Vac, 50/60Hz, 1.2A AC output cable: 2m, unshielded Output: 12Vdc, 4000mA DC output cable: 1.2m, unshielded
3	FSP GROUP, INC.	FSP040-DHMN2	Input: 100-240Vac, 50/60Hz, 1.2A Output: 12Vdc, 3400mA DC output cable: 1.5m, unshielded
4	FSP GROUP, INC.	FSP048-RHAN2	Input: 100-240Vac, 50/60Hz, 1.5A AC output cable: 1.8m, unshielded Output: 12Vdc, 4000mA DC output cable: 1.55m, unshielded with one core

From the above adapters, the worst case was found in **Adapter 4**. Therefore only the test data of the mode was recorded in this report.



5. The EUT incorporates a MIMO function with beamforming.

<b>For 2.4GHz Band</b>			
<b>MODULATION MODE</b>	<b>DATA RATE (MCS)</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11b</b>	1 ~ 11Mbps	2TX	2RX
<b>802.11g</b>	6 ~ 54Mbps	2TX	2RX
<b>802.11n (HT20) &amp; 802.11n (HT40)</b>	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
<b>For 5GHz Band</b>			
<b>802.11a</b>	6 ~ 54Mbps	2TX	2RX
<b>802.11n (HT20) &amp; 802.11n (HT40)</b>	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
<b>802.11ac (VHT20)</b>	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
<b>802.11ac (VHT40) &amp; 802.11ac (VHT80)</b>	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX

Note: 1. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)  
2. \* From the above modulation modes, the 802.11a, b, g without beamforming.

6. The antennas provided to the EUT, please refer to the following table:

<b>For WLAN used</b>						
<b>Antenna No.</b>	<b>Transmitter Circuit</b>	<b>Model</b>	<b>Antenna Gain(dBi)</b>	<b>Frequency range</b>	<b>Antenna Type</b>	<b>Connecter Type</b>
WIFI Antenna 1	2.4G Chain 0	RFA-25-G170-70B-154	3.5	2400~24835MHz	Dipole	i-pex(MHF)
	5G Chain 1		4.9	5150~5250MHz		
			4.9	5725~5850MHz		
WIFI Antenna 2	2.4G Chain 1	RFA-25-G170-70-64	3.5	2400~24835MHz	Dipole	
	5G Chain 0		4.9	5150~5250MHz		
			4.9	5725~5850MHz		
<b>For LTE used</b>						
<b>Antenna No.</b>	<b>Model</b>	<b>Antenna Gain(dBi)</b>	<b>Frequency range</b>	<b>Antenna Type</b>	<b>Connecter Type</b>	
LTE Antenna 1	YWX-6241SAXX-711C	2	698~960MHz	Dipole	SMA	
LTE Antenna 1	YWX-6241SAXX-711C	3	1710~2700MHz	Dipole	SMA	
LTE Antenna 2	RFA-LTE-T196-U-B70	-2	698~960MHz	Dipole	SMA	
LTE Antenna 2	RFA-LTE-T196-U-B70	1	1710~2700MHz	Dipole	SMA	

**Note:** 1. For LTE: Antenna No.: 1 was selected as representative antenna for the test.

7. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE $<$ 1G	PLC	APCM	
1	√	√	√	√	With Adapter 4
2	-	-	√	-	With Adapter 1
3	-	-	√	-	With Adapter 2
4	-	-	√	-	With Adapter 3

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE $<$ 1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

**NOTE:** “-” means no effect.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD Mode</b>					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
<b>Beamforming Mode</b>					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 68%RH	120Vac, 60Hz	Weiwei Lo
RE $<$ 1G	25deg. C, 68%RH	120Vac, 60Hz	Weiwei Lo
PLC	25deg. C, 65%RH	120Vac, 60Hz	JyunChun Lin
APCM	25deg. C, 60%RH	120Vac, 60Hz	Weiwei Lo

### 3.3 Duty Cycle of Test Signal

If duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

If duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.


**802.11b:** Duty cycle =  $12.41/12.43 = 0.998$

**802.11g:** Duty cycle =  $2.057/2.081 = 0.988$


**802.11n (HT20):** Duty cycle =  $1.914/1.943 = 0.985$

**802.11n (HT40):** Duty cycle =  $0.938/0.972 = 0.965$ , Duty factor =  $10 * \log[1/(0.938/0.972)] = 0.15$


**802.11b**

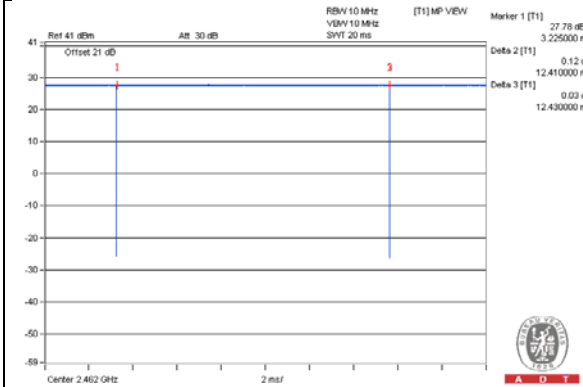


**802.11g**

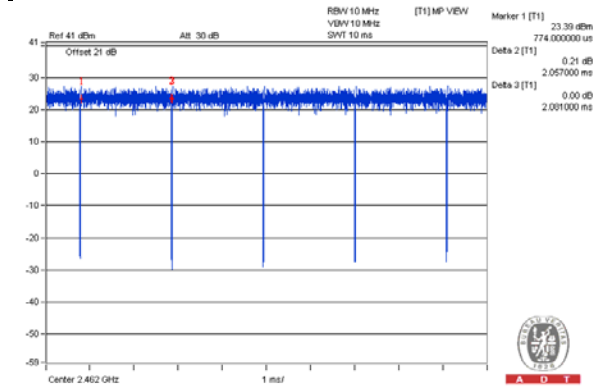

**802.11n (HT20)**

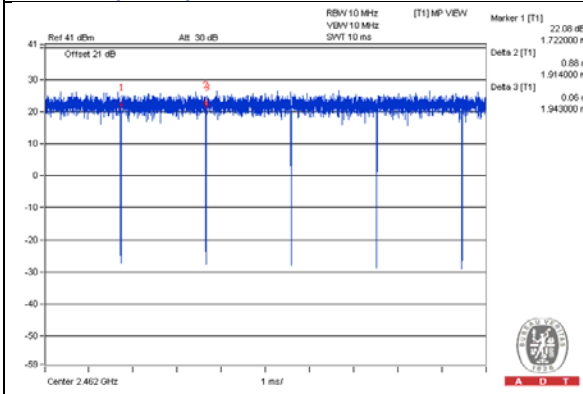

**802.11n (HT40)**

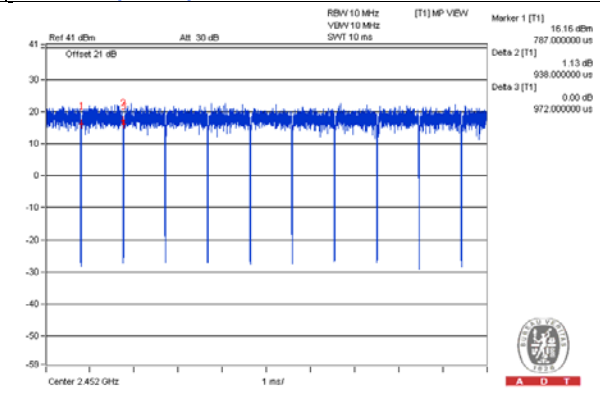

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	iPod shuffle	Apple	MC749TA/A	CC4DMFJUDFDM	NA	Provided by Lab
B.	NOTEBOOK COMPUTER	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
C.	NOTEBOOK COMPUTER	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
D.	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab
E.	USB device apply for mobile AP with 4G module	cradlepoint	MC400LPE	NA	N7NMC7355	Supplied by Client


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC (For Mode 1)	1	1.55	No	1	Supplied by Client
	DC (For Mode 2)	1	1.8	No	0	Supplied by Client
	DC (For Mode 3)	1	1.2	No	0	Supplied by Client
	DC (For Mode 4)	1	1.5	No	0	Supplied by Client
2.	AC (For Mode 1)	1	1.8	No	0	Supplied by Client
3.	AC (For Mode 3)	1	2	No	0	Supplied by Client
4.	USB	1	0.1	Yes	0	Provided by Lab
5.	RJ-45	1	10	No	0	Provided by Lab
6.	RJ-45	1	10	No	0	Provided by Lab
7.	RJ-45	3	10	No	0	Provided by Lab

### 3.4.1 Configuration of System under Test

For Mode 1:

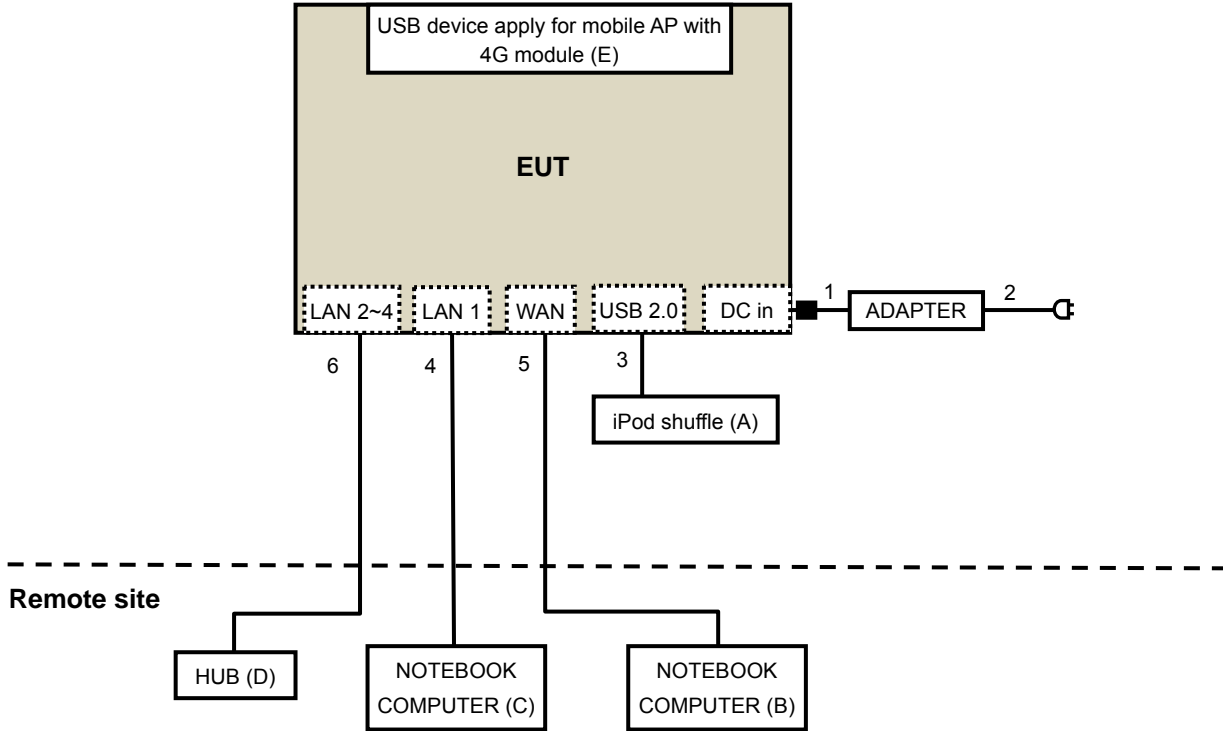


For Mode 2, 4:

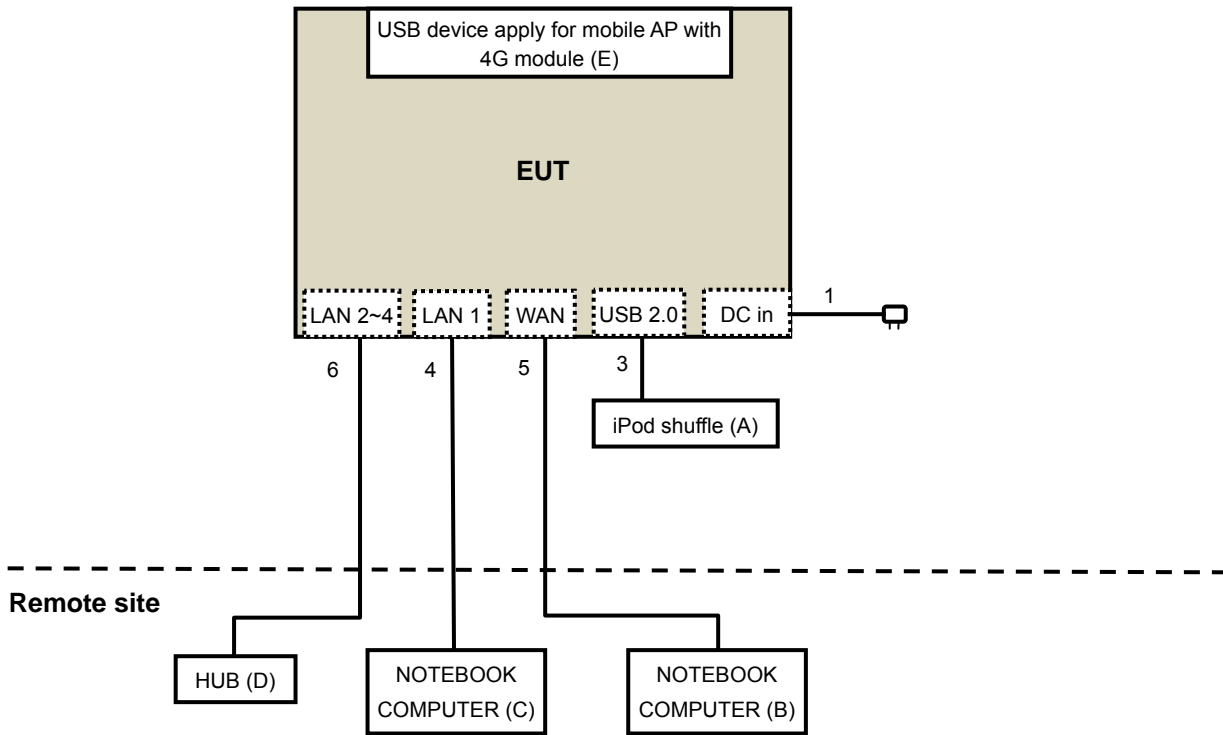



**For Mode 3:**

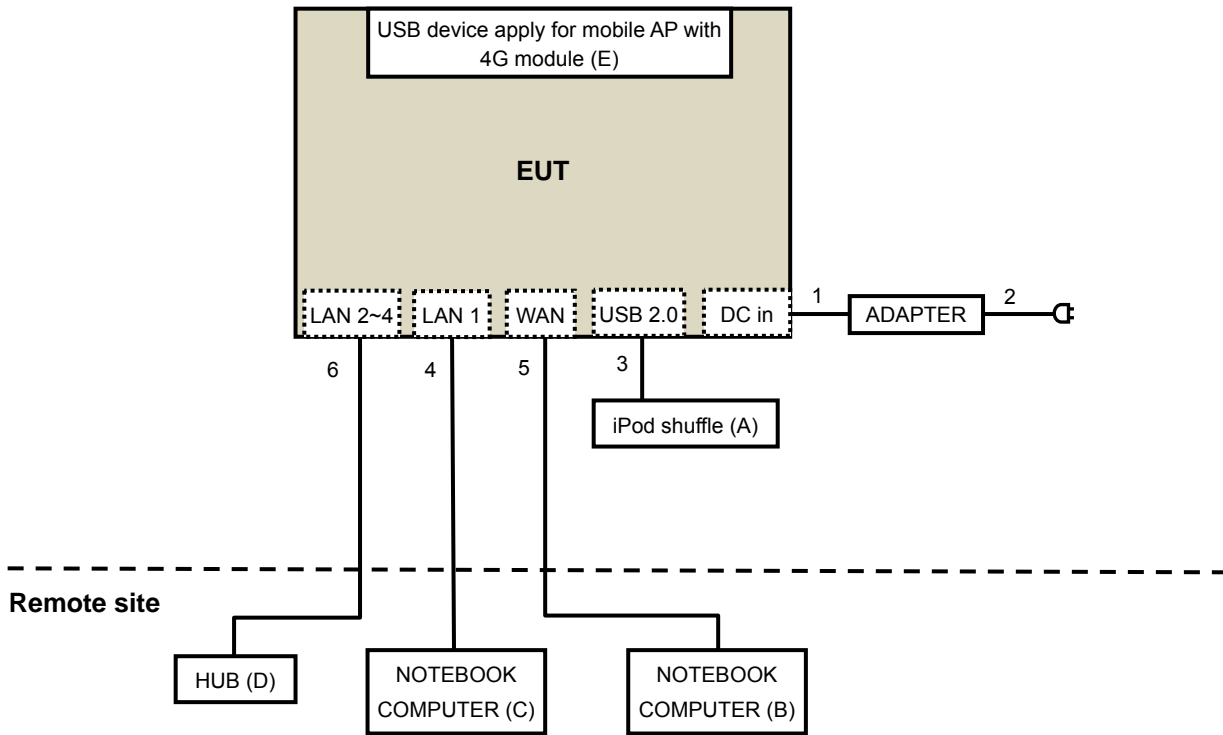

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v03r03**

**662911 D01 Multiple Transmitter Output v02r01**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

**For above 1GHz test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210105	July 24, 2015	July 23, 2016
Horn_Antenna AISI	AIH.8018	000032009111 0	Feb. 09, 2015	Feb. 08, 2016
Pre-Amplifier Agilent	8449B	3008A02578	June 23, 2015	June 22, 2016
RF Cable	NA	131205 131216 131217 SNMY23684/ 4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	June 26, 2015	June 25, 2016
Pre-Amplifier SPACEK LABS	SLKka-48-6	9K16	Dec. 12, 2014	Dec. 11, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Feb. 05, 2015	Feb. 04, 2016
RF Cable	NA	329751/4 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016
Power meter Anritsu	ML2495A	1014008	Apr. 28, 2015	Apr. 27, 2016
Power sensor Anritsu	MA2411B	0917122	Apr. 28, 2015	Apr. 27, 2016
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40-S P-AR	MAA0812-00 8	Jan. 12, 2015	Jan. 11, 2016

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. The FCC Site Registration No. is 966073.
4. The VCCI Site Registration No. is G-137.
5. The CANADA Site Registration No. is IC 7450H-2.
6. Tested Date: July 28 to Aug. 03, 2015

**For below 1GHz test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 12, 2014	Dec. 11, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 06, 2015	Feb. 05, 2016
RF Cable	8D-FB	CHGCAB-001 -1 CHGCAB-001 -2	Oct. 04, 2014	Oct. 03, 2015
	RF-141	CHGCAB-004	Oct. 04, 2014	Oct. 03, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. The FCC Site Registration No. is 966073.
4. The CANADA Site Registration No. is IC 7450H-2.
5. Tested Date: July 22, 2015

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq$  98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup

##### <Frequency Range below 1GHz>

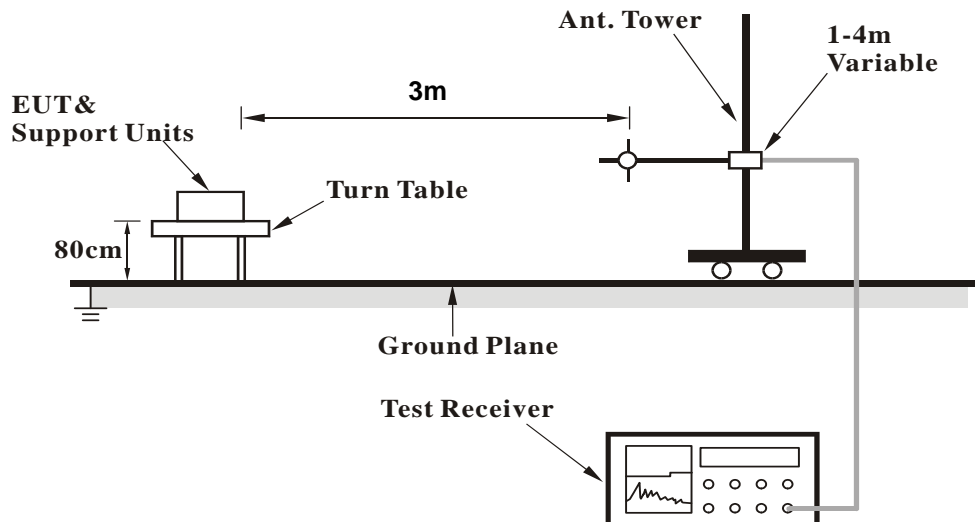

##### <Frequency Range above 1GHz>

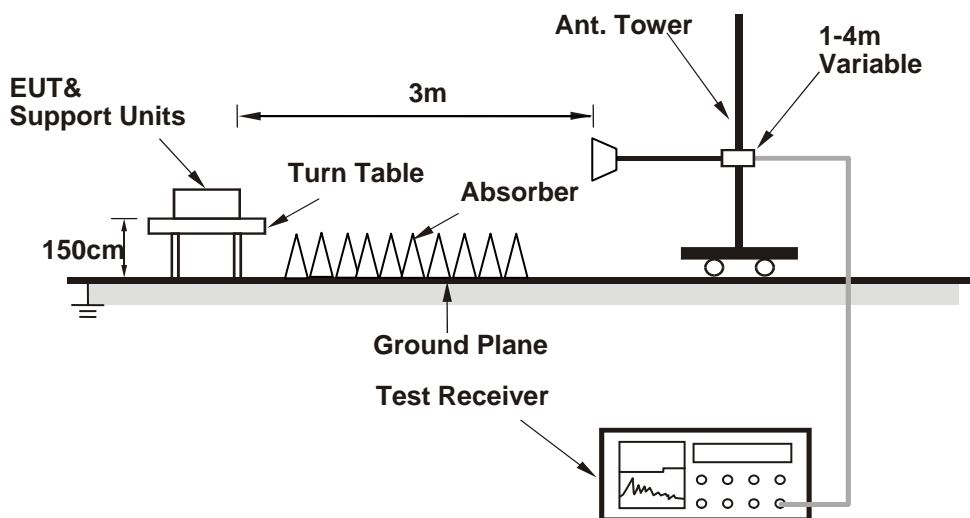

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

1. Placed the EUT on the testing table.
2. Connect the EUT with the support unit C (Notebook Computer) which is placed on a testing table.
3. The communication partner run test program "Mtool.exe[v2.0.1.0]" to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 Test Results

**ABOVE 1GHz DATA :**

**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.3 PK	74.0	-12.7	1.48 H	115	61.46	-0.16
2	2390.00	53.7 AV	54.0	-0.3	1.48 H	115	53.86	-0.16
3	*2412.00	118.9 PK			1.52 H	142	119.00	-0.10
4	*2412.00	116.2 AV			1.52 H	142	116.30	-0.10
5	4824.00	46.4 PK	74.0	-27.6	1.00 H	58	37.64	8.76
6	4824.00	38.2 AV	54.0	-15.8	1.00 H	58	29.44	8.76

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	1.68 V	68	57.56	-0.16
2	2390.00	46.9 AV	54.0	-7.1	1.68 V	68	47.06	-0.16
3	*2412.00	111.1 PK			1.20 V	111	111.20	-0.10
4	*2412.00	108.2 AV			1.20 V	111	108.30	-0.10
5	4824.00	45.9 PK	74.0	-28.1	1.00 V	20	37.14	8.76
6	4824.00	37.2 AV	54.0	-16.8	1.00 V	20	28.44	8.76

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.3 PK			1.55 H	22	119.33	-0.03
2	*2437.00	117.9 AV			1.55 H	22	117.93	-0.03
3	4874.00	45.7 PK	74.0	-28.3	1.54 H	42	36.79	8.91
4	4874.00	37.7 AV	54.0	-16.3	1.54 H	42	28.79	8.91
5	7311.00	51.2 PK	74.0	-22.8	1.01 H	242	34.75	16.45
6	7311.00	43.4 AV	54.0	-10.6	1.01 H	242	26.95	16.45

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.5 PK			1.22 V	21	111.53	-0.03
2	*2437.00	109.9 AV			1.22 V	21	109.93	-0.03
3	4874.00	45.2 PK	74.0	-28.8	1.04 V	22	36.29	8.91
4	4874.00	36.7 AV	54.0	-17.3	1.04 V	22	27.79	8.91
5	7311.00	51.8 PK	74.0	-22.2	1.02 V	137	35.35	16.45
6	7311.00	39.6 AV	54.0	-14.4	1.02 V	137	23.15	16.45

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.0 PK			1.49 H	203	117.95	0.05
2	*2462.00	116.0 AV			1.49 H	203	115.95	0.05
3	2483.50	58.2 PK	74.0	-15.8	2.03 H	149	58.09	0.11
4	2483.50	53.3 AV	54.0	-0.7	2.03 H	149	53.19	0.11
5	4924.00	46.4 PK	74.0	-27.6	1.55 H	62	37.31	9.09
6	4924.00	38.4 AV	54.0	-15.6	1.55 H	62	29.31	9.09
7	7386.00	51.4 PK	74.0	-22.6	1.56 H	228	34.80	16.60
8	7386.00	43.4 AV	54.0	-10.6	1.56 H	228	26.80	16.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.2 PK			1.05 V	9	110.15	0.05
2	*2462.00	108.0 AV			1.05 V	9	107.95	0.05
3	4924.00	44.4 PK	74.0	-29.6	1.00 V	9	35.31	9.09
4	4924.00	36.2 AV	54.0	-17.8	1.00 V	9	27.11	9.09
5	7386.00	52.1 PK	74.0	-21.9	1.00 V	146	35.50	16.60
6	7386.00	40.0 AV	54.0	-14.0	1.00 V	146	23.40	16.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.54 H	120	72.56	-0.16
2	2390.00	53.6 AV	54.0	-0.4	1.54 H	120	53.76	-0.16
3	*2412.00	115.9 PK			1.52 H	118	116.00	-0.10
4	*2412.00	105.4 AV			1.52 H	118	105.50	-0.10
5	4824.00	46.1 PK	74.0	-27.9	1.54 H	44	37.34	8.76
6	4824.00	38.0 AV	54.0	-16.0	1.54 H	44	29.24	8.76

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.00 V	90	59.46	-0.16
2	2390.00	41.9 AV	54.0	-12.1	1.00 V	90	42.06	-0.16
3	*2412.00	108.2 PK			1.00 V	90	108.30	-0.10
4	*2412.00	100.0 AV			1.00 V	90	100.10	-0.10
5	4824.00	46.3 PK	74.0	-27.7	1.00 V	30	37.54	8.76
6	4824.00	37.5 AV	54.0	-16.5	1.00 V	30	28.74	8.76

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	1.15 H	142	69.66	-0.16
2	2390.00	50.1 AV	54.0	-3.9	1.15 H	142	50.26	-0.16
3	*2437.00	120.3 PK			1.52 H	118	120.33	-0.03
4	*2437.00	109.5 AV			1.52 H	118	109.53	-0.03
5	2483.50	68.1 PK	74.0	-5.9	1.21 H	152	67.99	0.11
6	2483.50	45.3 AV	54.0	-8.7	1.21 H	152	45.19	0.11
7	4874.00	46.0 PK	74.0	-28.0	1.54 H	53	37.09	8.91
8	4874.00	38.1 AV	54.0	-15.9	1.54 H	53	29.19	8.91
9	7311.00	51.0 PK	74.0	-23.0	1.07 H	247	34.55	16.45
10	7311.00	43.2 AV	54.0	-10.8	1.07 H	247	26.75	16.45

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.7 PK	74.0	-17.3	1.10 V	30	56.86	-0.16
2	2390.00	38.9 AV	54.0	-15.1	1.10 V	30	39.06	-0.16
3	*2437.00	112.6 PK			1.10 V	30	112.63	-0.03
4	*2437.00	104.1 AV			1.10 V	30	104.13	-0.03
5	2483.50	55.6 PK	74.0	-18.4	1.12 V	21	55.49	0.11
6	2483.50	34.1 AV	54.0	-19.9	1.12 V	21	33.99	0.11
7	4874.00	45.4 PK	74.0	-28.6	1.00 V	9	36.49	8.91
8	4874.00	37.0 AV	54.0	-17.0	1.00 V	9	28.09	8.91
9	7311.00	51.9 PK	74.0	-22.1	1.01 V	136	35.45	16.45
10	7311.00	39.7 AV	54.0	-14.3	1.01 V	136	23.25	16.45

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	120.5 PK			1.55 H	119	120.45	0.05
2	*2462.00	111.5 AV			1.55 H	119	111.45	0.05
<b>3</b>	<b>2483.50</b>	<b>73.9 PK</b>	<b>74.0</b>	<b>-0.1</b>	<b>1.49 H</b>	<b>251</b>	<b>73.79</b>	<b>0.11</b>
4	2483.50	53.4 AV	54.0	-0.6	1.49 H	251	53.29	0.11
5	4924.00	45.6 PK	74.0	-28.4	1.54 H	45	36.51	9.09
6	4924.00	37.4 AV	54.0	-16.6	1.54 H	45	28.31	9.09
7	7386.00	50.8 PK	74.0	-23.2	1.01 H	231	34.20	16.60
8	7386.00	43.0 AV	54.0	-11.0	1.01 H	231	26.40	16.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.8 PK			1.02 V	10	112.75	0.05
2	*2462.00	106.1 AV			1.02 V	10	106.05	0.05
3	2483.50	60.9 PK	74.0	-13.1	1.03 V	23	60.79	0.11
4	2483.50	42.9 AV	54.0	-11.1	1.03 V	23	42.79	0.11
5	4924.00	44.8 PK	74.0	-29.2	1.03 V	28	35.71	9.09
6	4924.00	36.6 AV	54.0	-17.4	1.03 V	28	27.51	9.09
7	7386.00	50.9 PK	74.0	-23.1	1.12 V	158	34.30	16.60
8	7386.00	38.8 AV	54.0	-15.2	1.12 V	158	22.20	16.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11n (HT20)

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.9 PK	74.0	-0.1	1.47 H	124	74.06	-0.16
2	2390.00	51.1 AV	54.0	-2.9	1.47 H	124	51.26	-0.16
3	*2412.00	113.4 PK			1.50 H	112	113.50	-0.10
4	*2412.00	104.3 AV			1.50 H	112	104.40	-0.10
5	4824.00	45.7 PK	74.0	-28.3	1.00 H	62	36.94	8.76
6	4824.00	38.1 AV	54.0	-15.9	1.00 H	62	29.34	8.76

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.3 PK	74.0	-16.7	1.01 V	80	57.46	-0.16
2	2390.00	41.9 AV	54.0	-12.1	1.01 V	80	42.06	-0.16
3	*2412.00	105.2 PK			1.20 V	21	105.30	-0.10
4	*2412.00	98.0 AV			1.20 V	21	98.10	-0.10
5	4824.00	46.6 PK	74.0	-27.4	1.02 V	7	37.84	8.76
6	4824.00	37.7 AV	54.0	-16.3	1.02 V	7	28.94	8.76

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	1.19 H	114	69.36	-0.16
2	2390.00	49.7 AV	54.0	-4.3	1.19 H	114	49.86	-0.16
3	*2437.00	120.6 PK			1.54 H	109	120.63	-0.03
4	*2437.00	110.0 AV			1.54 H	109	110.03	-0.03
5	2483.50	67.7 PK	74.0	-6.3	1.18 H	163	67.59	0.11
6	2483.50	44.7 AV	54.0	-9.3	1.18 H	163	44.59	0.11
7	4874.00	45.0 PK	74.0	-29.0	1.00 H	40	36.09	8.91
8	4874.00	37.3 AV	54.0	-16.7	1.00 H	40	28.39	8.91
9	7311.00	51.1 PK	74.0	-22.9	1.25 H	232	34.65	16.45
10	7311.00	43.5 AV	54.0	-10.5	1.25 H	232	27.05	16.45

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.1 PK	74.0	-21.9	1.01 V	140	52.26	-0.16
2	2390.00	39.8 AV	54.0	-14.2	1.01 V	140	39.96	-0.16
3	*2437.00	112.5 PK			1.11 V	18	112.53	-0.03
4	*2437.00	103.8 AV			1.11 V	18	103.83	-0.03
5	2483.50	56.7 PK	74.0	-17.3	1.07 V	38	56.59	0.11
6	2483.50	39.0 AV	54.0	-15.0	1.07 V	38	38.89	0.11
7	4874.00	44.9 PK	74.0	-29.1	1.01 V	43	35.99	8.91
8	4874.00	36.6 AV	54.0	-17.4	1.01 V	43	27.69	8.91
9	7311.00	52.1 PK	74.0	-21.9	1.12 V	136	35.65	16.45
10	7311.00	39.7 AV	54.0	-14.3	1.12 V	136	23.25	16.45

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.2 PK			1.41 H	121	116.15	0.05
2	*2462.00	106.1 AV			1.41 H	121	106.05	0.05
3	2483.50	73.7 PK	74.0	-0.3	1.45 H	126	73.59	0.11
4	2483.50	48.4 AV	54.0	-5.6	1.45 H	126	48.29	0.11
5	4924.00	45.5 PK	74.0	-28.5	1.00 H	50	36.41	9.09
6	4924.00	37.5 AV	54.0	-16.5	1.00 H	50	28.41	9.09
7	7386.00	51.4 PK	74.0	-22.6	1.05 H	241	34.80	16.60
8	7386.00	43.3 AV	54.0	-10.7	1.05 H	241	26.70	16.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.1 PK			1.22 V	15	108.05	0.05
2	*2462.00	99.9 AV			1.22 V	15	99.85	0.05
3	2483.50	60.7 PK	74.0	-13.3	1.01 V	8	60.59	0.11
4	2483.50	42.8 AV	54.0	-11.2	1.01 V	8	42.69	0.11
5	4924.00	44.4 PK	74.0	-29.6	1.04 V	27	35.31	9.09
6	4924.00	36.2 AV	54.0	-17.8	1.04 V	27	27.11	9.09
7	7386.00	51.1 PK	74.0	-22.9	1.07 V	147	34.50	16.60
8	7386.00	39.1 AV	54.0	-14.9	1.07 V	147	22.50	16.60

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



**802.11n (HT40)**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.20 H	121	71.76	-0.16
2	2390.00	53.5 AV	54.0	-0.5	1.20 H	121	53.66	-0.16
3	*2422.00	110.1 PK			1.21 H	122	110.18	-0.08
4	*2422.00	99.0 AV			1.21 H	122	99.08	-0.08
5	4844.00	45.4 PK	74.0	-28.6	1.20 H	35	36.58	8.82
6	4844.00	37.3 AV	54.0	-16.7	1.20 H	35	28.48	8.82
7	7266.00	52.3 PK	74.0	-21.7	1.08 H	279	35.69	16.61
8	7266.00	44.6 AV	54.0	-9.4	1.08 H	279	27.99	16.61

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.20 V	122	60.46	-0.16
2	2390.00	41.7 AV	54.0	-12.3	1.20 V	122	41.86	-0.16
3	*2422.00	103.8 PK			1.22 V	52	103.88	-0.08
4	*2422.00	94.7 AV			1.22 V	52	94.78	-0.08
5	4844.00	44.5 PK	74.0	-29.5	1.01 V	38	35.68	8.82
6	4844.00	36.0 AV	54.0	-18.0	1.01 V	38	27.18	8.82
7	7266.00	51.7 PK	74.0	-22.3	1.08 V	153	35.09	16.61
8	7266.00	39.6 AV	54.0	-14.4	1.08 V	153	22.99	16.61

**REMARKS:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.8 PK	74.0	-0.2	1.41 H	129	75.23	-1.43
2	<b>2390.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.41 H</b>	<b>129</b>	<b>55.33</b>	<b>-1.43</b>
3	*2437.00	114.2 PK			1.36 H	124	115.52	-1.32
4	*2437.00	102.0 AV			1.36 H	124	103.32	-1.32
5	2483.50	54.3 PK	74.0	-19.7	1.41 H	129	55.51	-1.21
6	2483.50	47.1 AV	54.0	-6.9	1.41 H	129	48.31	-1.21
7	4874.00	46.1 PK	74.0	-27.9	1.26 H	38	38.85	7.25
8	4874.00	37.8 AV	54.0	-16.2	1.26 H	38	30.55	7.25
9	7311.00	52.0 PK	74.0	-22.0	1.09 H	267	37.55	14.45
10	7311.00	44.3 AV	54.0	-9.7	1.09 H	267	29.85	14.45

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.00 V	22	63.93	-1.43
2	2390.00	44.0 AV	54.0	-10.0	1.00 V	22	45.43	-1.43
3	*2437.00	108.0 PK			1.20 V	22	109.32	-1.32
4	*2437.00	97.7 AV			1.20 V	22	99.02	-1.32
5	2483.50	57.1 PK	74.0	-16.9	1.22 V	152	58.31	-1.21
6	2483.50	52.9 AV	54.0	-1.1	1.22 V	152	54.11	-1.21
7	4874.00	44.8 PK	74.0	-29.2	1.00 V	27	37.55	7.25
8	4874.00	36.5 AV	54.0	-17.5	1.00 V	27	29.25	7.25
9	7311.00	52.3 PK	74.0	-21.7	1.06 V	150	37.85	14.45
10	7311.00	39.8 AV	54.0	-14.2	1.06 V	150	25.35	14.45

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	112.5 PK			1.17 H	122	112.48	0.02
2	*2452.00	101.5 AV			1.17 H	122	101.48	0.02
3	2483.50	73.2 PK	74.0	-0.8	1.17 H	122	73.09	0.11
4	2483.50	50.4 AV	54.0	-3.6	1.17 H	122	50.29	0.11
5	4904.00	46.2 PK	74.0	-27.8	1.26 H	23	37.19	9.01
6	4904.00	37.8 AV	54.0	-16.2	1.26 H	23	28.79	9.01
7	7356.00	51.6 PK	74.0	-22.4	1.09 H	260	35.05	16.55
8	7356.00	44.2 AV	54.0	-9.8	1.09 H	260	27.65	16.55

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.6 PK			1.23 V	21	105.58	0.02
2	*2452.00	97.0 AV			1.23 V	21	96.98	0.02
3	2483.50	61.9 PK	74.0	-12.1	1.24 V	120	61.79	0.11
4	2483.50	40.4 AV	54.0	-13.6	1.24 V	120	40.29	0.11
5	4904.00	45.2 PK	74.0	-28.8	1.09 V	11	36.19	9.01
6	4904.00	36.6 AV	54.0	-17.4	1.09 V	11	27.59	9.01
7	7356.00	51.2 PK	74.0	-22.8	1.03 V	143	34.65	16.55
8	7356.00	39.2 AV	54.0	-14.8	1.03 V	143	22.65	16.55

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**BELOW 1GHz WORST-CASE DATA:**

**802.11b**

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.53	32.2 QP	40.0	-7.8	1.00 H	113	45.64	-13.46
2	76.66	31.7 QP	40.0	-8.3	2.00 H	231	48.55	-16.86
3	148.39	34.3 QP	43.5	-9.2	2.00 H	56	47.10	-12.81
4	326.96	30.3 QP	46.0	-15.7	1.50 H	146	41.38	-11.09
5	400.01	26.3 QP	46.0	-19.7	2.00 H	45	35.59	-9.27
6	510.01	24.3 QP	46.0	-21.7	1.00 H	22	30.74	-6.46

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	52.93	34.1 QP	40.0	-5.9	1.00 V	240	47.29	-13.16
2	77.63	35.1 QP	40.0	-4.9	1.00 V	295	52.37	-17.27
3	148.24	34.3 QP	43.5	-9.2	1.00 V	75	47.13	-12.82
4	424.55	24.6 QP	46.0	-21.4	1.00 V	2	33.01	-8.39
5	497.93	25.8 QP	46.0	-20.2	1.00 V	4	32.50	-6.74
6	693.96	25.2 QP	46.0	-20.8	1.50 V	70	28.06	-2.83

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100375	May 06, 2015	May 05, 2016
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 15, 2014	Sep. 14, 2015
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 11, 2015	June 10, 2016
RF Cable	5D-FB	COCCAB-001	Mar. 09, 2015	Mar. 08, 2016
50 ohms Terminator	N/A	EMC-03	Sep. 22, 2014	Sep. 21, 2015
50 ohms Terminator	N/A	EMC-02	Sep. 30, 2014	Sep. 29, 2015
Software BVADT	BVADT_Cond_ V7.3.7.3	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: July 24 to 27, 2015

#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

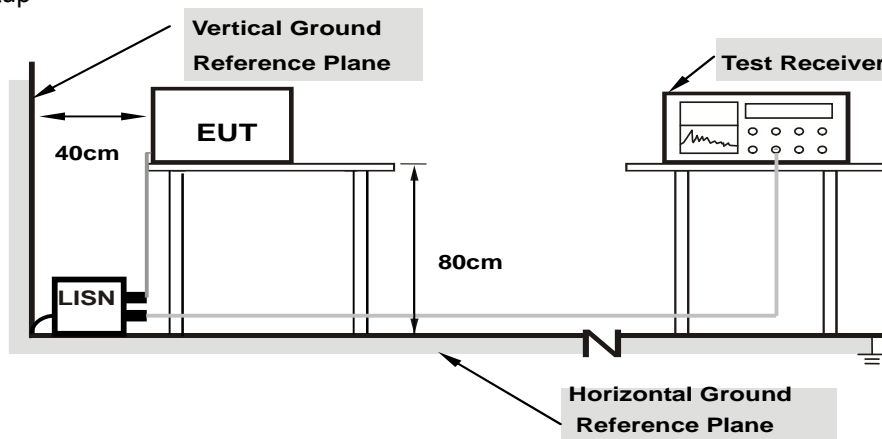

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.08	55.27	39.36	55.35	39.44	66.00	56.00	-10.65	-16.56
2	0.17734	0.09	50.14	36.56	50.23	36.65	64.61	54.61	-14.38	-17.96
3	0.32188	0.10	33.88	18.28	33.98	18.38	59.66	49.66	-25.68	-31.28
4	0.52600	0.11	34.45	26.78	34.56	26.89	56.00	46.00	-21.44	-19.11
5	2.49609	0.18	30.94	20.41	31.12	20.59	56.00	46.00	-24.88	-25.41
6	14.53125	0.56	29.95	22.41	30.51	22.97	60.00	50.00	-29.49	-27.03

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

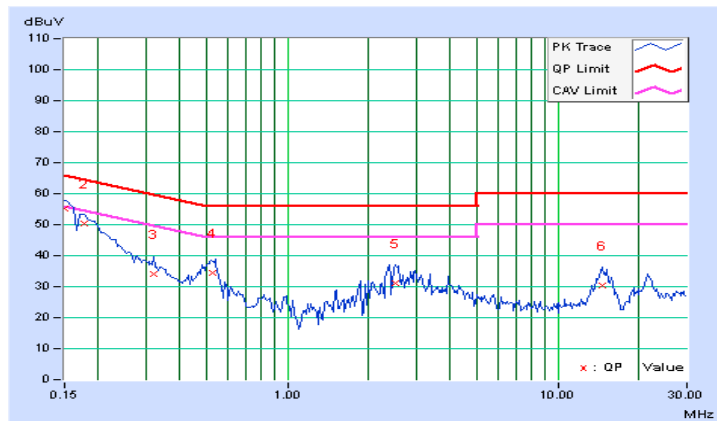


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.08	55.39	39.20	55.47	39.28	66.00	56.00	-10.53	-16.72
2	0.18516	0.08	49.00	33.34	49.08	33.42	64.25	54.25	-15.17	-20.83
3	0.29106	0.09	35.61	21.52	35.70	21.61	60.49	50.49	-24.80	-28.89
4	0.52109	0.11	32.80	24.26	32.91	24.37	56.00	46.00	-23.09	-21.63
5	2.26172	0.18	29.66	20.97	29.84	21.15	56.00	46.00	-26.16	-24.85
6	14.78516	0.59	31.50	23.96	32.09	24.55	60.00	50.00	-27.91	-25.45

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

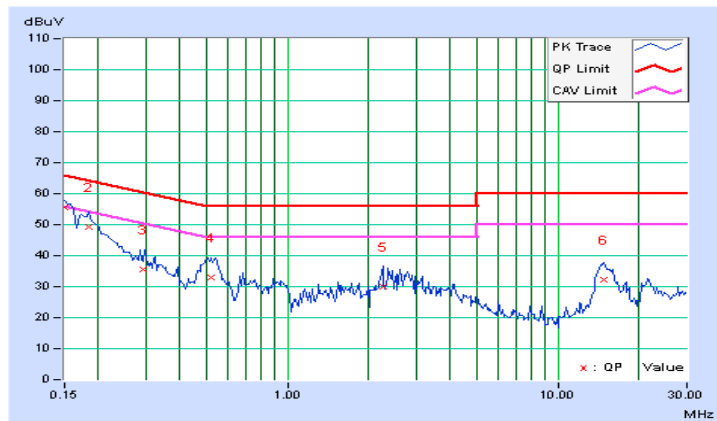




#### 4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15872	0.14	61.03	52.39	61.17	52.53	65.53	55.53	-4.36	-3.00
2	0.19687	0.15	54.64	46.06	54.79	46.21	63.74	53.74	-8.95	-7.53
3	0.23869	0.15	48.66	40.13	48.81	40.28	62.14	52.14	-13.33	-11.86
4	0.59266	0.18	44.65	39.78	44.83	39.96	56.00	46.00	-11.17	-6.04
5	0.87656	0.19	35.88	29.83	36.07	30.02	56.00	46.00	-19.93	-15.98
6	3.08203	0.32	28.59	21.73	28.91	22.05	56.00	46.00	-27.09	-23.95

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

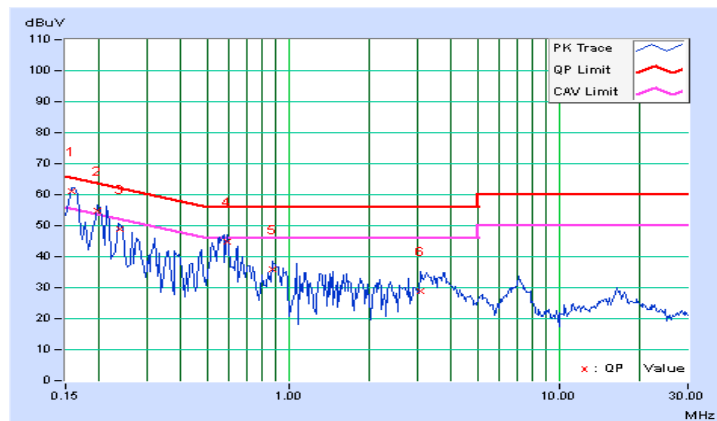


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
<b>1</b>	<b>0.15922</b>	<b>0.14</b>	<b>61.41</b>	<b>52.91</b>	<b>61.55</b>	<b>53.05</b>	<b>65.50</b>	<b>55.50</b>	<b>-3.95</b>	<b>-2.45</b>
2	0.19875	0.15	55.19	47.03	55.34	47.18	63.66	53.66	-8.32	-6.48
3	0.23984	0.16	48.70	40.25	48.86	40.41	62.10	52.10	-13.24	-11.69
4	0.59375	0.21	44.65	40.18	44.86	40.39	56.00	46.00	-11.14	-5.61
5	0.87203	0.23	35.89	30.59	36.12	30.82	56.00	46.00	-19.88	-15.18
6	1.89844	0.29	31.63	24.87	31.92	25.16	56.00	46.00	-24.08	-20.84

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

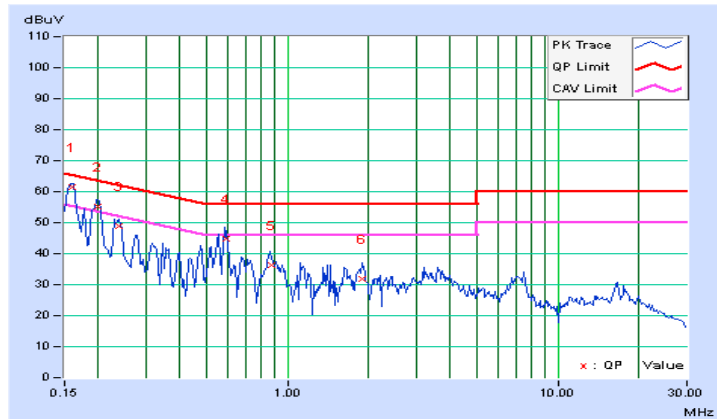


#### 4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.08	50.63	37.15	50.71	37.23	66.00	56.00	-15.29	-18.77
2	0.19297	0.09	43.11	29.24	43.20	29.33	63.91	53.91	-20.71	-24.58
3	0.40587	0.10	34.47	28.06	34.57	28.16	57.73	47.73	-23.16	-19.57
4	0.96641	0.13	26.41	16.47	26.54	16.60	56.00	46.00	-29.46	-29.40
5	1.76953	0.16	27.55	18.09	27.71	18.25	56.00	46.00	-28.29	-27.75
6	18.36719	0.66	24.20	19.50	24.86	20.16	60.00	50.00	-35.14	-29.84

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

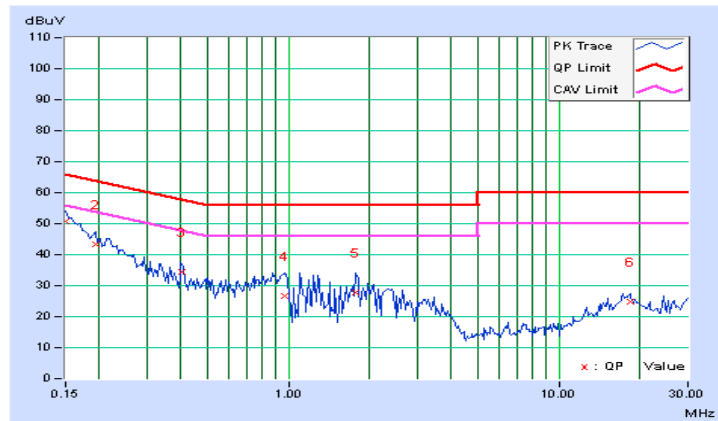


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.08	50.65	37.09	50.73	37.17	66.00	56.00	-15.27	-18.83
2	0.19297	0.08	42.68	28.80	42.76	28.88	63.91	53.91	-21.15	-25.03
3	0.40391	0.10	34.23	26.31	34.33	26.41	57.77	47.77	-23.44	-21.36
4	0.97813	0.13	26.32	18.50	26.45	18.63	56.00	46.00	-29.55	-27.37
5	1.51953	0.15	29.41	19.11	29.56	19.26	56.00	46.00	-26.44	-26.74
6	17.08594	0.66	23.22	18.46	23.88	19.12	60.00	50.00	-36.12	-30.88

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

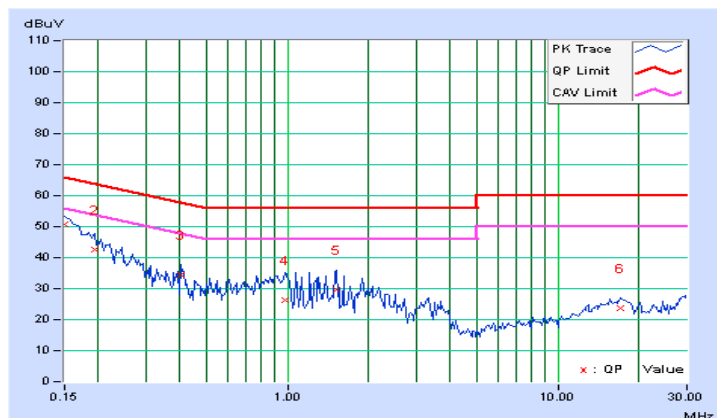


4.2.10 Test Results (Mode 4)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.14	45.22	33.20	45.36	33.34	65.79	55.79	-20.43	-22.45
2	0.19687	0.15	37.30	27.51	37.45	27.66	63.74	53.74	-26.29	-26.08
3	0.47813	0.17	43.42	38.49	43.59	38.66	56.37	46.37	-12.78	-7.71
4	0.75156	0.19	25.65	19.18	25.84	19.37	56.00	46.00	-30.16	-26.63
5	3.25391	0.34	22.26	16.91	22.60	17.25	56.00	46.00	-33.40	-28.75
6	11.64453	0.80	24.10	19.91	24.90	20.71	60.00	50.00	-35.10	-29.29

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

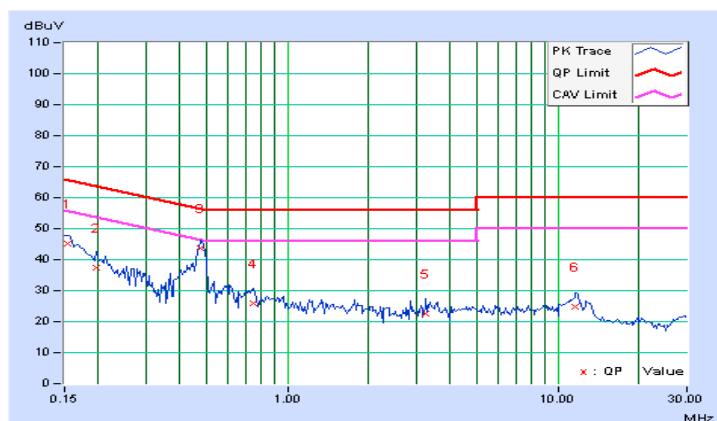


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.14	44.47	32.13	44.61	32.27	65.58	55.58	-20.97	-23.31
2	0.23594	0.16	34.31	23.14	34.47	23.30	62.24	52.24	-27.77	-28.94
3	0.47813	0.20	42.04	37.11	42.24	37.31	56.37	46.37	-14.13	-9.06
4	1.22266	0.25	25.63	20.85	25.88	21.10	56.00	46.00	-30.12	-24.90
5	3.93359	0.42	23.20	18.02	23.62	18.44	56.00	46.00	-32.38	-27.56
6	11.65234	0.86	25.57	21.04	26.43	21.90	60.00	50.00	-33.57	-28.10

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

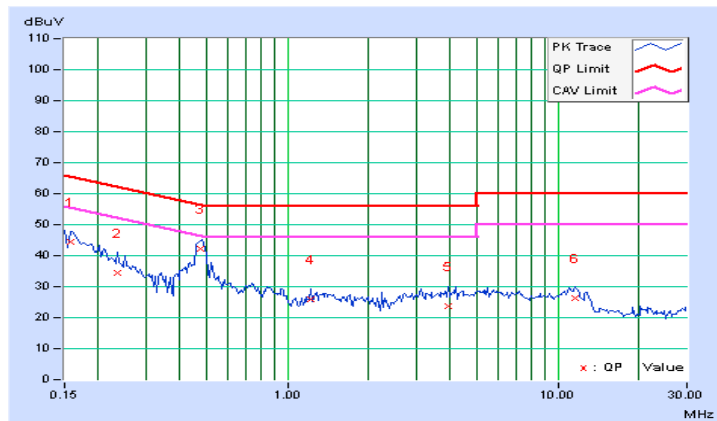


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup

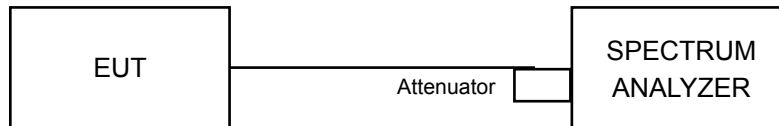

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	9.06	9.06	0.5	PASS
6	2437	9.09	9.03	0.5	PASS
11	2462	8.62	8.61	0.5	PASS

##### 802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.36	16.42	0.5	PASS
6	2437	16.35	16.42	0.5	PASS
11	2462	16.18	16.40	0.5	PASS

##### 802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.57	17.64	0.5	PASS
6	2437	17.62	17.65	0.5	PASS
11	2462	17.24	17.61	0.5	PASS

##### 802.11n (HT40)



CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.05	36.44	0.5	PASS
6	2437	36.11	36.11	0.5	PASS
9	2452	35.89	35.91	0.5	PASS



**SPECTRUM PLOT of WORST VALUE**



**802.11b / CHAIN 1, CH 11**

**802.11g / CHAIN 0, CH 11**

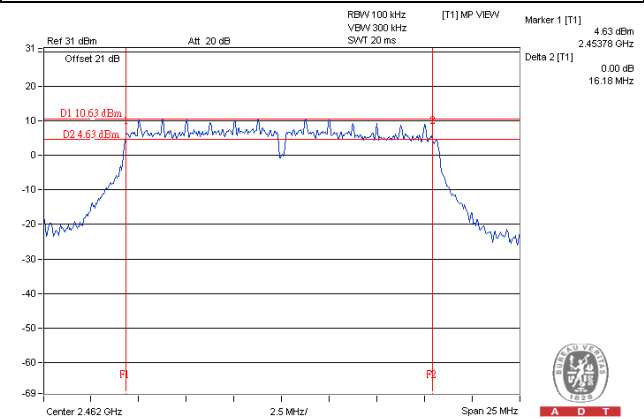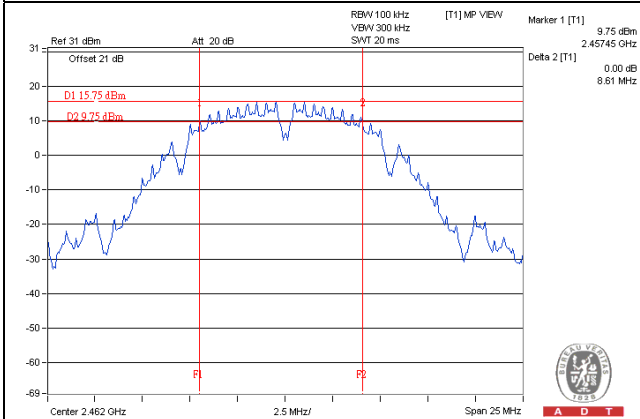

**802.11n (HT20) / CHAIN 0, CH 11**

**802.11n (HT40) / CHAIN 0, CH 9**

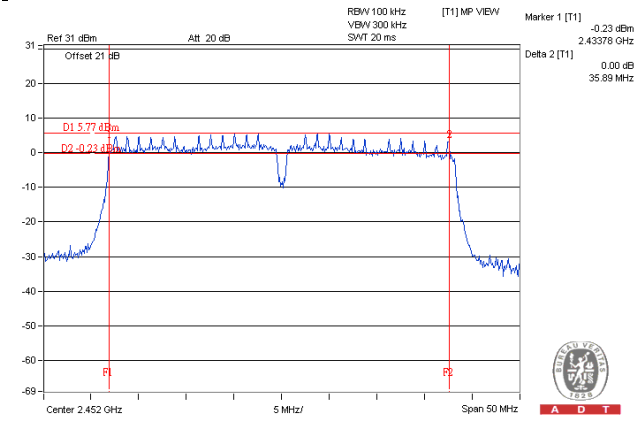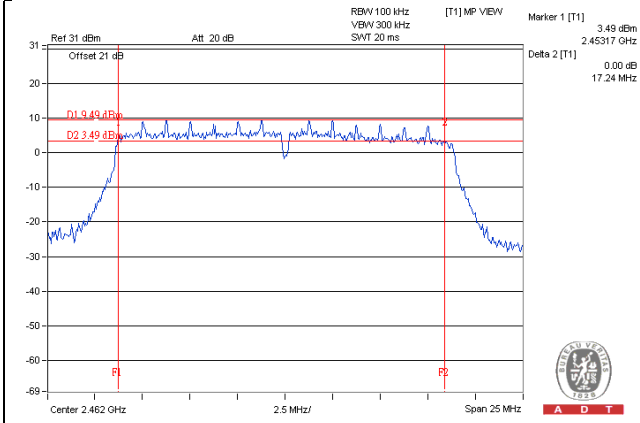

#### 4.4 Conducted Output Power Measurement

##### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

##### 4.4.2 Test Setup

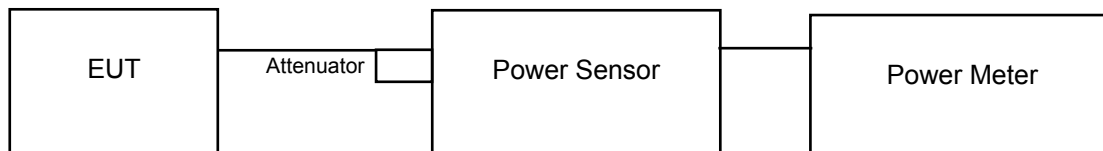

##### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.4.4 Test Procedures

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

##### 4.4.5 Deviation from Test Standard

No deviation.

##### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

## 4.4.7 Test Results

**FOR AVERAGE POWER**
**CDD Mode**
**802.11b**

CHAN.	FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	25.63	24.88	673.205	28.28	30	PASS
6	2437	25.94	25.02	710.332	28.51	30	PASS
11	2462	23.85	22.85	435.413	26.39	30	PASS

**802.11g**

CHAN.	FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	19.60	18.54	162.651	22.11	30	PASS
6	2437	25.56	24.53	643.541	28.09	30	PASS
11	2462	21.92	20.65	271.742	24.34	30	PASS

**802.11n (HT20)**

CHAN.	FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	18.28	17.20	119.779	20.78	30	PASS
6	2437	25.50	24.50	636.651	28.04	30	PASS
11	2462	20.45	19.25	195.057	22.90	30	PASS

**802.11n (HT40)**

CHAN.	FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	16.70	15.50	82.255	19.15	30	PASS
6	2437	20.34	19.40	195.239	22.91	30	PASS
9	2452	19.50	18.26	156.113	21.93	30	PASS

### Beamforming Mode

#### 802.11n (HT20)

CHAN.	FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	18.28	17.20	119.779	20.78	29.49	PASS
6	2437	25.50	24.50	636.651	28.04	29.49	PASS
11	2462	20.45	19.25	195.057	22.90	29.49	PASS

**Note:** Directional gain =  $3.5\text{dBi} + 10\log(2) = 6.51\text{dBi} > 6\text{dBi}$  , so the power limit shall be reduced to  $30 - (6.51 - 6) = 29.49\text{dBm}$ .

#### 802.11n (HT40)

CHAN.	FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	16.70	15.50	82.255	19.15	29.49	PASS
6	2437	20.34	19.40	195.239	22.91	29.49	PASS
9	2452	19.50	18.26	156.113	21.93	29.49	PASS


**Note:** Directional gain =  $3.5\text{dBi} + 10\log(2) = 6.51\text{dBi} > 6\text{dBi}$  , so the power limit shall be reduced to  $30 - (6.51 - 6) = 29.49\text{dBm}$ .

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup

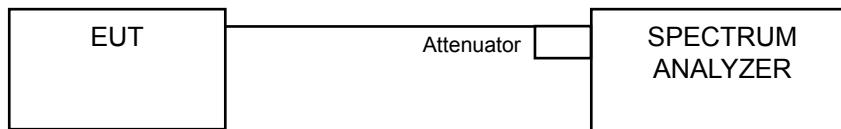

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

**For AVG. power (duty cycle  $\geq 98\%$ )**

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

**For AVG. power (duty cycle  $< 98\%$ )**

- Measure the duty cycle (x) of the transmitter output signal as described in 6.0.
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-2.86	3.01	0.15	7.49	PASS
	6	2437	-2.96	3.01	0.05	7.49	PASS
	11	2462	-2.75	3.01	0.26	7.49	PASS
1	1	2412	-3.40	3.01	-0.39	7.49	PASS
	6	2437	-3.46	3.01	-0.45	7.49	PASS
	11	2462	-4.09	3.01	-1.08	7.49	PASS

**NOTE:** Directional gain = 3.50dBi + 10log(2) = 6.51dBi > 6dBi , so the power density limit shall be reduced to 8-(6.51-6) = 7.49dBm.

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-9.77	3.01	-6.76	7.49	PASS
	6	2437	-3.43	3.01	-0.42	7.49	PASS
	11	2462	-7.26	3.01	-4.25	7.49	PASS
1	1	2412	-9.89	3.01	-6.88	7.49	PASS
	6	2437	-4.17	3.01	-1.16	7.49	PASS
	11	2462	-7.68	3.01	-4.67	7.49	PASS

**NOTE:** Directional gain = 3.50dBi + 10log(2) = 6.51dBi > 6dBi , so the power density limit shall be reduced to 8-(6.51-6) = 7.49dBm.

##### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-12.03	3.01	-9.02	7.49	PASS
	6	2437	-4.72	3.01	-1.71	7.49	PASS
	11	2462	-9.85	3.01	-6.84	7.49	PASS
1	1	2412	-13.06	3.01	-10.05	7.49	PASS
	6	2437	-5.96	3.01	-2.95	7.49	PASS
	11	2462	-11.15	3.01	-8.14	7.49	PASS

**NOTE:** Directional gain = 3.50dBi + 10log(2) = 6.51dBi > 6dBi , so the power density limit shall be reduced to 8-(6.51-6) = 7.49dBm.


802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm)	Limit (dBm)	Pass /Fail
0	3	2422	-16.32	3.01	0.15	-13.16	7.49	PASS
	6	2437	-11.97	3.01	0.15	-8.81	7.49	PASS
	9	2452	-13.15	3.01	0.15	-9.99	7.49	PASS
1	3	2422	-17.07	3.01	0.15	-13.91	7.49	PASS
	6	2437	-12.99	3.01	0.15	-9.83	7.49	PASS
	9	2452	-14.23	3.01	0.15	-11.07	7.49	PASS


- Note:**
1. Directional gain =  $3.50\text{dBi} + 10\log(2) = 6.51\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(6.51-6) = 7.49\text{dBm}$ .
  2. Refer to section 3.3 for duty cycle spectrum plot.

SPECTRUM PLOT of WORST VALUE


802.11b / CHAIN 0, CH 11

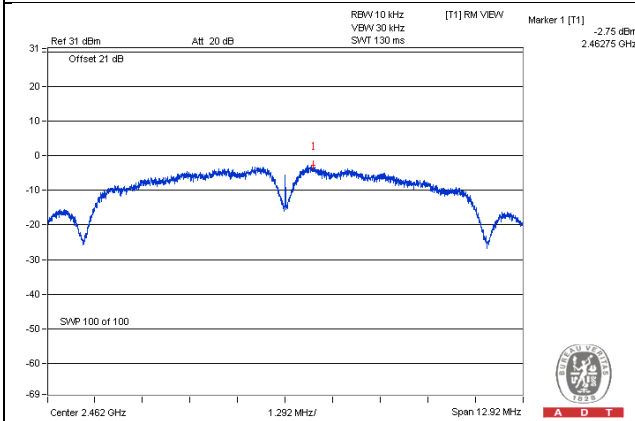


802.11g / CHAIN 0, CH 6

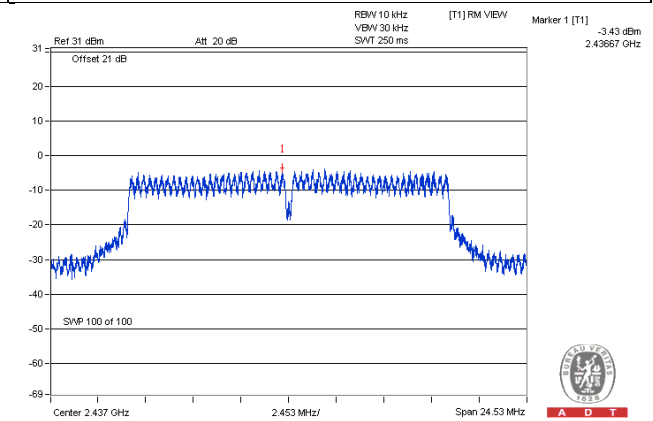

802.11n (HT20) / CHAIN 0, CH 6

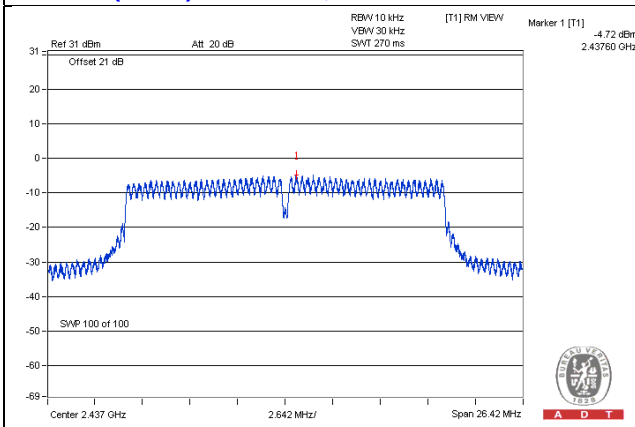

802.11n (HT40) / CHAIN 0, CH 6

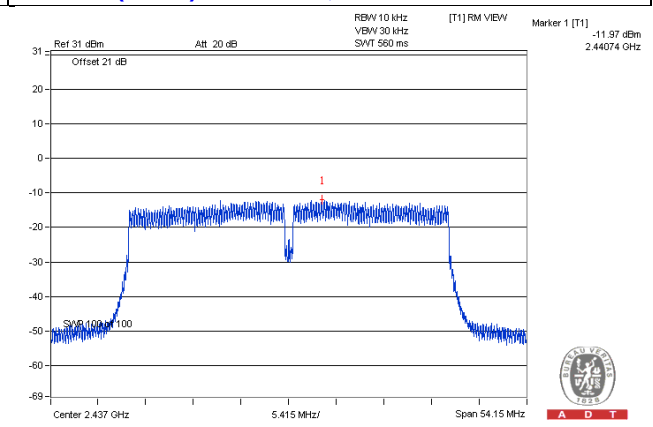


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup

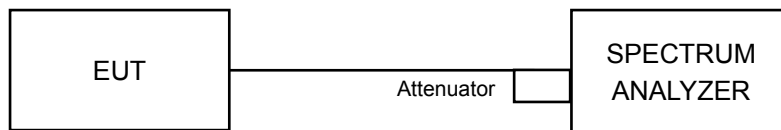

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition


Same as Item 4.3.6




#### 4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b  
CHAIN 0

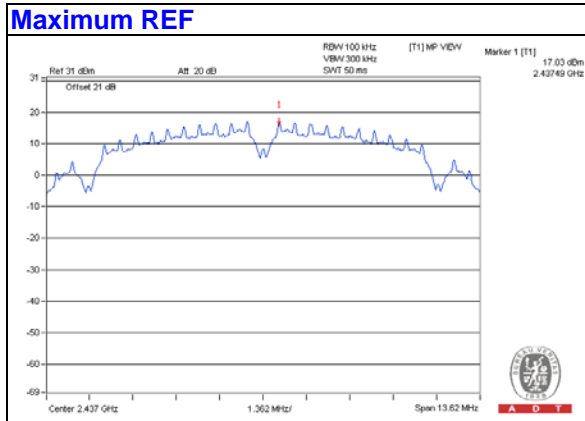


**CH 1**

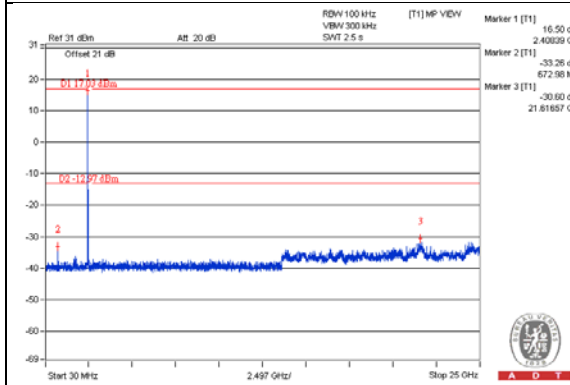


**CH 6**

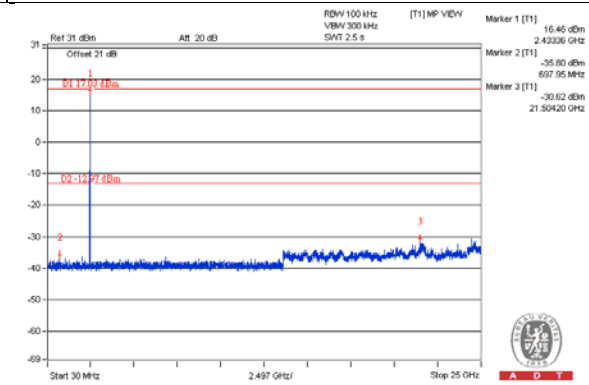


**CH 11**

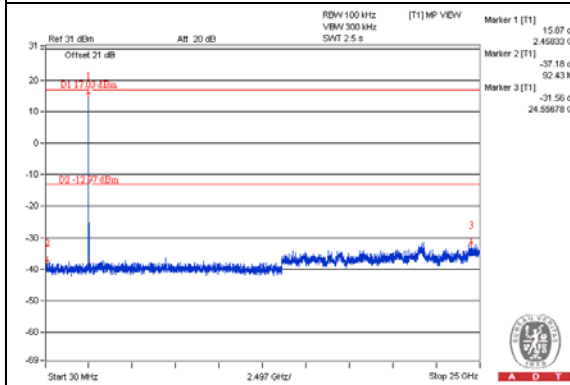


**CH 1 Band edge**

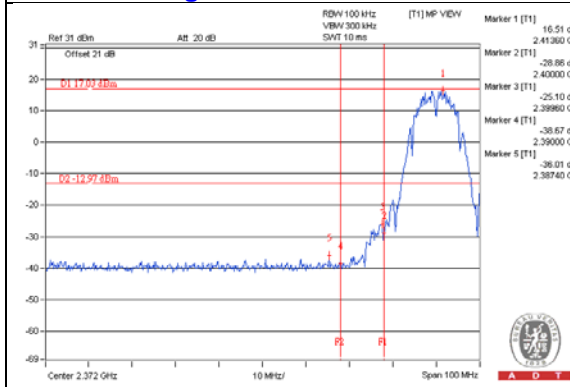


**CH 11 Band edge**

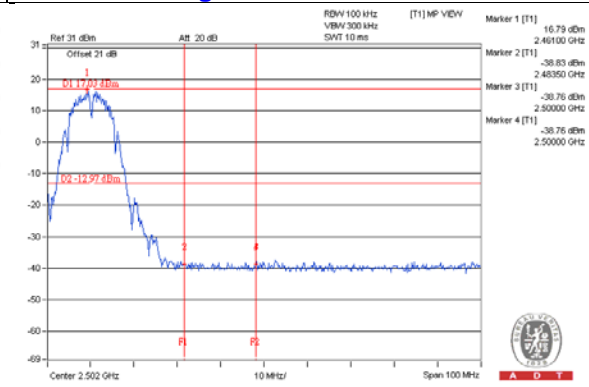


CHAIN 1

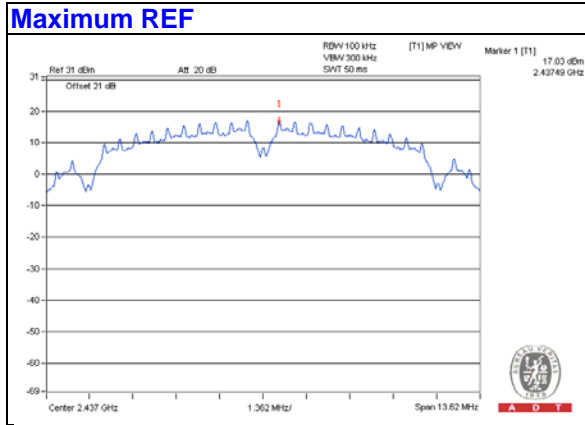


CH 1

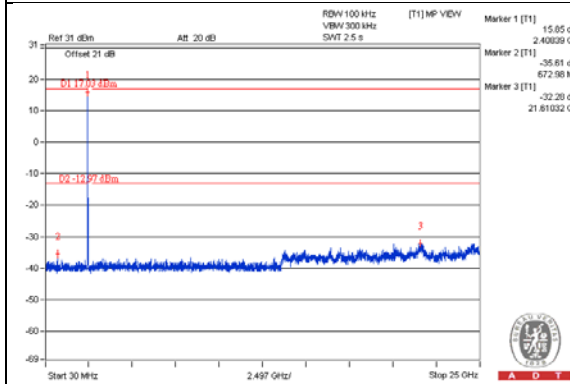


CH 6

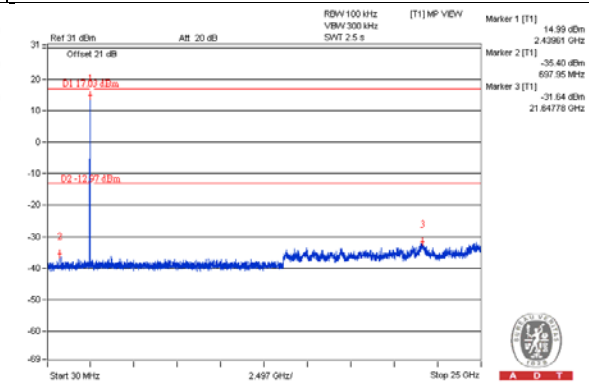


CH 11

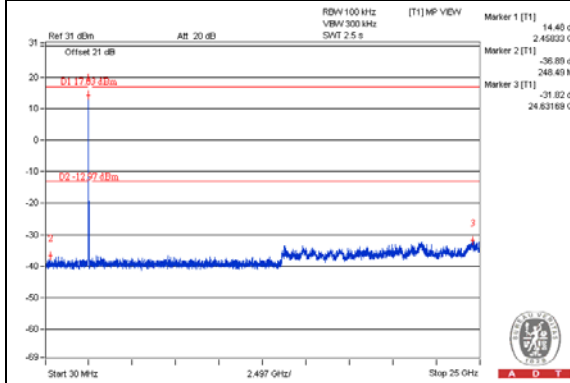


CH 1 Band edge

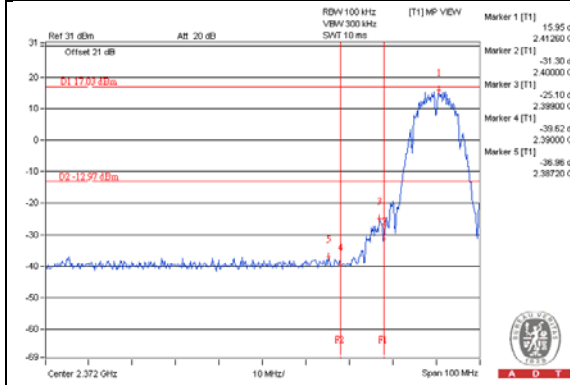


CH 11 Band edge

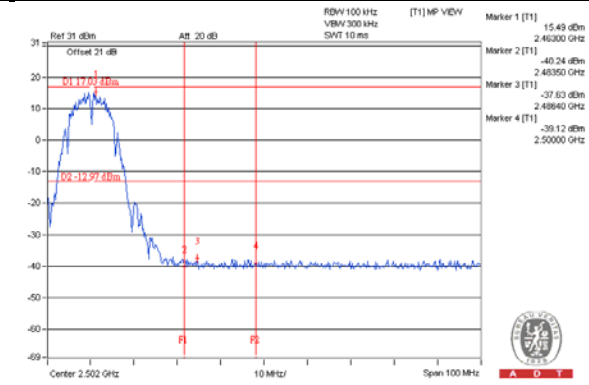


802.11g  
CHAIN 0

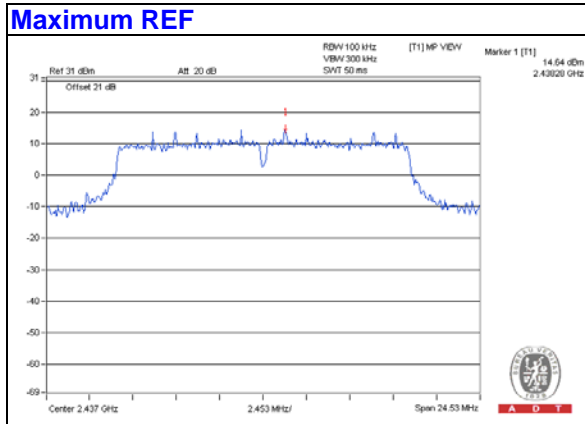


### CH 1

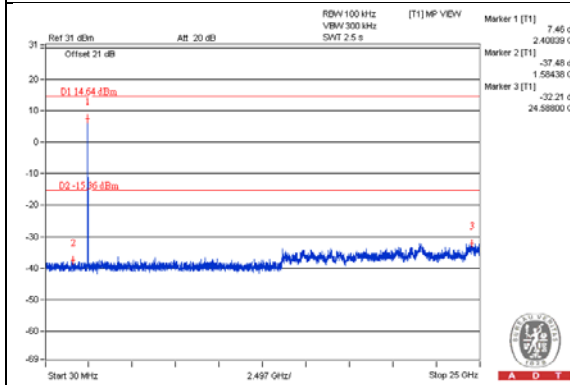


### CH 6

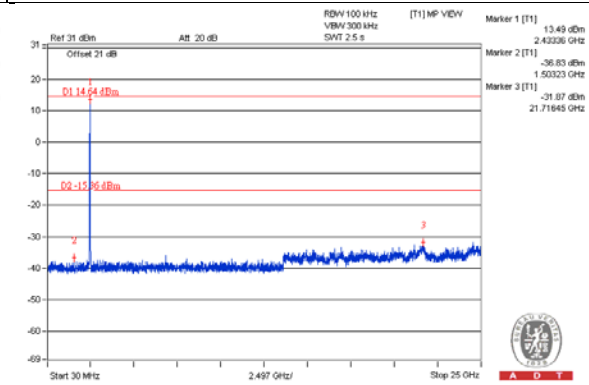


### CH 11

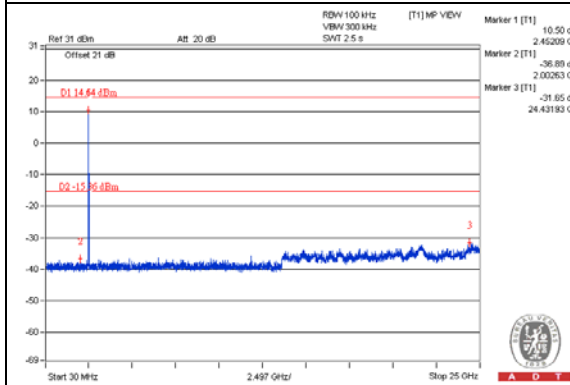


### CH 1 Band edge

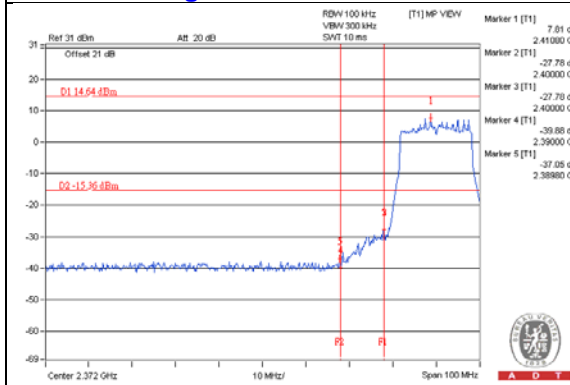


### CH 11 Band edge

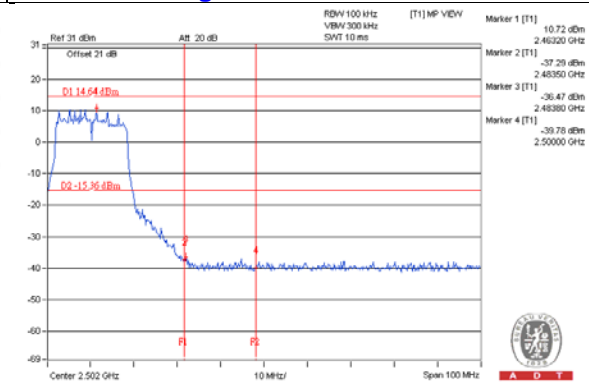


CHAIN 1

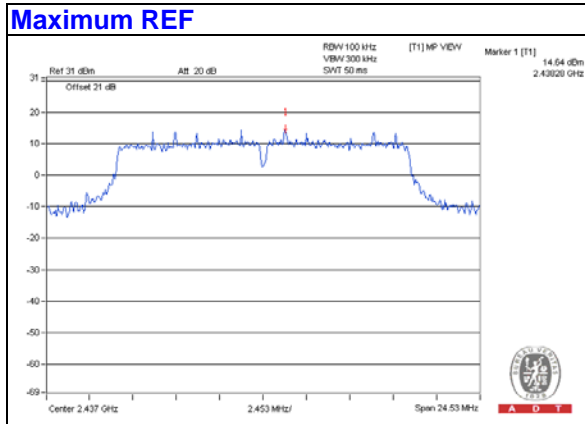


CH 1

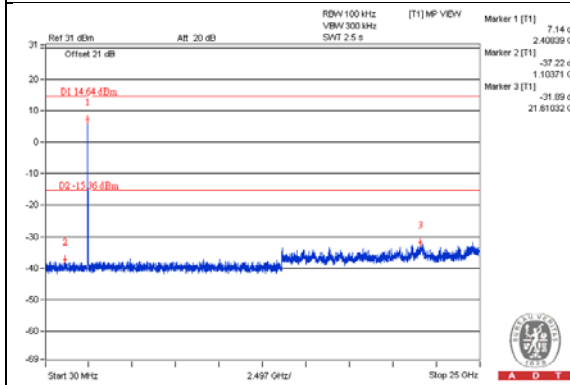


CH 6

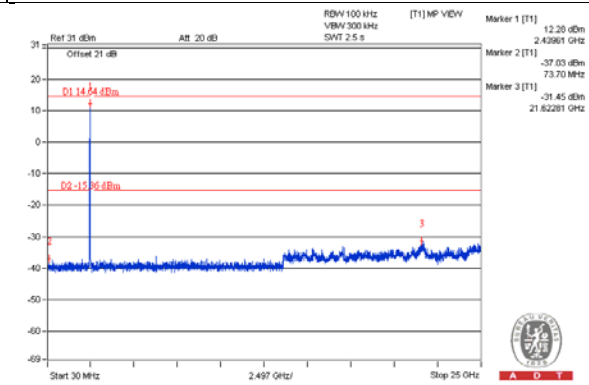


CH 11

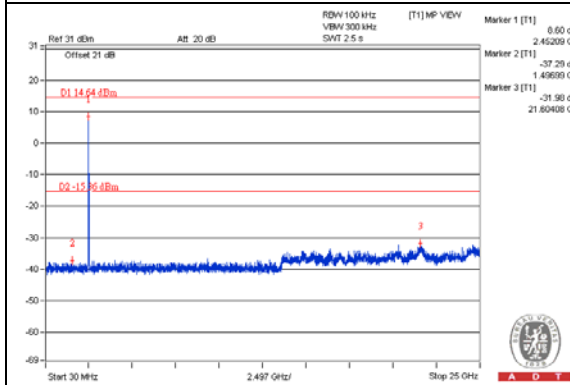

CH 1 Band edge

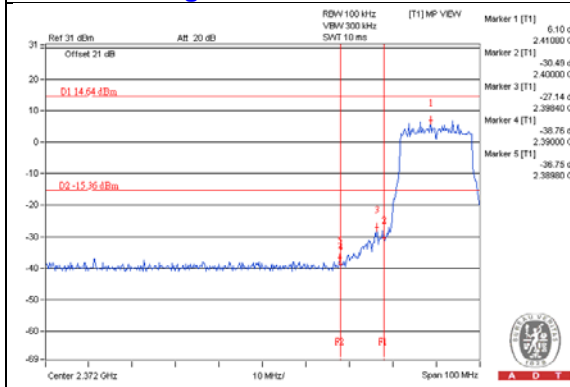


CH 11 Band edge

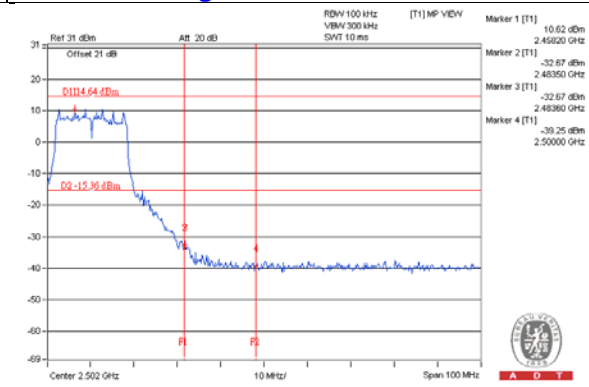


802.11n (HT20)  
CHAIN 0


Maximum REF

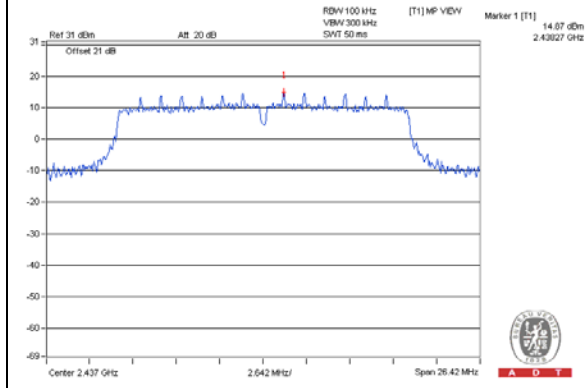


CH 1

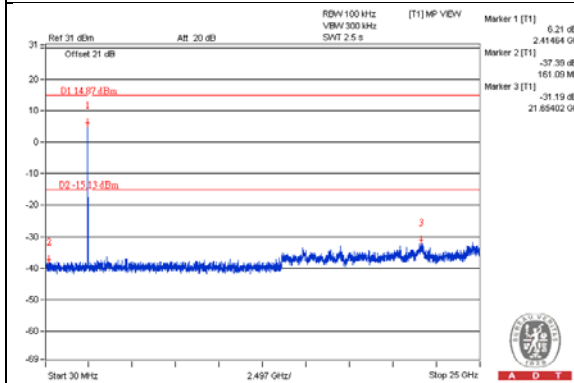


CH 6

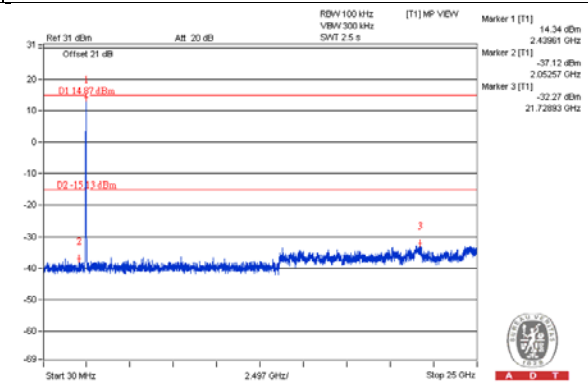


CH 11

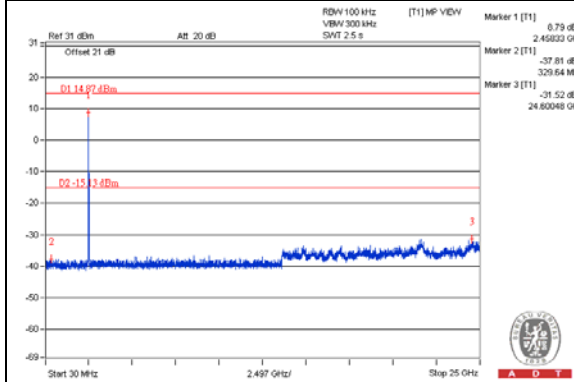


CH 1 Band edge

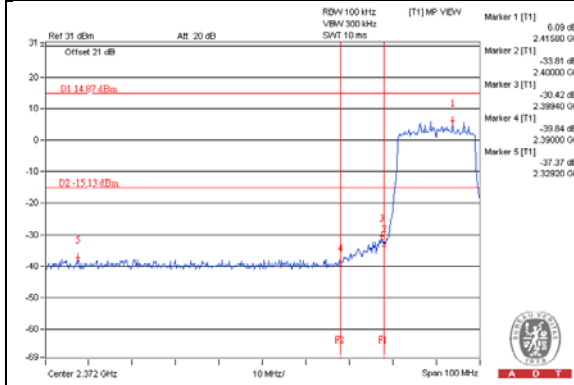


CH 11 Band edge

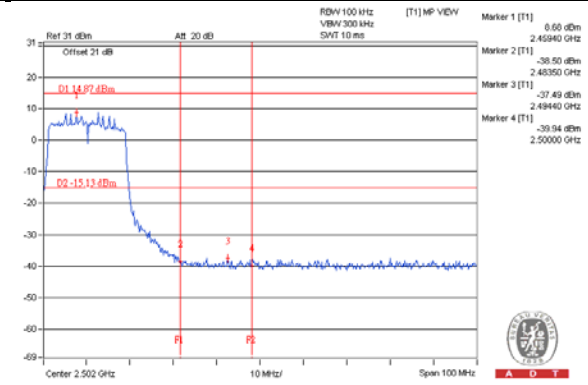


CHAIN 1

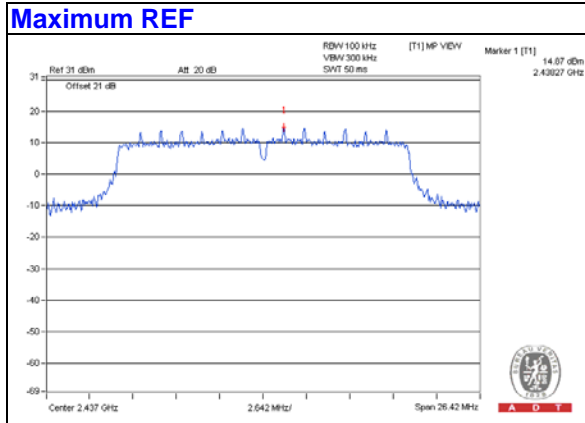


CH 1

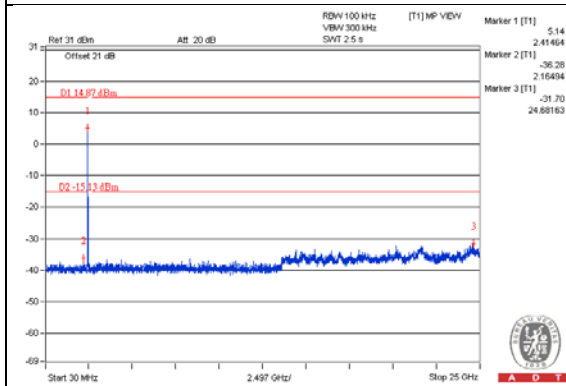


CH 6

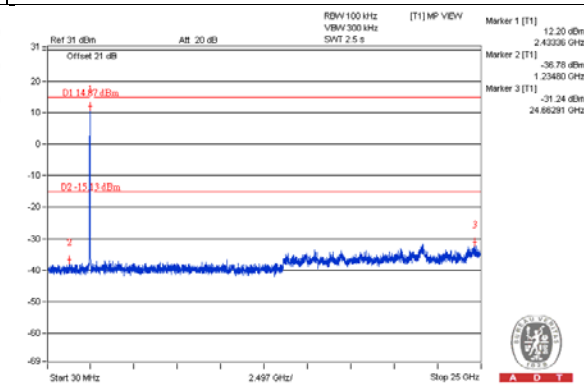


CH 11

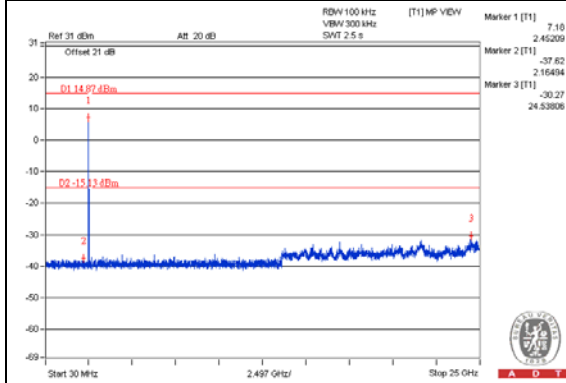







CH 1 Band edge

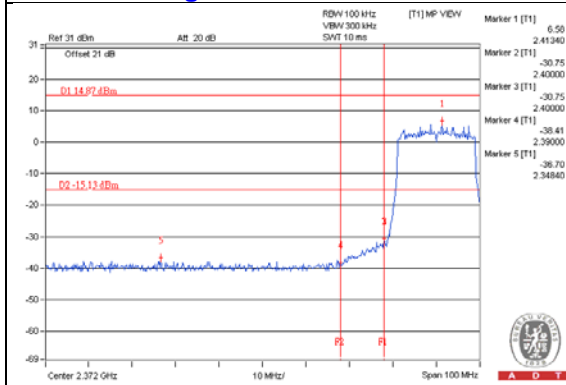

CH 11 Band edge

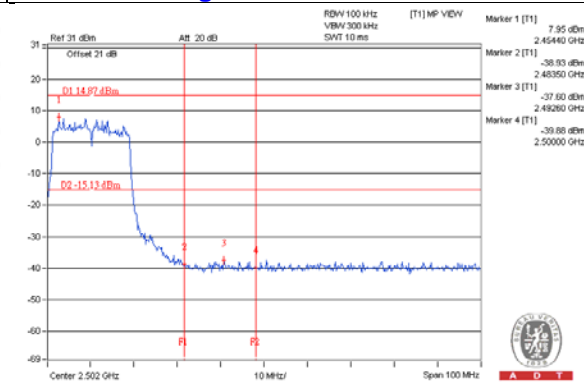


802.11n (HT40)  
CHAIN 0

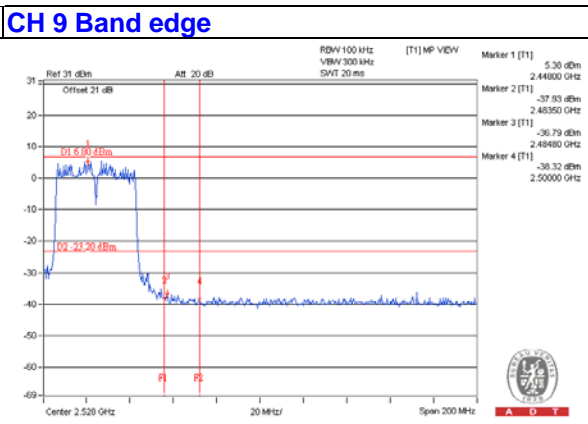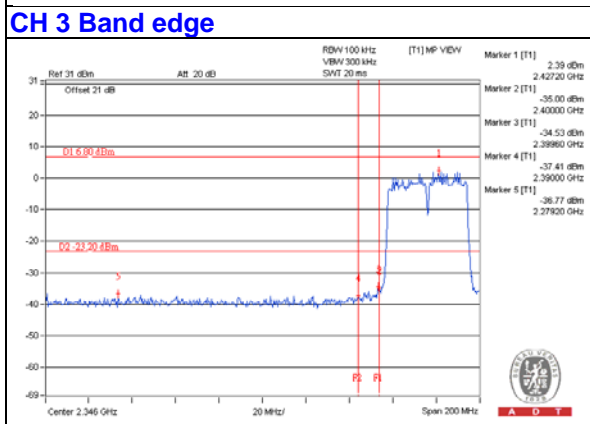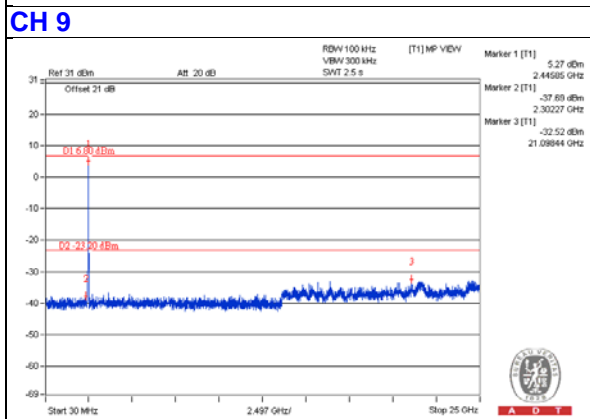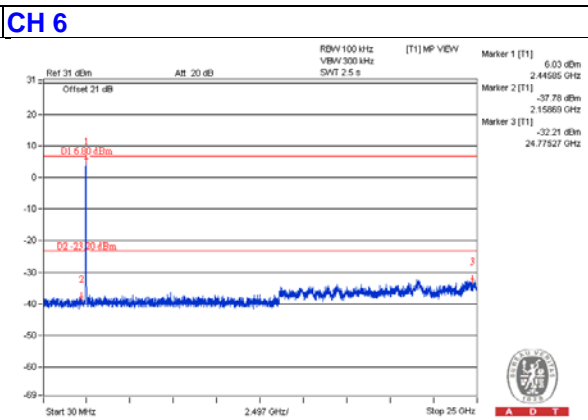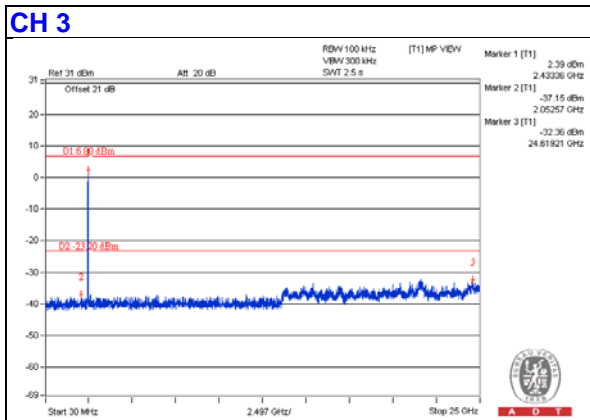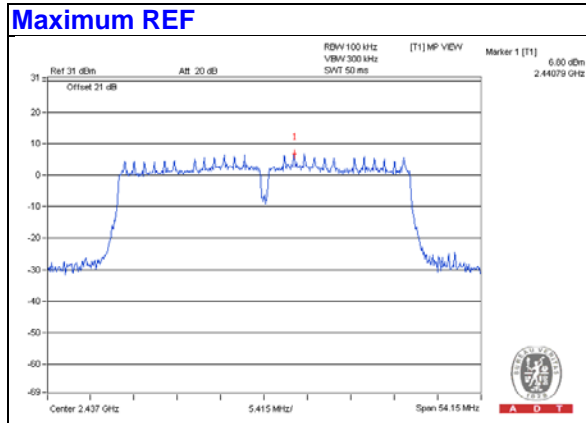





CHAIN 1

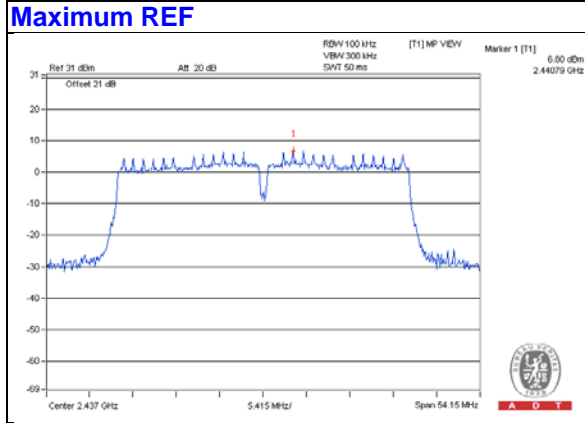


CH 3

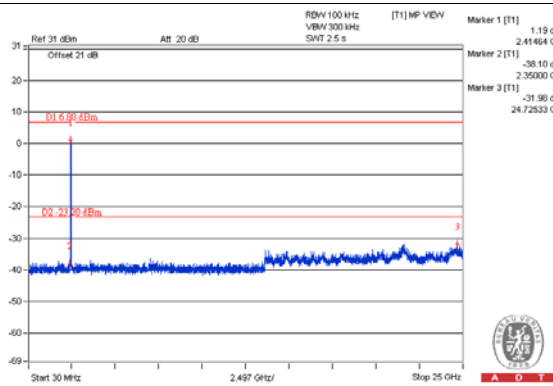


CH 6

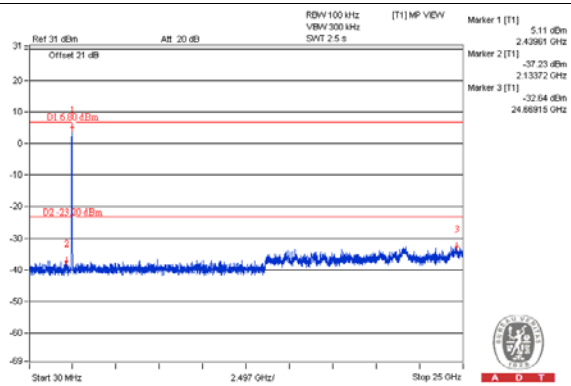


CH 9

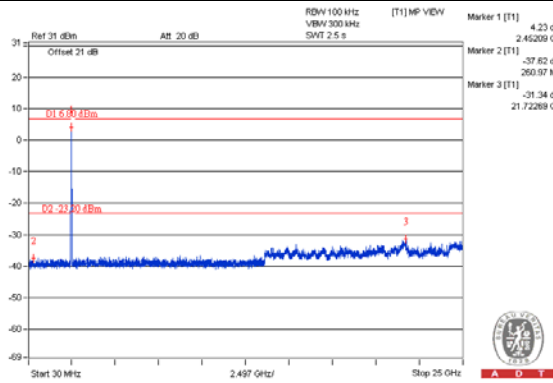

CH 3 Band edge

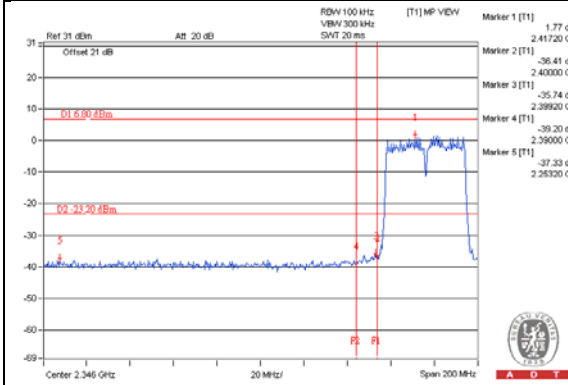

CH 9 Band edge

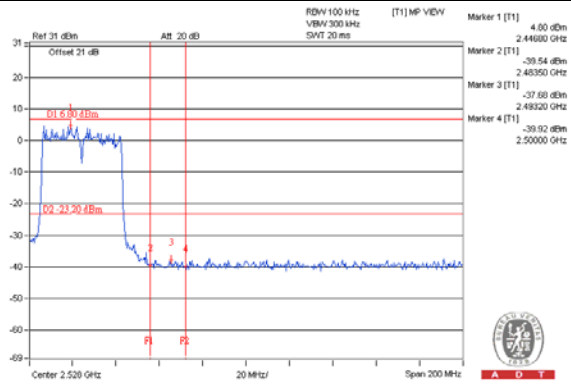

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---