

TEST REPORT

Report Number: 3112812LEX001
Project Number: 3112812

Evaluation of the Air Talk 900™ Wireless Console
Model Number: 5030
FCC ID: UY55030AIRTALK900

FCC Part 15 Subpart B
FCC Part 15 Subpart C

For

Greyfield Industries, Inc.

Test Performed by:

Intertek
731 Enterprise Drive
Lexington, KY 40510

Test Authorized by:

Greyfield Industries, Inc.
3104 Wayne Madison Road
Trenton, OH 45067

Prepared By: Jason Centers Date: 2/5/2007

Jason Centers, Senior Project Engineer

Approved By: Bryan C. Taylor Date: 2/5/2007

Bryan C. Taylor, Team Leader



This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek

731 Enterprise Drive, Lexington, KY 40510

Telephone: 859-226-1000 Fax: 859-226-1040 Web: www.etlsemko.com

Evaluation For:Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

TABLE OF CONTENTS

1	JOB DESCRIPTION	3
1.1	COMPANY INFORMATION	3
1.2	TEST SAMPLE INFORMATION	3
1.3	SYSTEM SUPPORT EQUIPMENT	4
1.4	CABLES USED DURING TESTING	4
1.5	SYSTEM BLOCK DIAGRAM(S)	5
1.6	MODE(S) OF OPERATION / ENGINEERING JUDGMENTS	5
2	EXECUTIVE SUMMARY	6
2.1	MODIFICATIONS REQUIRED FOR COMPLIANCE	6
3	TEST FACILITY	7
3.1	TEST EQUIPMENT	7
4	FIELD STRENGTH OF SPURIOUS RADIATION	8
4.1	TEST PROCEDURE	8
4.2	TEST RESULTS	8
5	RADIATED RECEIVER EMISSIONS	10
5.1	TEST METHOD	10
5.2	TEST RESULTS	11
6	CONDUCTED VOLTAGE EMISSIONS	15
6.1	TEST METHOD:	15
6.2	TEST RESULTS:	16

Evaluation For:Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

1 JOB DESCRIPTION

1.1 Company Information

Company Information	
Manufacturer:	Greyfield Industries, Inc.
Address:	3104 Wayne Madison Road Trenton, OH 45067
Contact Name:	Brian Miller
Telephone Number:	(513) 988-9524
Email Address:	bmiller@hamiltonsafe.com

1.2 Test Sample Information

The Air Talk 900™ is a wireless, full-duplex intercom system that supports any combination of one to four 5030 wireless audio consoles communicating with one to eight 5031 wireless lane modules. Thus, the system can be as simple as one audio console communicating with one lane or as complex as four audio consoles communicating with up to eight lanes. The Air Talk 900™ contains audio processing features such as background noise cancellation, echo cancellation, and RF compression / expansion techniques. This report pertains only to the Air Talk 900™ Wireless Console Model 5030.

Test sample			
Model Number:	5030		
Serial Number:	Not Labeled		
FCC ID:	UY55030AIRTALK900		
Device Category:	Mobile		
RF Exposure Category:	General Population/Uncontrolled Environment		
Transmission:	Full Duplex FM		
Frequency Range (MHz)	924 – 927		
Antenna Type:	½ wave monopole with 8 inch RG-178 cable		
Antenna Location:	External		
Power Supply	Manufacturer	Model Number	Serial Number
	Ablex	138-12-1000D	Not Labeled

Evaluation For:Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

1.3 System Support Equipment

A Greyfield Industries, Inc. 5031 Wireless Lane Module (FCCID: UY5 5031AirTalk900) was used to link to the Air Talk 900™ Wireless Console to allow constant transmission during the evaluation.

1.4 Cables Used During Testing

Table 1-1 contains the details of the cables used during the testing.


Table 1-1: Interconnecting Cables Used During Testing

Description	Length	Shielding	Ferrites	Cables	
				Connection	
				From	To
AC Power Cable	6 ft	None	None	AC Power Source	AC Input of AC/DC Converter

1.5 System Block Diagram(s)

The diagrams below detail the interconnection of the EUT and its accessories during the testing.

Figure 1-1: Test Configuration

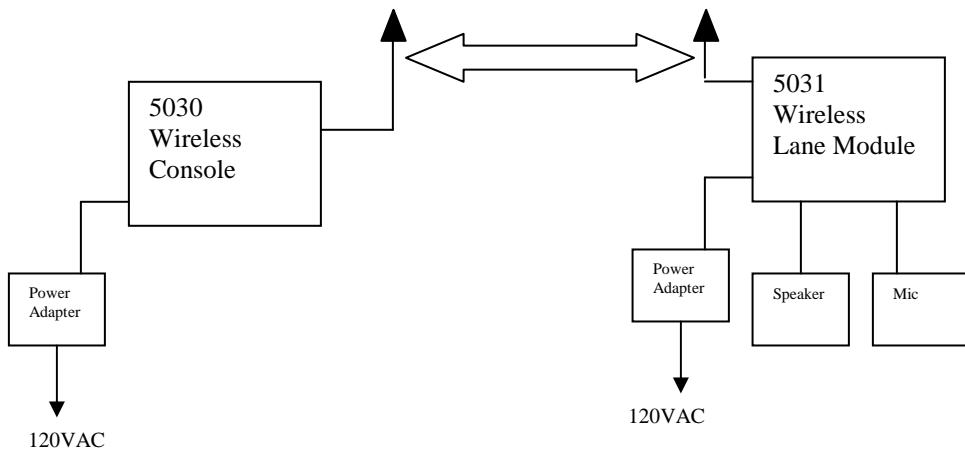

1.6 Mode(s) of operation / Engineering Judgments

The Air Talk 900™ Wireless Console was powered by the AC to DC power supply provided with the sample. Tests were performed with the wireless console transmitting on the highest and lowest channels at maximum output power.

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

2 EXECUTIVE SUMMARY

Testing performed for: Greyfield Industries, Inc.

Equipment Under Test: 5030

Receipt of Test Sample: 1/12/2007

Test Start Date: 1/12/2007

Test End Date: 1/31/2007

FCC RULE	DESCRIPTION OF TEST	RESULT	PAGE
§15.249, 15.209	Field Strength of Spurious Radiation	Compliant	8
§15.109	Receiver Radiated Emissions	Compliant	10
§15.207, 15.107	Conducted Voltage Emissions	Compliant	15

2.1 Modifications required for compliance

No modifications were implemented by Intertek. All results in this report pertain to the un-modified sample provided to Intertek.

Evaluation For:Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

3 TEST FACILITY

All testing was completed at the INTERTEK-Lexington location at 731 Enterprise Drive, Lexington Kentucky, 40510. The radiated emission test site is a 10-meter semi-anechoic chamber. The chamber meets the characteristics of CISPR 16-1: 1993 and ANSI C63.4: 1992. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters.

For radiated immunity testing, removable ferrite tiles are positioned between the transmitting antenna and the area occupied by the equipment under test. The remaining tests typically are performed outside the chamber on the conducting ground reference plane.



The Industry Canada filing number for this site is 2055. The FCC registration number is 485103. The VCCI registration numbers are R-2056, C-2214, and T-195.

3.1 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Calibration due date
Horn Antenna	EMCO	3115	6556	7/28/2007
EMI Receiver	Rohde & Schwarz	ESI 26	1088.7490	9/6/2007
Bilog Antenna	EMCO	3142C	00051864	11/14/2007
Preamplifier	Miteq	AFS44-00102000-30-10P-44	987410	6/15/2007
LISN	Fischer Custom Communication	FCC-LISN-50-50-2M	1026	5/9/2007

Evaluation For:Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

4 FIELD STRENGTH OF SPURIOUS RADIATION

FCC §15.209, §15.249

4.1 Test Procedure

- Measurements are made over the frequency range of 30 MHz to five times the highest frequency operating within the device.
- The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.
- From 30 to 1000 MHz, a quasi-peak detector was used for measurement. Above 1000 MHz, average measurements were performed.
- The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.
- The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.
- The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.
- The EUT was placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.
- Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4.
- The test was performed on the highest and lowest transmitting frequencies at maximum output power.

4.2 Test Results

The Air Talk 900™ Wireless Console met the field strength requirements of FCC §15.249 for the fundamental, harmonics and spurious emissions. See Table 4-1 and for the measured fundamental and spurious emissions. All other spurious emissions not shown below were greater than 20dB below the limit.

Table 4-1: Field Strength of Spurious Radiation – Low Channel

Frequency	Polarity (H/V)	Analyzer Reading (dBuV/m)	Cable/Pre-amp (dB)	Ant. (dB)	Corr. Reading. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Results	Comment
924.01 MHz	V	63.8	4.69	22.6	91.09	94	-2.91	Compliant	Fundamental
924.01 MHz	H	58.58	4.69	23.64	86.91	94	-7.09	Compliant	Fundamental
33.209 MHz	V	15.66	0.76	13.69	30.11	40	-9.89	Compliant	
55.313 MHz	V	14.97	1	7.6	23.57	40	-16.43	Compliant	
495.27 MHz	V	6.85	3.36	17.69	27.9	46.02	-18.12	Compliant	
2.7719 GHz	V	52.76	-35.12	29.1	46.74	53.98	-7.24	Compliant	
3.6959 GHz	V	38.27	-33.14	32.27	37.4	53.98	-16.58	Compliant	
2.7719 GHz	H	49.97	-35.12	29.1	43.95	53.98	-10.03	Compliant	
3.6961 GHz	H	45.64	-33.15	32.27	44.76	53.98	-9.22	Compliant	

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

Table 4-2: Field Strength of Spurious Radiation – High Channel

Frequency (MHz)	Polarity (H/V)	Analyzer Reading (dBuV/m)	Cable/Pre-amp (dB)	Ant. (dB)	Corr. Reading. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Results	Comment
926.85 MHz	V	64.41	4.69	22.56	91.66	94	-2.34	Compliant	Fundamental
926.86 MHz	H	60.23	4.69	23.6	88.52	94	-5.48	Compliant	Fundamental
33.203 MHz	V	16.27	0.76	13.69	30.72	40	-9.28	Compliant	
495.28 MHz	V	11.12	3.36	17.69	32.17	46.02	-13.85	Compliant	
2.7806 GHz	V	58.44	-35.21	29.1	52.33	53.98	-1.65	Compliant	
3.7074 GHz	V	45.49	-33.31	32.34	44.52	53.98	-9.46	Compliant	
4.6343 GHz	V	24.44	-32.93	32.6	24.11	53.98	-29.87	Compliant	
2.7806 GHz	H	55.34	-35.21	29.1	49.23	53.98	-4.75	Compliant	
3.7074 GHz	H	45.45	-33.31	32.34	44.48	53.98	-9.5	Compliant	

Evaluation For:Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

5 RADIATED RECEIVER EMISSIONS

FCC §15.109

5.1 Test Method

- Measurements are made over the frequency range of 30 MHz to five times the highest frequency operating within the device.
- The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.
- From 30 to 1000 MHz, a quasi-peak detector was used for measurement. Above 1000 MHz, average measurements were performed.
- The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.
- The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.
- The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.
- The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.
- The test was performed on the device while in receive mode.
- Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4. Photographs of the test setup are shown in Exhibit 3 and Exhibit 4.

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

5.2 Test Results

The Air Talk 900™ Wireless Console was **compliant** with the radiated emissions requirements of FCC §15.109 of Class B limits. The maximized radiated emissions data can be found in Exhibit 1. Graphical results are shown in Exhibit 2.

Maximized Quasi Peak and Average Emissions (Sorted by Delta)

Test Engineer: Jason Centers								
Test Start Date: 1/31/2007 Test End Date: 1/31/2007								
Emission Limit Tested To: Class B Test Distance (EUT to Antenna): 3m								
Frequency (MHz)	Polarity (H/V)	Analyzer Reading (dBuV/m)	Cable/Pre-amp (dB)	Ant. (dB)	Corr. Reading. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Results
1.8087 GHz	V	58.02	-36.38	26.67	48.31	54	-5.69	Compliant
1.8086 GHz	H	57.52	-36.38	26.73	47.87	54	-6.13	Compliant
33.201 MHz	V	17.5	0.76	13.69	31.95	40	-8.05	Compliant
801.8	H	10.71	4.33	22	37.04	46	-8.96	Compliant
55.3	V	15.29	1	7.6	23.89	40	-16.11	Compliant
495.24 MHz	V	8.04	3.36	17.7	29.1	46	-16.9	Compliant

Exhibit 1

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

Graphical Peak Scan

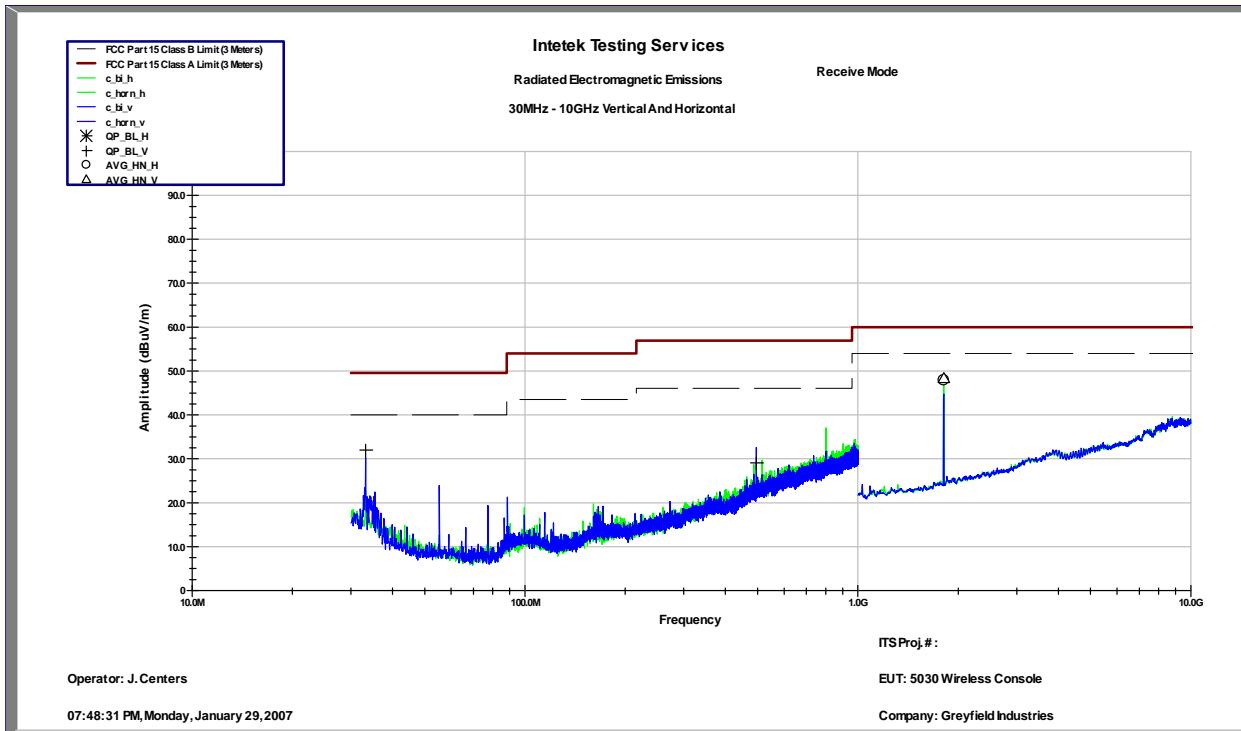


Exhibit 2

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

Photograph of Radiated Emissions Test Setup – Front



Exhibit 3

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

Photograph of Radiated Emissions Test Setup – Back

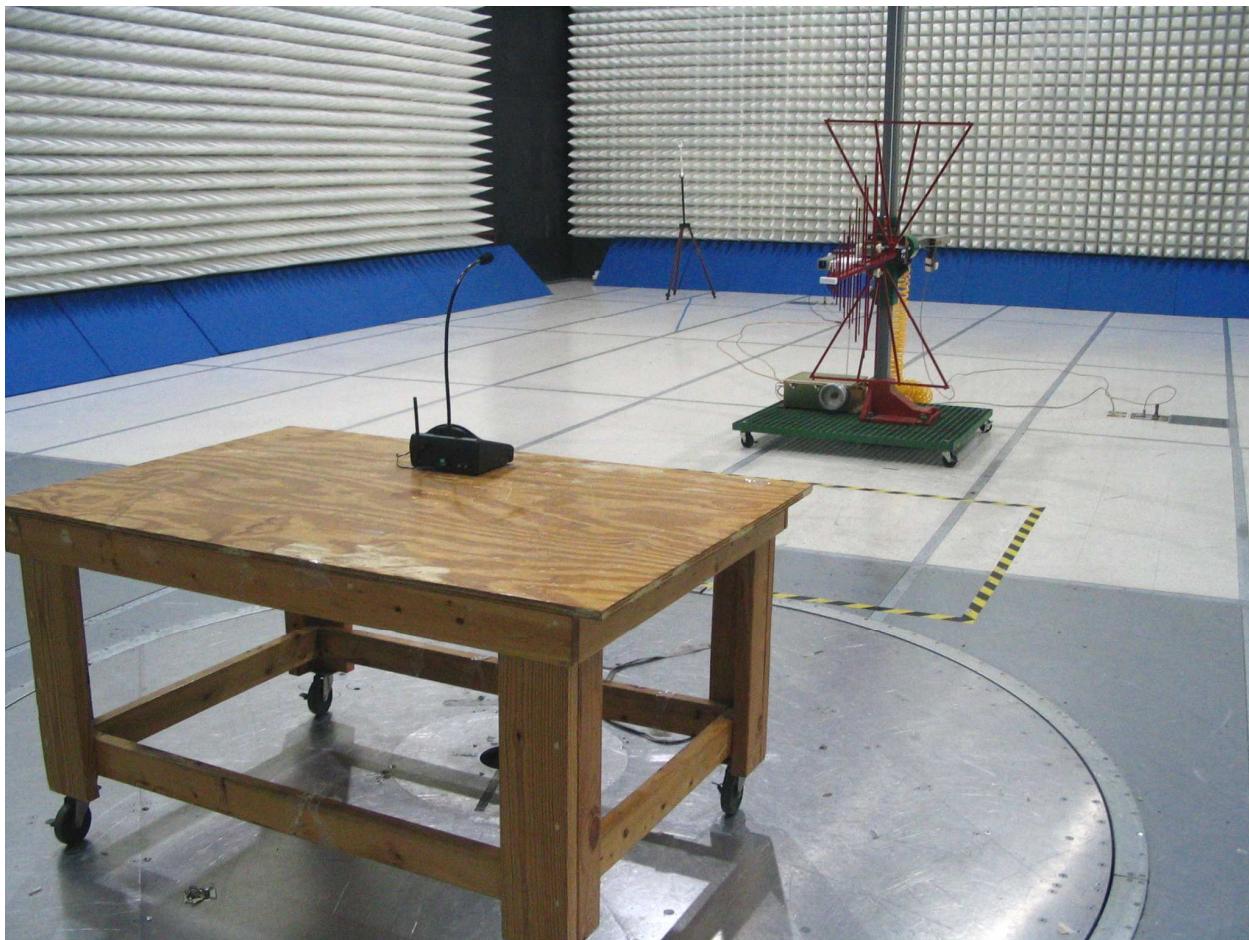


Exhibit 4

Evaluation For:Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

6 CONDUCTED VOLTAGE EMISSIONS

FCC §15.107, §15.207

6.1 Test Method:

Conducted voltage emission measurements were performed as follows:

- The Air Talk 900™ Wireless Console was connected to the power source using a Line Impedance Stabilization Network (LISN) in line with each current carrying conductor.
- A spectrum analyzer was connected to the RF port of the LISN installed on the line under test.
- The LISNs installed on all lines not under test were terminated into 50Ω .
- The Air Talk 900™ Wireless Console was powered. Its functions and features were exercised during the testing process, and a scan was taken.
- The orientation of each connecting cable was varied to find the configuration that maximized the conducted emission.
- The insertion loss of the measurement cable, the LISN insertion loss, and the output of the spectrum analyzer were added together to give a corrected reading in dBuV.
- The corrected reading was compared to the limit above to determine compliance.
- A quasi-peak and/or average detector was used for measurements close to or exceeding the limit with a peak detector.
- The test was performed on the highest and lowest transmitting frequencies at maximum output power and in receive mode.

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

6.2 Test Results:

The Air Talk 900™ Wireless Console was **compliant** with conducted voltage emissions requirements for Class B limits. No conducted voltage emissions on the AC power interface exceeded the quasi-peak or average limits. See Exhibit 5 for tabular results of conducted voltage emissions and Exhibit 6 through Exhibit 8 graphical test results.

Conducted Voltage Emissions Tabular Data (L1 & L2)

Test Engineer: Jason Centers

Test Start Date: 1/31/2007 **Test End Date:** 1/31/2007

Emission Limit Tested To: Class B

General Notes / Comments / Performance Monitoring Method:

Device powered by 120VAC, 60Hz

All emissions were greater than 10dB below the Class B limits when measured with the specified detector.

Exhibit 5

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

Conducted Voltage Emissions Graphical Data – Receive Mode

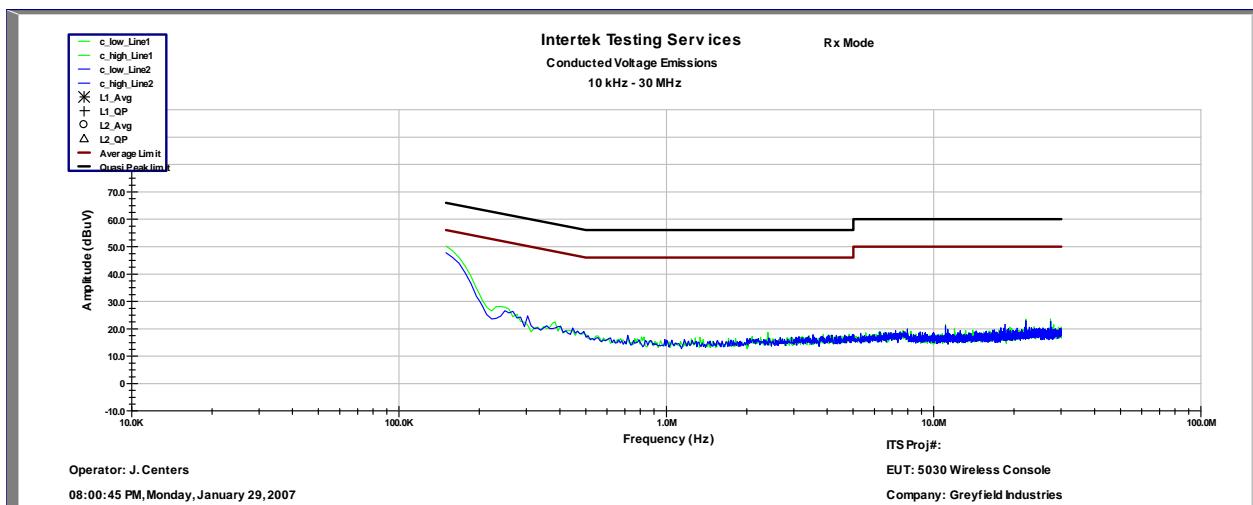


Exhibit 6

Conducted Voltage Emissions Graphical Data – Low Channel

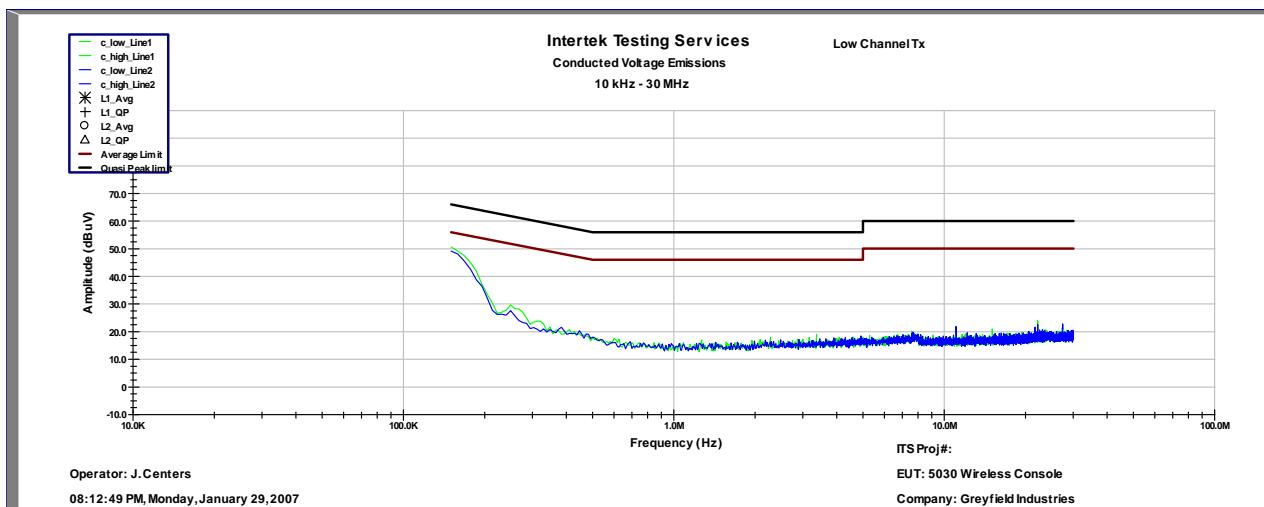


Exhibit 7

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

Conducted Voltage Emissions Graphical Data – High Channel

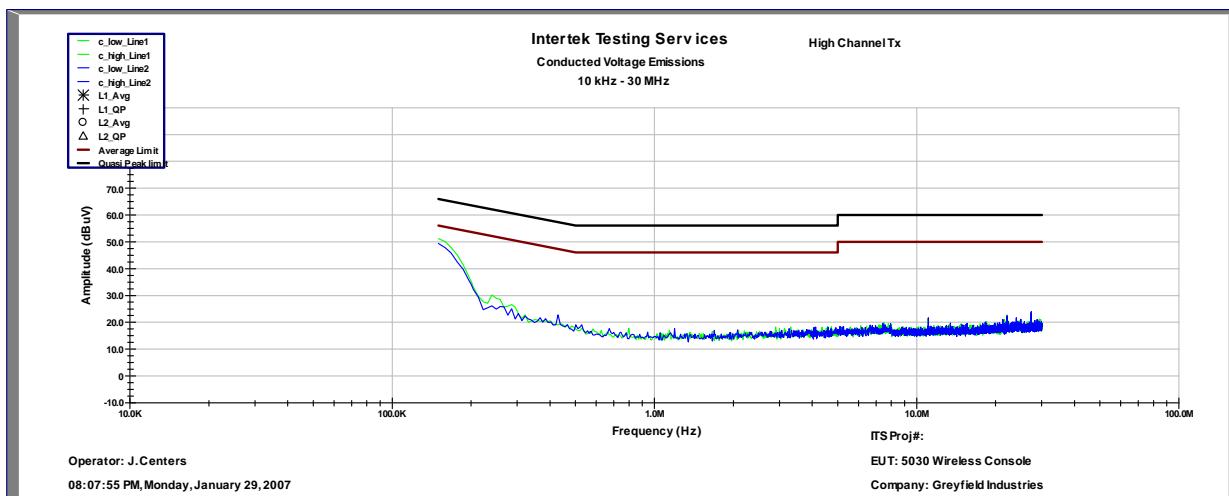


Exhibit 8

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

Photograph of the Conducted Voltage Emissions Test Setup – Front



Exhibit 9

Evaluation For: Greyfield Industries, Inc.
Model No: 5030

FCC ID: UY55030AIRTALK900

Photograph of the Conducted Voltage Emissions Test Setup – Back

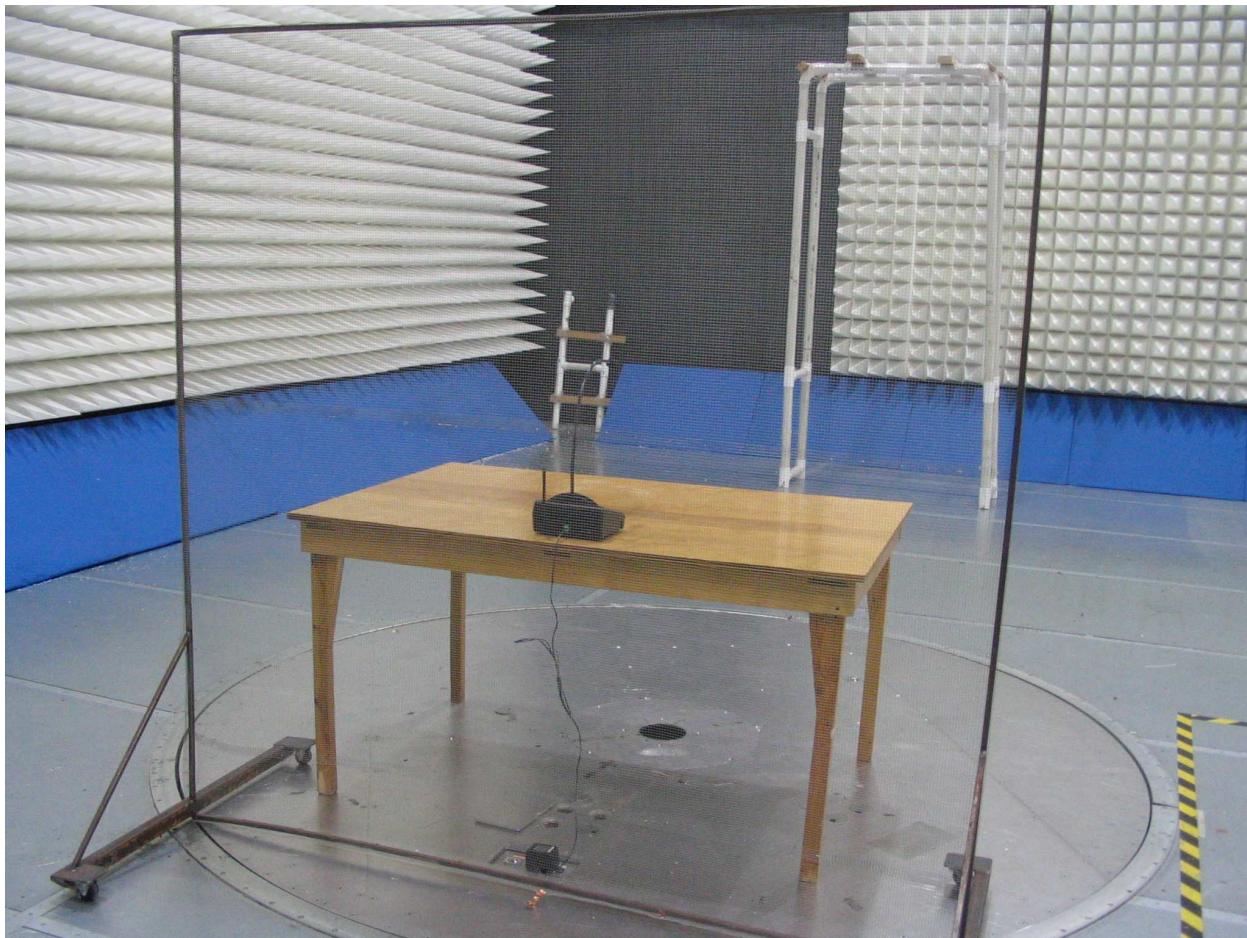


Exhibit 10