



Test Report No. 8612342881

For Cadent Ltd

Equipment Under Test:

Foot pedal

Model: MA14731-D

FCC ID: UZ2MA14731

***From The Standards Institution
Of Israel
Industry Division
Electronics & Telematics Laboratory
EMC Section***



Certificate No. 1487-01

**Test Report No.: 8612342881****Page 1 of 33 pages****Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D**

Order placed by:	Cadent Ltd
Address:	17 Ha'Taaasiya Street, POB 1018, Or Yehuda, Israel
Sample for test selected by:	The customer
The date of test:	August 2006

Description of Equipment

Under Test (EUT):	Foot pedal transmitter.
Model:	MA14731-D
Manufactured by:	Cadent Ltd

Reference Documents:

- ❖ CFR 47 FCC: Rules and Regulations; Part 15. "Radio frequency devices";
Subpart B: "Unintentional radiators" (2006)
Subpart C: "Intentional radiators" (2006),
Section 15.205. "Restricted bands of operations",
Section 15.209. "Radiated emission limits, general requirements".
"Radiated Emission Limits, Additional Provisions";
Section 15.249. "Operation within the bands 902 - 928 MHz,
2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz".

Test Results: The EUT meets the following requirements of CFR 47 FCC
Part 15:

Subpart B Section 15.109 (a)
Subpart C Section 15.249 (a),
Section 15.209,
Section 15.205.

This Test Report contains 33 pages and may be used only in full.	This Test Report applies only to the specimen tested and may not be applied to other specimens of the same product.
---	--

**Test Report No.: 8612342881****Page 2 of 33 pages****Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D**

Table of Contents

1. EUT Description and operation	3
1.1. General description:	3
1.2. Potential emission sources:	8
1.3. EUT setup and operation:	8
2. Measurements, examinations and derived results	8
2.1. Location of the Test Site:	8
2.2. Test condition:	8
2.3. Initial visual check and functional test:	8
2.4. Radiated emission test:	9
2.5. General:	9
2.6. Test of field strength of emission from intentional radiators	10
3. Test summary	29
4. Appendix 1. Test equipment used	30
5. Appendix 2: Antenna Factor and Cable Loss	31

**Test Report No.: 8612342881****Page 3 of 33 pages****Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D**

1. EUT Description and operation

1.1. General description:

* Note: the customer supplied all information in clause below.

The MA14731-D is transceiver located in foot pedal and cart units for activating the scanning sequence and responding to screen questions.

Tested model has 4 carrier frequencies 915.1, 919.2, 923.5, 927.6 MHz and intended for use in 915 – 928 MHz frequency range EUT based on frequency diversity mechanism Activated transmitter every 10 msec changes transmission frequency than waits 10 msec for cart respond on requested frequency (i.e. each frequency is transmitted during 10 msec every 50 msec).

The EUT transceiver based on single-chip TRF6901.

Declare output transmission power:	-1 dBm
Type of modulation:	FSK
Antenna type:	Integrated (wire 4 cm long soldered to PCB)

The PCB's dimensions: 54 mm x 28 mm .

The EUT power source: 3.0V Lithium battery in pedal and 12V from P.S. inside cart.

The EUT's block diagram is shown in Figures 1

The EUT external and internal views are presented in Photos #1 and #2.



Test Report No.: 8612342881

Page 4 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

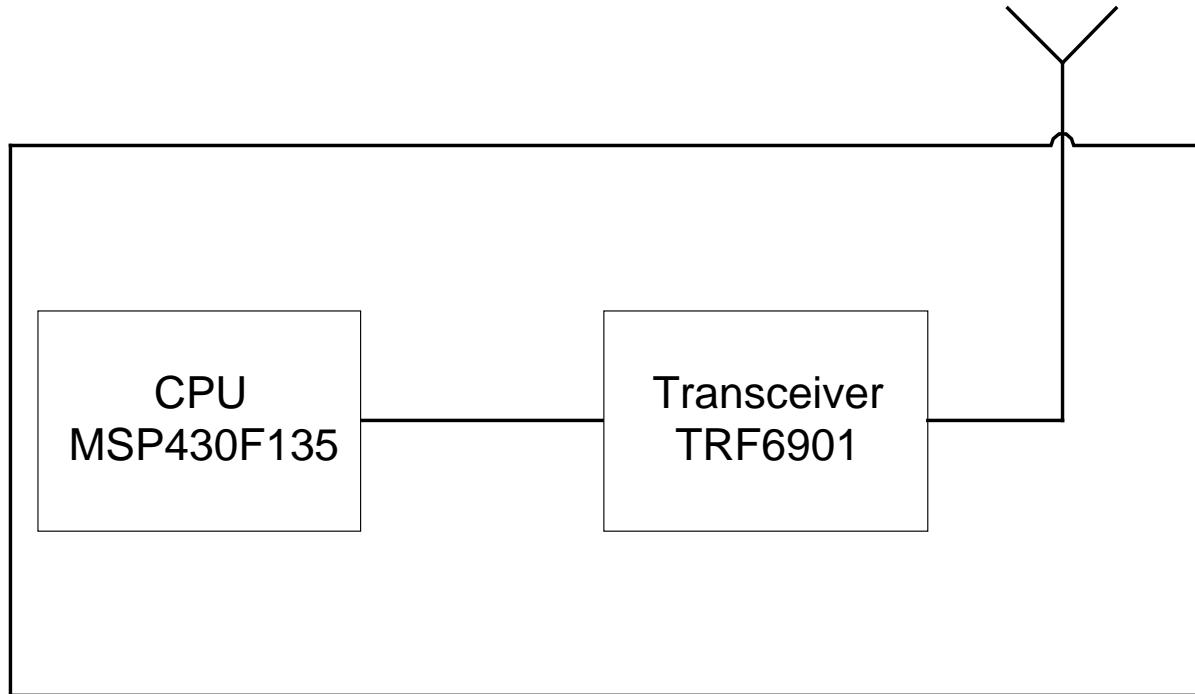


Figure 1. EUT's block diagram



Test Report No.: 8612342881

Page 5 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D



Photo 1. EUT's external view



Photo 2. EUT's internal view



Test Report No.: 8612342881

Page 6 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

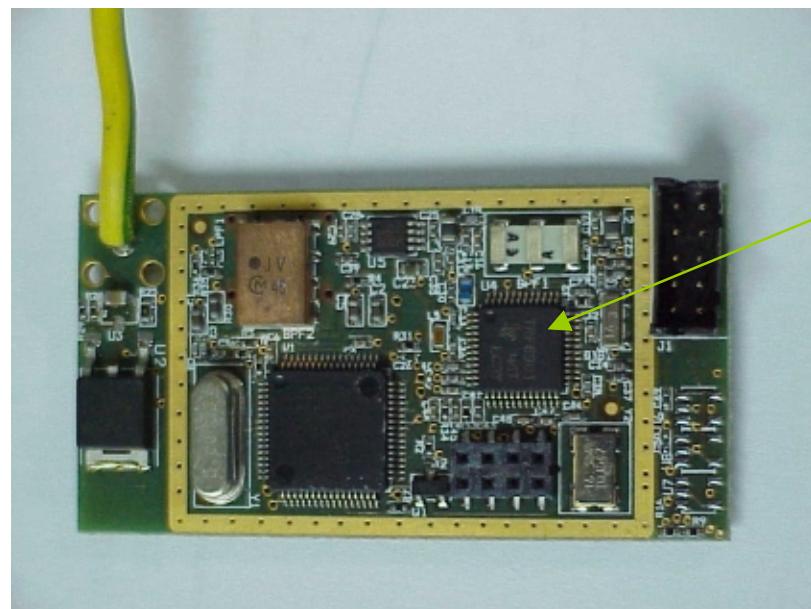


Photo 3. PCB view. Component side

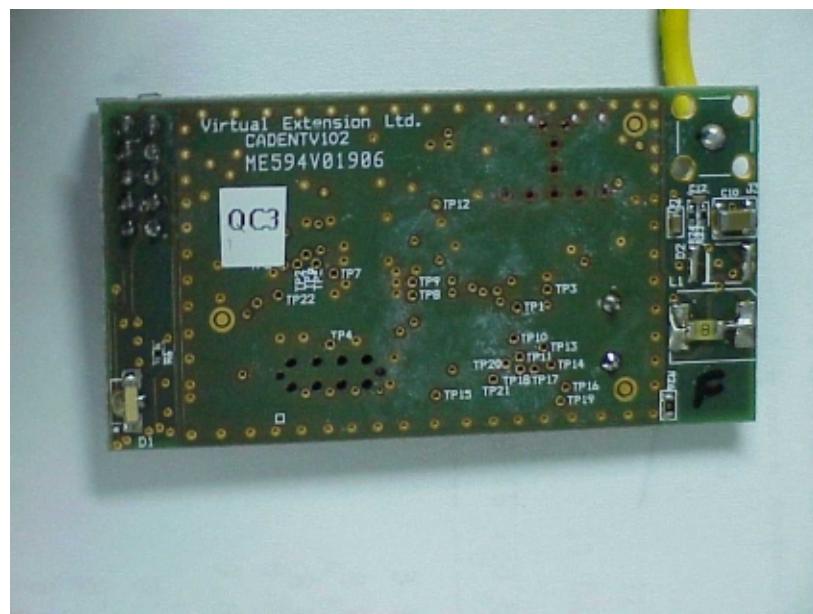


Photo 4. PCB view. Backside



Test Report No.: 8612342881

Page 7 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D



Photo 5. Spurious emissions test setup.



Photo 6. Spurious emissions test setup.

**Test Report No.: 8612342881****Page 8 of 33 pages****Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D**

1.2. Potential emission sources:

The potential emission sources are detailed in Table 1.

Table 1. Potential emission sources

Frequency	Location
5.0 MHz crystal	PCB
16.384 MHz crystal	PCB
914 - 928 MHz RF signal	Base unit

1.3. EUT setup and operation:

Measurements of transmitter according to 15.31(m) were performed in 3 carrier frequencies in continue transmission mode. Respective tests were performed in Transmission (Tx) and Receiving (Rx) modes.

2. Measurements, examinations and derived results

2.1. Location of the Test Site:

Preliminary radiated test was conducted at the EMC laboratory of the Standards Institution of Israel in Tel-Aviv.

All other tests were conducted in an Open Area Test Site located at Kibbutz Native Halamed Hai in Emek HaEla, Israel.

2.2. Test condition:

Temperature: 22 °C. Humidity: 56 %. Atmospheric pressure: 1006 mbar.

2.3. Initial visual check and functional test:

Initial visual check and brief built-in-test of the EUT was performed before testing.

- No external damages were found.
- The test on the EUT passed successfully.



Test Report No.: 8612342881

Page 9 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

2.4. Radiated emission test:

2.5. General:

Per FCC Part 15 Subpart B Section 15.109 and subpart C Section 15.249, 15.209, 15.205

- * Initial scans were made using a peak detector but still using the appropriate ANSI IF bandwidth.
- * A tolerance limit was set 10 dB below the specification limit. Levels above the tolerance limit were retested using the Peak or QP detector.

2.5.1. Preliminary radiated emission tests:

Preliminary investigation measurements were performed in a semi-anechoic chamber at distances 1 and 3 meters. The EUT was setup in its typical configuration and operated in its various modes. For each mode of operation the frequency spectrum was monitored. EUT configuration, cable configuration and mode of operation, which produced the maximum level of emission, were documented. A list of frequencies to be tested was prepared.

2.5.2. Final measurements:

The final radiated emission measurements were performed at the Open Area Test Site at the same (1 and 3 m.) distances. Test was started with fresh batteries. Measured voltage was 3.2V. The EUT was operated as described in clause 1.5. The EUT was installed on a turn-table.

The measurements at the Open Area Test Site were performed. Biconilog and Double Ridged Guide antennas were used.

The measurements were performed at each frequency that founded previously at which the signal was 10 dB below the limit or less. The levels were maximized by rotating turntable through 360° and changing antenna-to-EUT polarization from vertical to horizontal. The worse case result was noted in tables.

2.5.3. Radiated emission test results:

All received emissions from the EUT were found below FCC Part 15 Subpart B Section 15.109 and Subpart C Section 15. 209. 15.249 specified limit is presented in section 2.6.2. Preliminary test results are presented in plots below. Final result measurements in tables in section 2.6.5.



Test Report No.: 8612342881

Page 10 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

2.6. Test of field strength emission from intentional radiator

2.6.1. General:

Per FCC Part 15 Subpart C Clauses 15.249 (a)(d)

2.6.2. Requirements:

The EUT's operation frequencies are within 902 – 928 MHz band.

The field strength emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (mV/m)	Calculated Field Strength of Fundamental dB (μ V/m)	Field Strength of Harmonics (μ V/m)	Calculated Field Strength of Harmonics dB (μ V/m)
902 – 928 MHz	50	94	500	54

Note: Peak field strength of Harmonics shall not exceed the maximum permitted specified limit above by more than 20 dB.

Field strength limits are specified at a distance of 3 meters.

2.6.3. Test procedure:

The test was conducted according to clause 15.249.

2.6.4. Test summary:

The tested unit meets the standard requirement.



Test Report No.: 8612342881

Page 11 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

2.6.5. Test results:

Carrier frequency MHz	Peak Amplitude dB (μ V/m)	Limit@ 3m dB (μ V/m)
915.1	93.4	94.0
919.2	93.6	94.0
927.6	93.1	94.0

For recorded Fundamental frequencies result see plots #2-4.

All received spurious emissions were found below the specified limit.

Founded spurious emissions results presented in tables below.

Frequency carrier 915.1 MHz

Freq. MHz	Peak Ampl dB (μ V/m)	Peak limit dB (μ V/m)	Margin dB	*Ampl dB (μ V/m)	Specified @3m limit, dB (μ V/m)	Margin dB	Reference Plot
1830.1	60.2	74.0	13.8	42.4	54.0	11.6	Plot #6
2745.09	57.4	74.0	17.0	39.2	54.0	14.8	Plot #6

Frequency carrier 919.2 MHz

Freq. MHz	Peak Ampl dB (μ V/m)	Peak limit dB (μ V/m)	Margin dB	*Ampl dB (μ V/m)	Specified @3m limit, dB (μ V/m)	Margin dB	Reference Plot
1838.49	57.4	74.0	16.6	39.6	54.0	14.4	Plot #13
2757.6	53.5	74.0	20.5	35.7	54.0	18.3	Plot #13



Test Report No.: 8612342881

Page 12 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

Frequency carrier 927.6 MHz

Freq. MHz	Peak Ampl dB (μ V/m)	Peak limit dB (μ V/m)	Margin dB	QP Ampl dB (μ V/m)	Specified @3m limit, dB (μ V/m)	Margin dB	Reference plot
928.03	55.0	66.0	11.0	35.2	46.0	10.8	Plot #20

Freq. MHz	Peak Ampl dB (μ V/m)	Peak limit dB (μ V/m)	Margin dB	*Ampl dB (μ V/m)	Specified @3m limit, dB (μ V/m)	Margin dB	Reference plot
1855.2	57.4	74.0	16.6	39.6	54.0	11.9	Plot #21
2782.9	53.5	74.0	20.5	35.7	54.0	14.8	Plot #21

*Amplitude result was calculated from measured Peak value – Average factor.

Average factor = $20 \log_{10} \text{Tx on}/100 \text{ msec} = 20 \log_{10} [(2 \times 6.4 \text{ ms})/100] = -17.8 \text{ dB}$

For transmitter average factor calculation see plots # 30,31.

Test results are presented in tables above and plots # 4-25 for Tx mode and plots #26-29 for Rx mode.


Note: According to FCC recommendation average measurement (belongs to average limit) shall be performed with RBW=1 MHz and VBW= 10 Hz. Plot scans were performed with VBW more than 10 Hz that is worse case result.




Test Report No.: 8612342881

Page 13 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

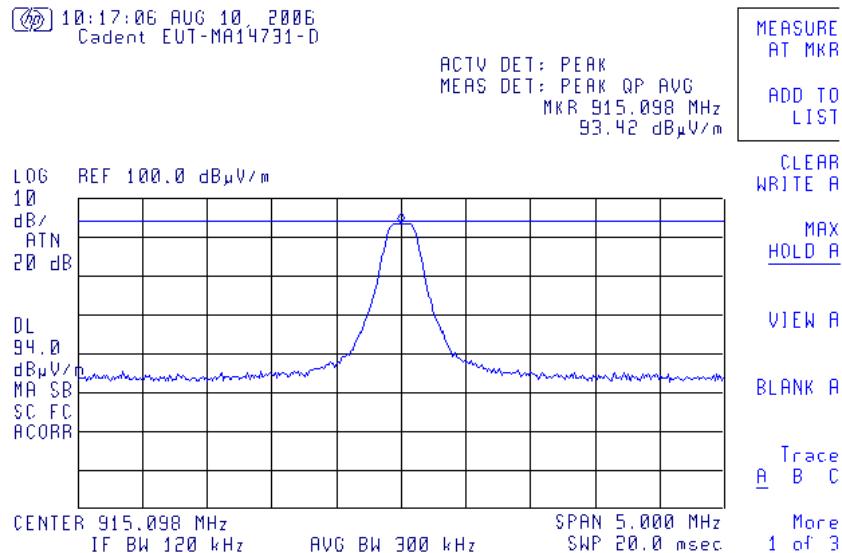

Plot # 1. Field strength of Fundamental frequency 915.1 MHz. Test distance =3m

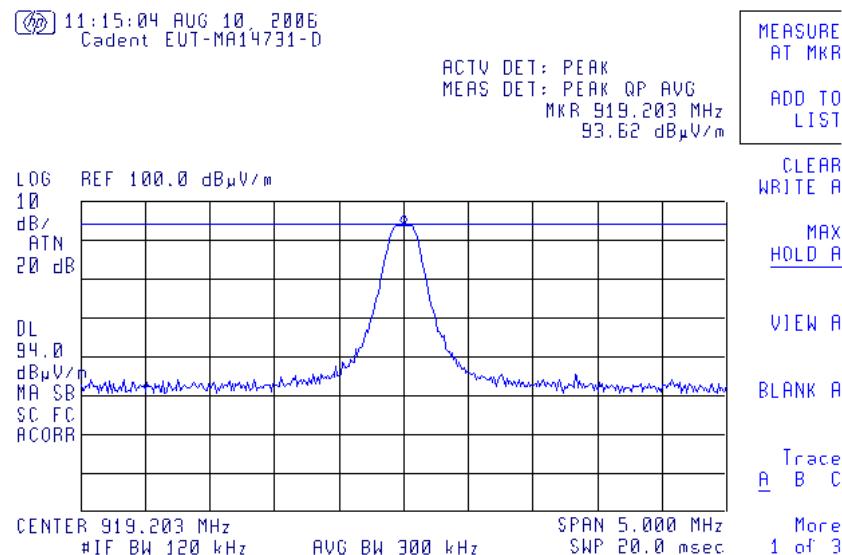

Plot # 2. Field strength of Fundamental frequency 919.2 MHz. Test distance =3m



Test Report No.: 8612342881

Page 14 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

⌚ 11:24:25 AUG 10, 2006
Cadent EUT-MA14731-D

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 927.655 MHz
93.07 dB μ V/m

MEASURE AT MKR

ADD TO LIST

CLEAR WRITE A


MAX HOLD A

VIEW A

BLANK A

Trace A B C


More 1 of 3

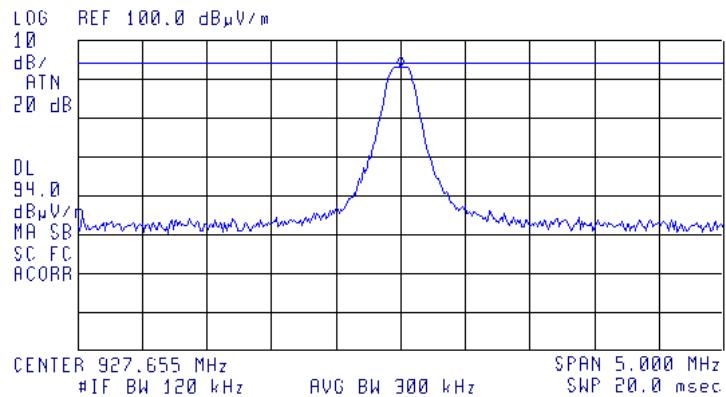

Plot # 3. Field strength of Fundamental frequency 927.6 MHz. Test distance =3m

⌚ 10:43:13 AUG 10, 2006 Tx mode Fc-915.1 MHz
Cadent EUT-MA14731-D

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 902.0 MHz
27.84 dB μ V/m

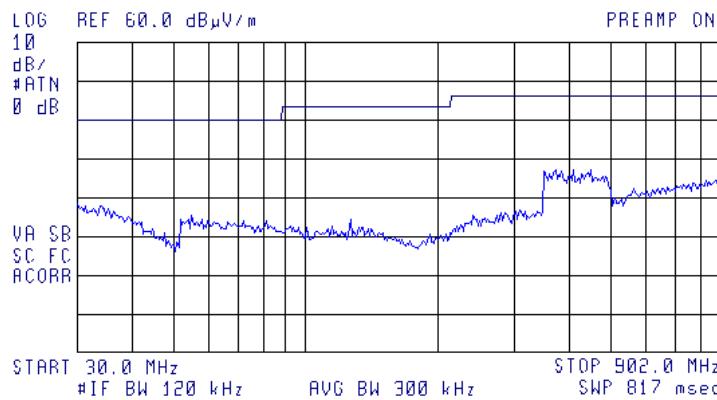


Plot # 4. Tx mode. Spurious emissions. Fcarrier - 915.1 MHz. Test distance =3m




Test Report No.: 8612342881

Page 15 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

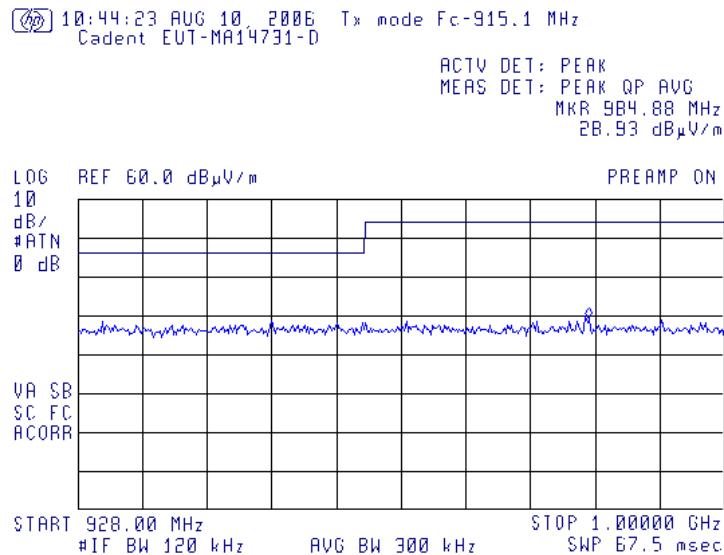

Plot # 5. Tx mode. Fcarrier - 915.1 MHz. Test distance =3m

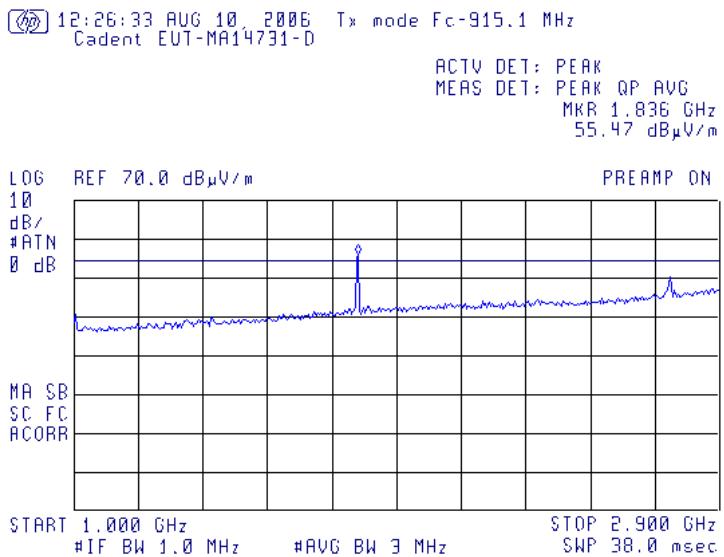


Plot # 6. Tx mode. Fcarrier - 915.1 MHz. Test distance =3m.

**Test Report No.: 8612342881****Page 16 of 33 pages****Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D**

⌚ 12:35:50 JAN 18, 2007 Tx mode Fc-915.1 MHz
Cadent EUT-MA14731-D


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.032 GHz
57.76 dB μ V/m

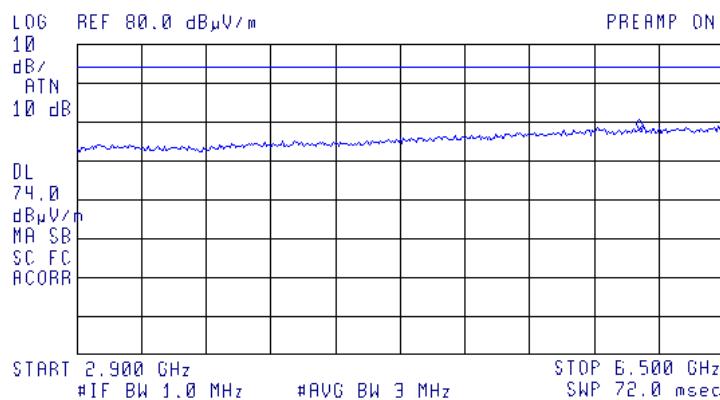

Plot # 7. Tx mode. Fcarrier - 915.1 MHz.
Preliminary scan of spurious emissions (For information only)
Limit line: Peak, Detector Peak. Test distance =3m

⌚ 12:37:19 AUG 10, 2006 Tx mode Fc-915.1 MHz
Cadent EUT-MA14731-D

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.482 GHz
46.10 dB μ V/m

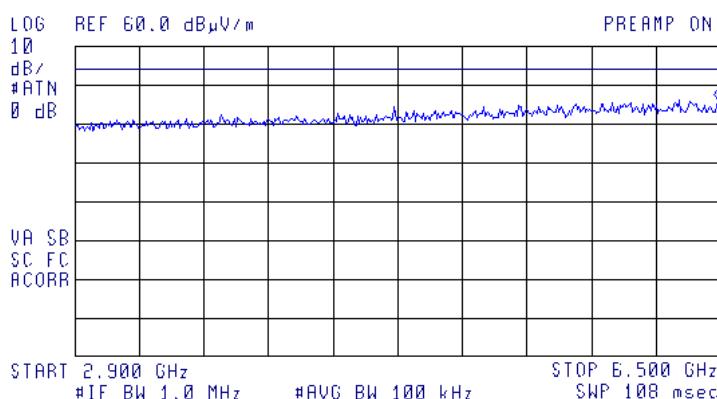


Plot # 8. Tx mode. Fcarrier - 915.1 MHz.
Preliminary scan of spurious emissions (For information only)
Limit line: Average, Detector: Average Test distance =3m.




Test Report No.: 8612342881

Page 17 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

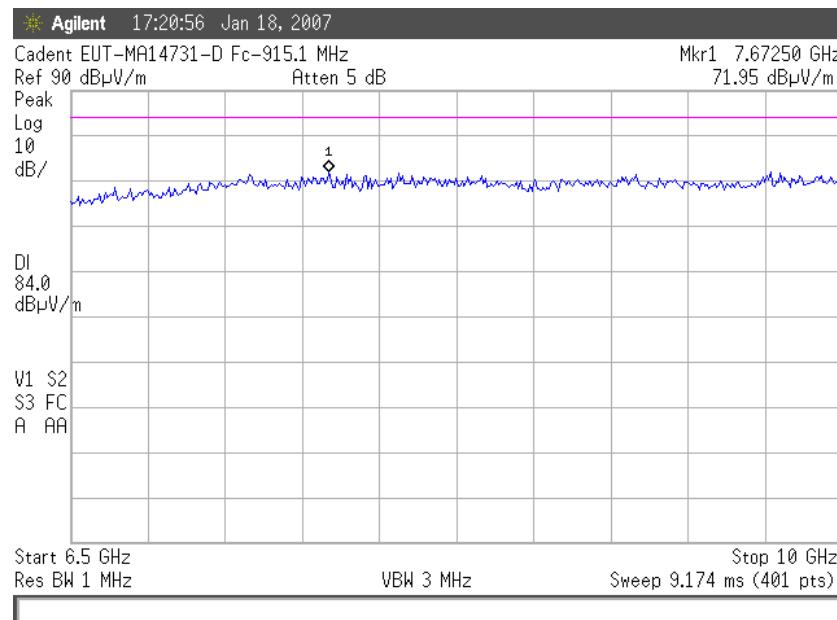

Plot # 9. Tx mode. Preliminary scan of spurious emissions (For information only)
Frequency range from 6.5 GHz to 10 GHz Carrier frequency 915.1 MHz. D = 1m.
Limit line: Peak, Detector: Peak.

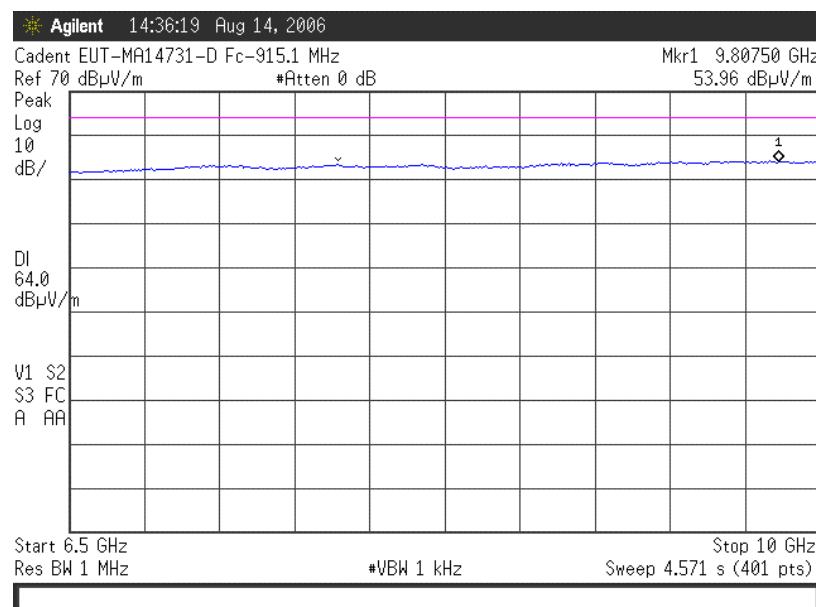

Plot # 10. Tx mode. Preliminary scan of spurious emissions (For information only)
Frequency range from 6.5 GHz to 10 GHz Carrier frequency 915.1 MHz. D = 1m.
Limit line: Average, Detector: Average.




Test Report No.: 8612342881

Page 18 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

10:52:45 AUG 10, 2006 Tx mode Fc-919.2 MHz
Cadent EUT-MA14731-D


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 902.0 MHz
32.87 dB μ V/m

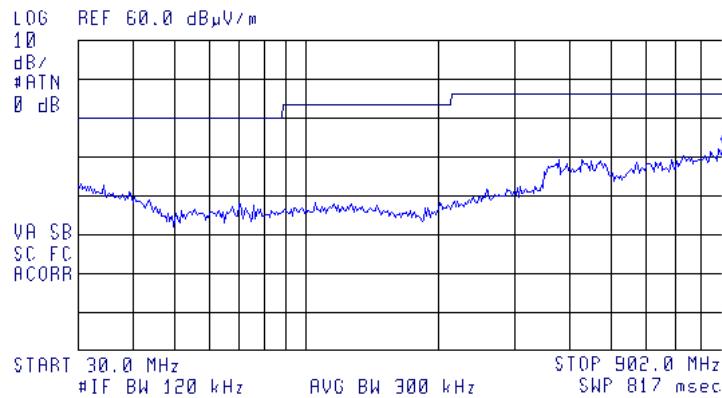

Plot # 11. Tx mode. Fcarrier - 919.2 MHz. Test distance =3m

10:55:42 AUG 10, 2006 Tx mode Fc-919.2 MHz
Cadent EUT-MA14731-D

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 936.82 MHz
28.14 dB μ V/m

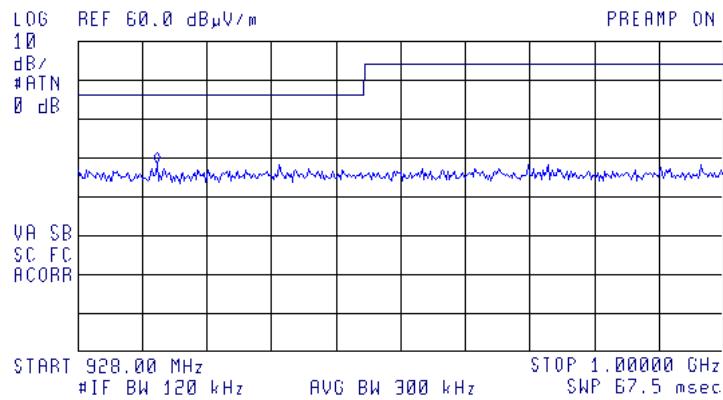


Plot # 12. Tx mode. Fcarrier - 919.2 MHz. Test distance =3m




Test Report No.: 8612342881

Page 19 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

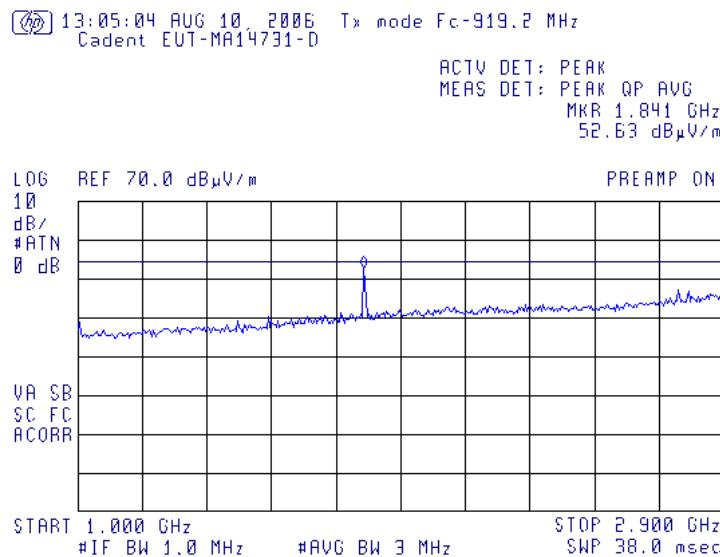

Plot # 13. Tx mode.. Fcarrier - 919.2 MHz. Test distance =3m

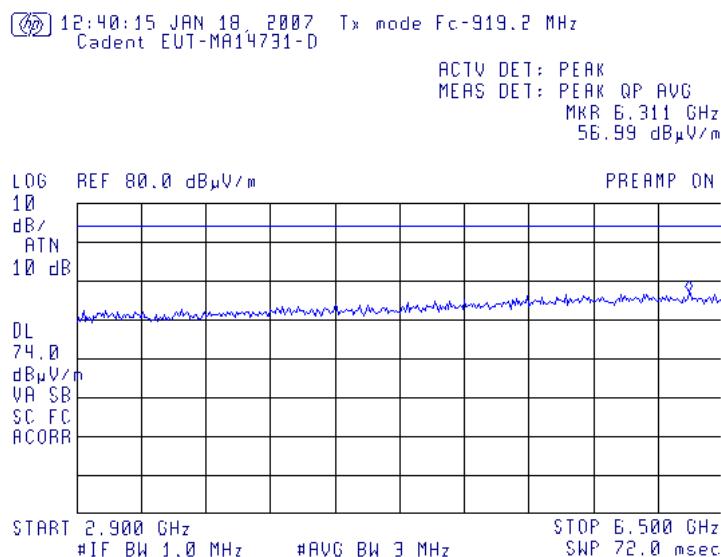


Plot # 14. Tx mode.. Fcarrier - 919.2 MHz.
Preliminary scan of spurious emissions (For information only)
Limit line: Peak. Detector: Peak. Test distance =3m




Test Report No.: 8612342881

Page 20 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

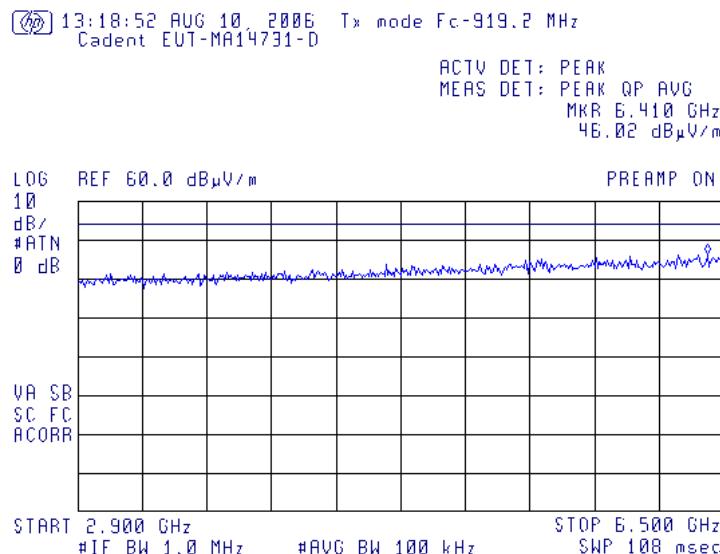

Plot # 15. Tx mode.. Fcarrier - 919.2 MHz.
Preliminary scan of spurious emissions (For information only)
Limit line: Average, Detector Average. Test distance =3m.

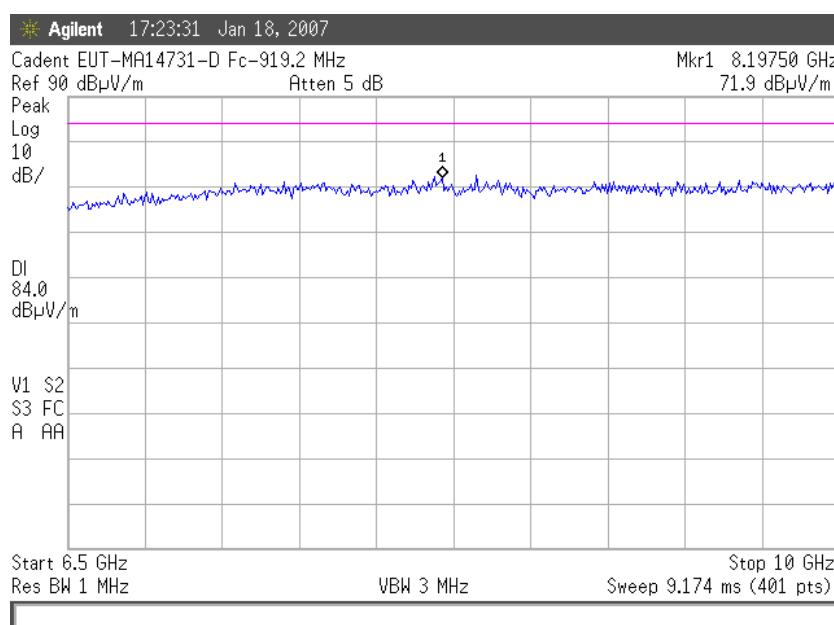


Plot # 16. Tx mode. Preliminary scan of spurious emissions (For information only)
Freq. range from 6.5 GHz to 10 GHz Carrier frequency 919.2 MHz. D = 1m.
Limit line: Peak, Detector: Peak.




Test Report No.: 8612342881

Page 21 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

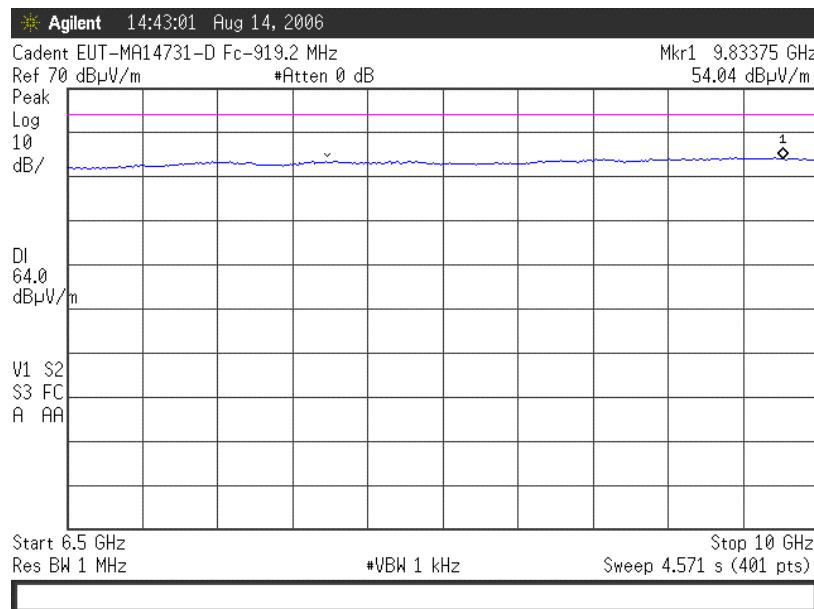

Plot # 17. Tx mode. Preliminary scan of spurious emissions (For information only)
Freq. range from 6.5 GHz to 10 GHz Carrier frequency 919.2 MHz. D = 1m.
Limit line: Average, Detector: Average.

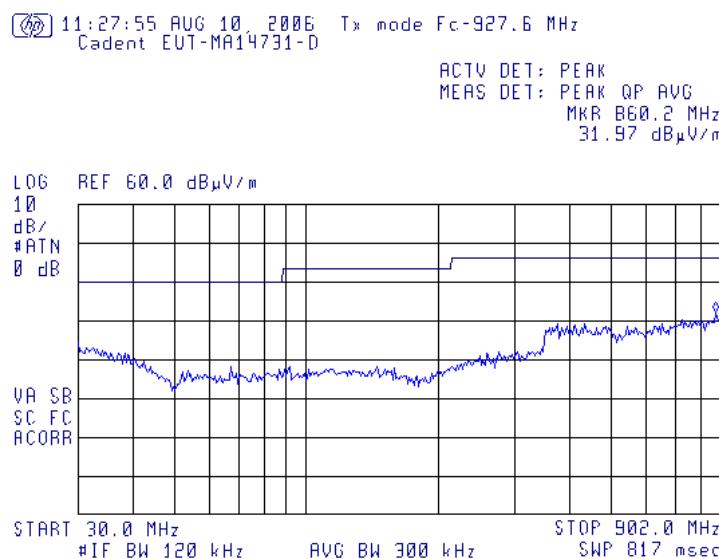

Plot # 18. Tx mode. Fcarrier – 927.6 MHz. Test distance =3m




Test Report No.: 8612342881

Page 22 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

11:33:35 AUG 10 2006 Tx mode Fc-927.6 MHz
Cadent EUT-MA14731-D


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 991.72 MHz
27.07 dB μ V/m

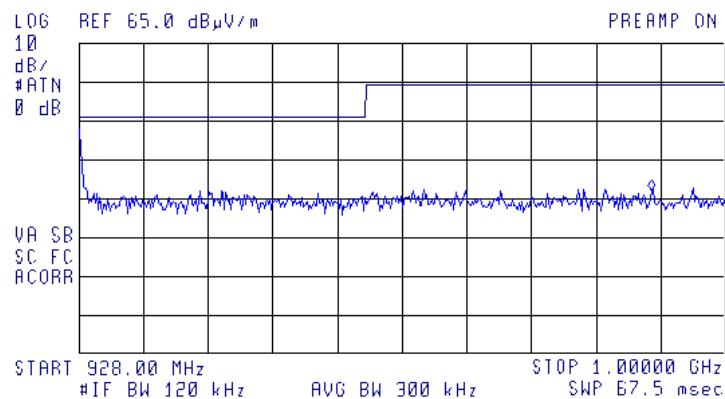

Plot # 19. Tx mode. Fcarrier – 927.6 MHz. Test distance =3m

11:42:40 10 AUG 2006
Cadent EUT-MA14731-D

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 928.030 MHz
55.01 dB μ V/m

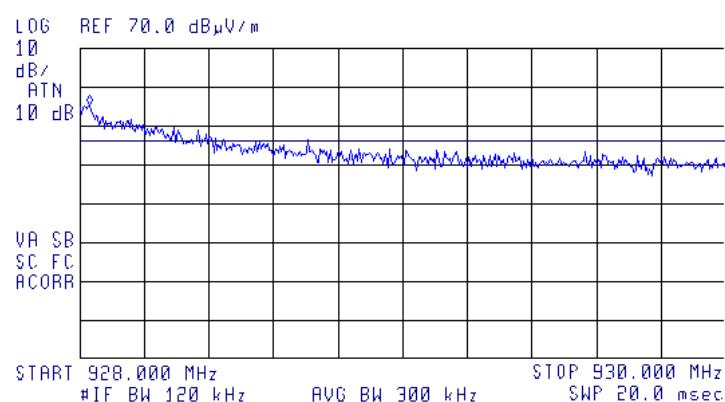

Plot # 20. Tx mode. Fcarrier – 927.6 MHz. Test distance =3m




Test Report No.: 8612342881

Page 23 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

11:57:34 AUG 10 2006 Tx mode Fc-927.6 MHz
Cadent EUT-MA14731-D


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 1.860 GHz
55.58 dB μ V/m

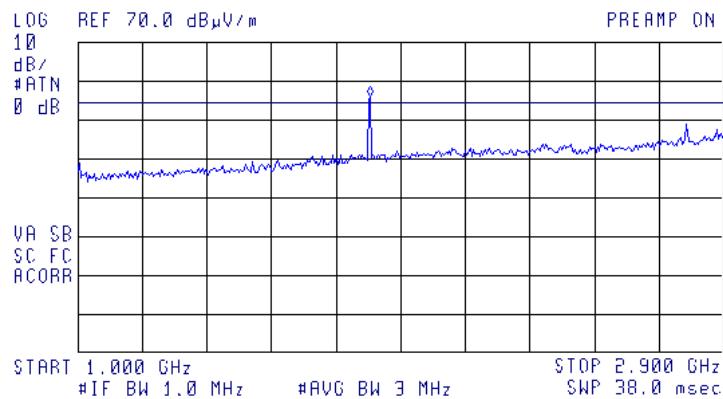

Plot # 21. Tx mode. Fcarrier – 927.6 MHz. Test distance =3m

12:35:50 JAN 18 2007 Tx mode Fc-915.1 MHz
Cadent EUT-MA14731-D

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.032 GHz
57.76 dB μ V/m

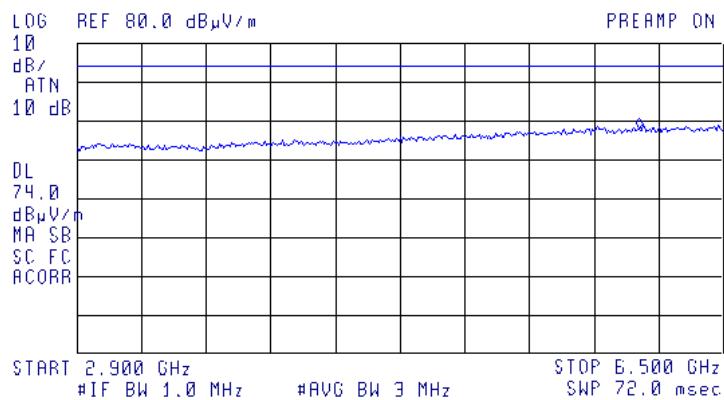

Plot # 22. Tx mode. Fcarrier – 927.6 MHz.
Preliminary scan of spurious emissions (For information only)
Limit line: Peak. Detector: Peak. Test distance =3m




Test Report No.: 8612342881

Page 24 of 33 pages


Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

12:14:09 AUG 10, 2006 Tx mode Fc-927.6 MHz
 Cadent EUT-MA14731-D

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 Mkr E, 365 GHz
 45.77 dB μ V/m

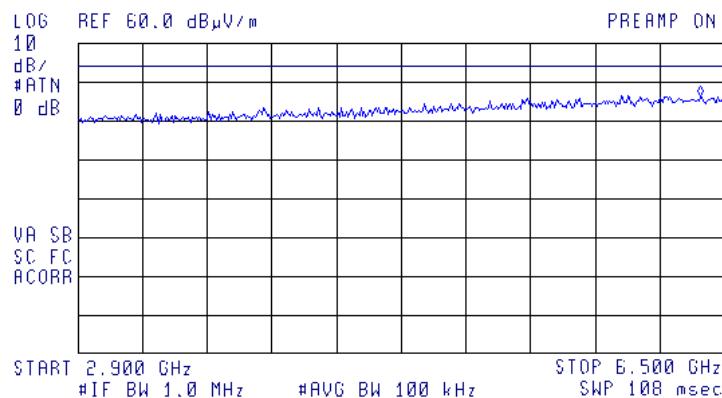

Plot # 23. Tx mode. Fcarrier – 927.6 MHz.
Preliminary scan of spurious emissions (For information only)
Limit line: Average, Detector: Average. Test distance =3m.

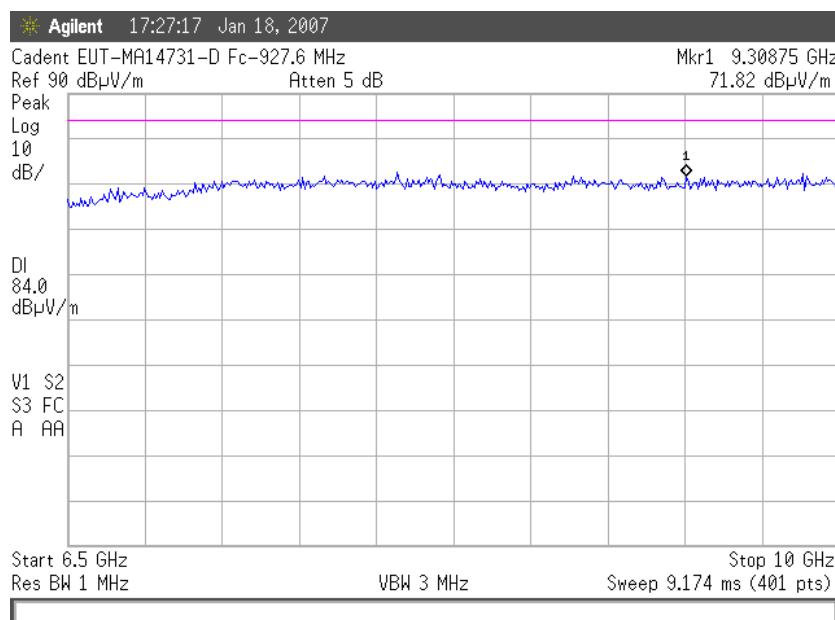


Plot # 24. Tx mode. Fcarrier – 927.6 MHz.
Preliminary scan of spurious emissions (For information only)
Limit line: Peak. Detector: Peak. Test distance =1m




Test Report No.: 8612342881

Page 25 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

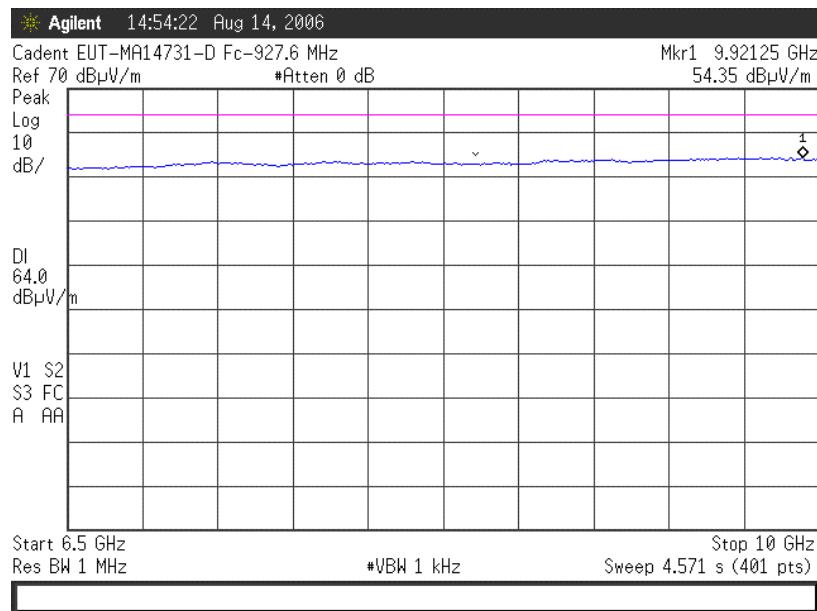

Plot # 25. Tx mode. Preliminary scan of spurious emissions (For information only)
Freq. range from 6.5 GHz to 10 GHz Carrier frequency 927.6 MHz. D = 1m.
Limit line: Average, Detector: Average.

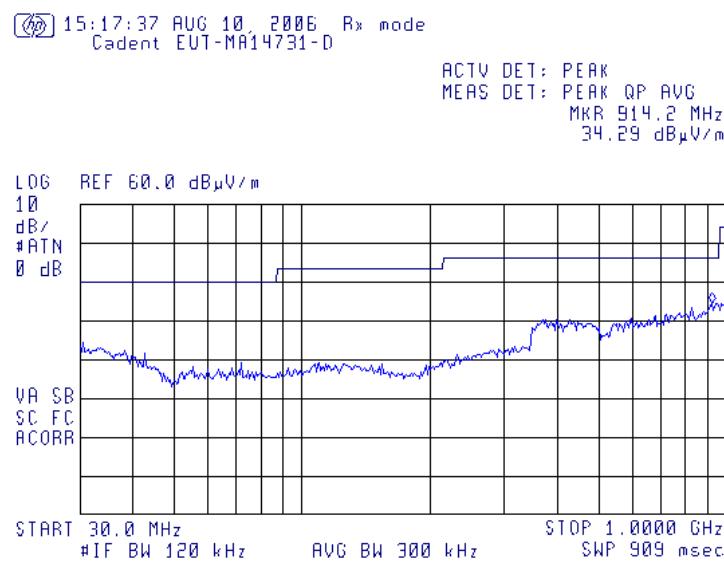


Plot # 26. Rx mode. Spurious emissions
Frequency range from 30 MHz to 1000 MHz. Test distance =3m.




Test Report No.: 8612342881

Page 26 of 33 pages


Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

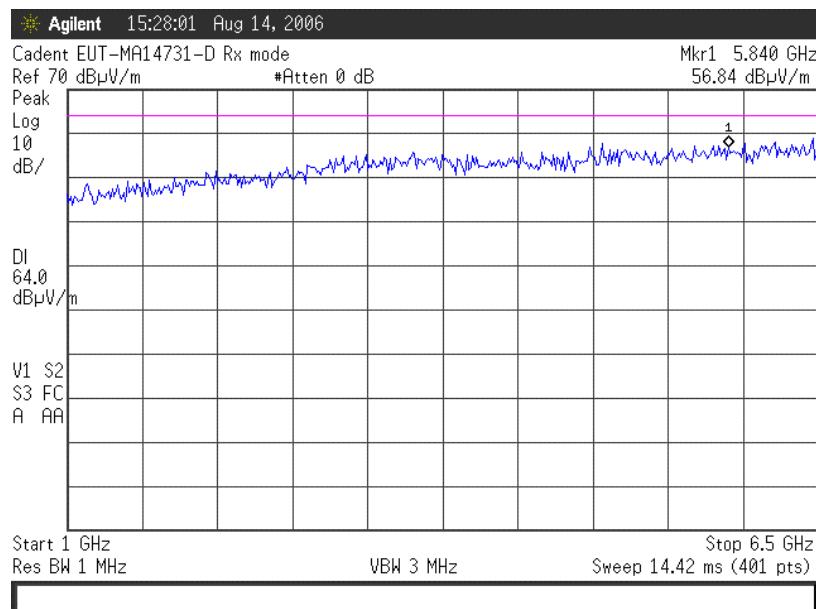

Plot # 27. Rx mode. Preliminary scan of spurious emissions (For information only)
Frequency range from 1000 MHz to 6500 MHz. Test distance =1m

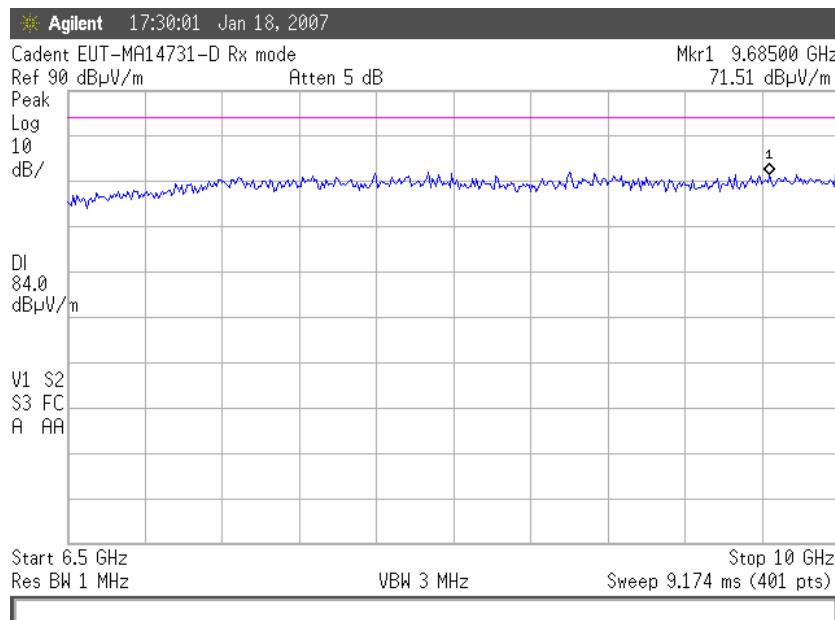

Plot # 28. Rx mode. Preliminary scan of spurious emissions (For information only)
Frequency range from 6.5 GHz to 10 GHz. Test distance = 1m.
Limit line: Peak, Detector: Peak.

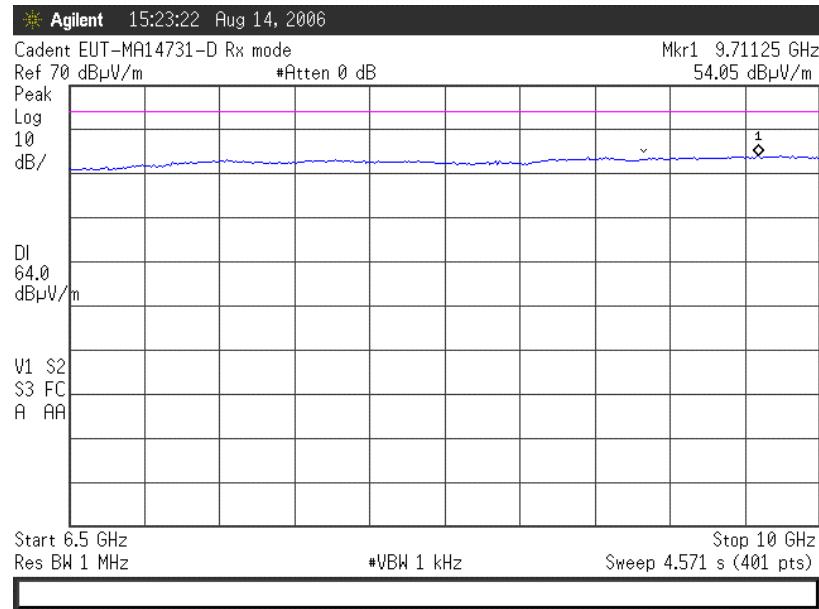**Test Report No.: 8612342881****Page 27 of 33 pages****Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D**


Plot # 29. Rx mode. Preliminary scan of spurious emissions (For information only)
Frequency range from 6.5 GHz to 10 GHz. Test distance = 1m.
Limit line: Average, Detector: Average




Test Report No.: 8612342881

Page 28 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

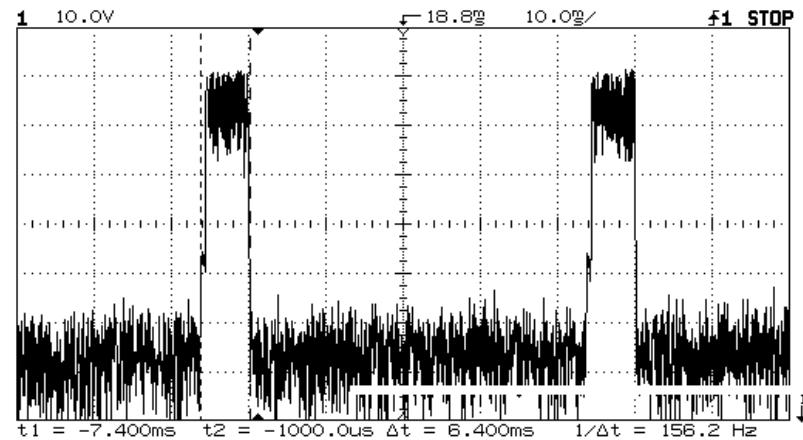

Plot # 30. Transmition during 100 msec

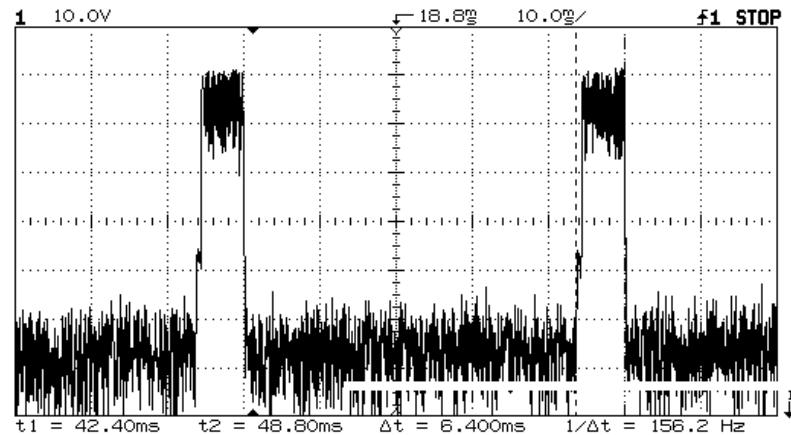

Plot # 31. Transmition during 100 msec

AVG factor was calculated as $20 \log (\text{Tx on}/100 \text{ msec}) = 20 \log [(2 \times 6.4 \text{ ms})/100] = -17.8 \text{ dB}$



Test Report No.: 8612342881

Page 29 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

3. Test summary

Parameter	FCC Part 15 Reference paragraph	Comply/not comply with the requirements
Radiated emission test.	Subpart B Section 15.109 Subpart C Section 15.209	Comply
Test of field strength of emission from intentional radiators	“Radiated Emission Limits, Additional Provisions”; Section 15.249 (a).	Comply
Radiated emission from intentional radiators in restricted bands	Subpart C Section 15.205	Comply

Telematics
Laboratory

August 2006

Name: Eng. Yuri Rozenberg
Position: Head of EMC BranchName: Michael Feldman
Position: Test TechnicianWritten by: Rotenfeld Mariya
Position: Technical Writer

**Test Report No.: 8612342881****Page 30 of 33 pages****Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D**

4. Appendix 1. Test equipment used

All measurements equipment is on SII calibration schedule with a recalibration interval not exceeding one year.

Instrument	MFR	Model	Serial No.	Due calibration date
EMI Receiver 9 kHz – 6.5 GHz	HP	8546A+85460 A	SII 4068	March 2007
Antenna Biconilog 30 – 2000 MHz	Schaffner-Chase	CBL6112B	S/N 2531	Dec 2006
EMI Analyser 9 kHz - 26.5 GHz	HP	E7405A	SII 4944	Feb 2007
Antenna Double Ridged Guide, 1-18 GHz	EMCO	3115	SII4873	March 2007
Oscilloscope	HP	54610B	US37340682	May 2007
RF cable, 3m	Sucoflex	104PE	21328/4PE	Oct 2006
Antenna Mast	R&S	HCM	100002	N/A
Metallic turntable	R&S	HCT12	100001	N/A
Positioning controller	R&S	HCC	100002	N/A



Test Report No.: 8612342881

Page 31 of 33 pages

Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D

5. Appendix 2: Antenna Factor and Cable Loss

Cable Loss (10m cable + Mast)

Point	Frequency (MHz)	Cable Loss (dB)	Point	Frequency (MHz)	Cable Loss (dB)
1	30	0.53	21	1000	3.68
2	50	0.75	22	1100	3.82
3	100	1.08	23	1200	4.07
4	150	1.39	24	1300	4.24
5	200	1.61	25	1400	4.43
6	250	1.752	26	1500	4.6
7	300	2.00	27	1600	4.7
8	350	2.15	28	1700	4.85
9	400	2.26	29	1800	4.98
10	450	2.383	30	1900	5.19
11	500	2.52	31	2000	5.34
12	550	2.606	32	2100	5.51
13	600	2.75	33	2200	5.69
14	650	2.856	34	2300	5.89
15	700	3.06	35	2400	6.07
16	750	3.201	36	2500	6.22
17	800	3.27	37	2600	6.28
18	850	3.38	38	2700	6.41
19	900	3.46	39	2800	6.53
20	950	3.55	40	2900	6.84



Test Rep

Title: Te

**Table 2. Antenna Factor****Biconilog Antenna, Model Number: CBL-6112B, S/N: 2531
3 m calibration**

Frequency (MHz)	Antenna Factor (dB/m)	Frequency (MHz)	Antenna Factor (dB/m)	Frequency (MHz)	Antenna Factor (dB/m)	Frequency (MHz)	Antenna Factor (dB/m)
Vertical Polarization				Horizontal Polarization			
26.00	20.77	625.00	19.10	26.00	20.39	625.00	19.08
28.00	19.77	650.00	19.20	28.00	19.15	650.00	19.26
30.00	18.72	675.00	19.05	30.00	18.29	675.00	19.12
40.00	14.76	700.00	19.26	40.00	12.64	700.00	19.11
50.00	8.32	725.00	19.73	50.00	7.99	725.00	19.49
60.00	6.15	750.00	20.11	60.00	5.95	750.00	19.94
70.00	6.49	775.00	20.41	70.00	6.04	775.00	20.07
80.00	7.26	800.00	20.50	80.00	7.60	800.00	20.18
90.00	8.83	825.00	20.57	90.00	9.07	825.00	20.36
100.00	10.55	850.00	20.73	100.00	10.34	850.00	20.57
110.00	11.38	875.00	20.92	110.00	11.12	875.00	20.83
120.00	11.71	900.00	20.79	120.00	11.46	900.00	20.74
130.00	11.57	925.00	21.02	130.00	11.47	925.00	21.17
140.00	11.09	950.00	21.32	140.00	11.15	950.00	21.11
150.00	10.46	975.00	21.76	150.00	10.50	975.00	21.52
160.00	9.82	1,000.00	21.97	160.00	9.86	1,000.00	21.64
170.00	9.52	1,050.00	22.55	170.00	9.58	1,050.00	22.02
180.00	9.18	1,100.00	22.47	180.00	9.28	1,100.00	22.16
190.00	8.90	1,150.00	22.78	190.00	9.54	1,150.00	22.44
200.00	9.11	1,200.00	22.77	200.00	9.82	1,200.00	22.86
225.00	9.70	1,250.00	23.36	225.00	10.42	1,250.00	23.37
250.00	12.41	1,300.00	23.90	250.00	12.43	1,300.00	23.86
275.00	12.81	1,350.00	24.19	275.00	13.19	1,350.00	24.02
300.00	13.37	1,400.00	24.42	300.00	13.48	1,400.00	24.42
325.00	13.70	1,450.00	24.83	325.00	13.73	1,450.00	24.61
350.00	14.45	1,500.00	24.88	350.00	14.61	1,500.00	25.02
375.00	14.90	1,550.00	24.85	375.00	15.15	1,550.00	25.27
400.00	15.63	1,600.00	25.06	400.00	15.74	1,600.00	25.27
425.00	16.38	1,650.00	25.55	425.00	16.52	1,650.00	25.50
450.00	16.43	1,700.00	26.20	450.00	16.54	1,700.00	25.48
475.00	17.28	1,750.00	26.45	475.00	17.28	1,750.00	26.35
500.00	17.41	1,800.00	26.58	500.00	17.47	1,800.00	26.51
525.00	17.35	1,850.00	27.30	525.00	17.31	1,850.00	26.63
550.00	18.97	1,900.00	27.96	550.00	18.64	1,900.00	27.04
575.00	18.87	1,950.00	27.80	575.00	18.60	1,950.00	27.13
600.00	18.82	2,000.00	27.73	600.00	19.04	2,000.00	27.20

**Test Report No.: 8612342881****Page 33 of 33 pages****Title: Test on Foot pedal transmitter FCC ID: UZ2MA14731 Model: MA14731-D**

Antenna Factor
Double Ridged Guide Antenna mfr EMCO model 3115 1m calibration

Point	Frequency (MHz)	Antenna Factor (dB/m)
1	1000	23.9
2	2000	28.3
3	3000	31.0
4	4000	33.1
5	4500	32.5
6	5000	32.4
7	6000	53.7
8	6500	35.6
9	7000	36.4
10	7500	36.9
11	8000	37.0
12	8500	38.0
13	9000	38.6
14	9500	38.4
15	10000	38.4
16	10500	38.4
17	11000	38.9
18	11500	39.6
19	12000	39.4
20	12500	39.2
21	13000	40.3
22	13500	41.0
23	14000	41.2
24	14500	41.3
25	15000	40.0
26	15500	38.0
27	16000	38.1
28	16500	40.3
29	17000	42.2
30	17500	44.6
31	18000	46.2

Cable Loss
Type: Sucoflex 104PE; Ser.No.21328/4PE; 3 m length

Point	Frequency (GHz)	Cable Loss (dB)
0	0.0-1.8	1.67
1	1.8-3.6	2.39
2	3.6-5.4	3.04
3	5.4-7.2	3.58
4	7.2-9.0	4.06
5	9.0-10.8	4.49
6	10.8-12.6	4.91
7	12.6-14.4	5.31
8	14.4-16.2	5.66
9	16.2-18.00	6.01