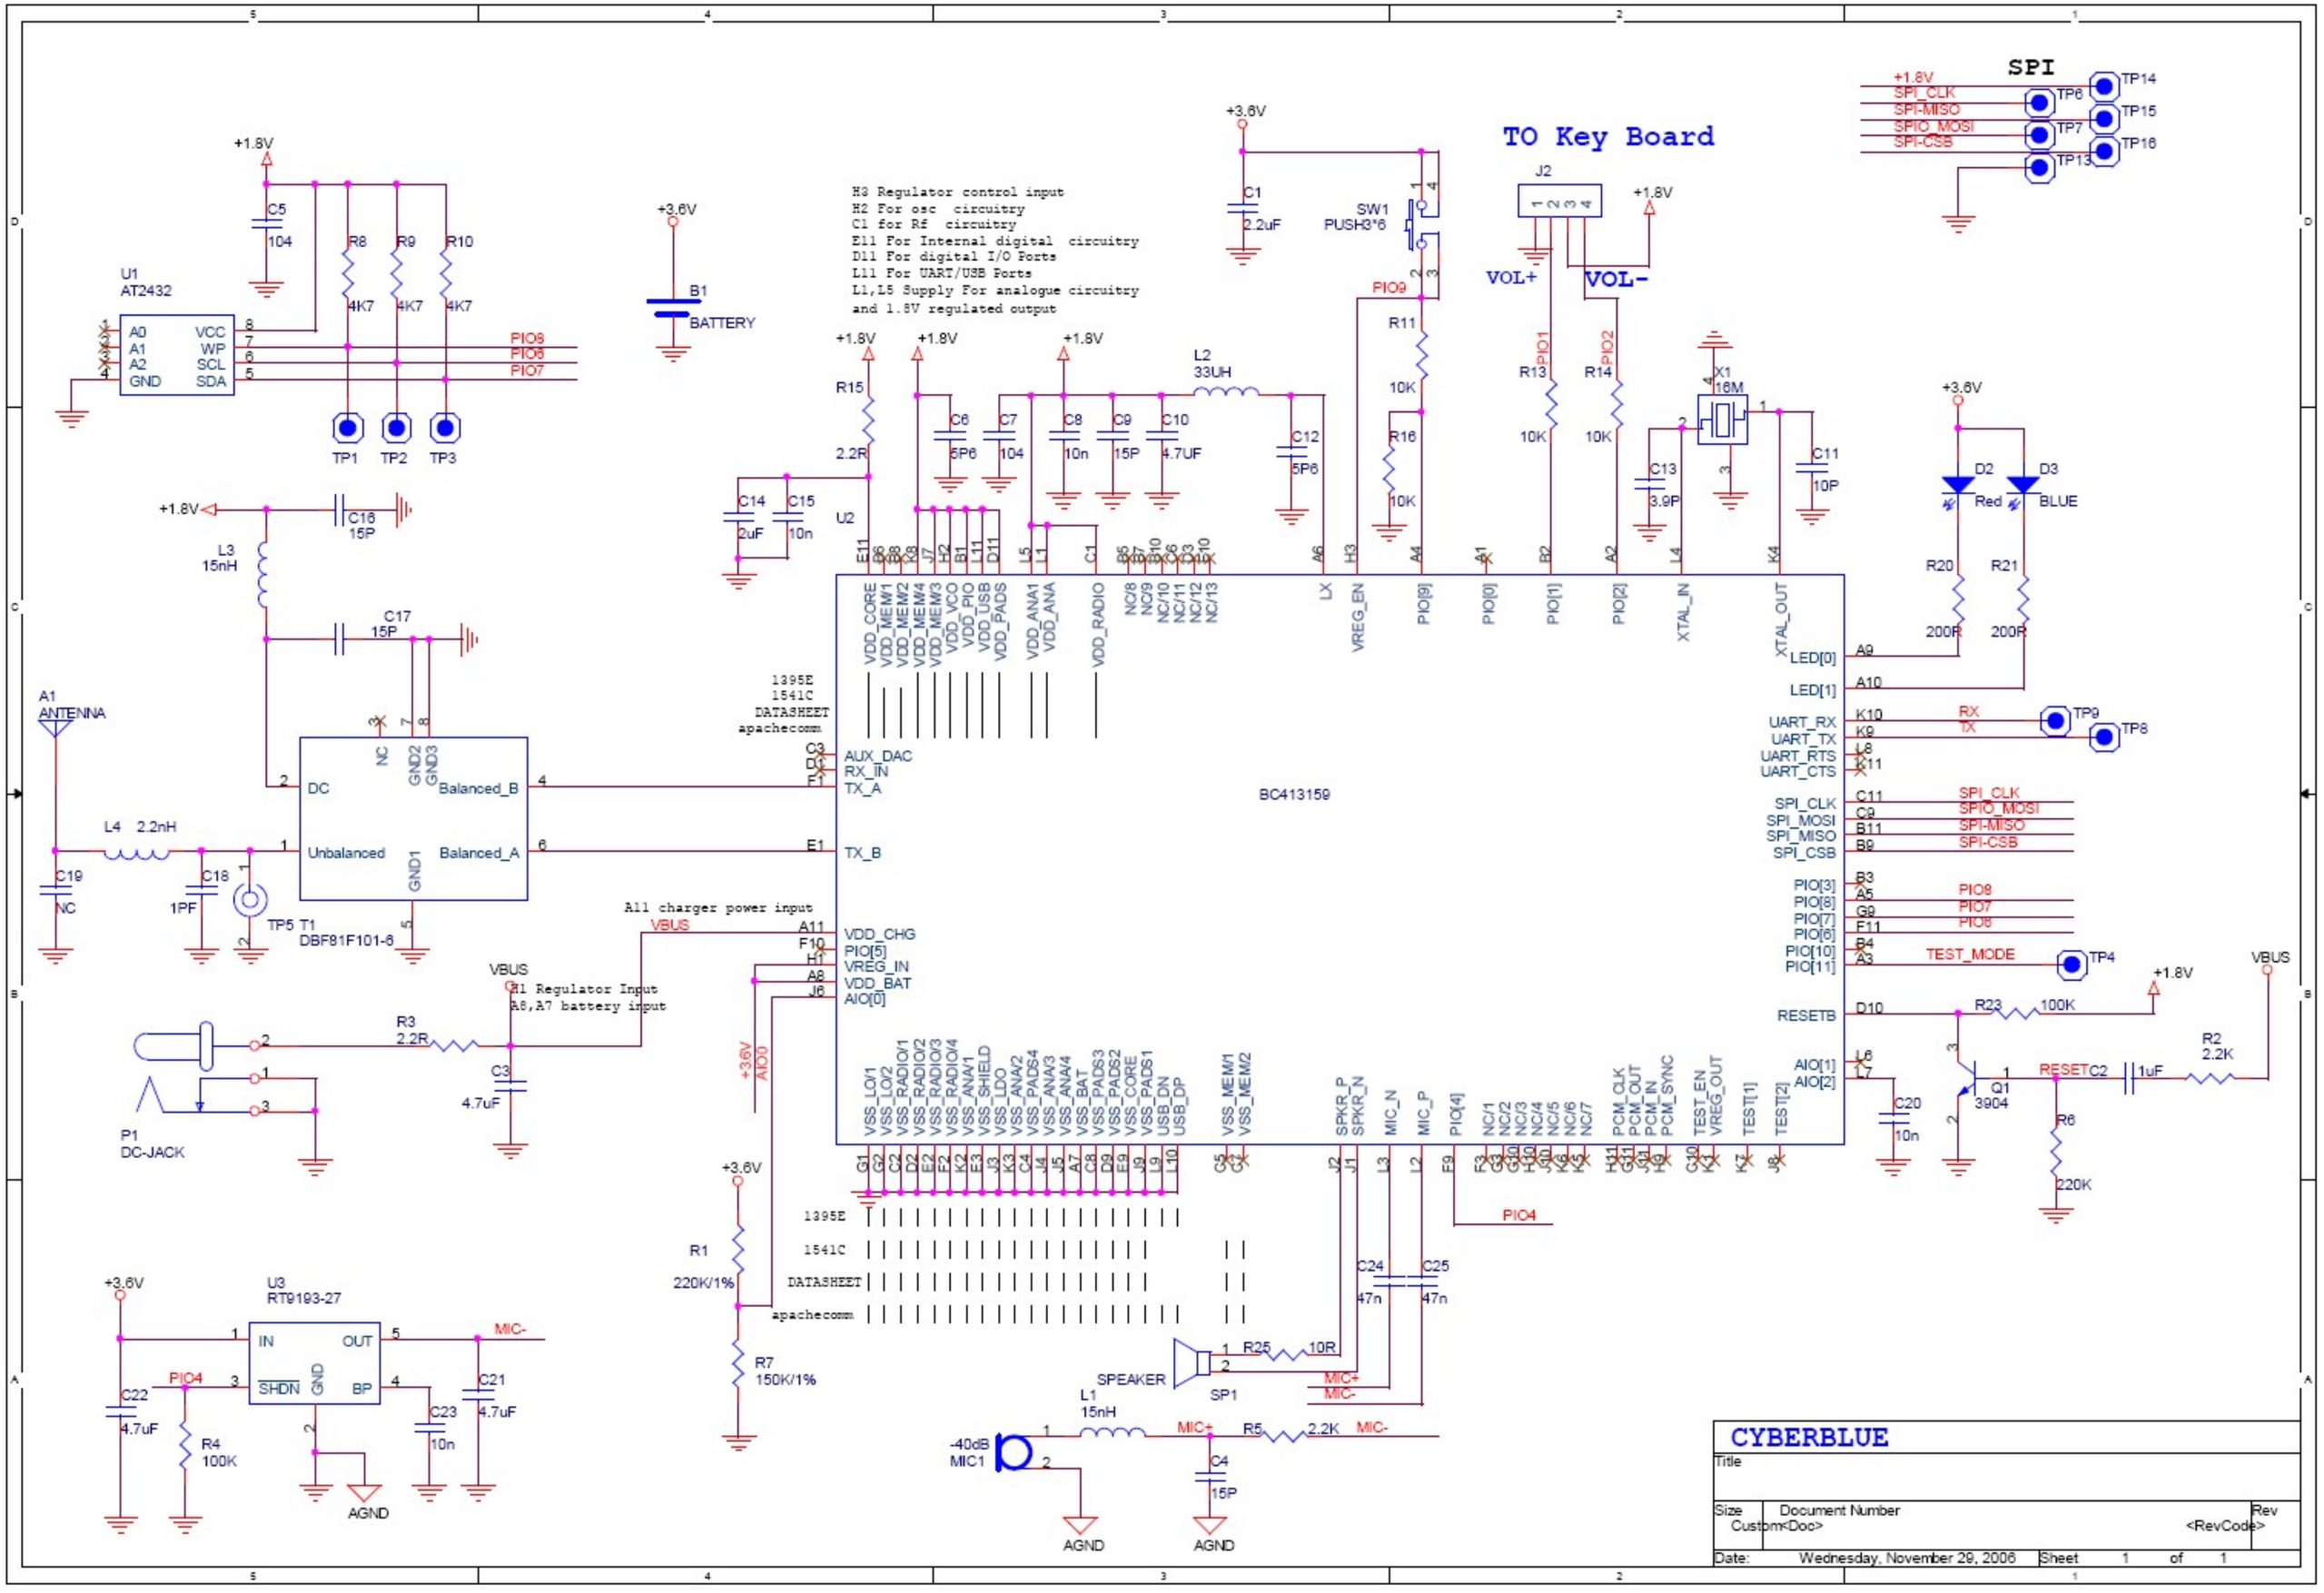
SPI
TO Key Board
H3 Regulator control input
H2 For osc circuitry
C1 for Rf circuitry
E11 For Internal digital circuitry
D11 For digital I/O Ports
L11 For UART/USB Ports
L1,L5 Supply For analogue circuitry
and 1.8V regulated output
U1
AT2432
U2
BC413159
U3
RT9193-27
T1
DBF81F101-6
P1
DC-JACK
SW1
PUSH3*6
J2
VOL+
VOL-
X1
16M
D2
Red
D3
BLUE
SPEAKER
SP1
MIC1
-40dB
A1
ANTENNA
B1
BATTERY
All charger power input
VBUS
H1 Regulator Input
A8,A7 battery input
1395E
1541C
DATASHEET
apachecomm
AGND
CYBERBLUE
Title
Size
Custom
Document Number
<Doc>
Rev
<RevCode>
Date:
Wednesday, November 29, 2006
Sheet
1
of
1