


## Appendix B. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	2.4G + 5G

Horizontal

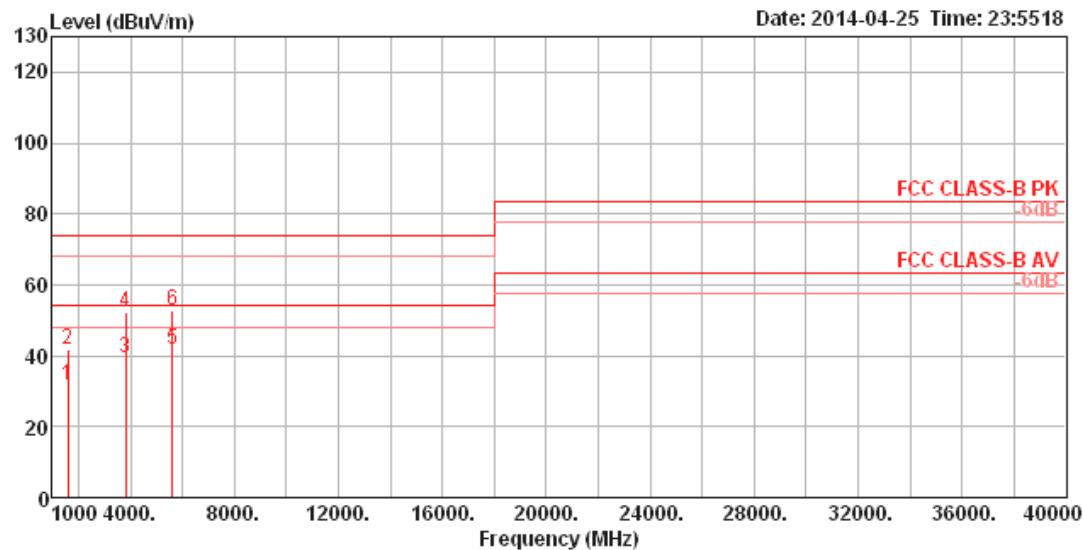

Freq	Level	Limit	Over	Read	Cable			A/Pos	T/Pos	Pol/Phase	Remark
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1582.34	31.58	54.00	-22.42	39.91	2.95	25.66	36.94	100	12	HORIZONTAL Average
2	1582.34	41.58	74.00	-32.42	49.91	2.95	25.66	36.94	100	12	HORIZONTAL Peak
3	3817.34	39.20	54.00	-14.80	38.68	4.84	31.40	35.72	100	304	HORIZONTAL Average
4	3817.34	52.20	74.00	-21.80	51.68	4.84	31.40	35.72	100	304	HORIZONTAL Peak
5	5612.34	41.86	54.00	-12.14	36.98	6.28	34.04	35.44	100	256	HORIZONTAL Average
6	5612.34	52.86	74.00	-21.14	47.98	6.28	34.04	35.44	100	256	HORIZONTAL Peak

## Vertical

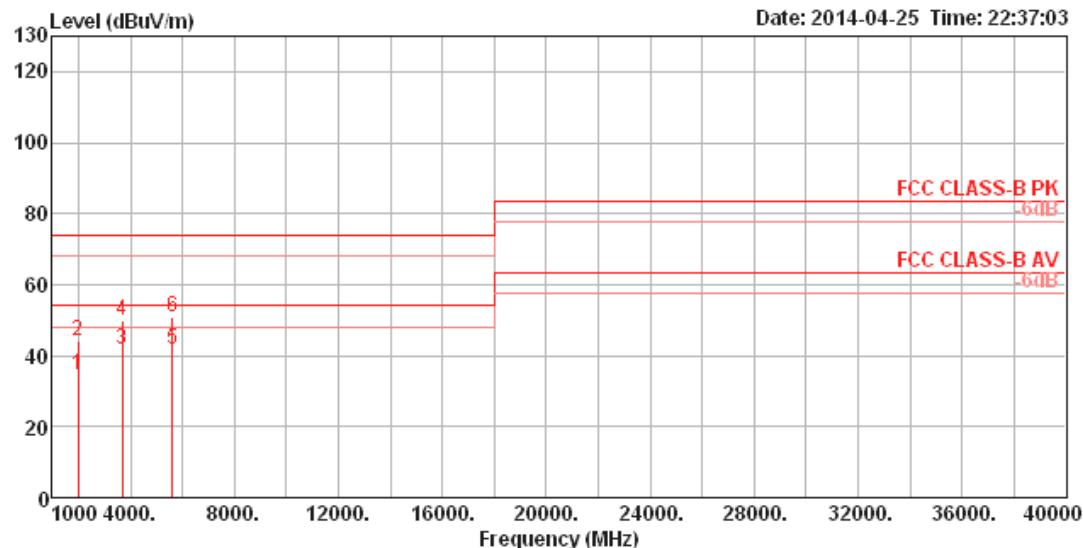

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1997.34	34.41	54.00	-19.59	38.77	3.44	27.95	35.75	100	333	VERTICAL Average
2	1997.34	43.89	74.00	-30.11	48.25	3.44	27.95	35.75	100	333	VERTICAL Peak
3	3677.34	41.80	54.00	-12.20	41.82	4.76	31.10	35.88	100	181	VERTICAL Average
4	3677.34	49.80	74.00	-24.20	49.82	4.76	31.10	35.88	100	181	VERTICAL Peak
5	5612.34	41.86	54.00	-12.14	36.98	6.28	34.04	35.44	100	360	VERTICAL Average
6	5612.34	50.86	74.00	-23.14	45.98	6.28	34.04	35.44	100	360	VERTICAL Peak