




Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

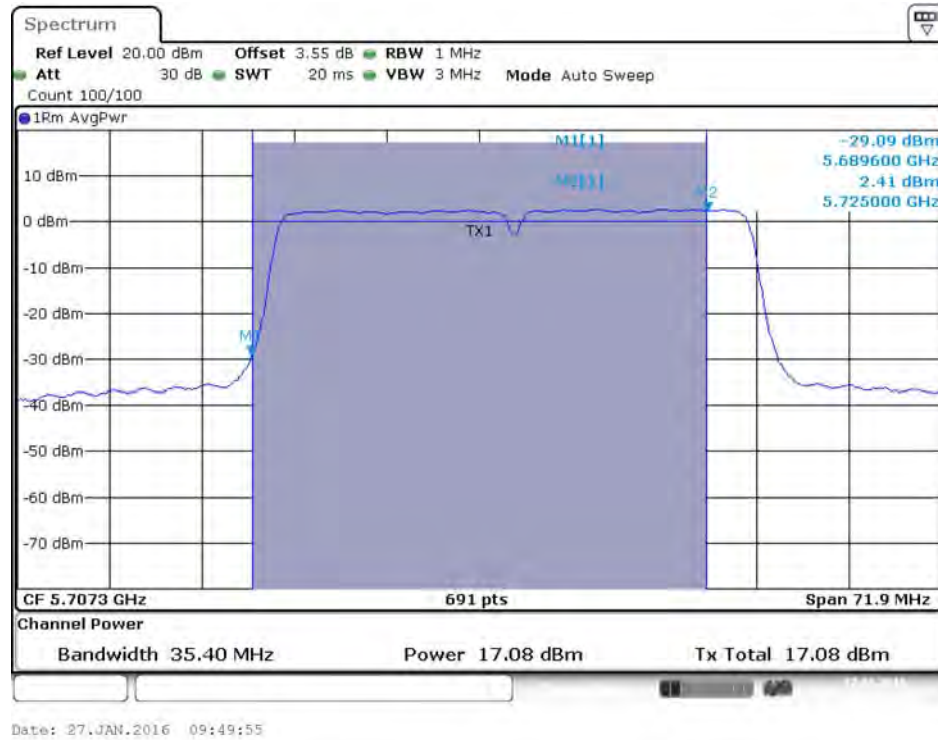

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

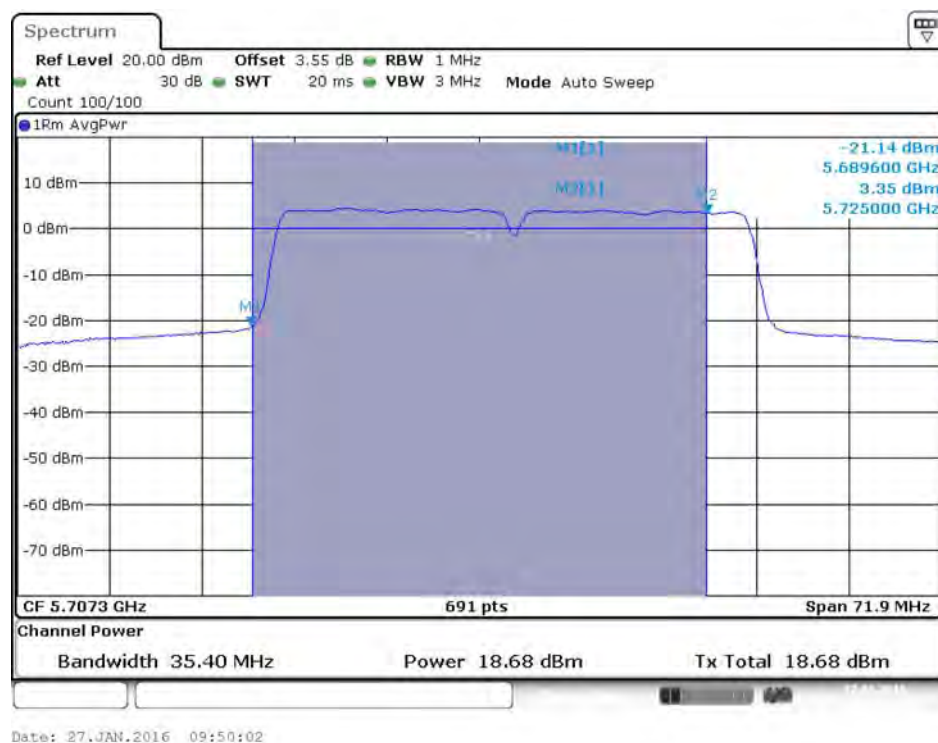

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

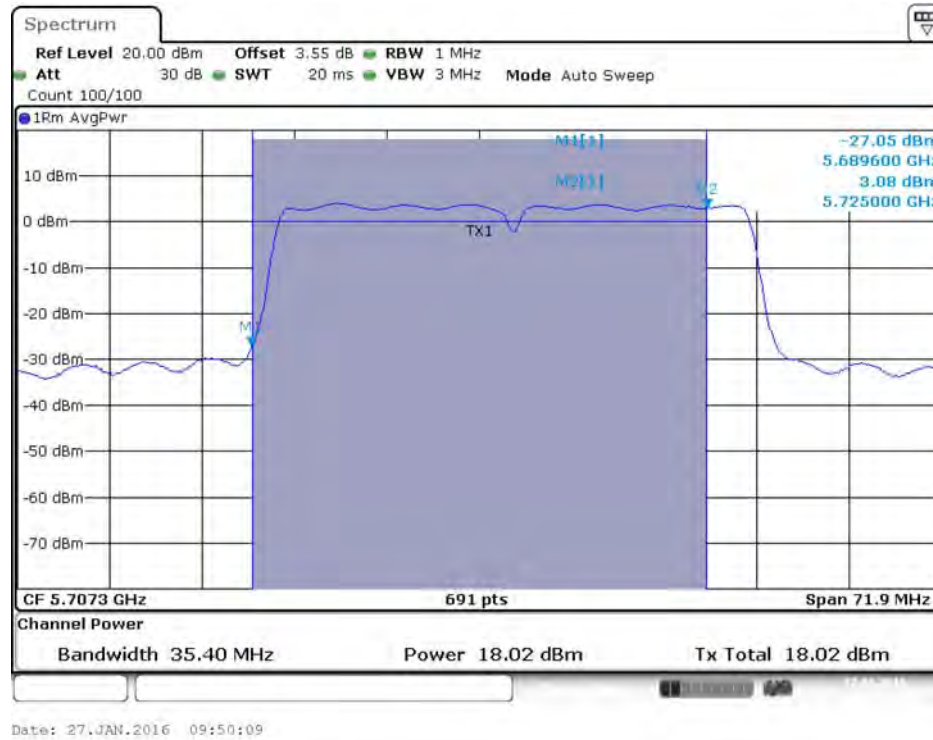


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)




Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)



Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)

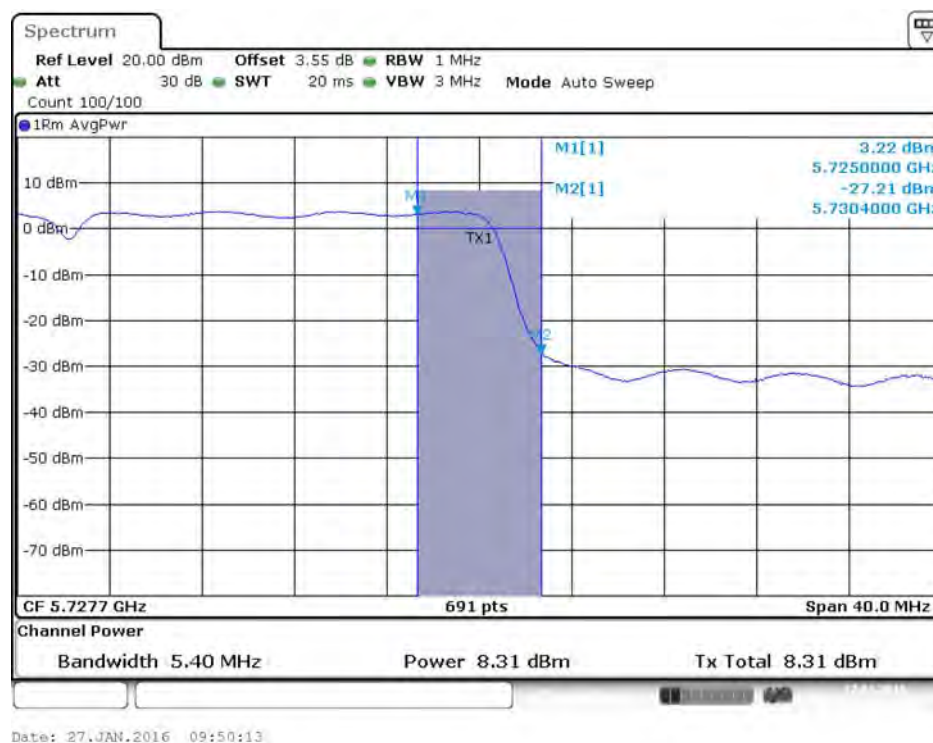


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

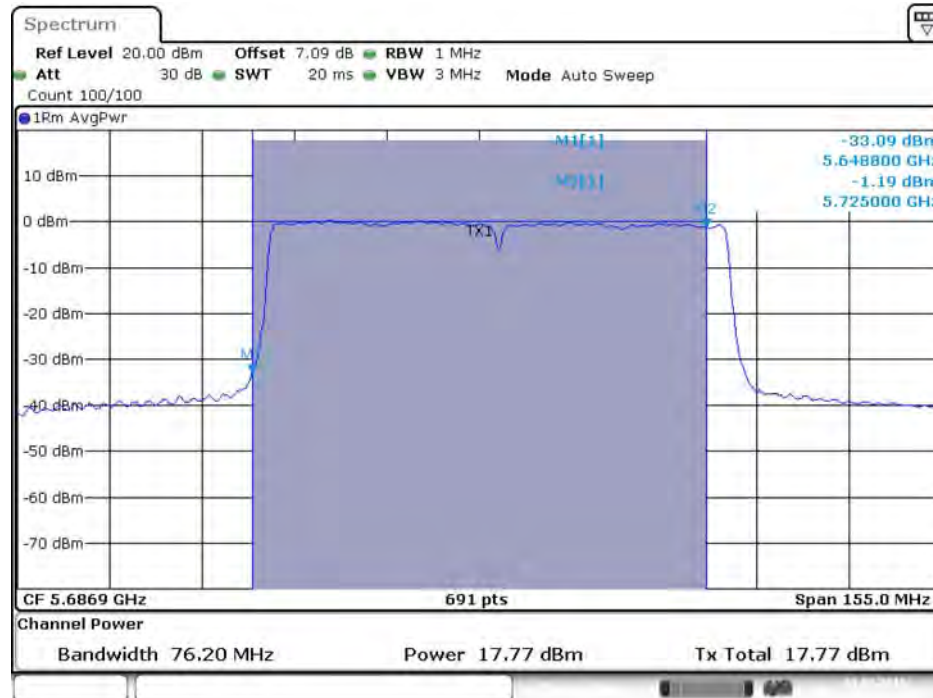


Date: 1.MAR.2016 20:48:23

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 2C)

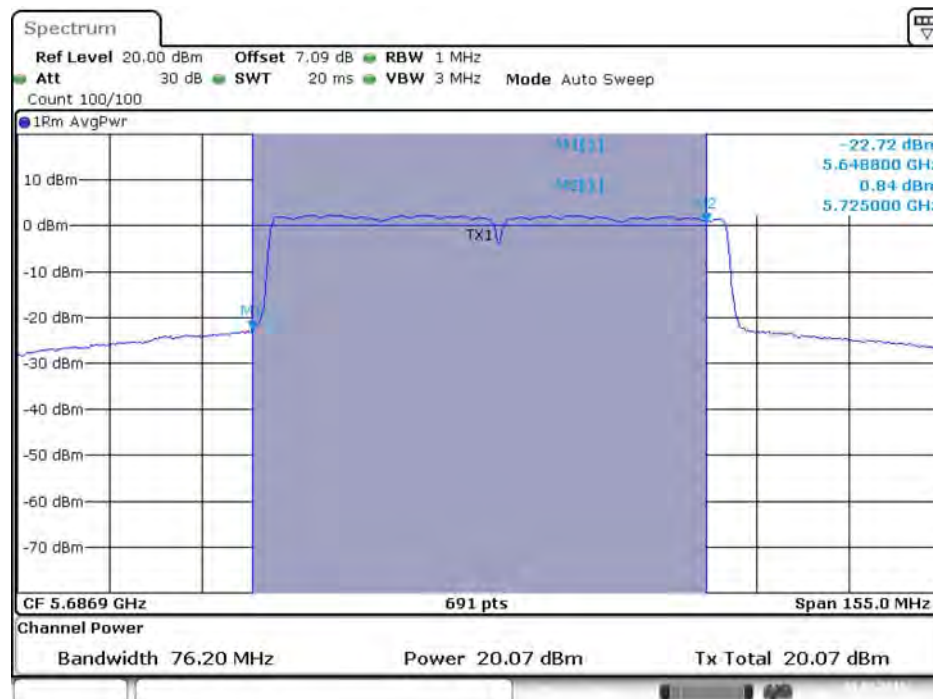


Date: 1.MAR.2016 20:48:30

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 2C)

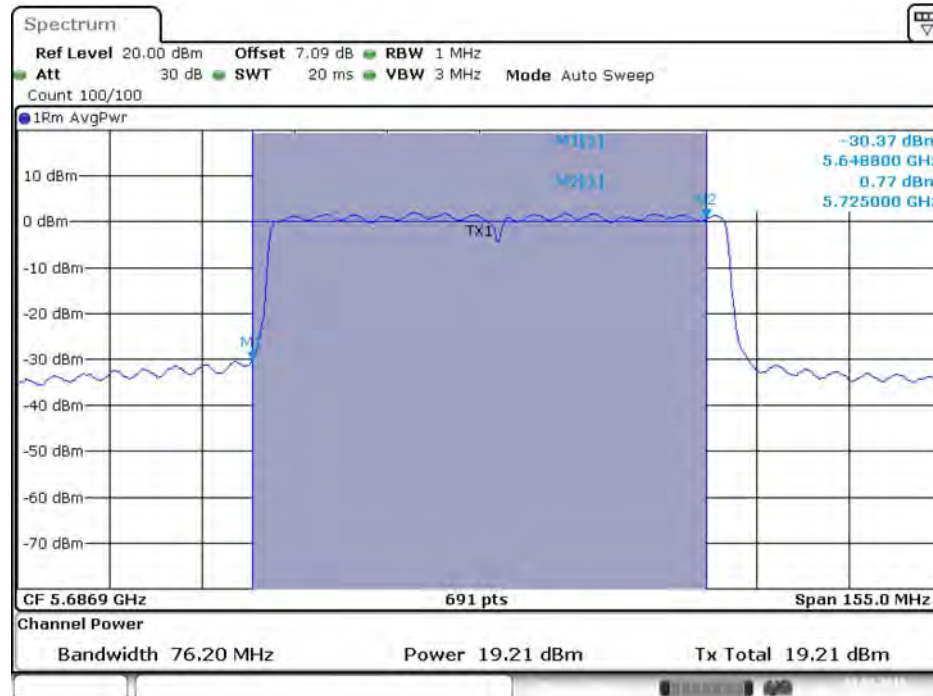


Date: 1.MAR.2016 20:48:37

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

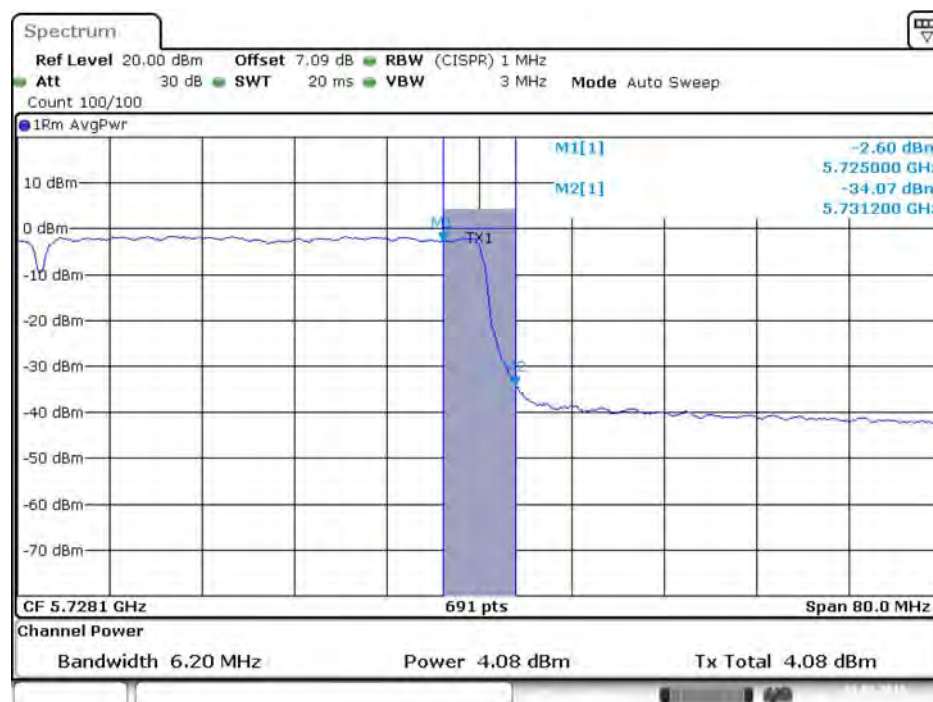


Date: 1.MAR.2016 20:48:27

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

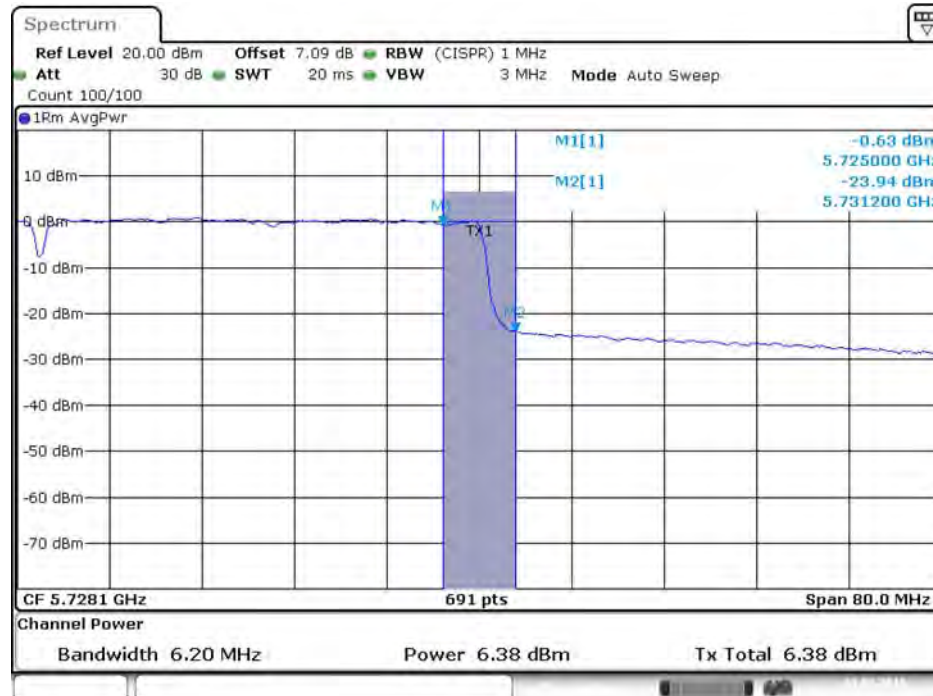

Date: 1.MAR.2016 20:48:34


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)

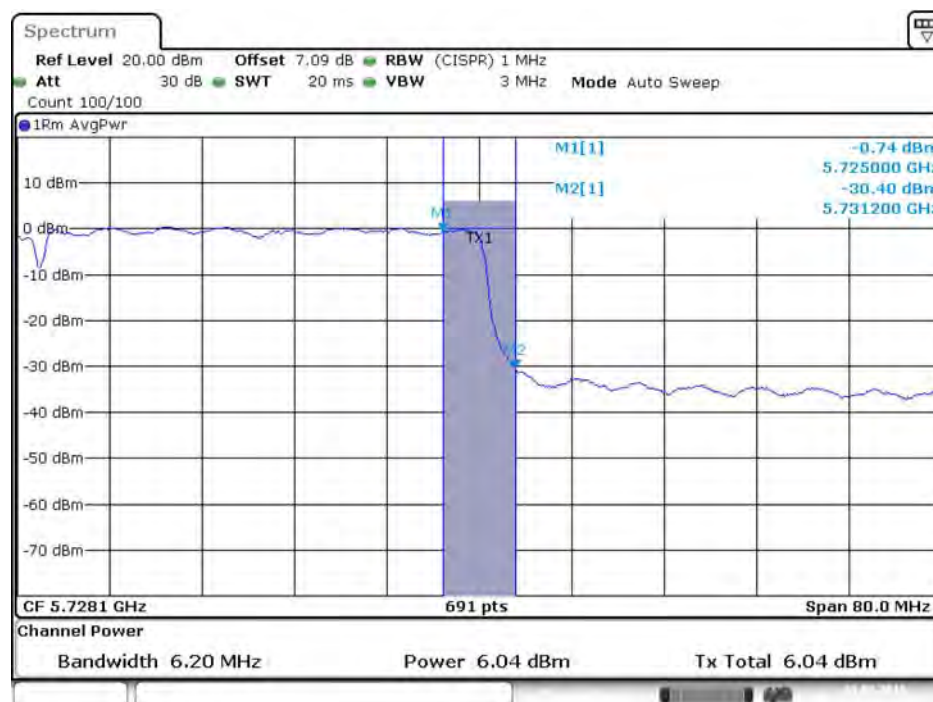

Date: 1.MAR.2016 20:48:41


Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz
(UNII 2C)

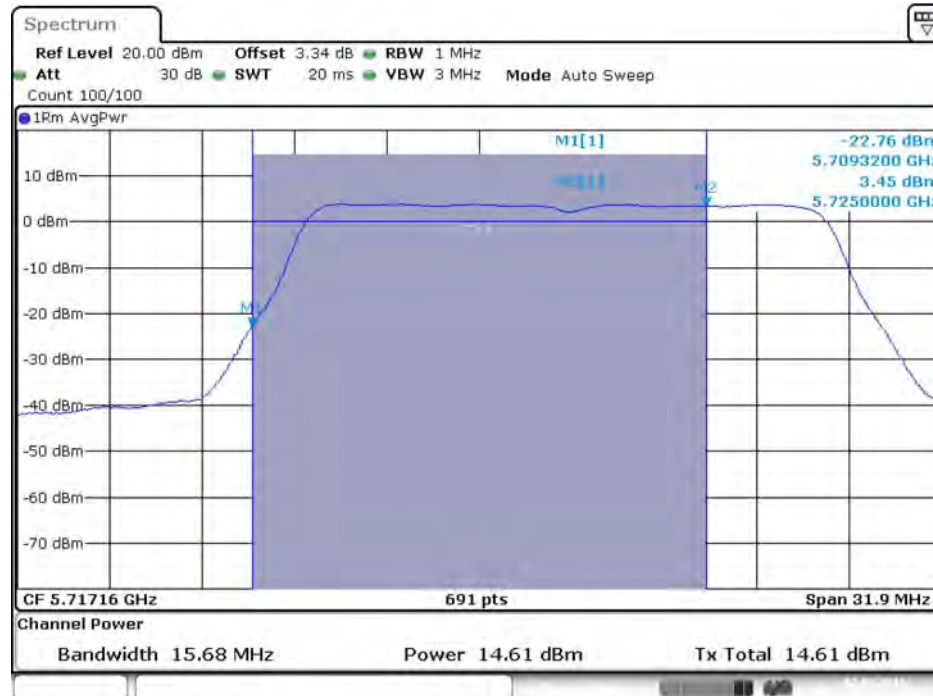

Date: 2.MAR.2016 02:58:54

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz
(UNII 2C)

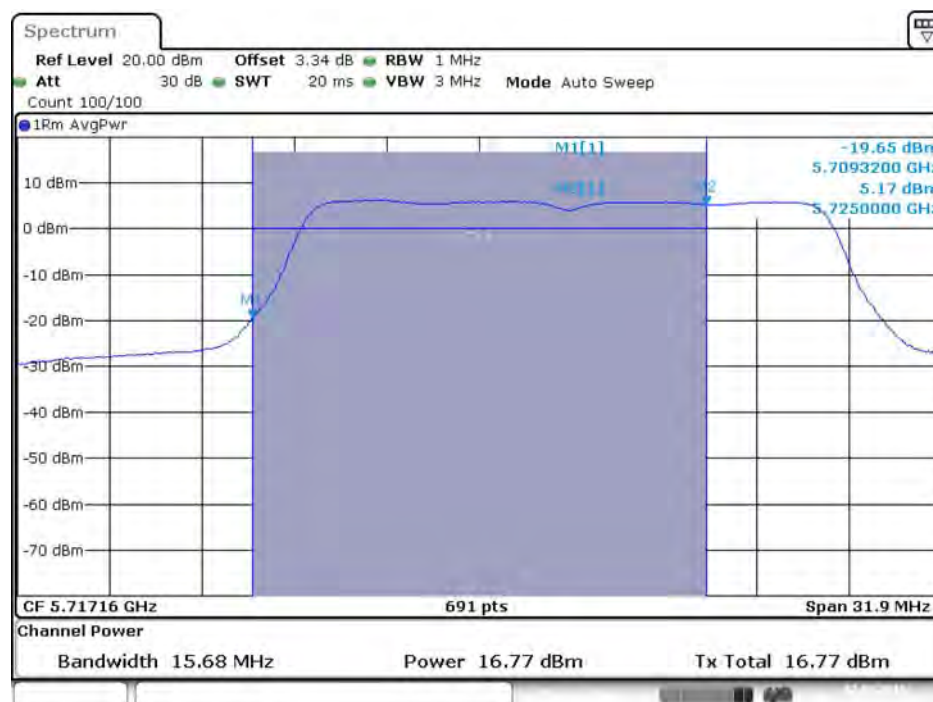


Date: 2.MAR.2016 02:59:01

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 2C)




Date: 2.MAR.2016 02:59:08

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 2C)

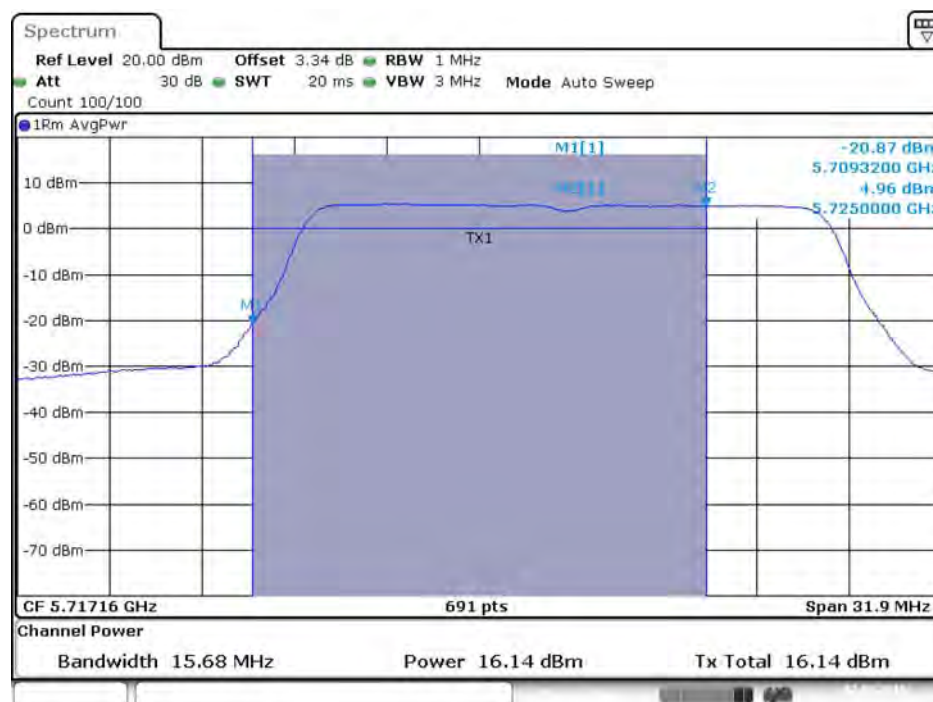

Date: 2.MAR.2016 02:59:15

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

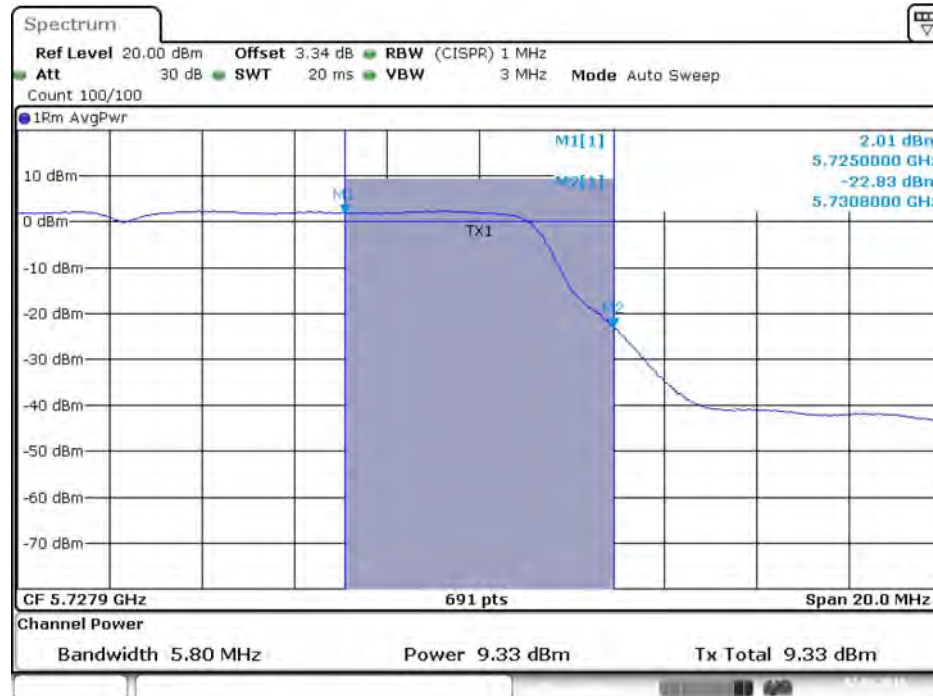

Date: 2.MAR.2016 02:58:57

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)



Date: 2.MAR.2016 02:59:04

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 3)




Date: 2.MAR.2016 02:59:11

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 3)




Date: 2.MAR.2016 02:59:18


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

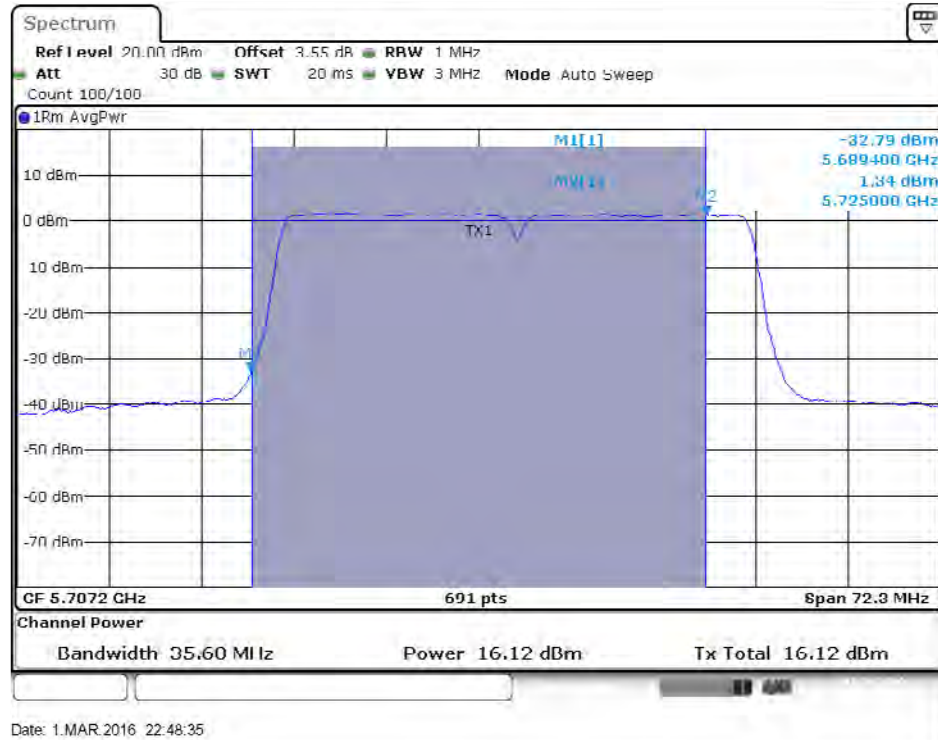


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

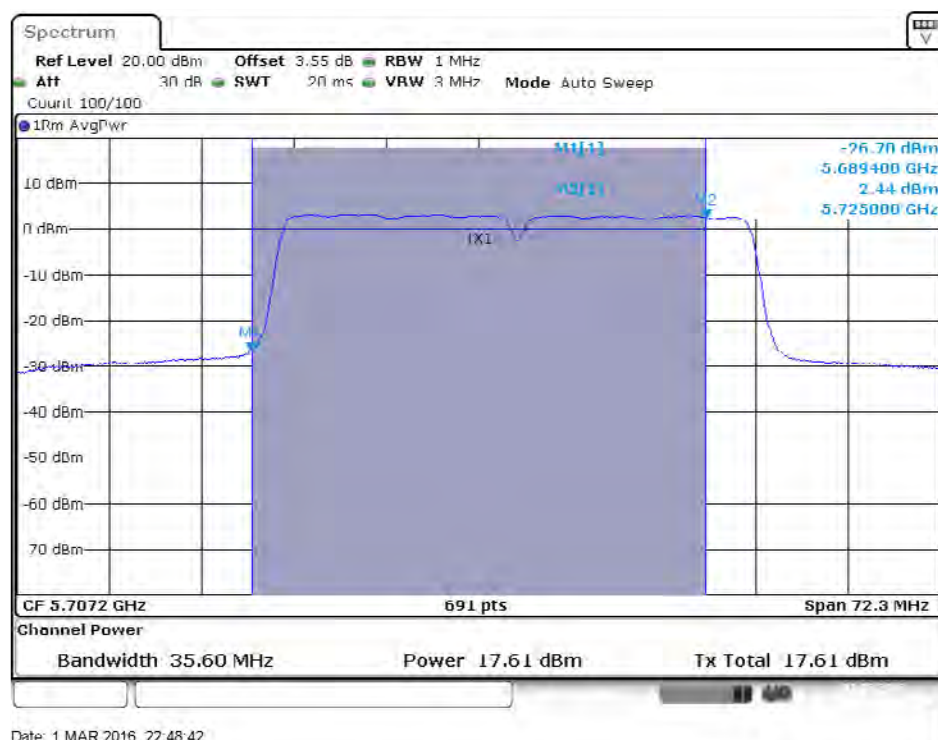


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

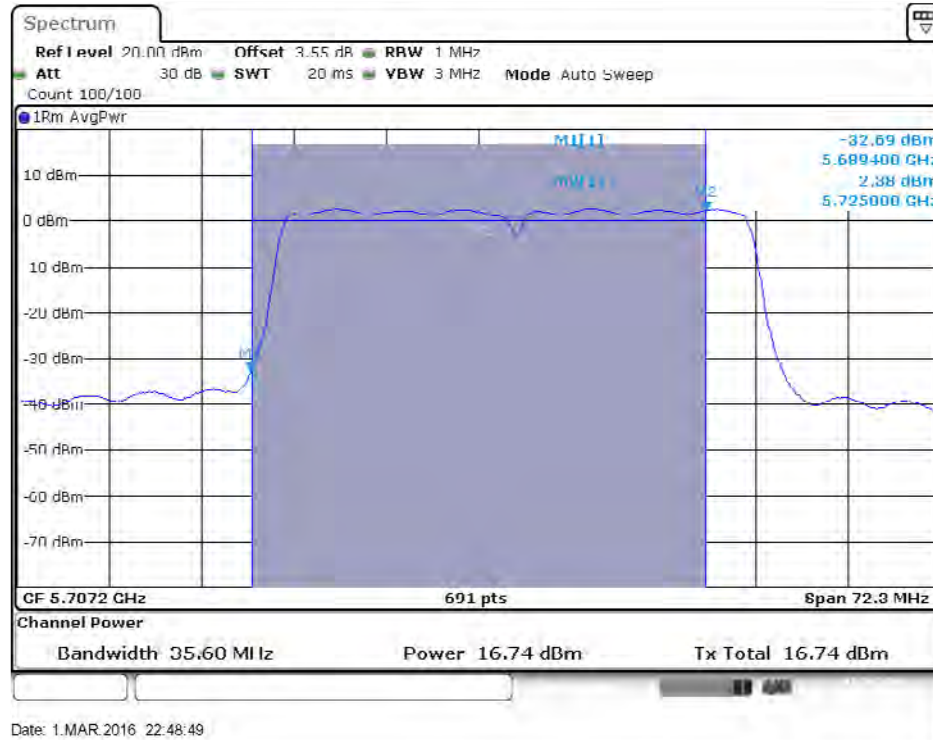


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 2C)

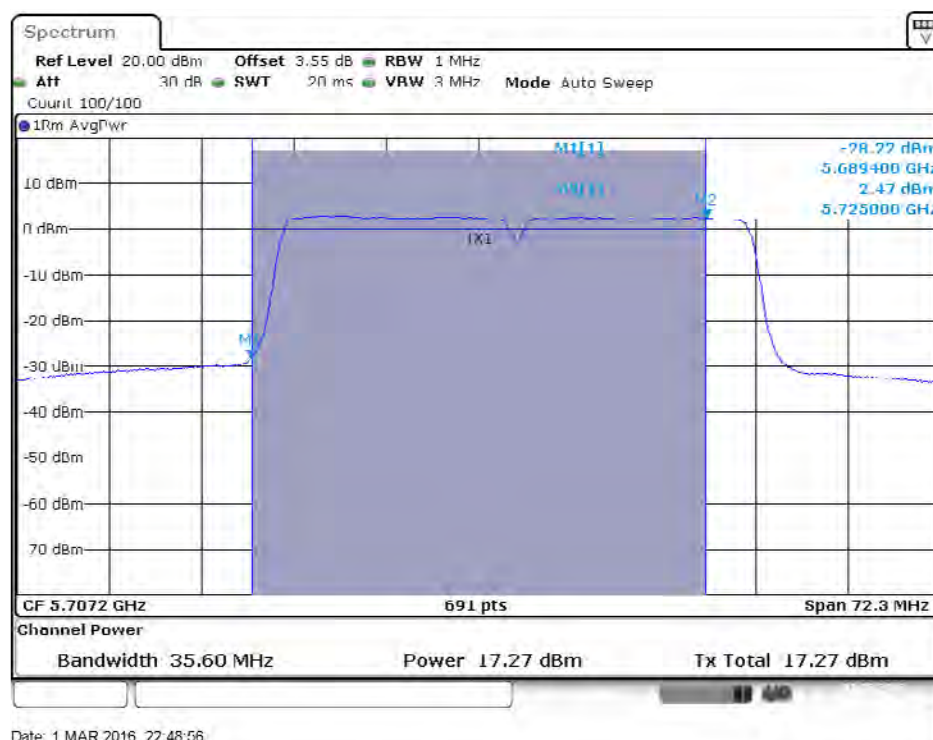


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)

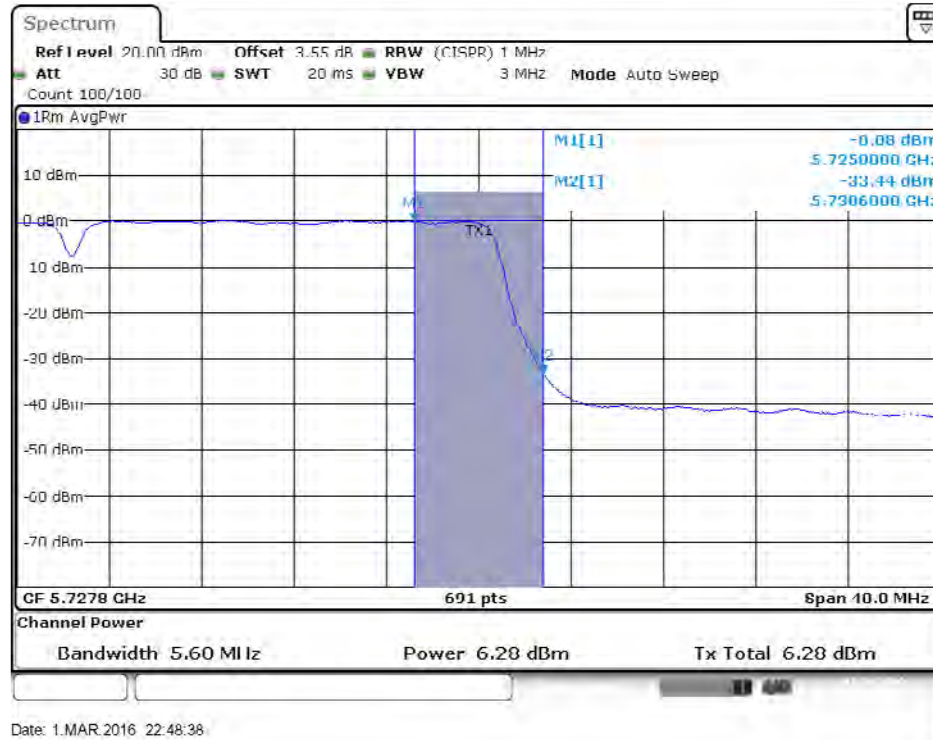


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)

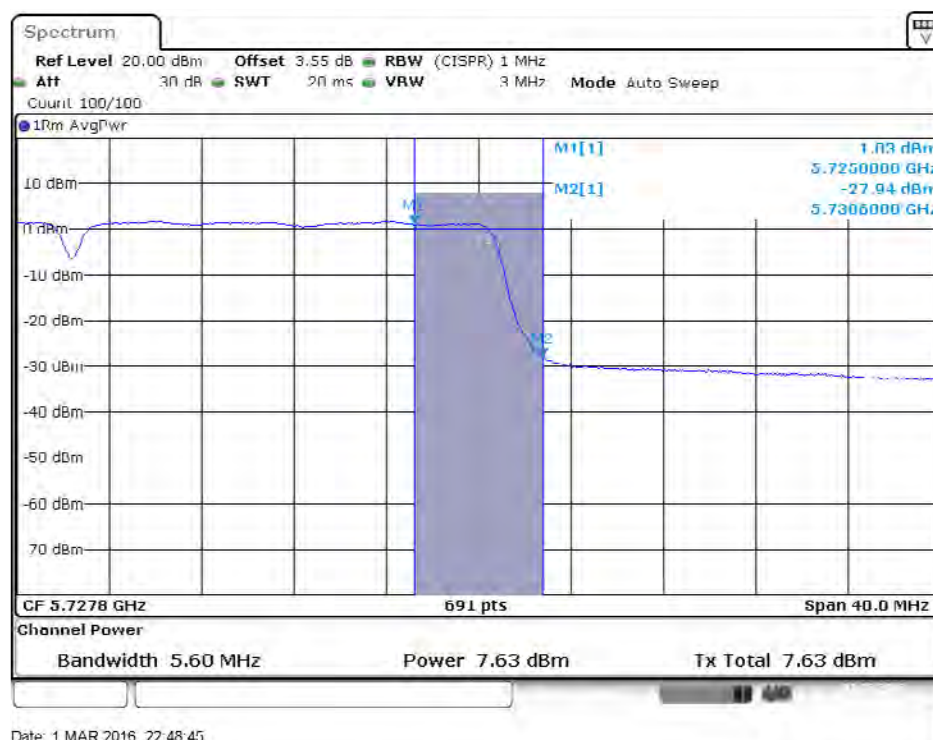


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)

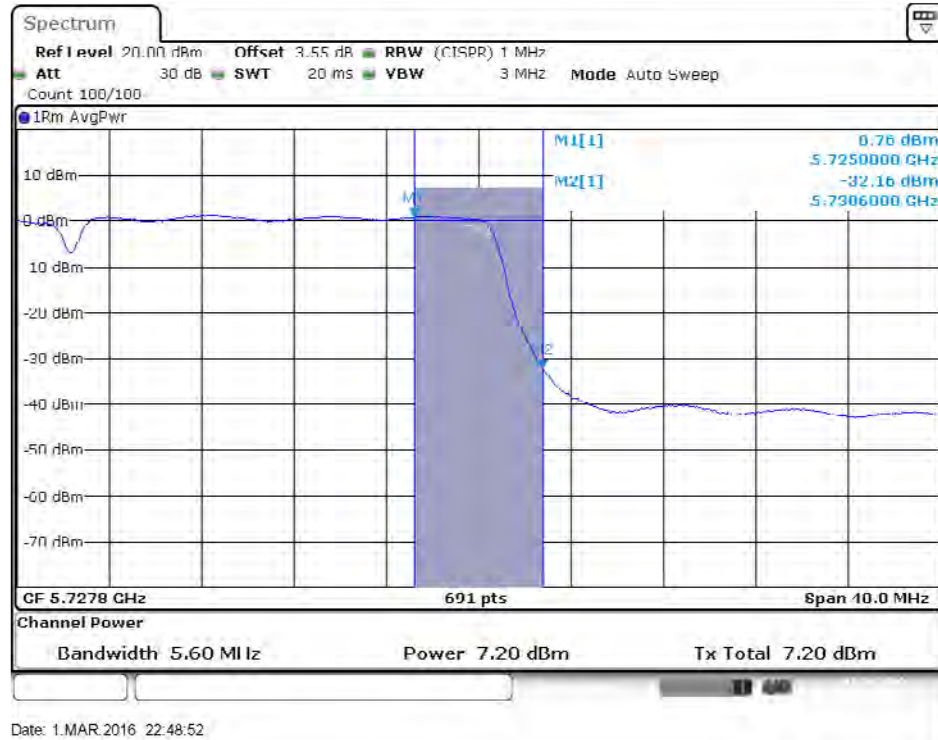

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 3)

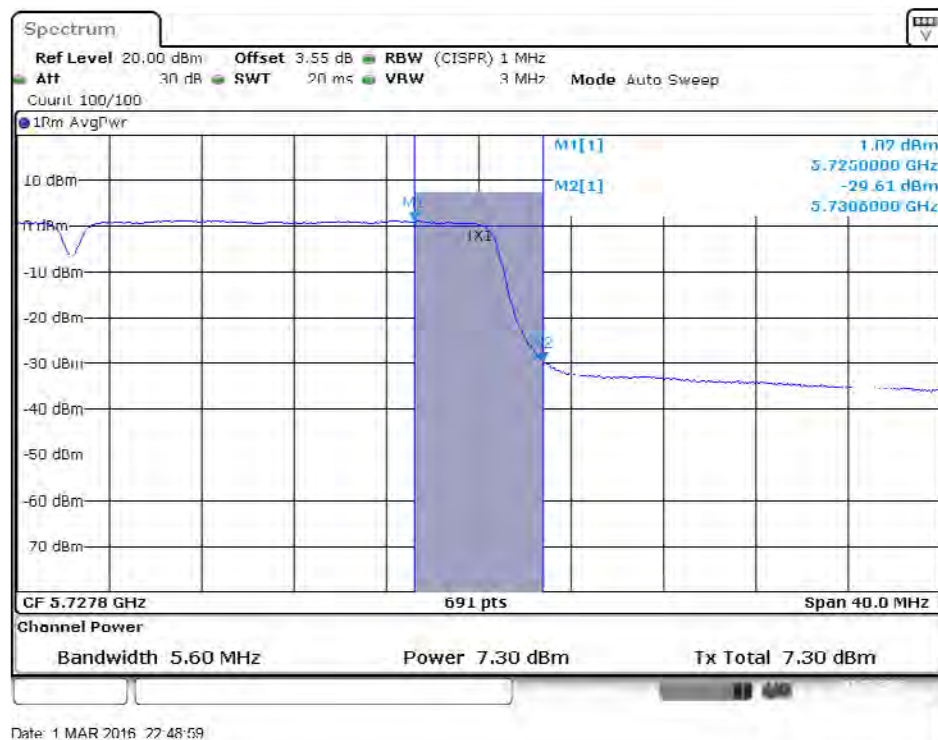


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

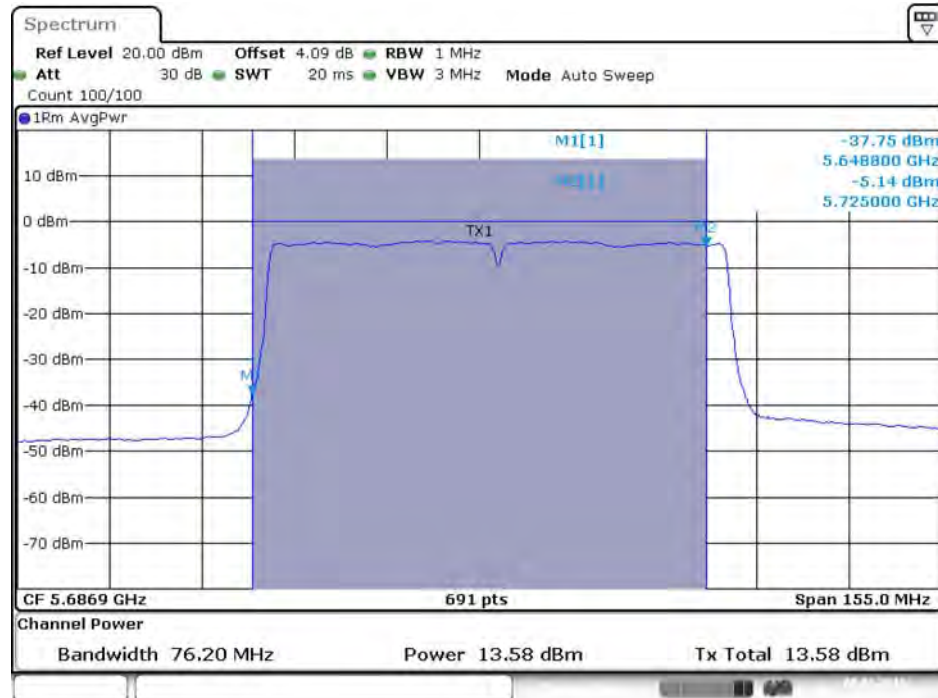


Date: 8.JAN.2016 15:24:32

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 2C)

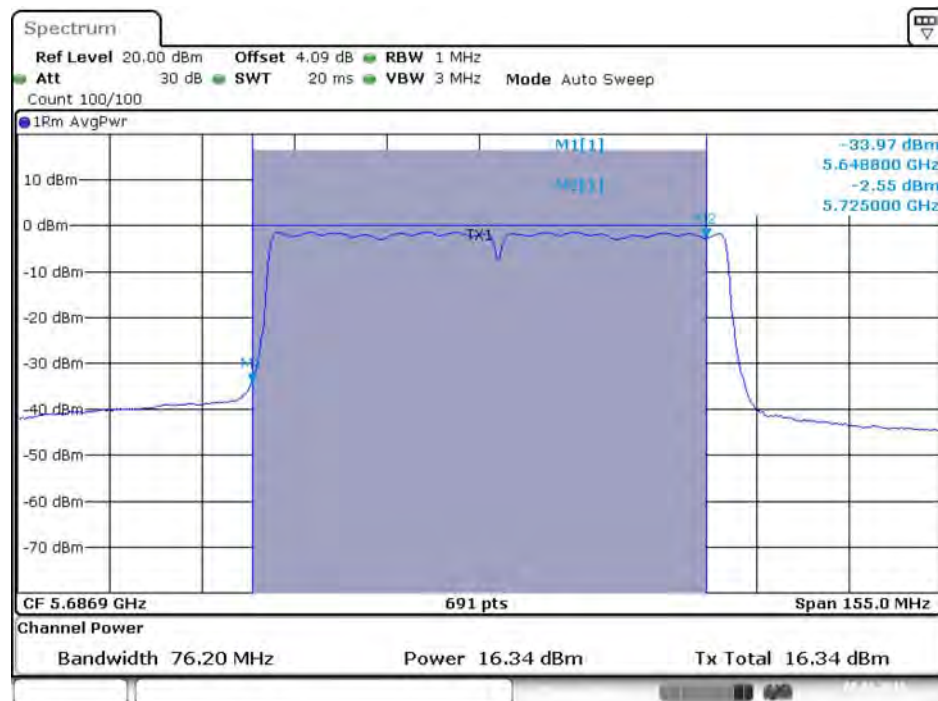


Date: 8.JAN.2016 15:24:39

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 2C)

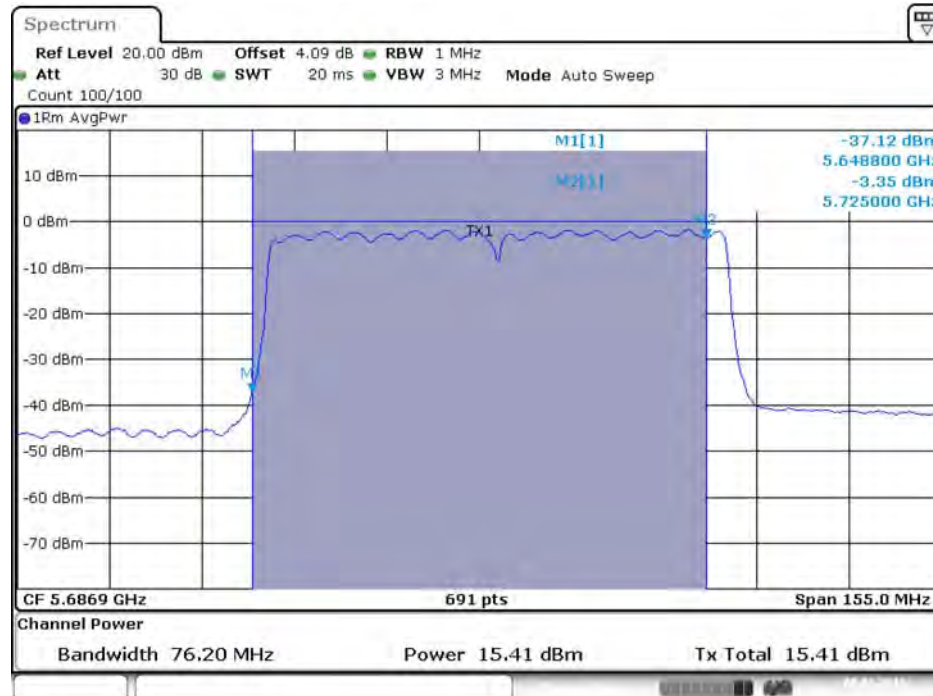


Date: 8.JAN.2016 15:24:46

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 2C)

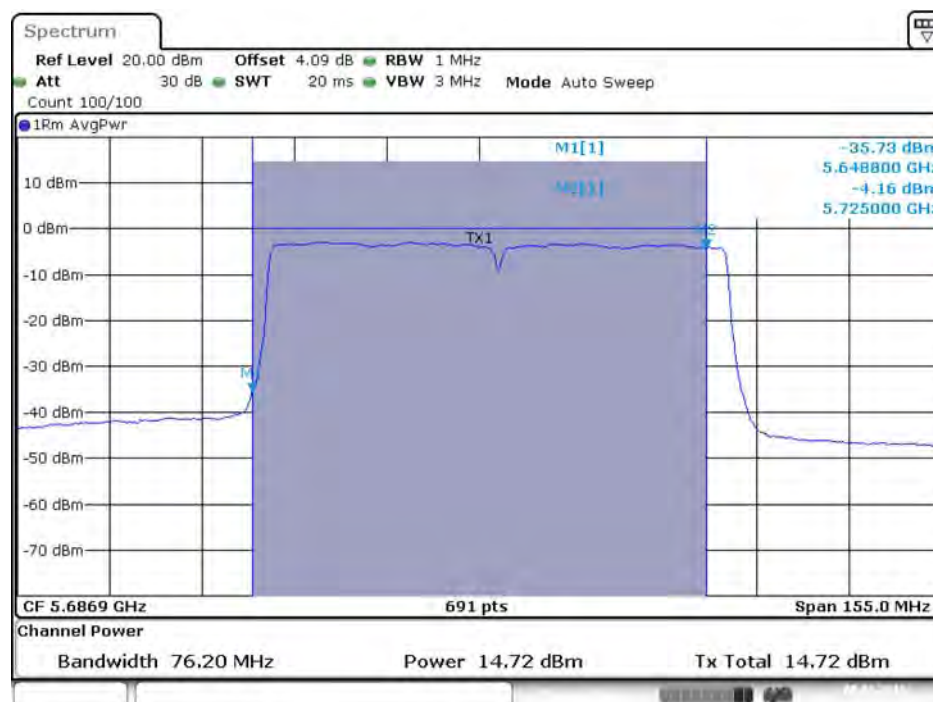


Date: 8.JAN.2016 15:24:53


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

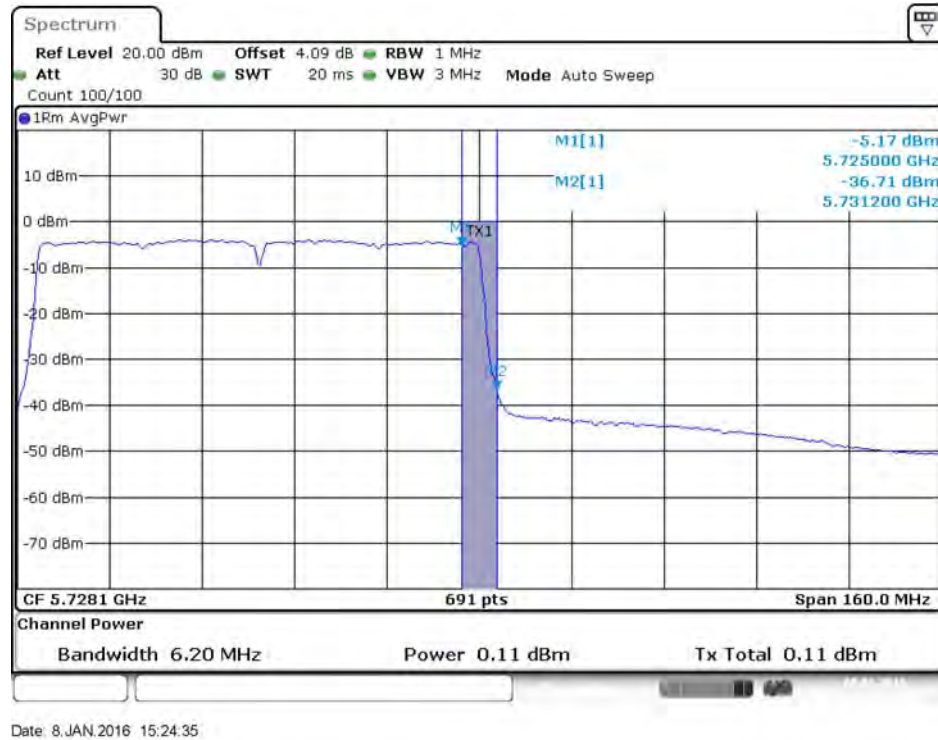

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

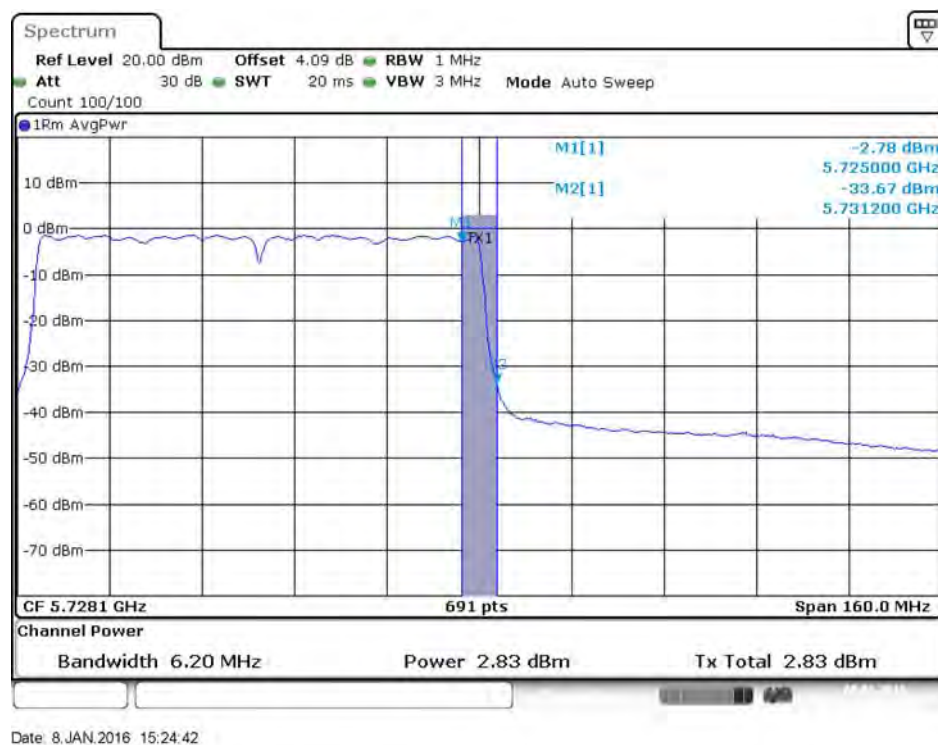


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)

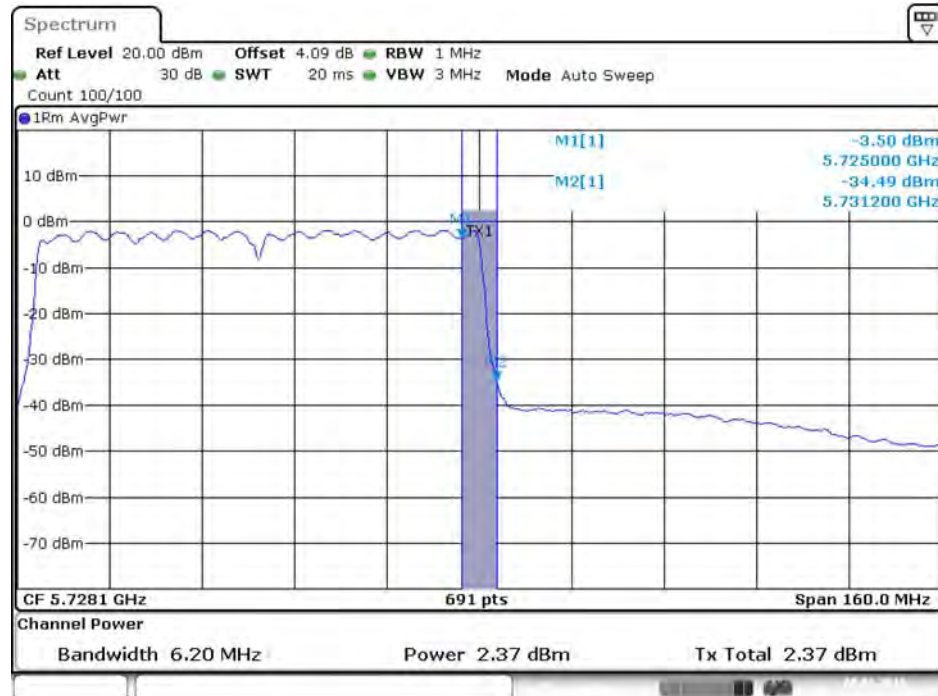

Date: 8.JAN.2016 15:24:49


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 3)

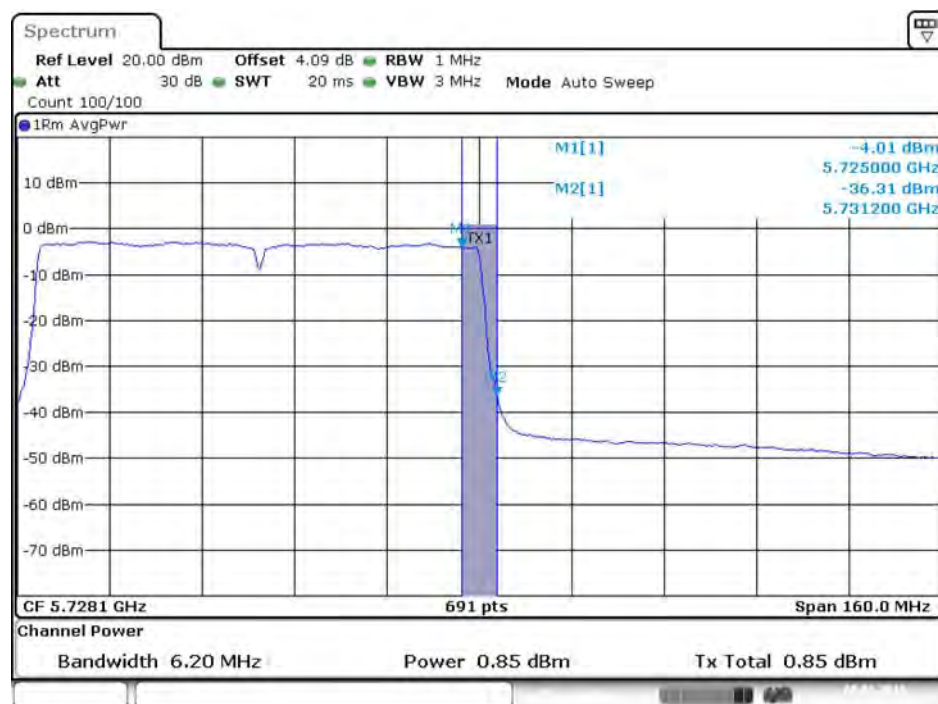

Date: 8.JAN.2016 15:24:56


Mode 5 (Set 8 Patch antenna / 3.26dBi / 2TX)

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

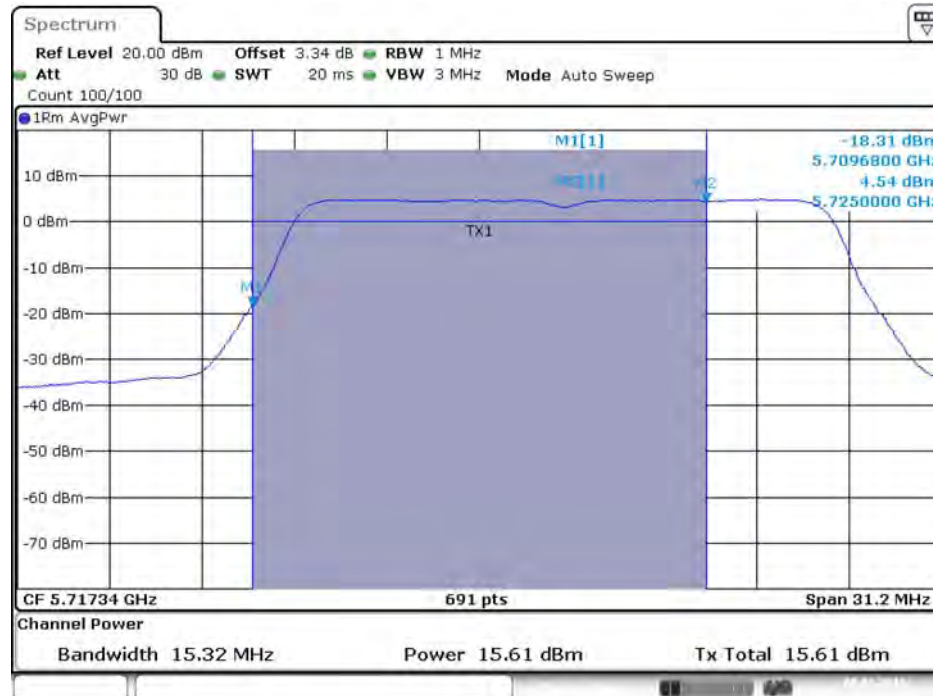

Date: 8.JAN.2016 11:54:21

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 2C)

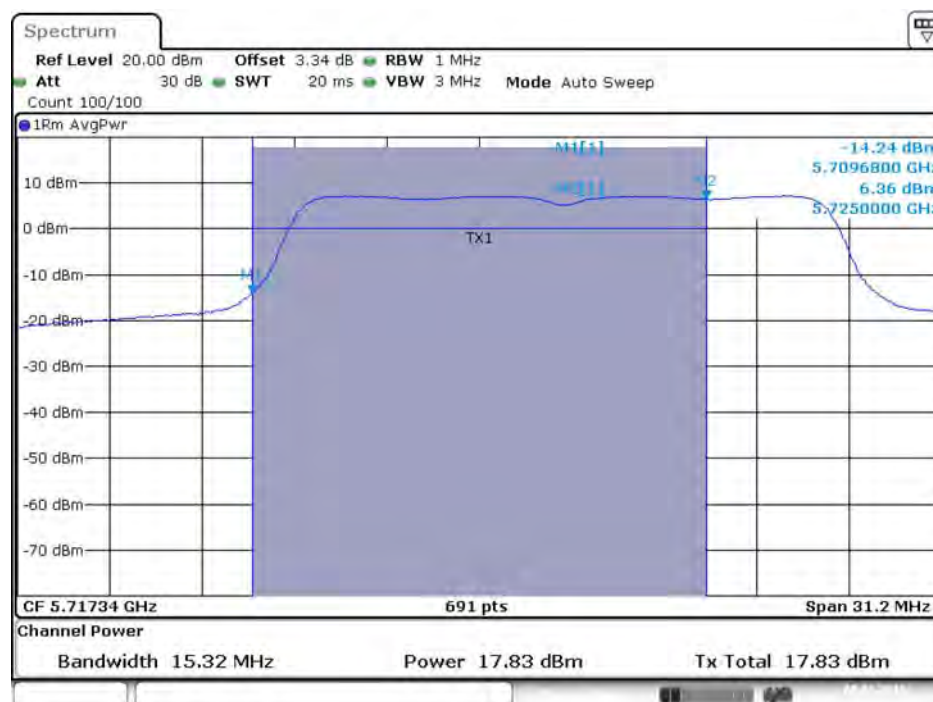


Date: 8.JAN.2016 11:54:28


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)



Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)

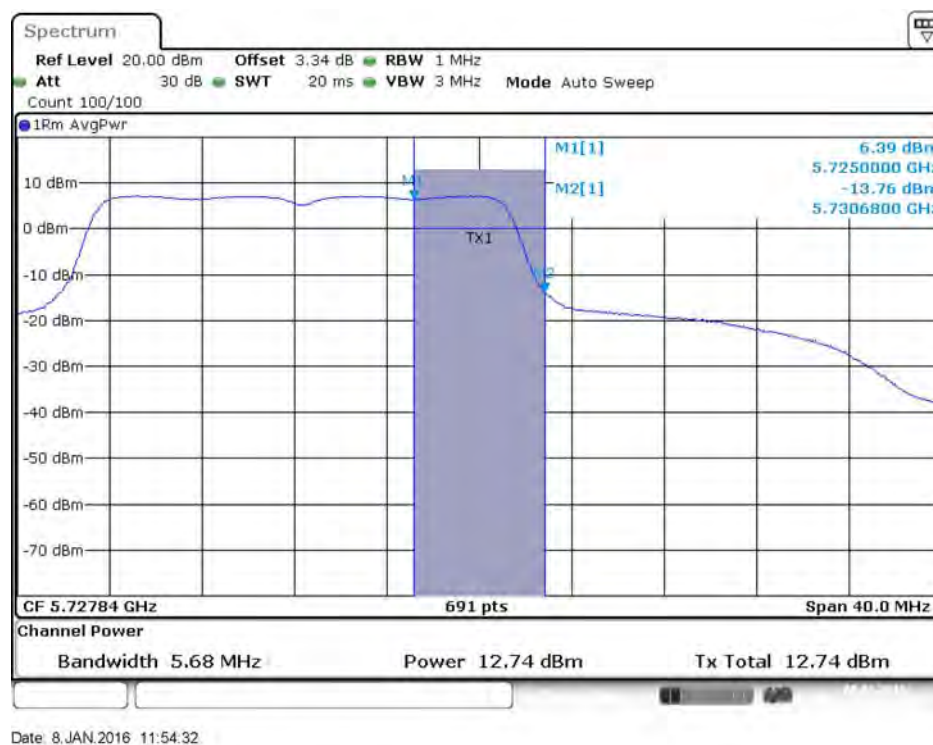


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

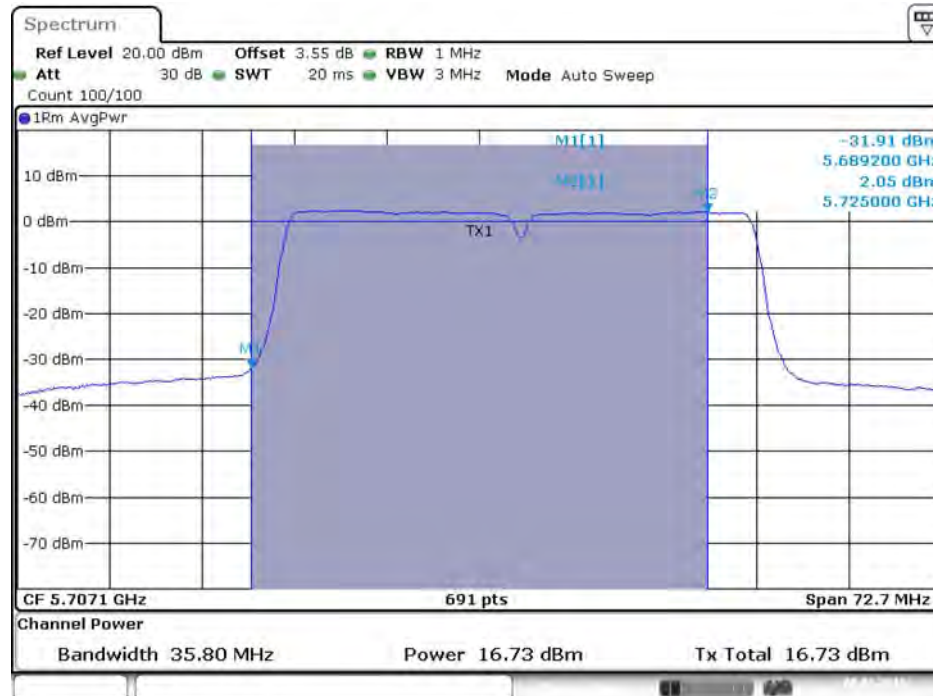


Date: 8.JAN.2016 12:01:52

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

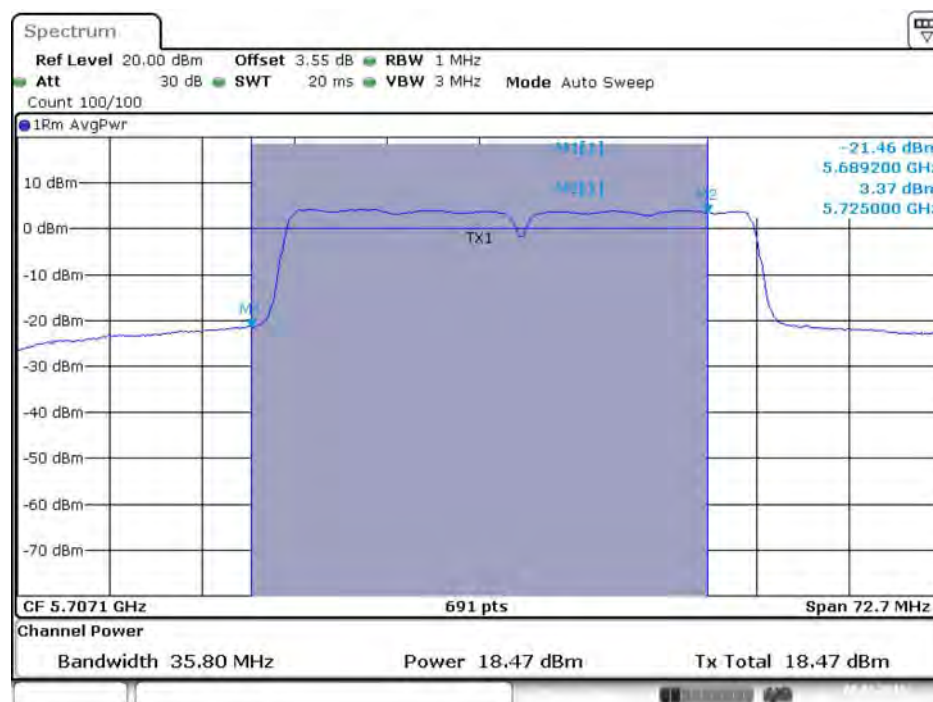


Date: 8.JAN.2016 12:01:59


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)

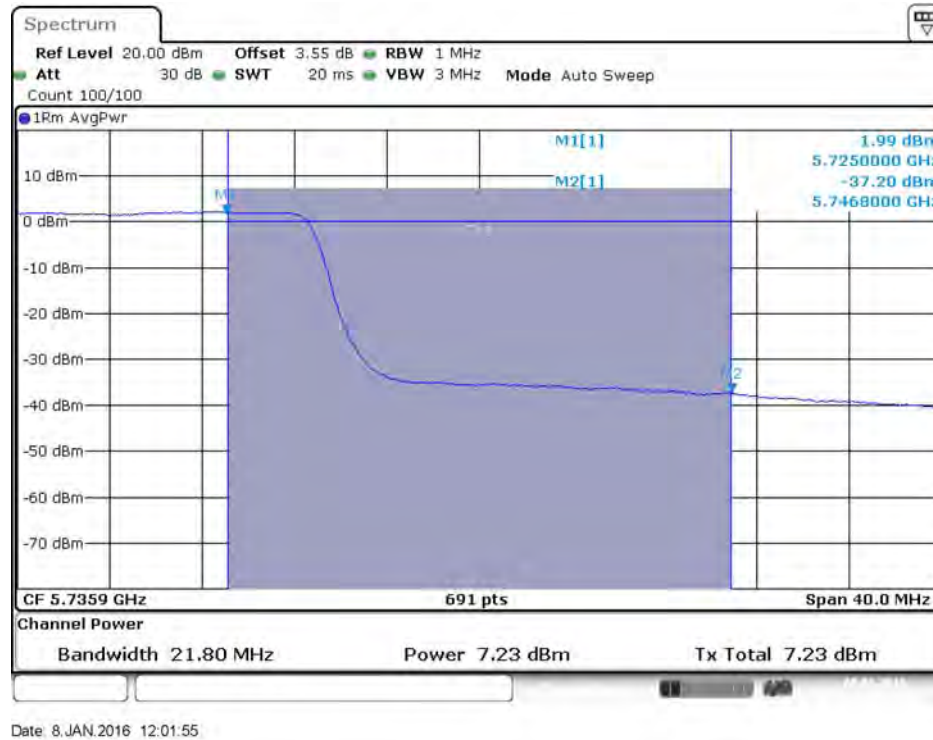


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)

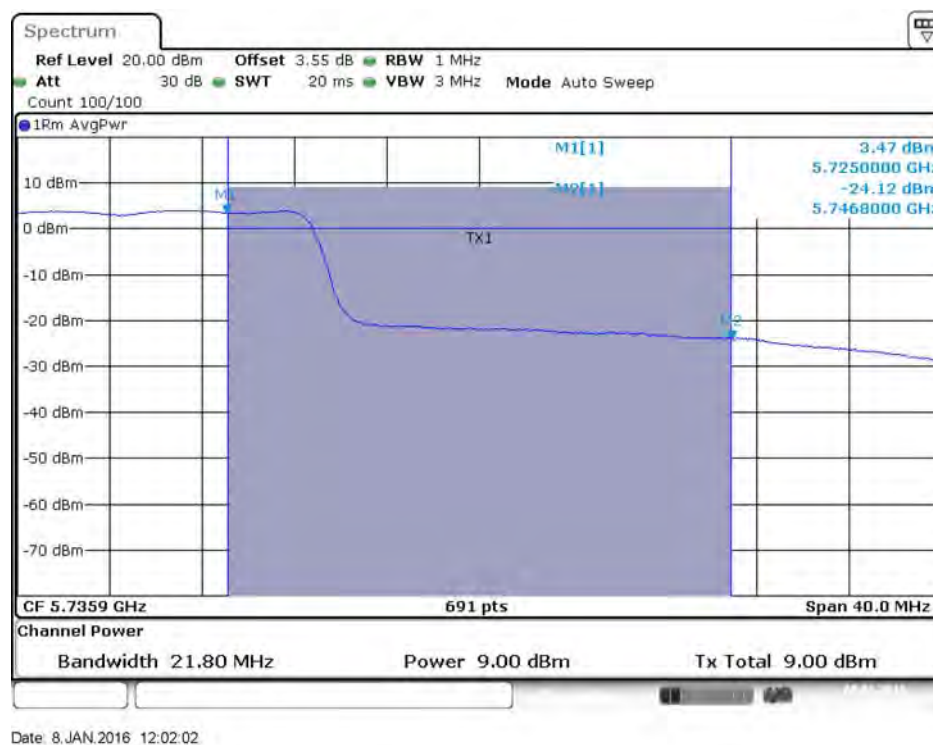

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

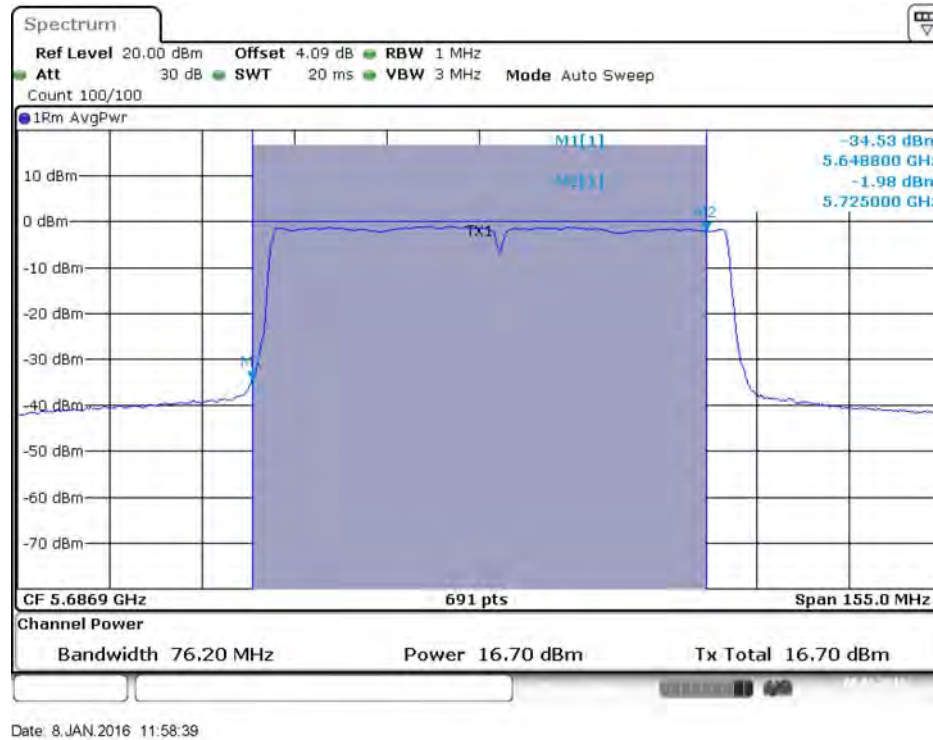


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 2C)

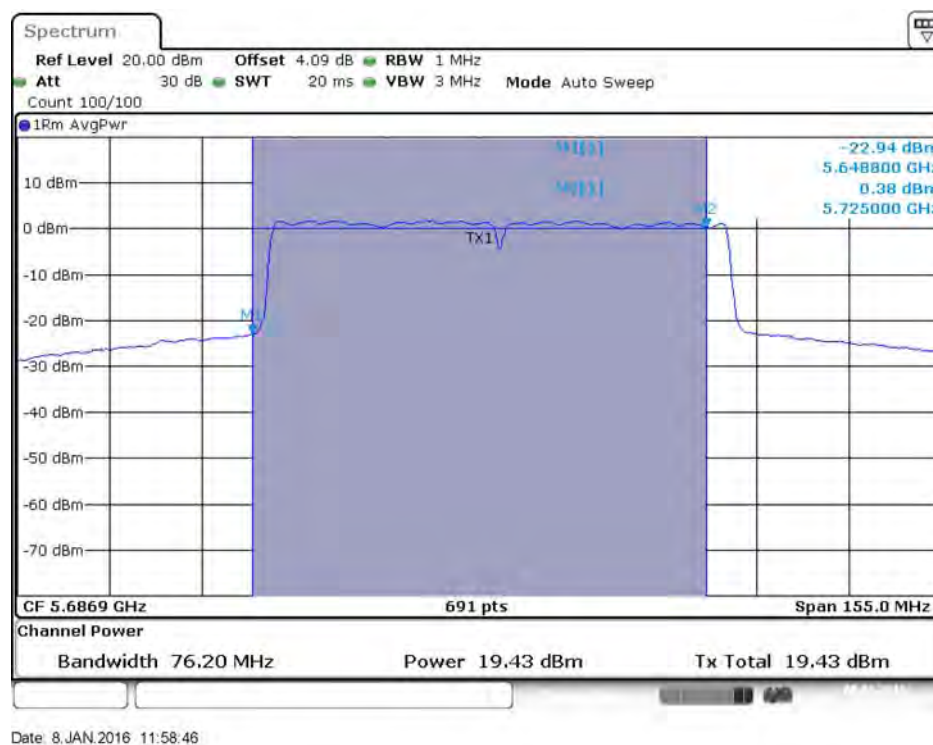

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)




Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

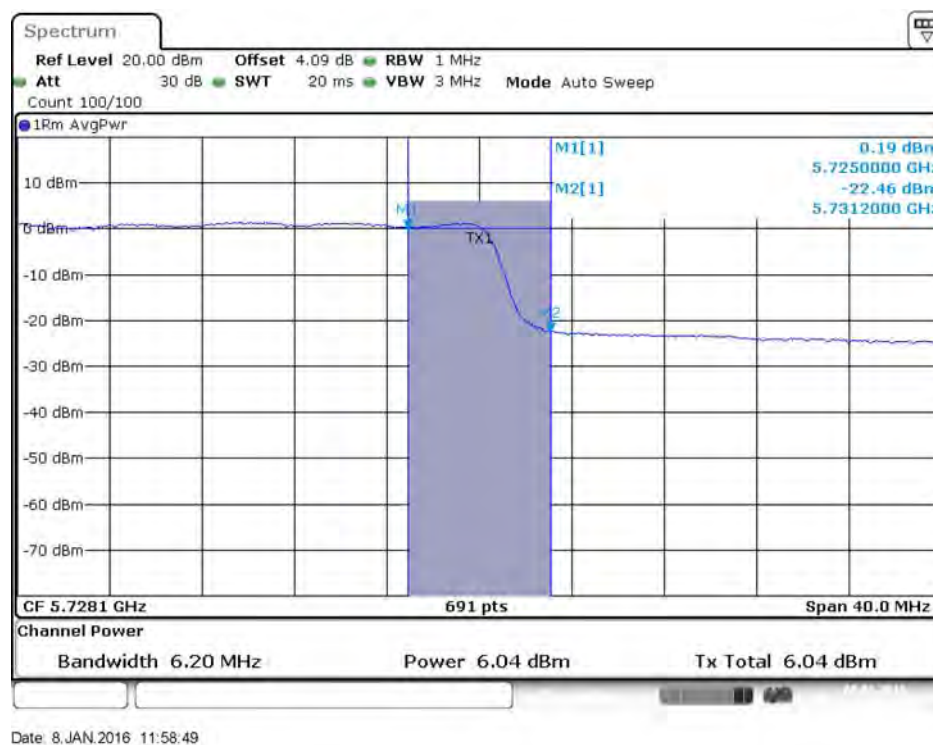


Mode 5 (Set 8 Patch antenna / 3.26dBi / 3TX)

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

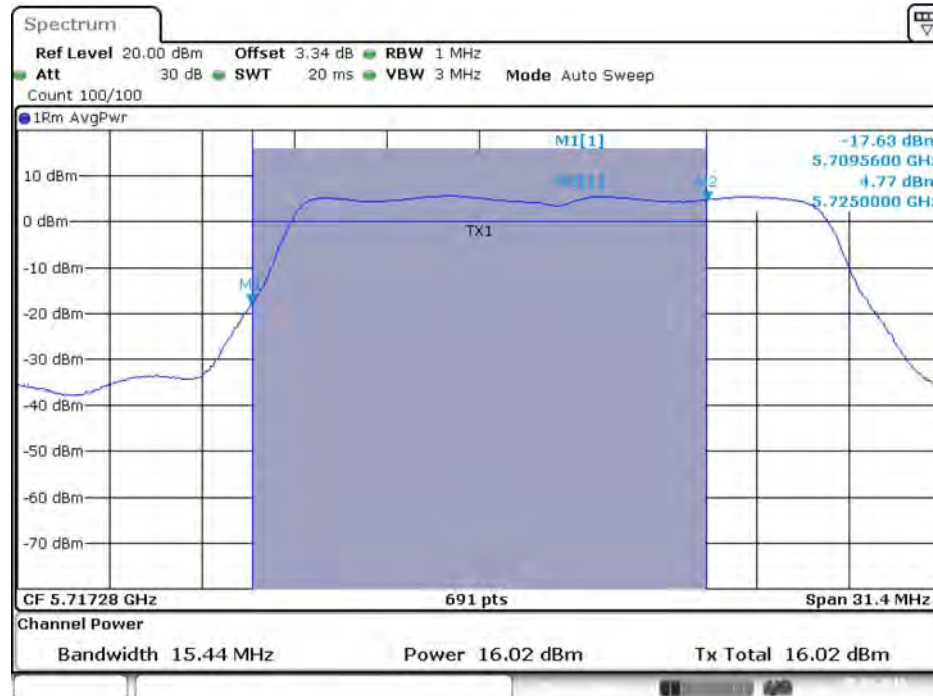


Date: 5.FEB.2016 14:13:11

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 2C)

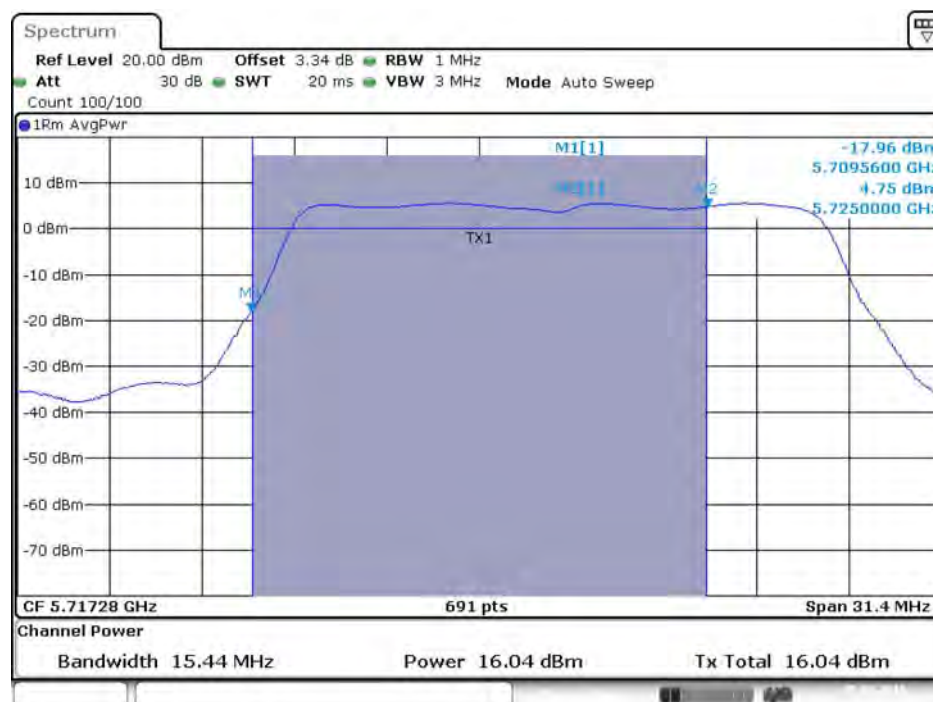

Date: 5.FEB.2016 14:13:18

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 2C)

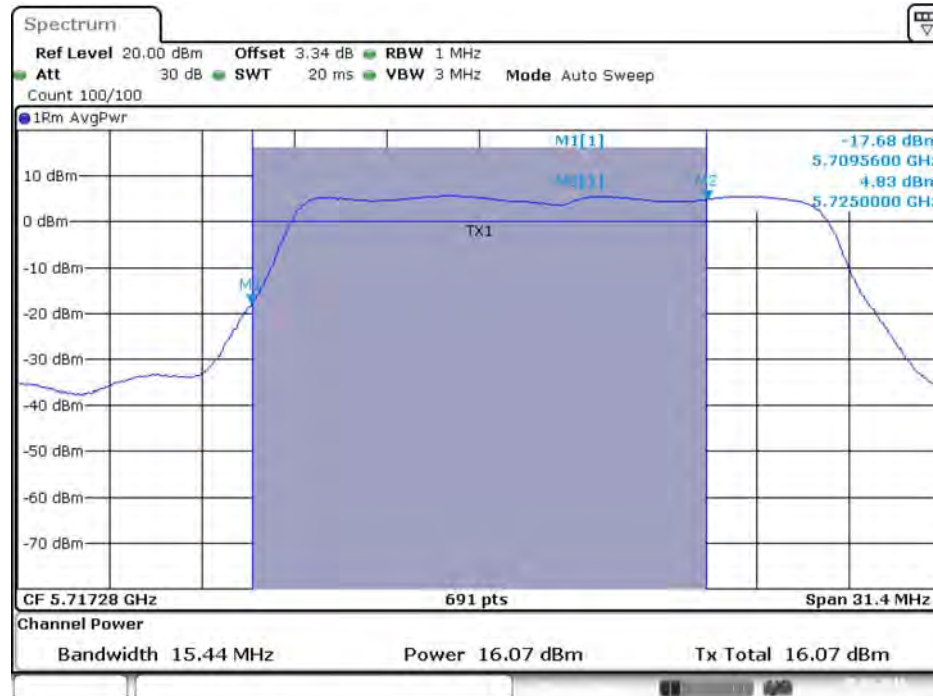

Date: 5.FEB.2016 14:13:25

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)



Date: 5.FEB.2016 14:13:15

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)




Date: 5.FEB.2016 14:13:22

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 3)




Date: 5.FEB.2016 14:13:29

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

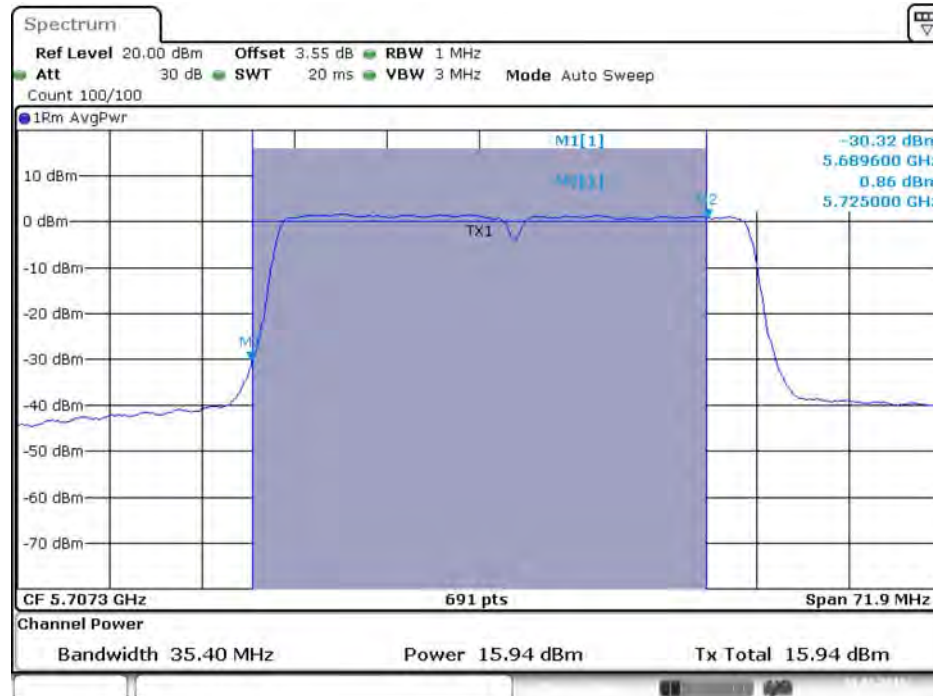


Date: 31.JAN.2016 14:25:54

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

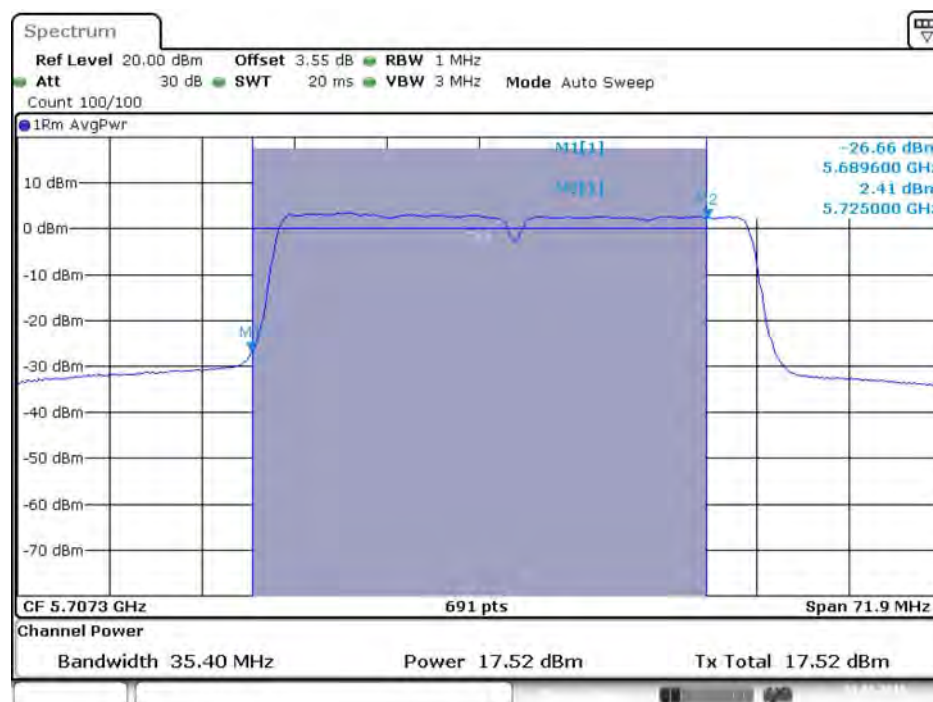


Date: 31.JAN.2016 14:26:01

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

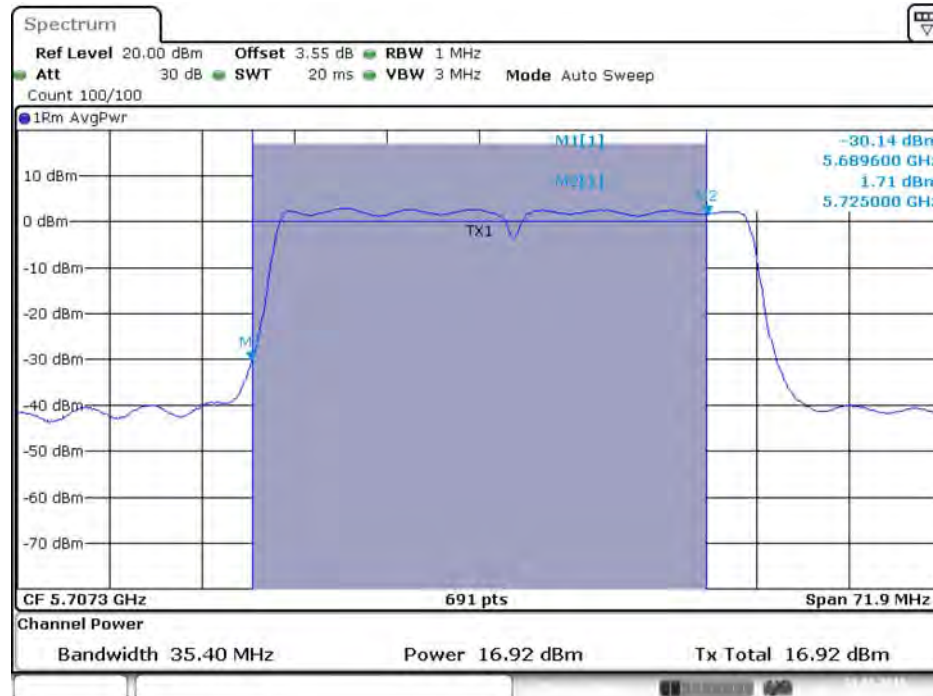

Date: 31.JAN.2016 14:26:08

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)

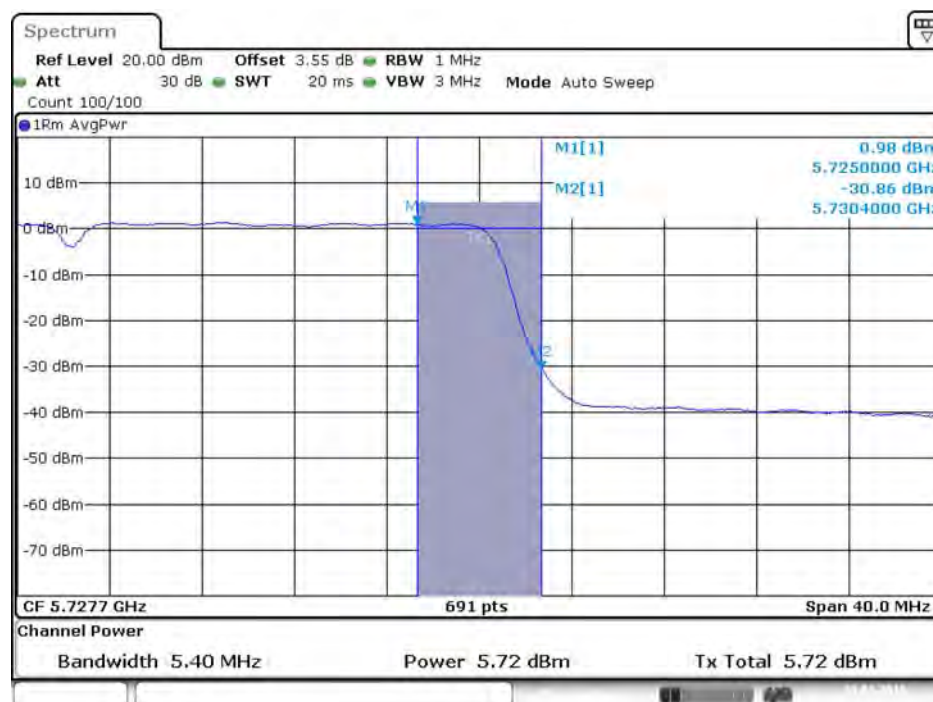


Date: 31.JAN.2016 14:25:57

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)



Date: 31.JAN.2016 14:26:04

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)

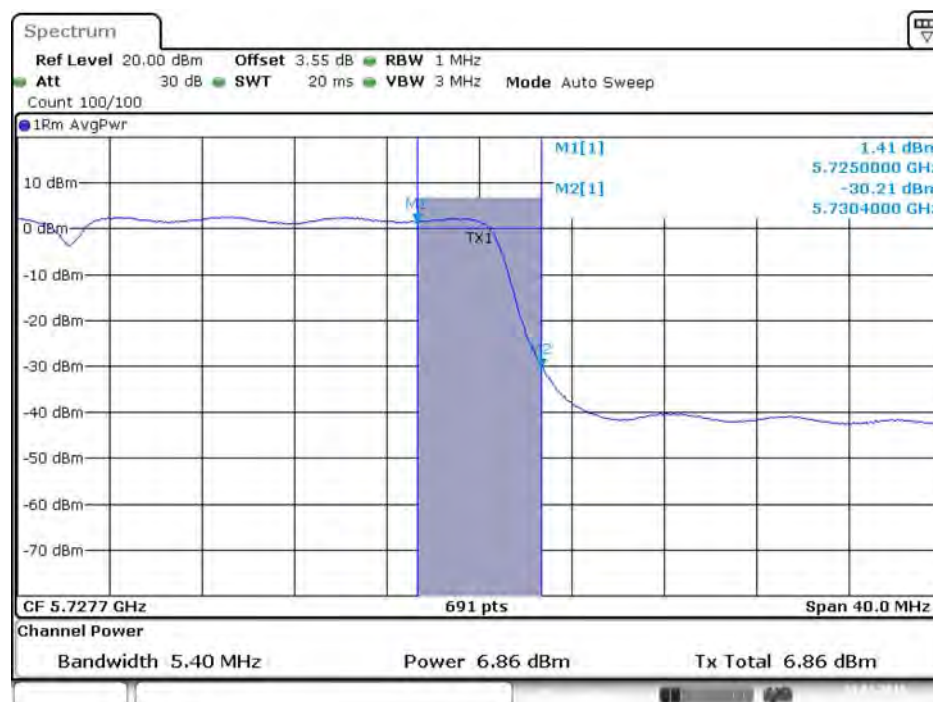

Date: 31.JAN.2016 14:26:11



Spectrum

Ref Level 20.00 dBm Offset 7.09 dB RBW 1 MHz
Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep
Count 100/100

■ IRM AvgPwr

The spectrum plot displays a signal centered at 5.6869 GHz. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in GHz, with a span of 155.0 MHz. A blue shaded area indicates the signal's bandwidth. Key parameters shown include a reference level of 20.00 dBm, an attenuation of 30 dB, a sweep time of 20 ms, a resolution bandwidth (RBW) of 1 MHz, and a video bandwidth (VBW) of 3 MHz. The mode is set to Auto Sweep. The signal is identified as TX1.

MI[1]
-35.59 dBm
5.648800 GHz
-3.01 dBm
5.725000 GHz

Tx1

CF 5.6869 GHz 691 pts Span 155.0 MHz

Channel Power

Bandwidth 76.20 MHz Power 16.00 dBm Tx Total 16.00 dBm

Spectrum

Ref Level 20.00 dBm Offset 7.09 dB RBW 1 MHz
Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep
Count 100/100

1Rm AvgPwr

10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

M1
M2

-29.86 dBm
5.648800 GHz
-1.04 dBm
5.725000 GHz


CF 5.6869 GHz 691 pts Span 155.0 MHz

Channel Power

Bandwidth 76.20 MHz Power 18.17 dBm Tx Total 18.17 dBm


Date: 31.JAN.2016 14:40:38

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 2C)

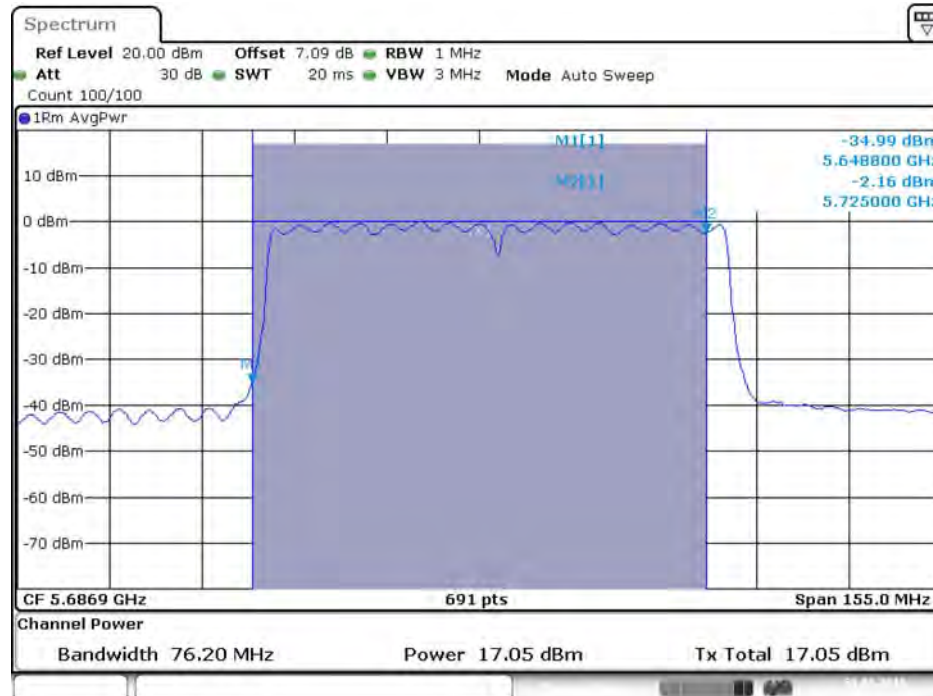


Date: 31.JAN.2016 14:40:45

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

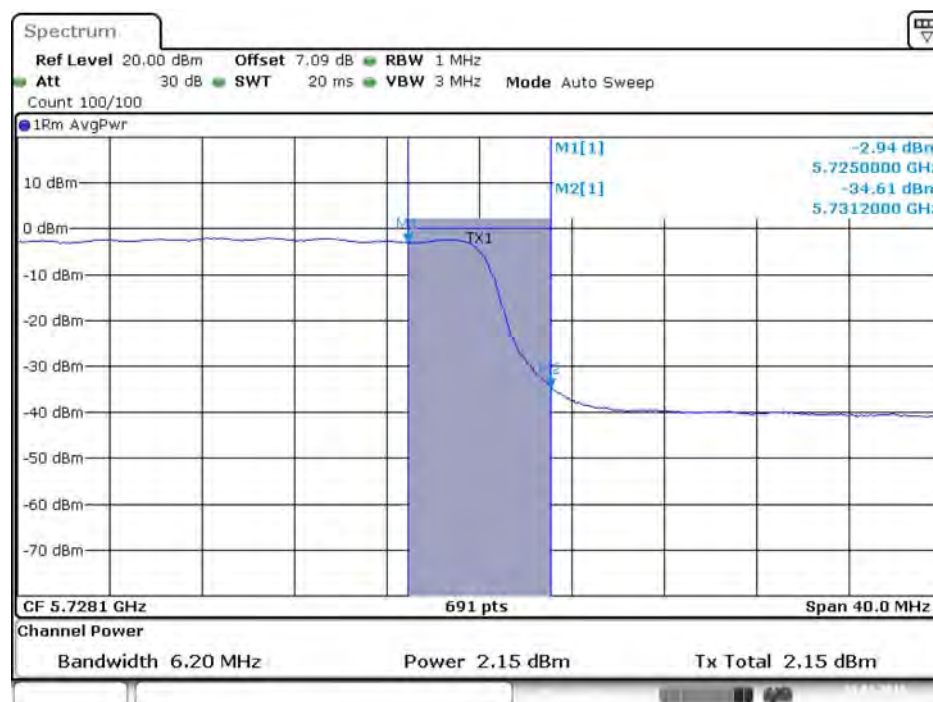


Date: 31.JAN.2016 14:40:34

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

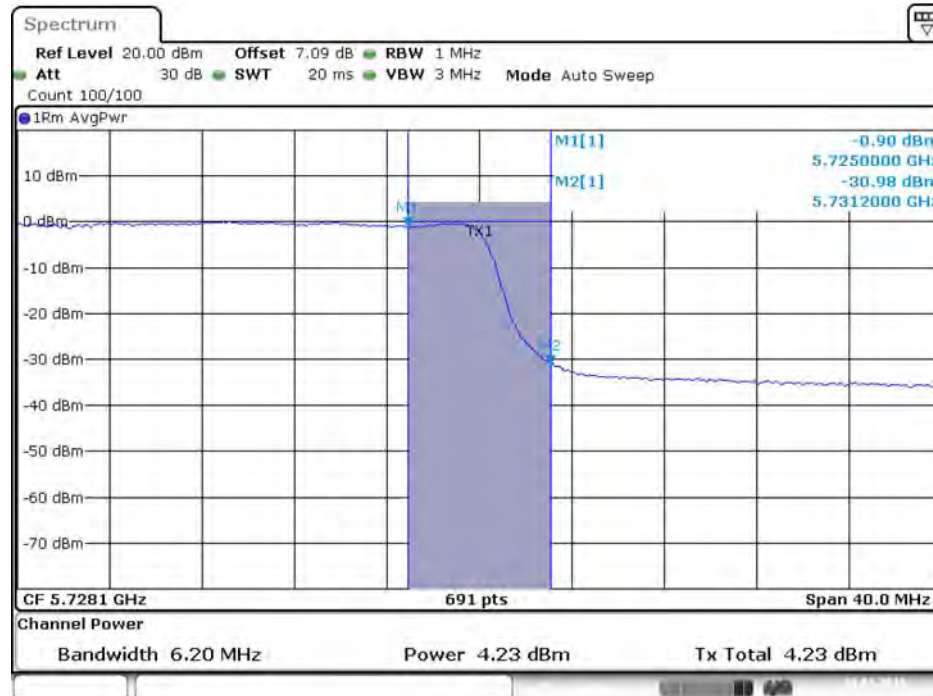

Date: 31.JAN.2016 14:40:41


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)

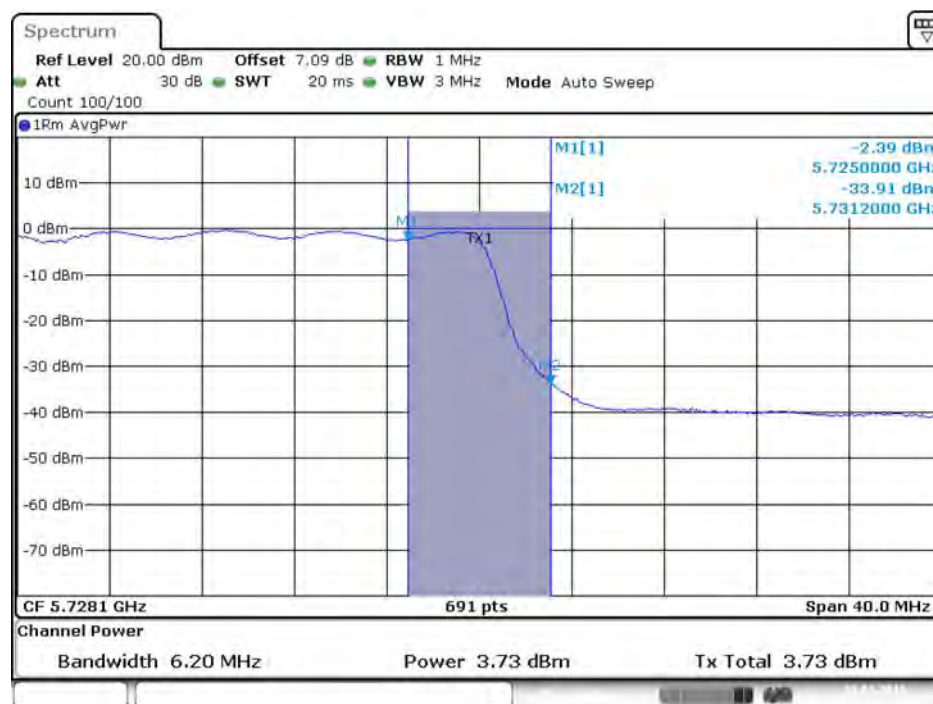

Date: 31.JAN.2016 14:40:48

Mode 5 (Set 8 Patch antenna / 3.26dBi / 4TX)

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

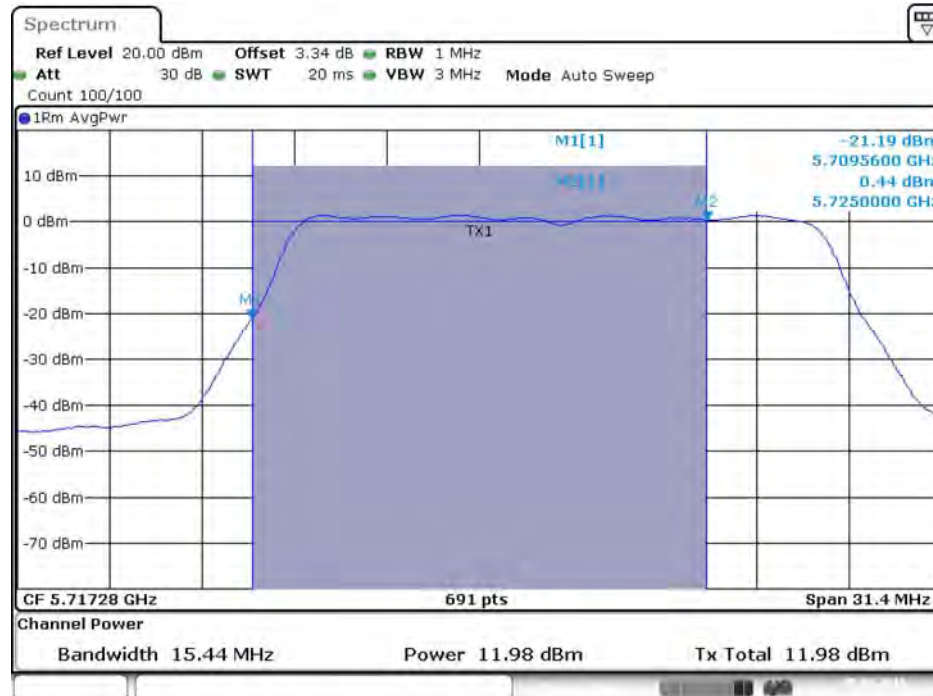


Date: 5.FEB.2016 13:47:14

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 2C)



Date: 5.FEB.2016 13:47:21

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 2C)

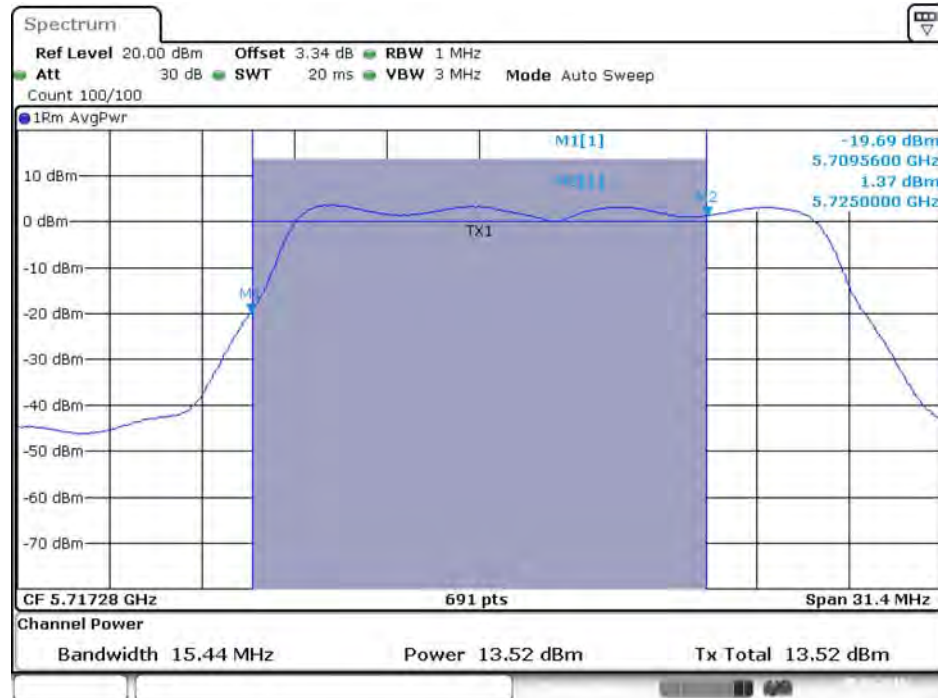


Date: 5.FEB.2016 13:47:28

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 2C)




Date: 5.FEB.2016 13:47:35


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

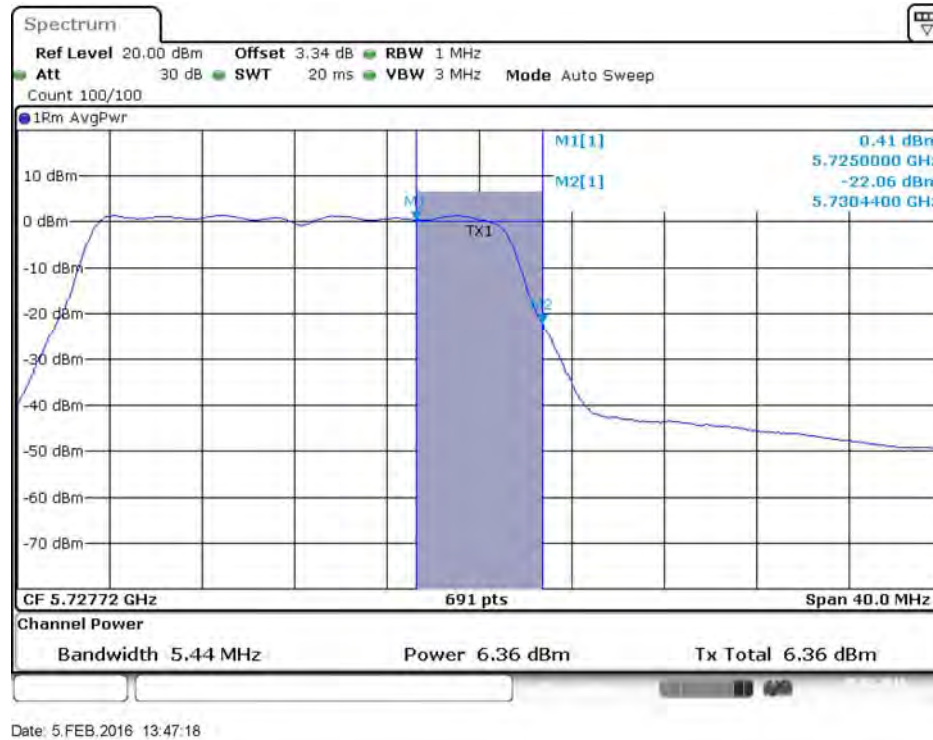

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)

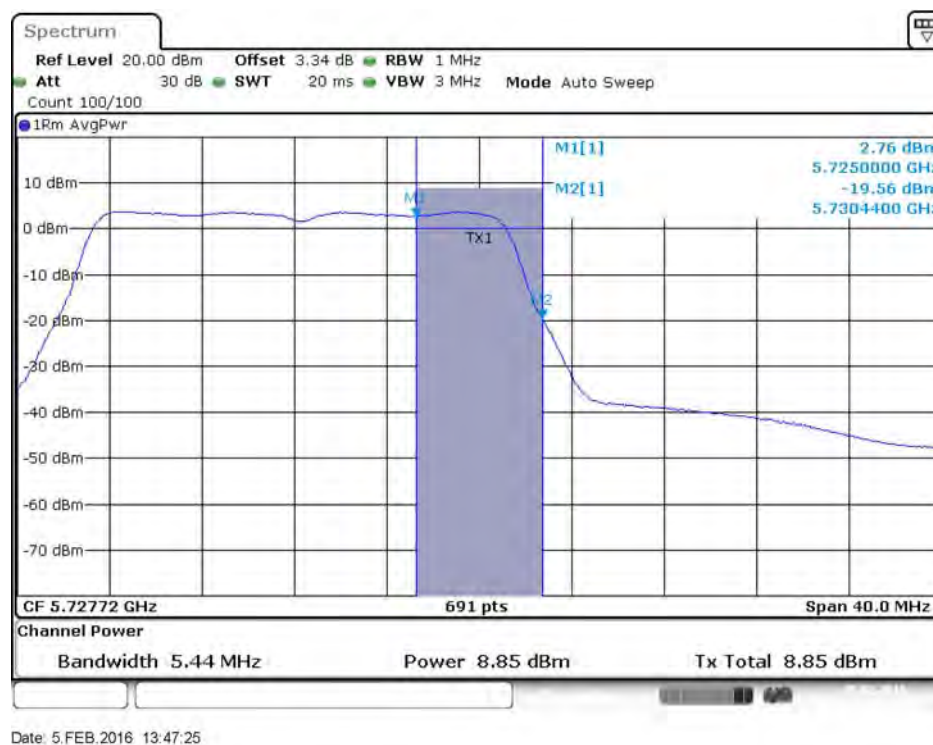


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 3)

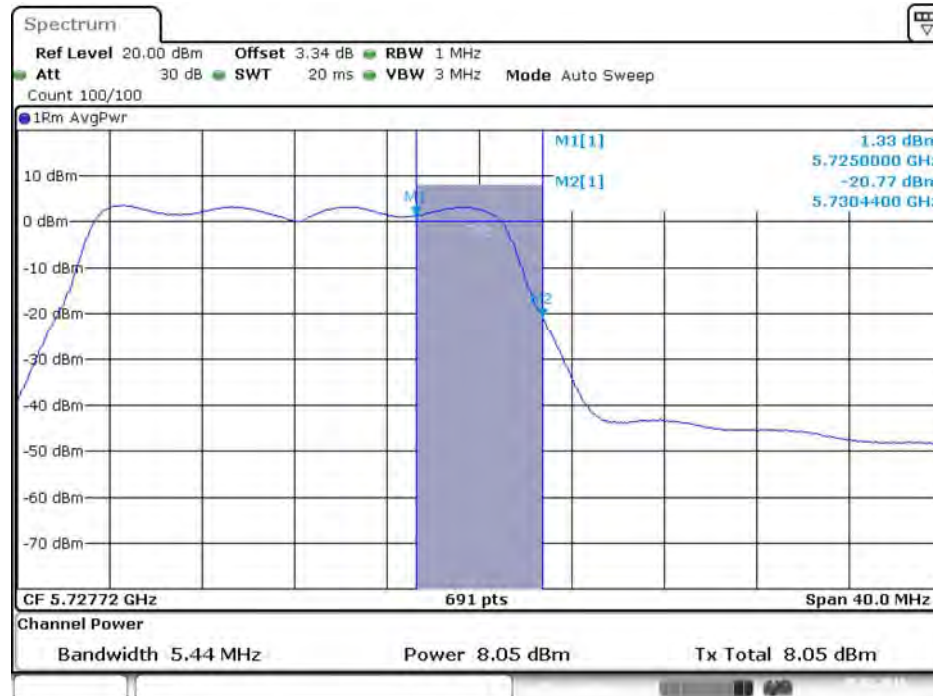


Date: 5.FEB.2016 13:47:32

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 3)

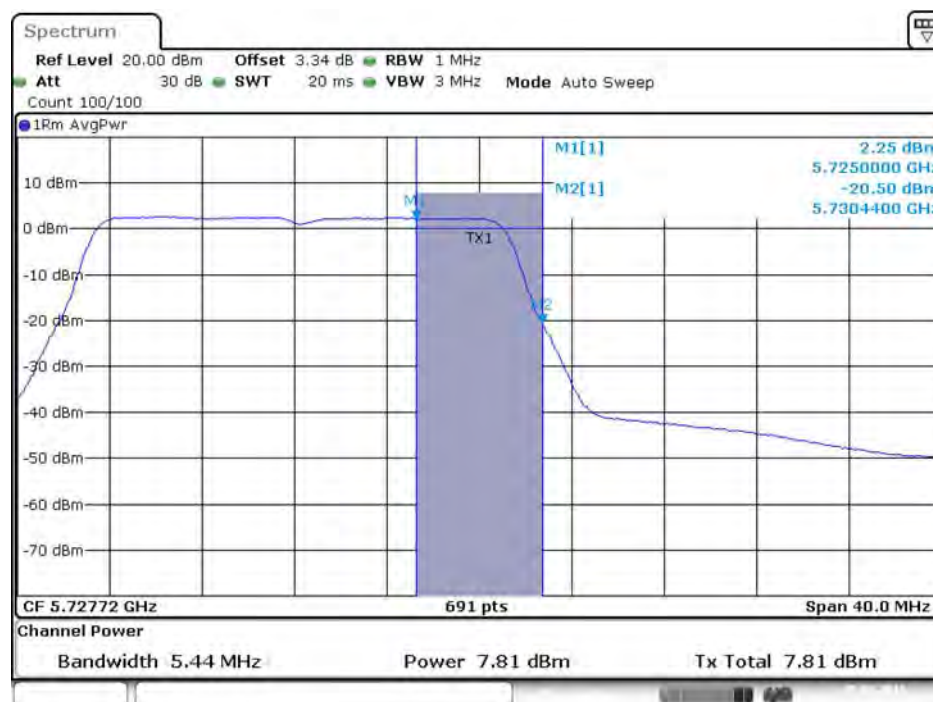


Date: 5.FEB.2016 13:47:39

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

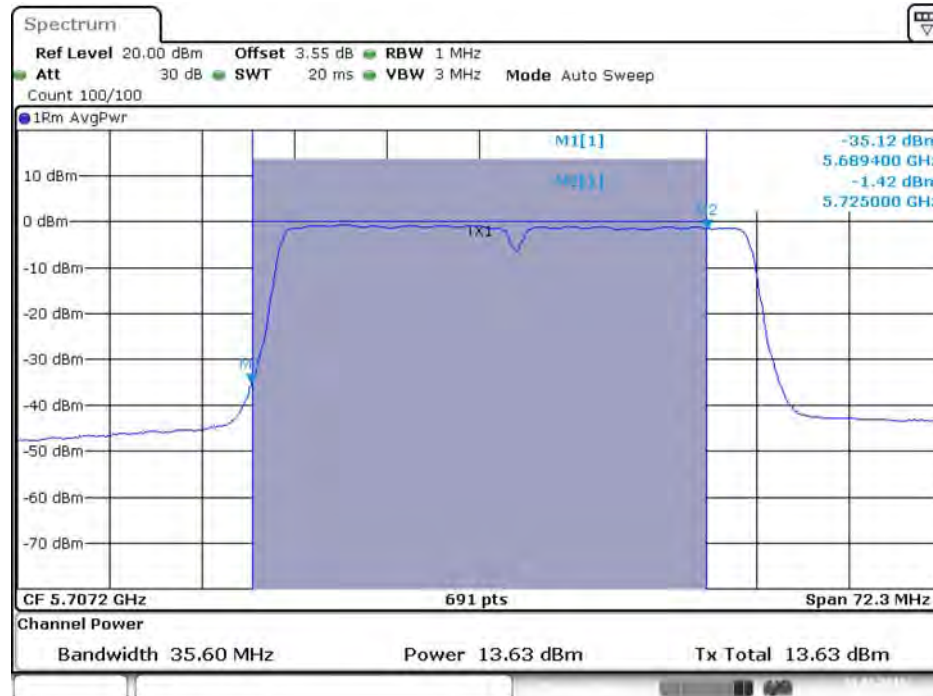


Date: 31.JAN.2016 14:59:25

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

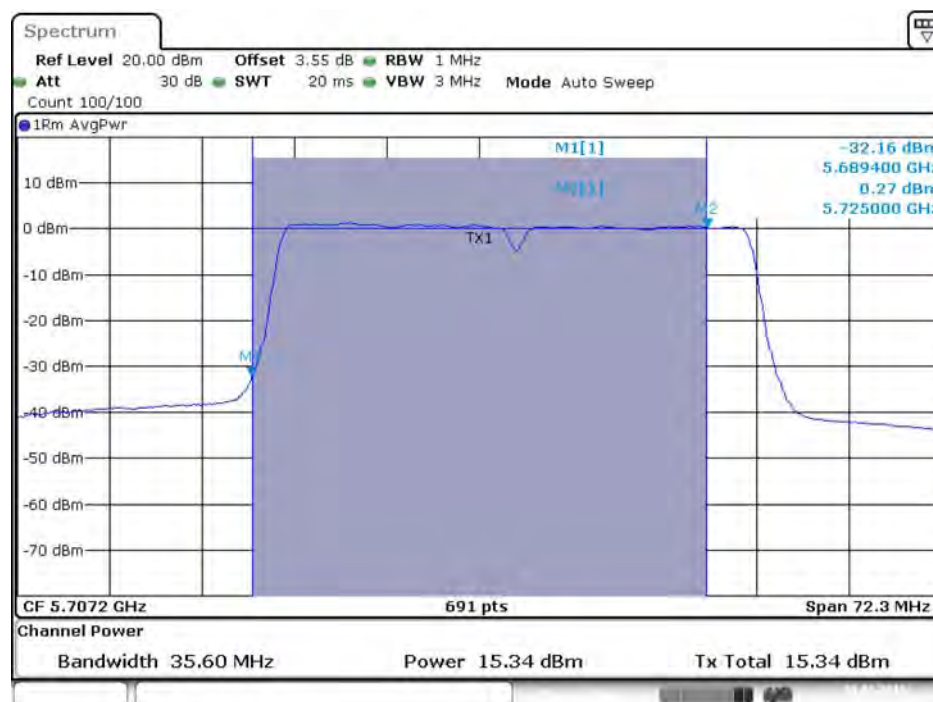


Date: 31.JAN.2016 14:59:32

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

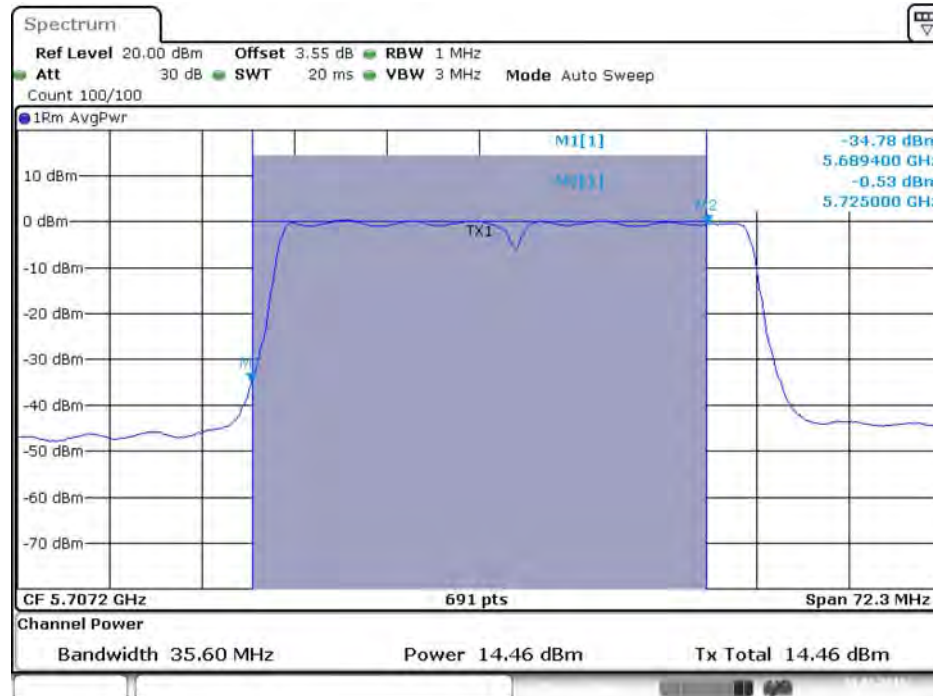

Date: 31.JAN.2016 14:59:39

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 2C)

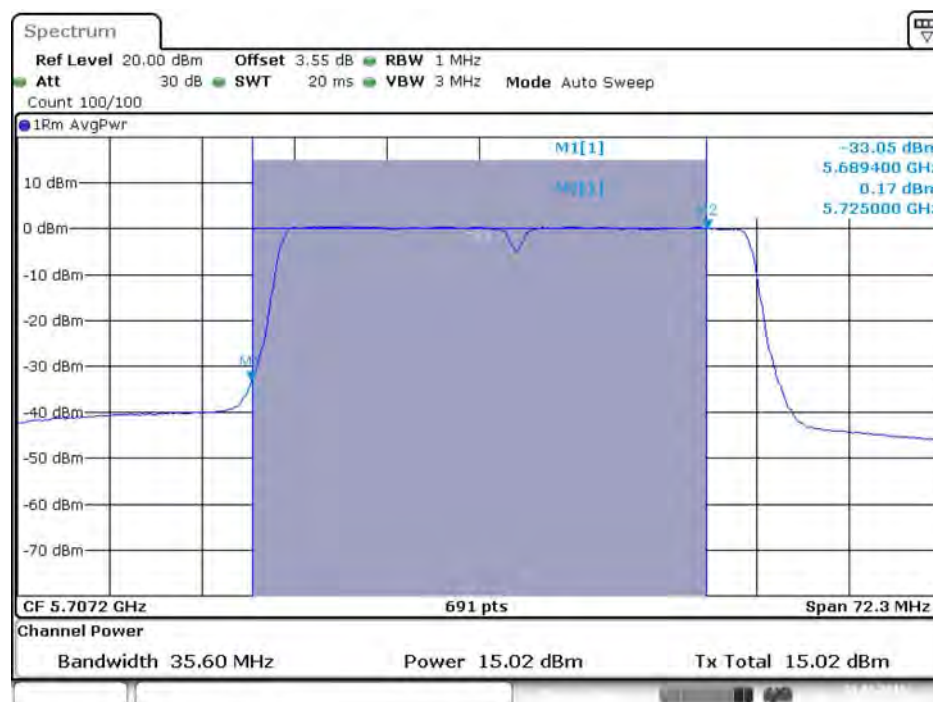


Date: 31.JAN.2016 14:59:46

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)



Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)

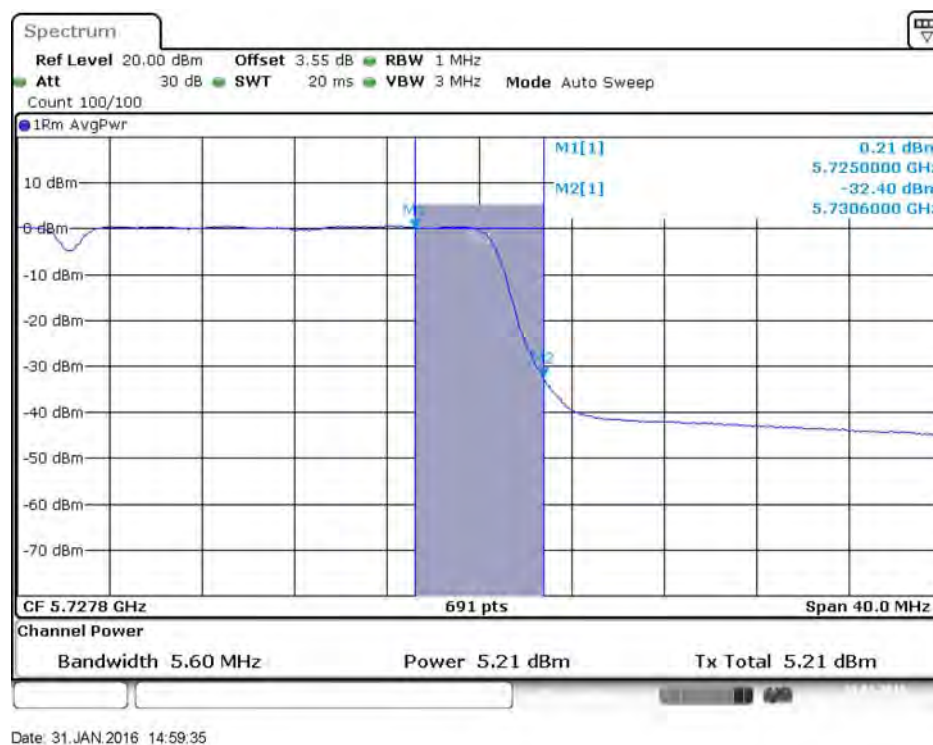

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)




Date: 31.JAN.2016 14:59:42

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 3)




Date: 31.JAN.2016 14:59:50

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

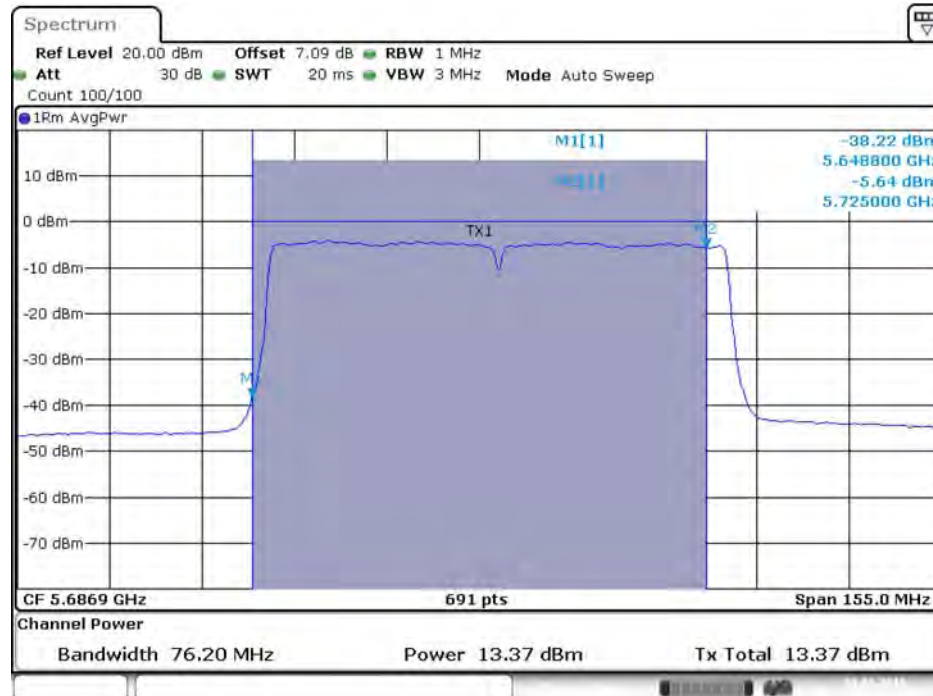


Date: 31.JAN.2016 15:09:44

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 2C)

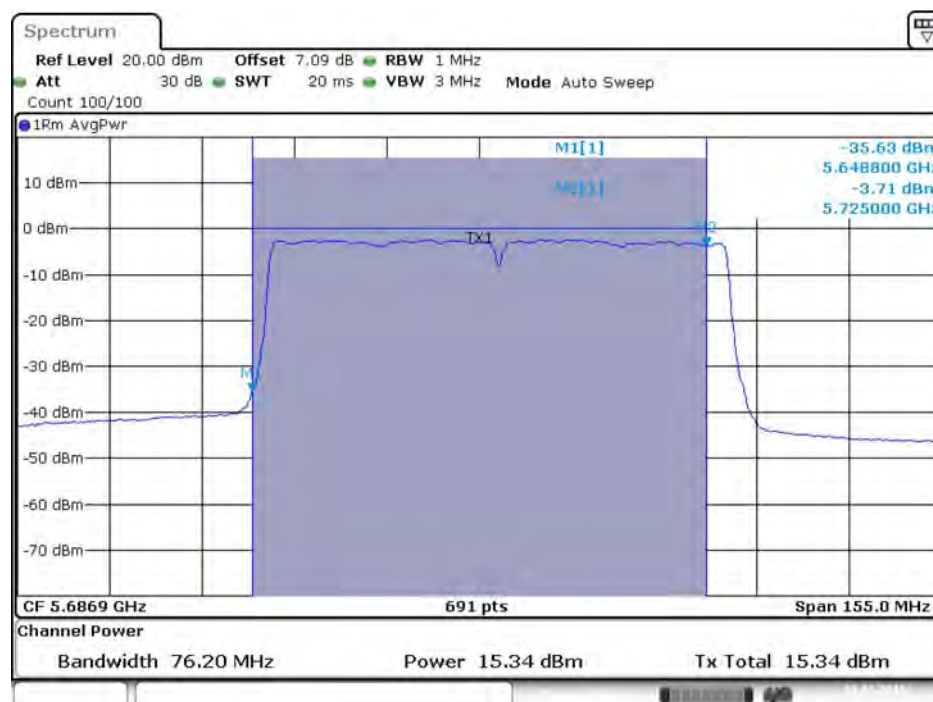


Date: 31.JAN.2016 15:09:51

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 2C)

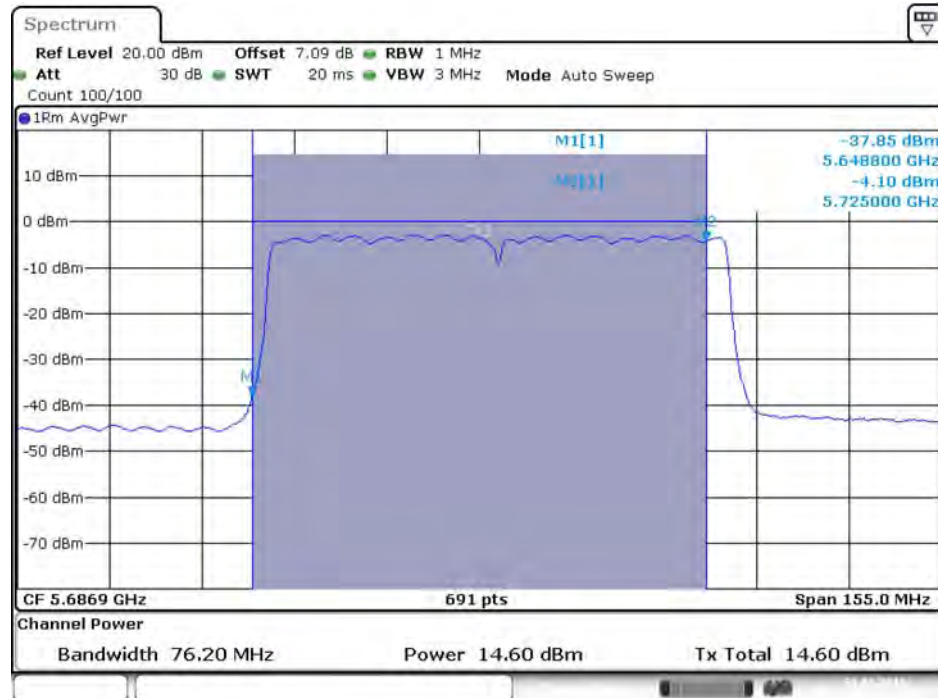


Date: 31.JAN.2016 15:09:58

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 2C)

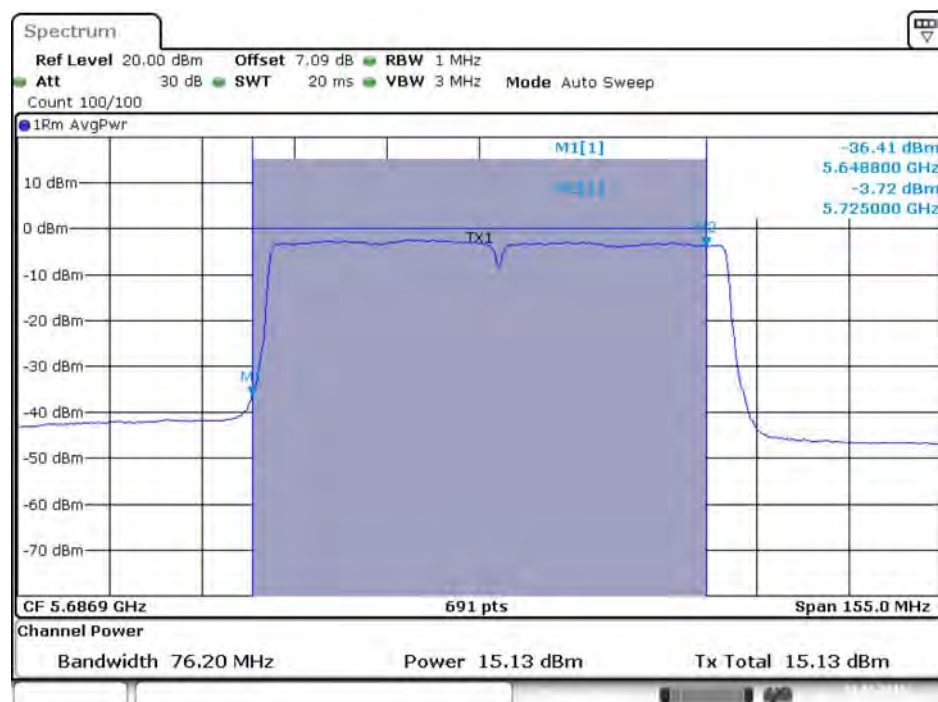

Date: 31.JAN.2016 15:10:05

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

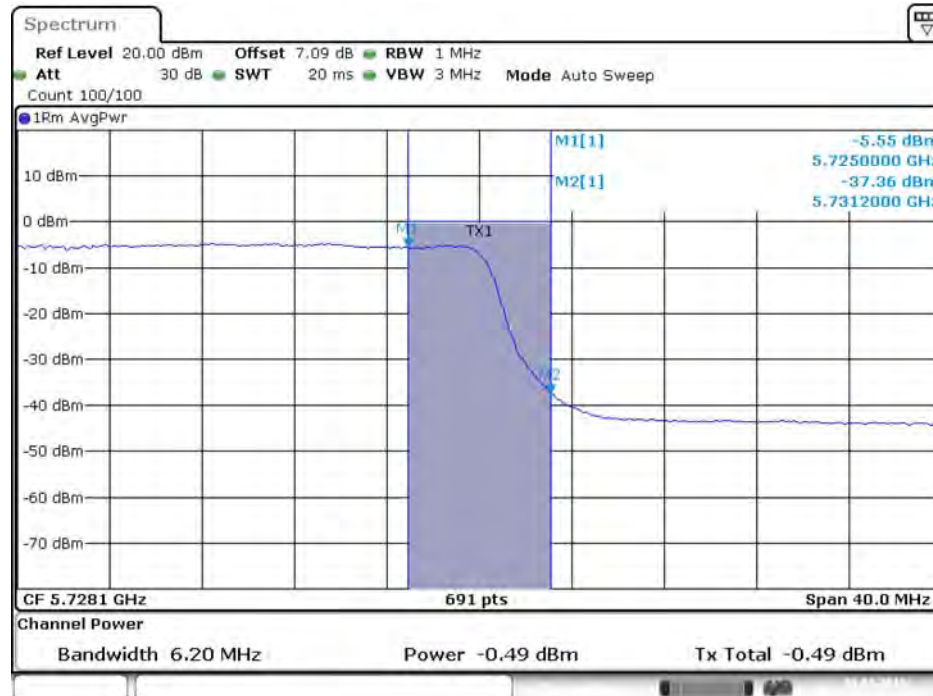


Date: 31.JAN.2016 15:09:47

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)




Date: 31.JAN.2016 15:09:54

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)

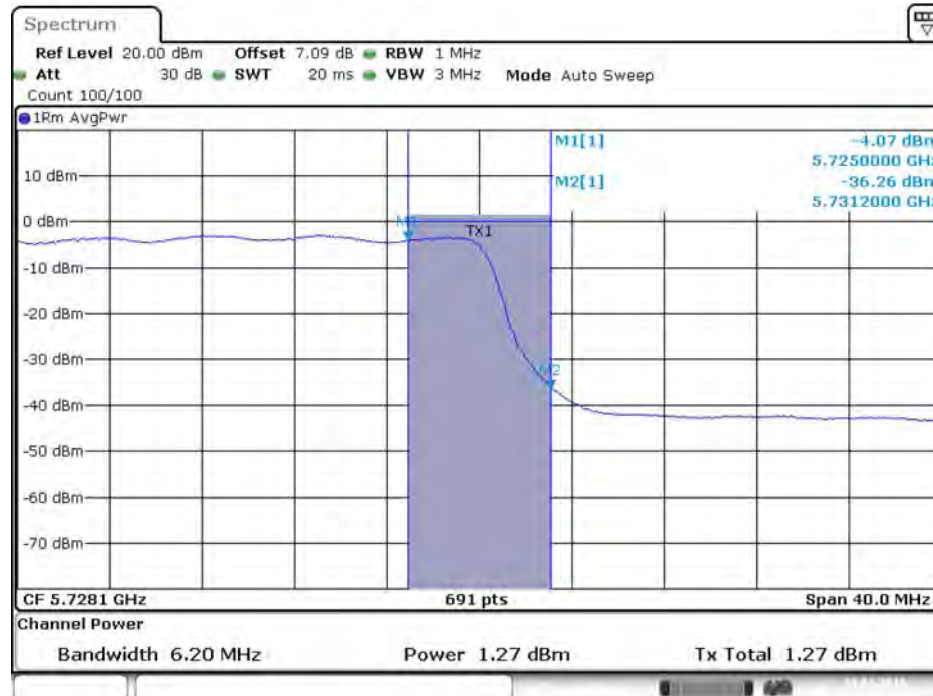

Date: 31.JAN.2016 15:10:01


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 3)

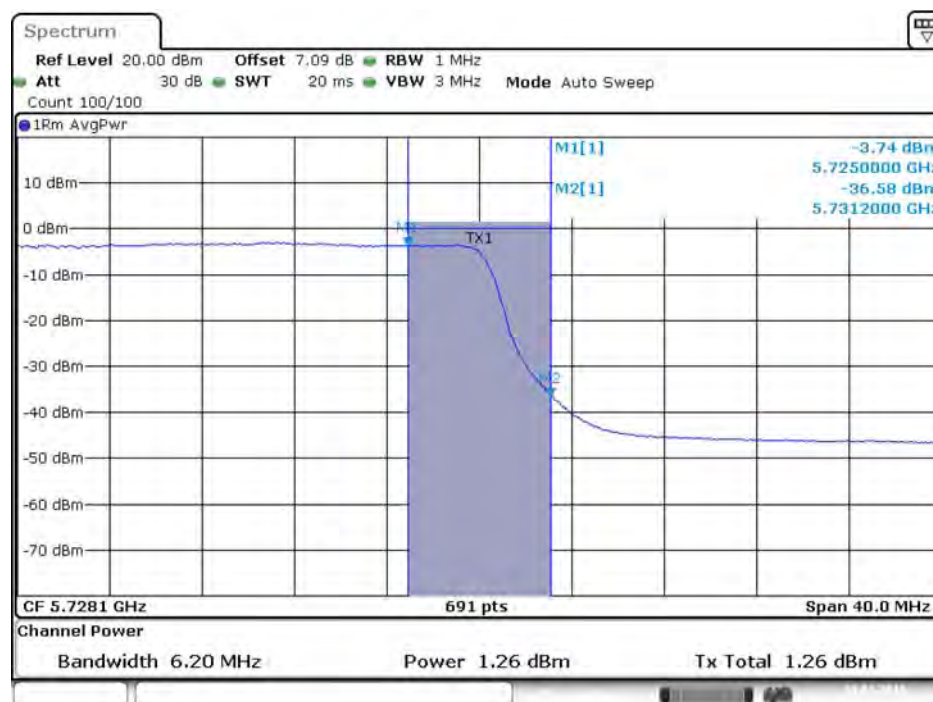

Date: 31.JAN.2016 15:10:08


Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi / 2TX)

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz
(UNII 2C)

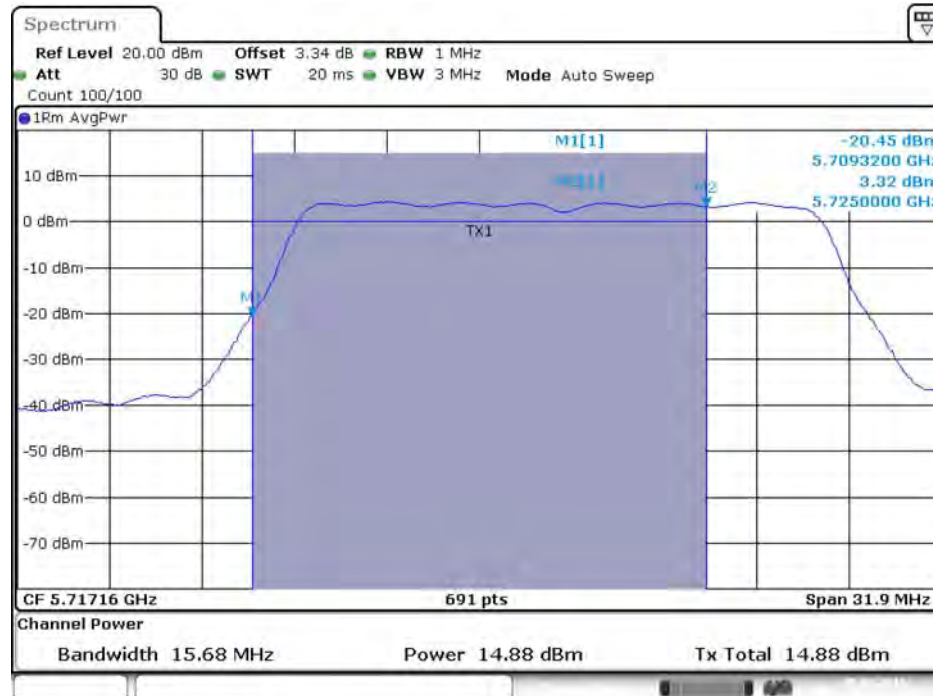

Date: 5.FEB.2016 10:21:37

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz
(UNII 2C)

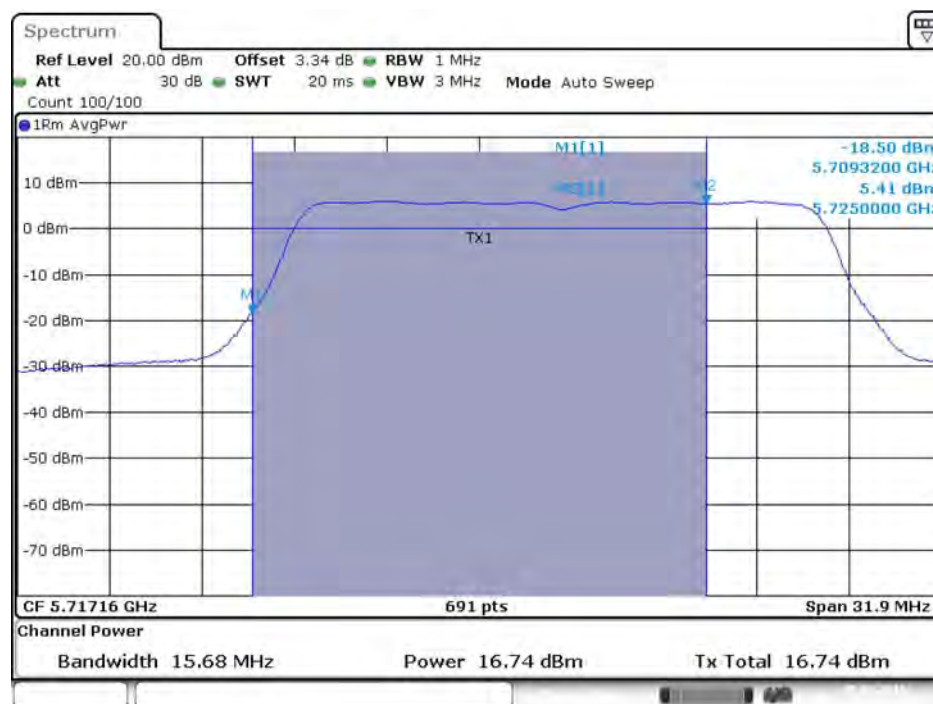


Date: 5.FEB.2016 10:21:44


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)



Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)

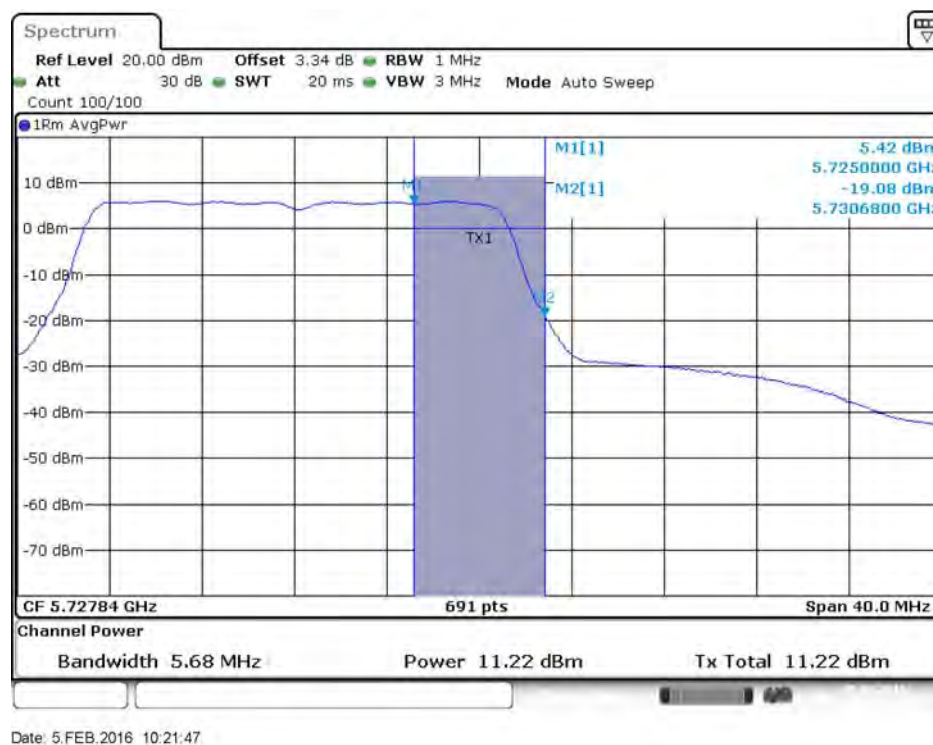


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

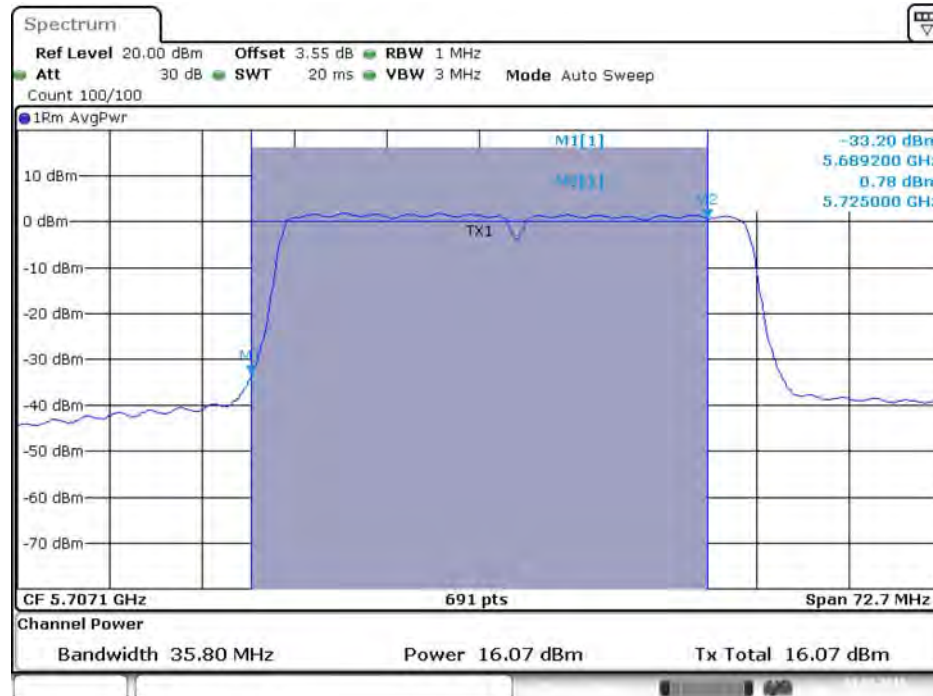


Date: 1.FEB.2016 17:22:21

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

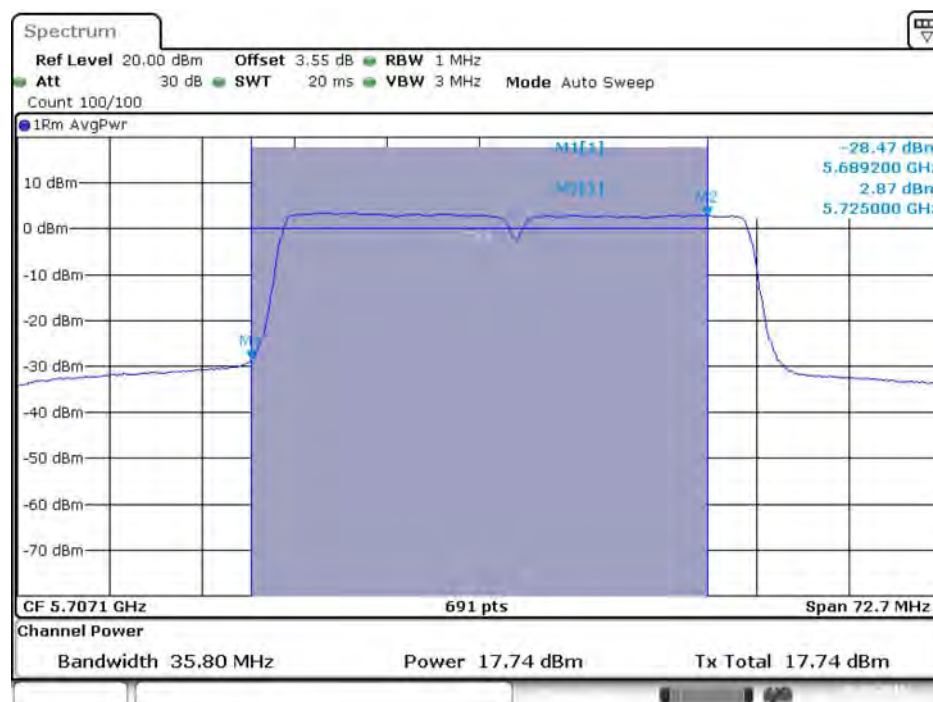


Date: 1.FEB.2016 17:22:28

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)

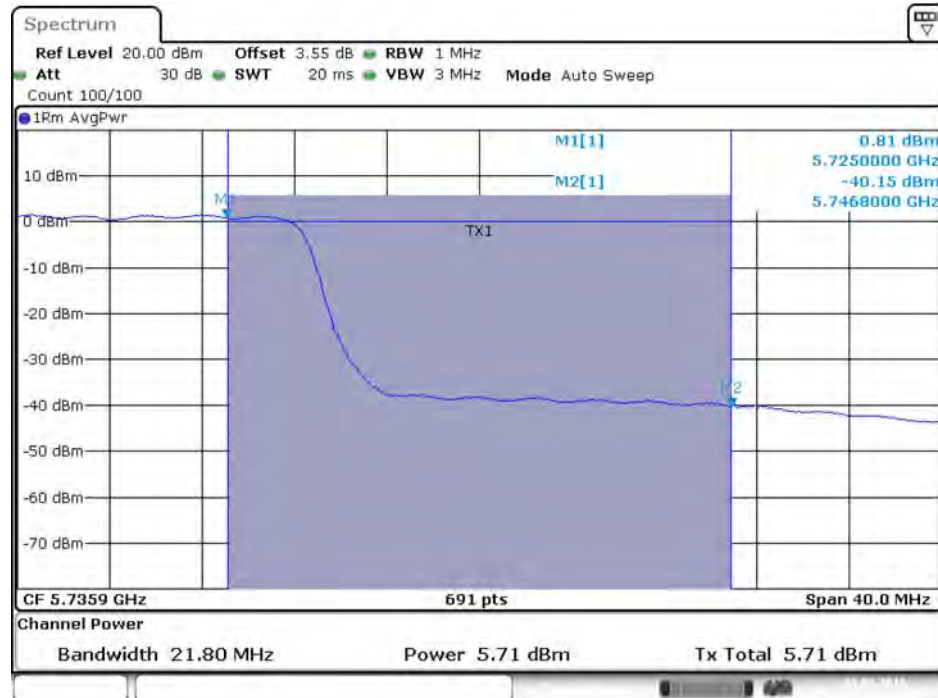


Date: 1.FEB.2016 17:22:25

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)

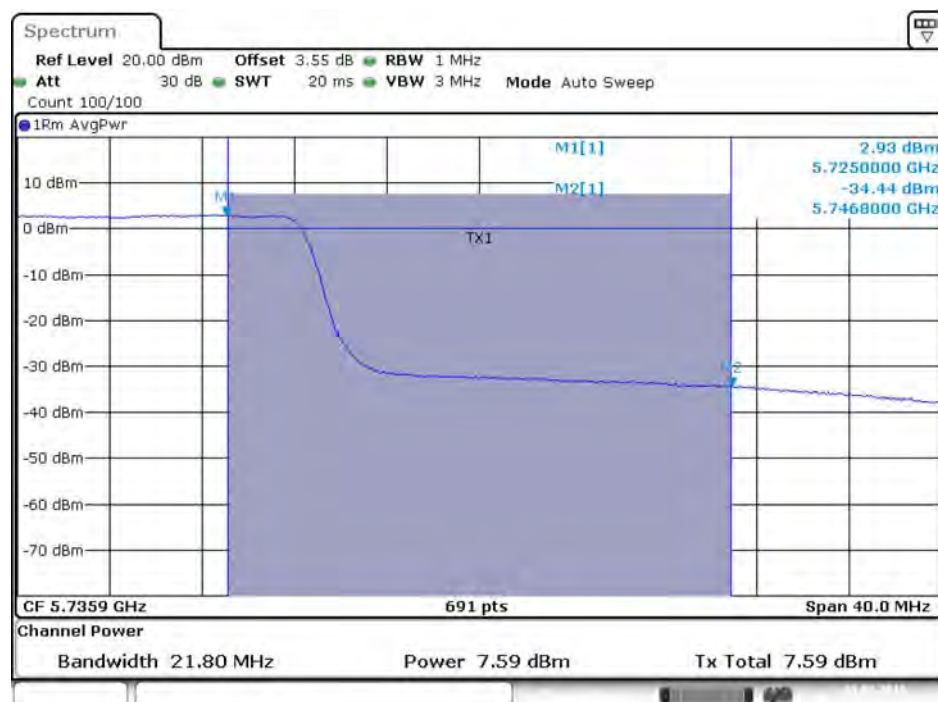


Date: 1.FEB.2016 17:22:32

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

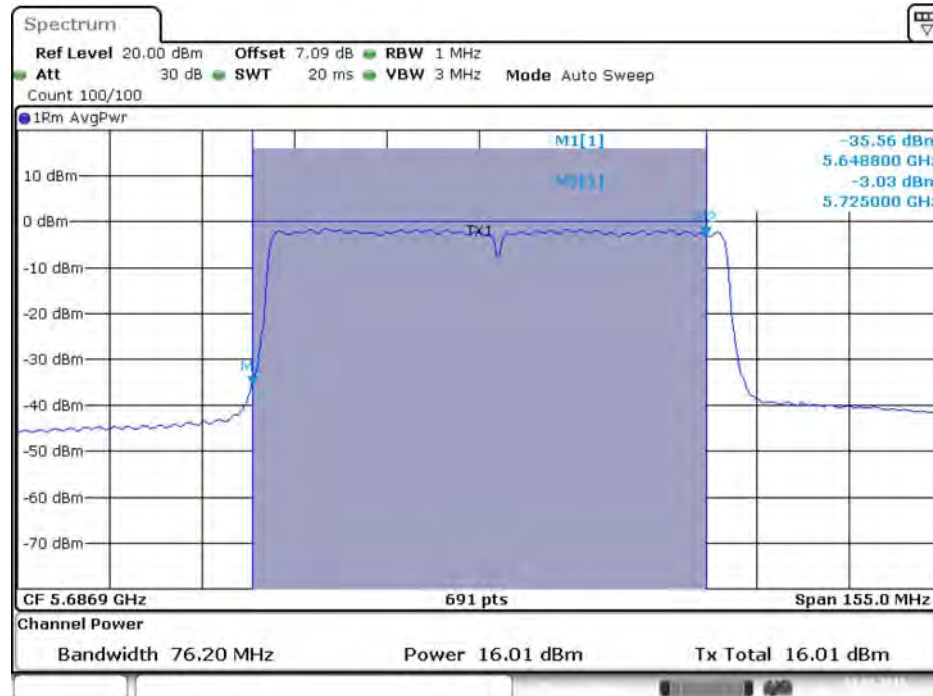


Date: 1.FEB.2016 17:26:58

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 2C)

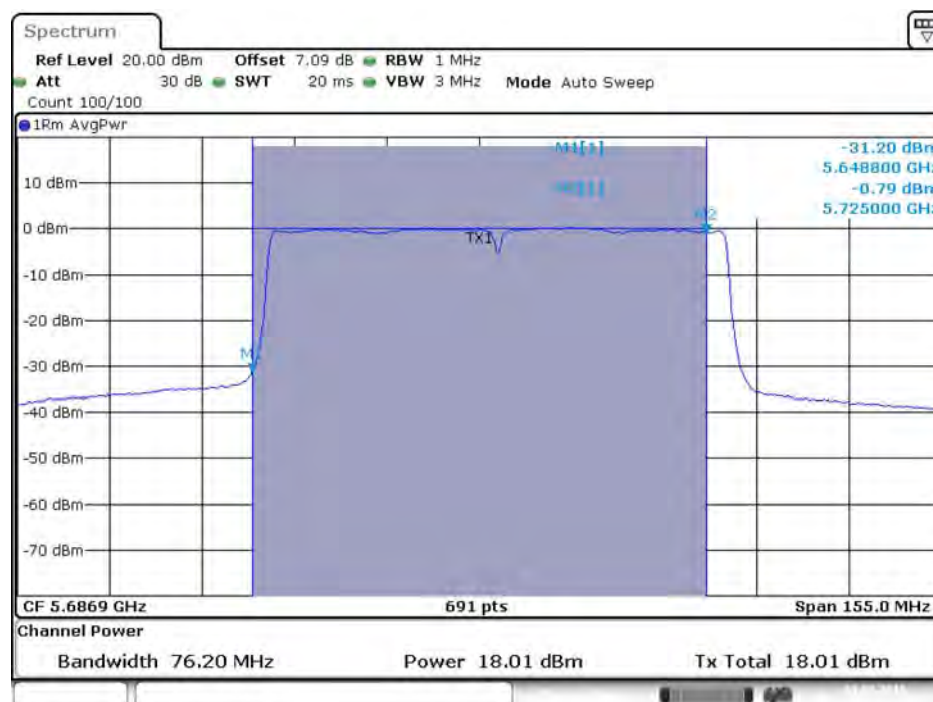


Date: 1.FEB.2016 17:27:06

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

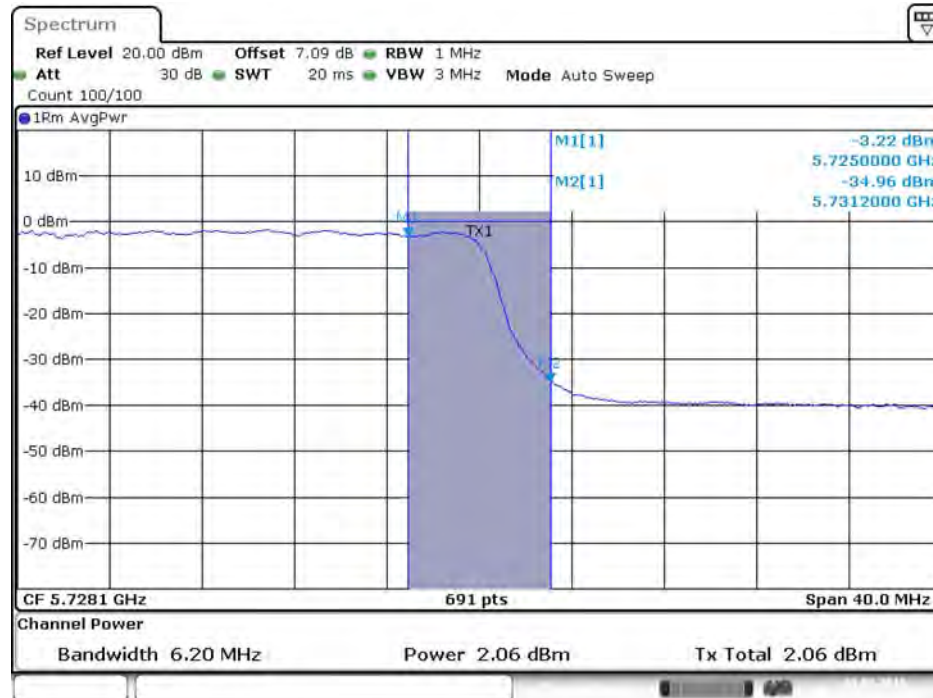

Date: 1.FEB.2016 17:27:02

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

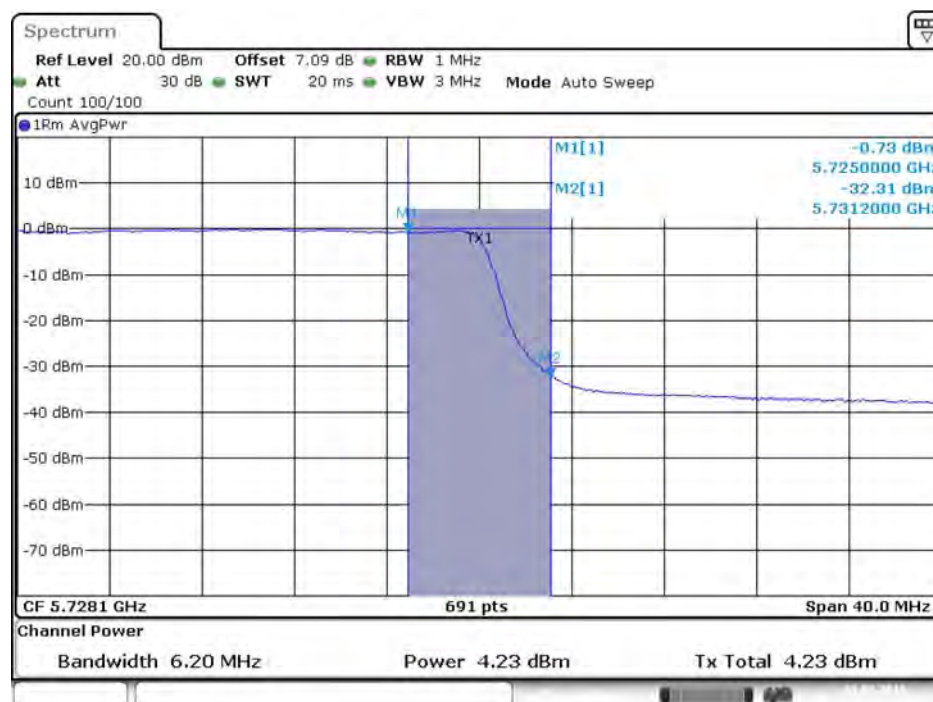

Date: 1.FEB.2016 17:27:09

Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi / 3TX)

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)




Date: 1.FEB.2016 18:06:15

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 2C)




Date: 1.FEB.2016 18:06:22

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 2C)

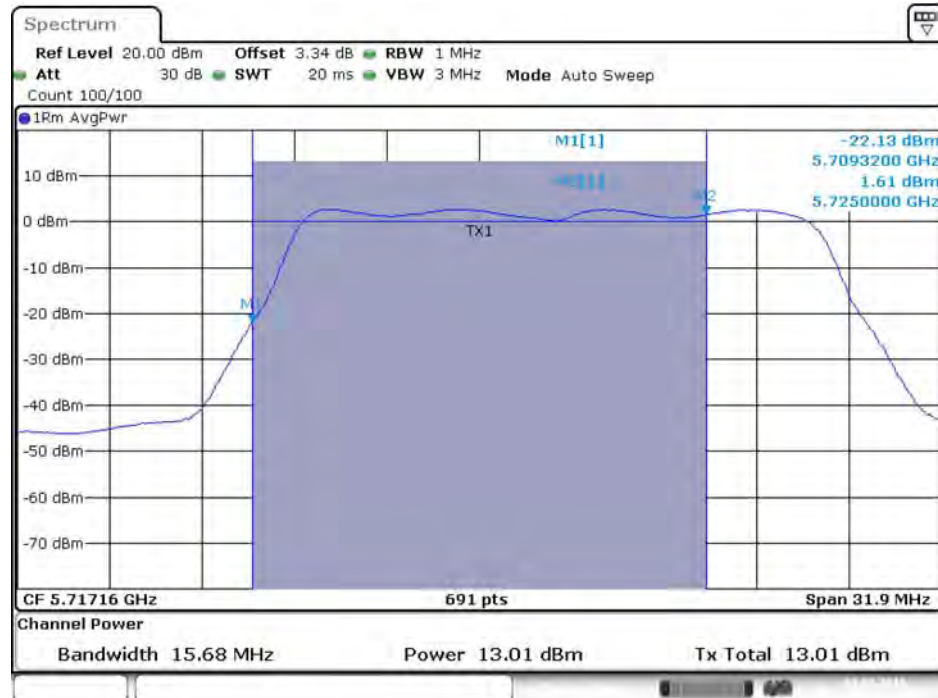


Date: 1.FEB.2016 18:06:29

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

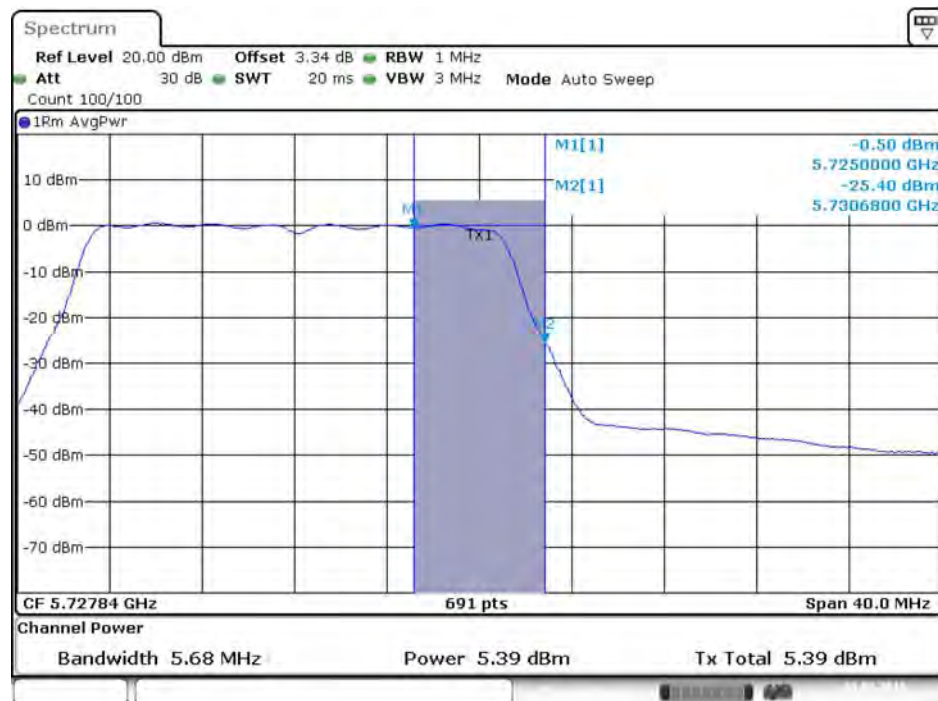

Date: 1.FEB.2016 18:06:18

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)

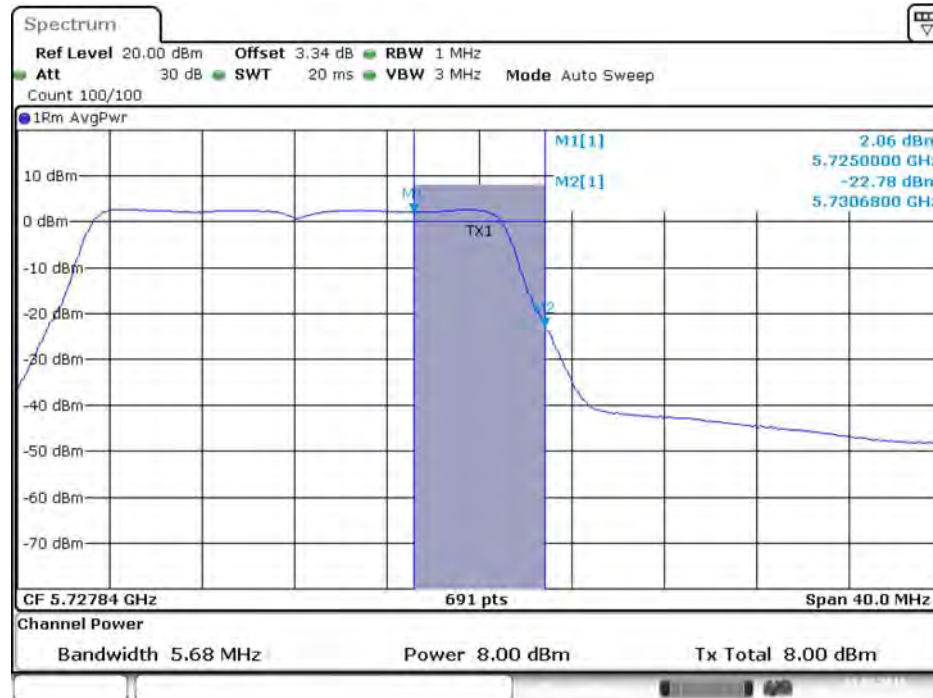


Date: 1.FEB.2016 18:06:25

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 3)




Date: 1.FEB.2016 18:06:32

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

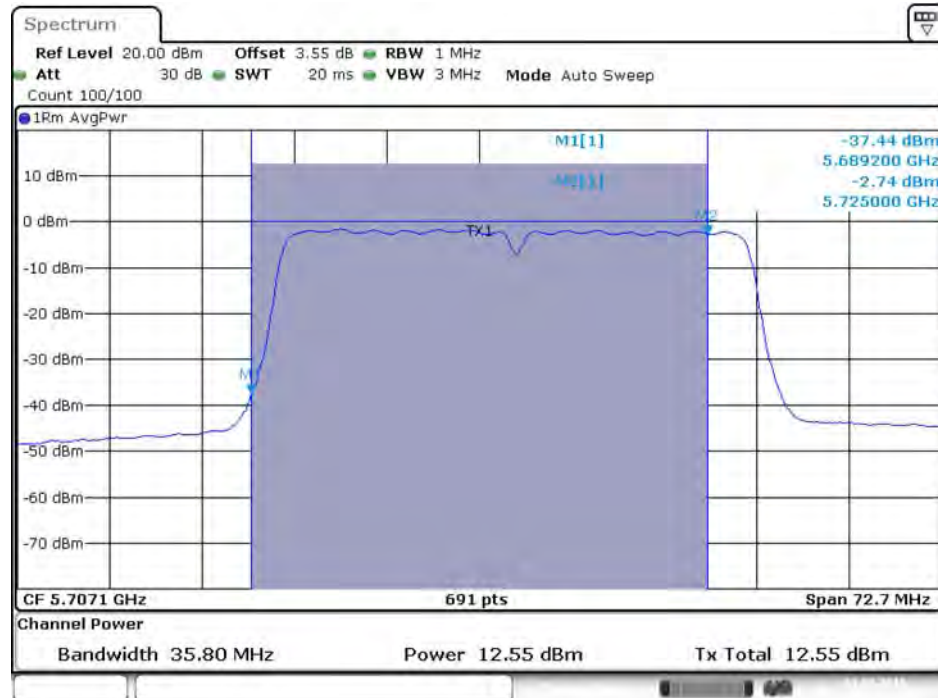


Date: 1.FEB.2016 18:11:04

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

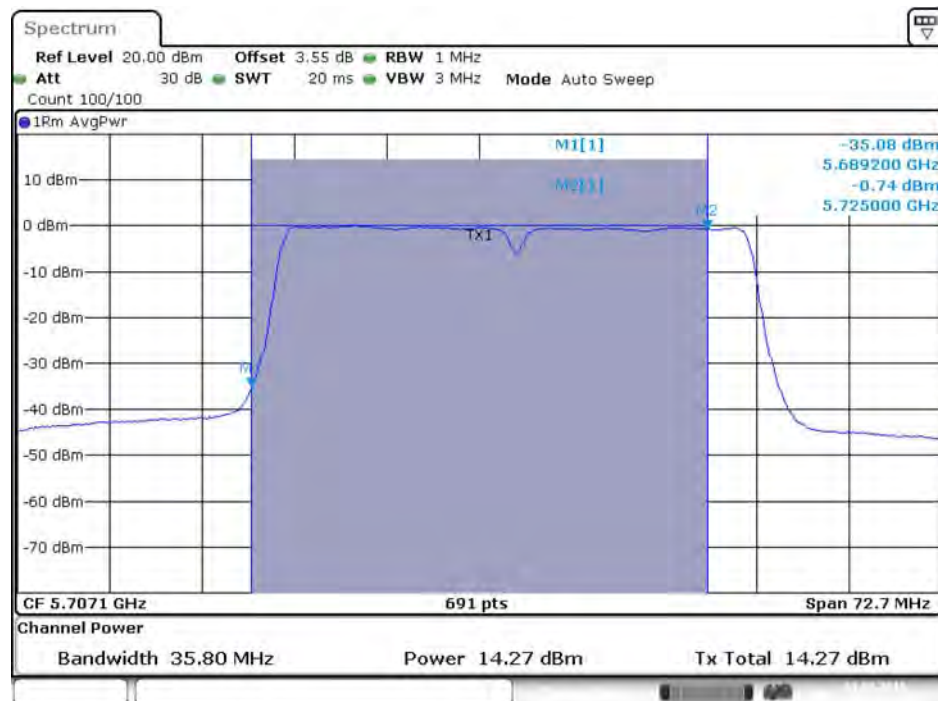


Date: 1.FEB.2016 18:11:11

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

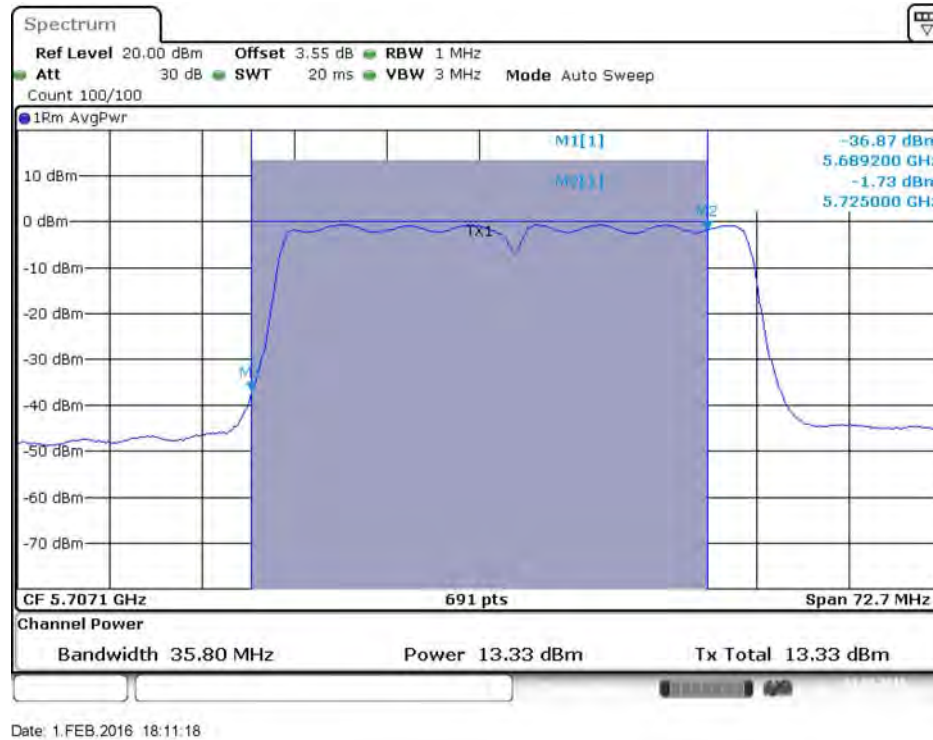

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)

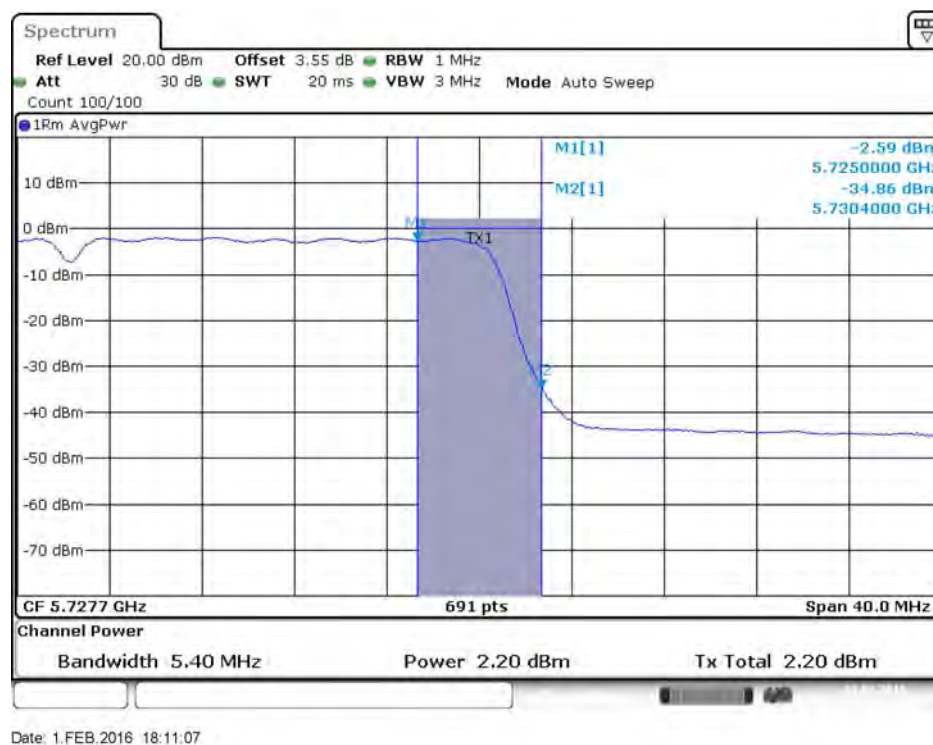


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)




Date: 1.FEB.2016 18:11:14

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)

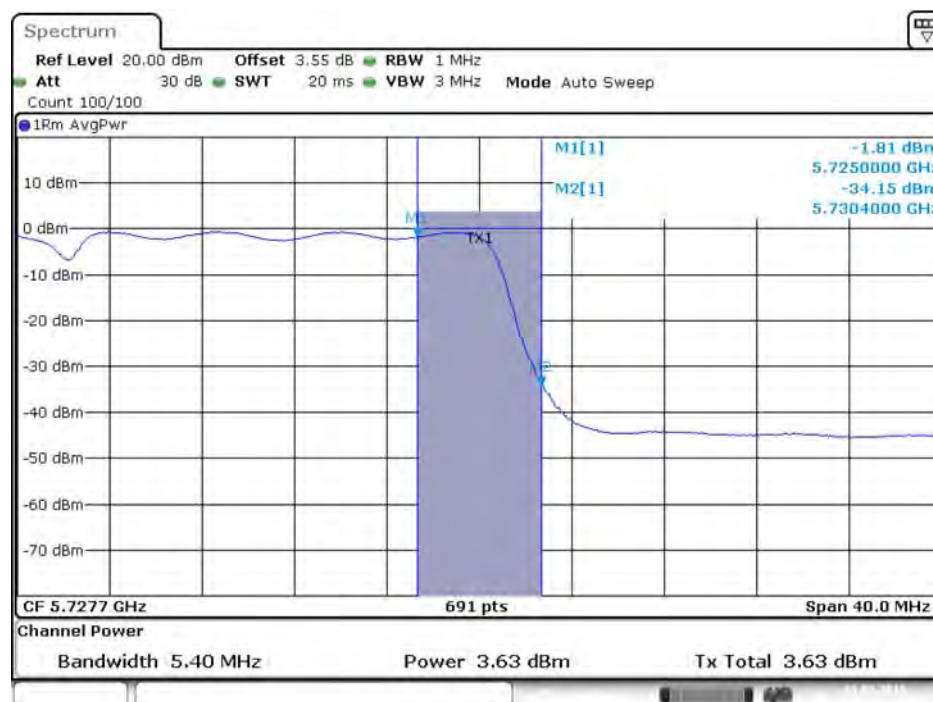


Date: 1.FEB.2016 18:11:21

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

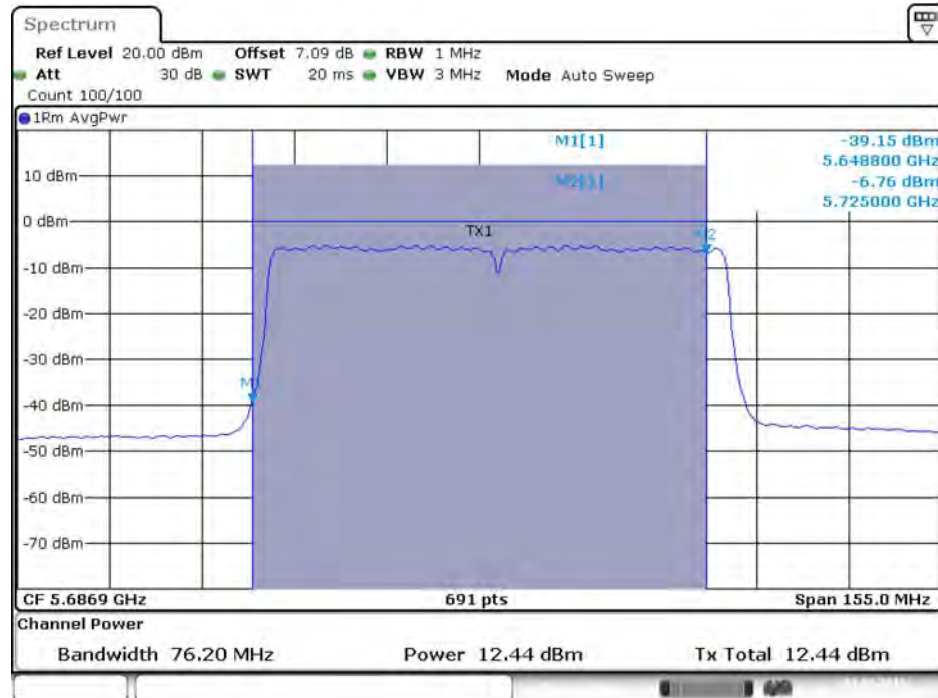

Date: 1.FEB.2016 18:23:26

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 2C)

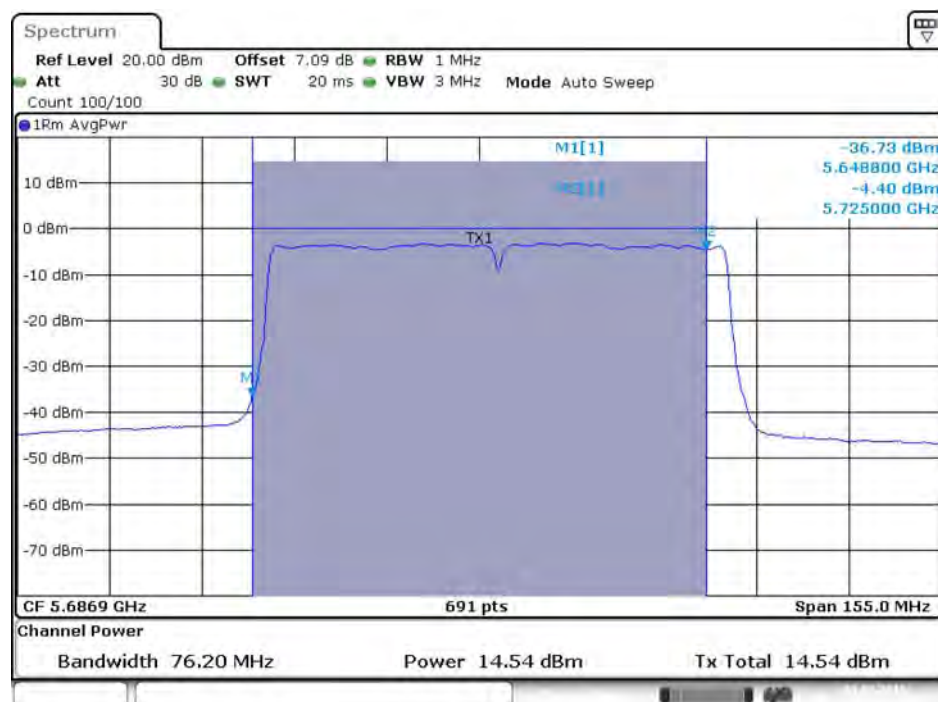


Date: 1.FEB.2016 18:23:33

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 2C)




Date: 1.FEB.2016 18:23:40

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

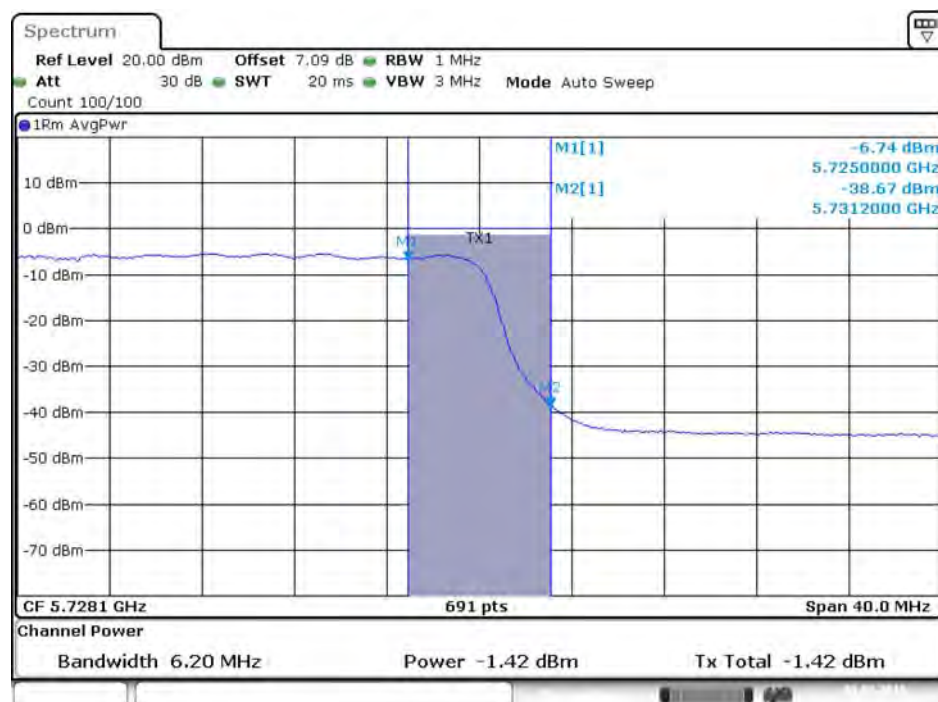


Date: 1.FEB.2016 18:23:29

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

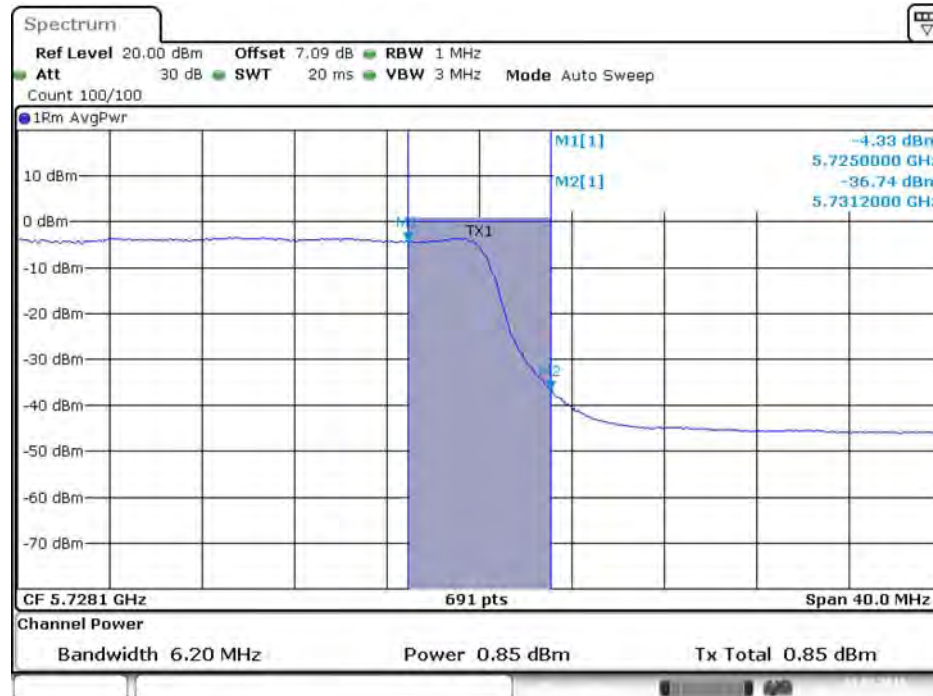

Date: 1.FEB.2016 18:23:36


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)

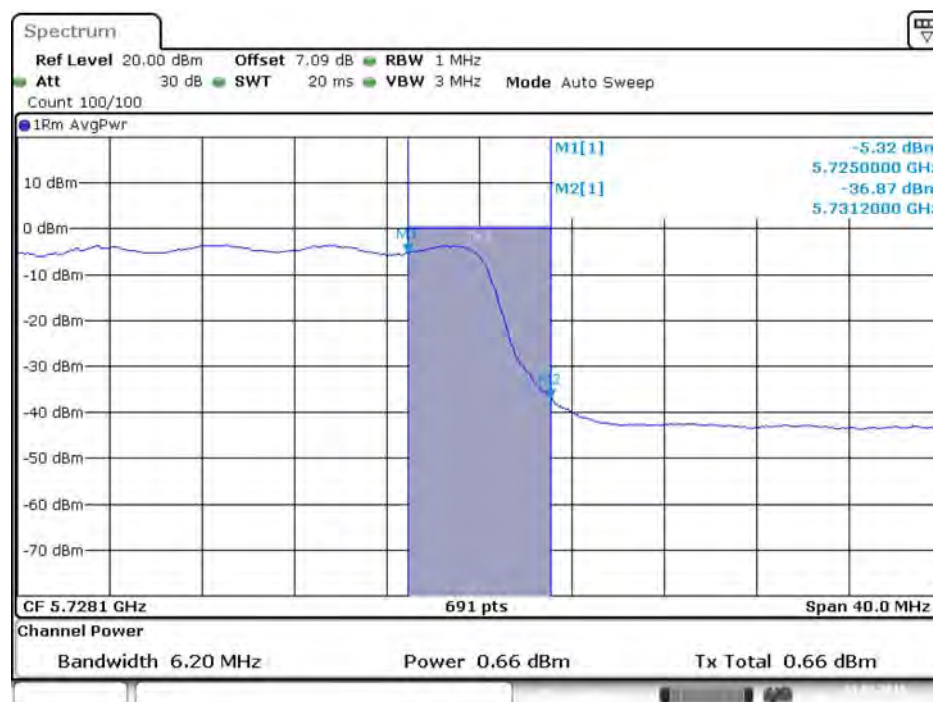

Date: 1.FEB.2016 18:23:43

Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi, Chain 4: 5.9dBi / 4TX)

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

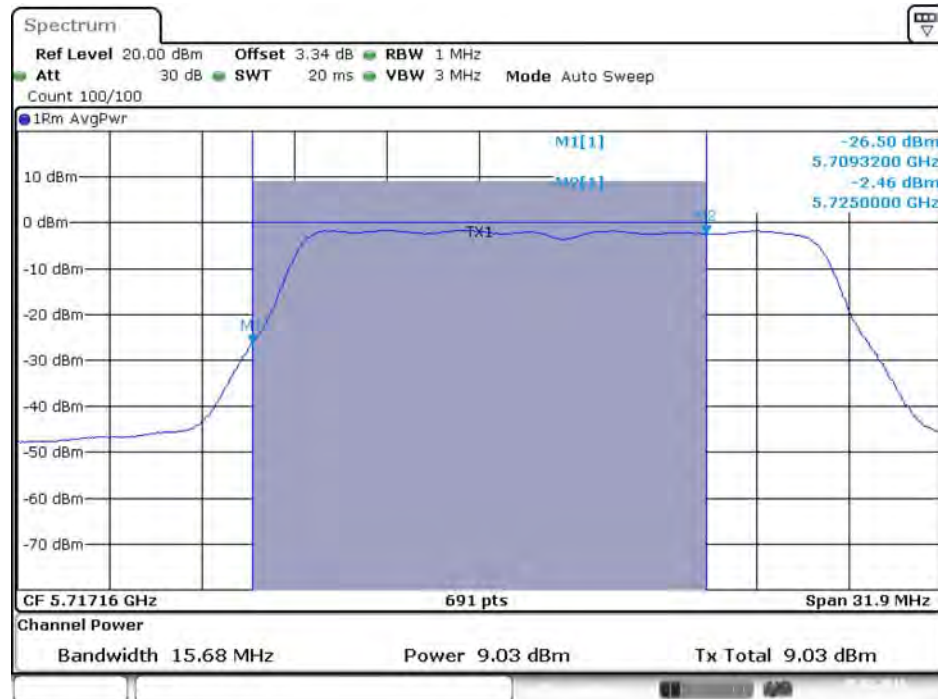

Date: 5.FEB.2016 10:35:56

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 2C)




Date: 5.FEB.2016 10:36:03

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 2C)



Date: 5.FEB.2016 10:36:10

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 2C)

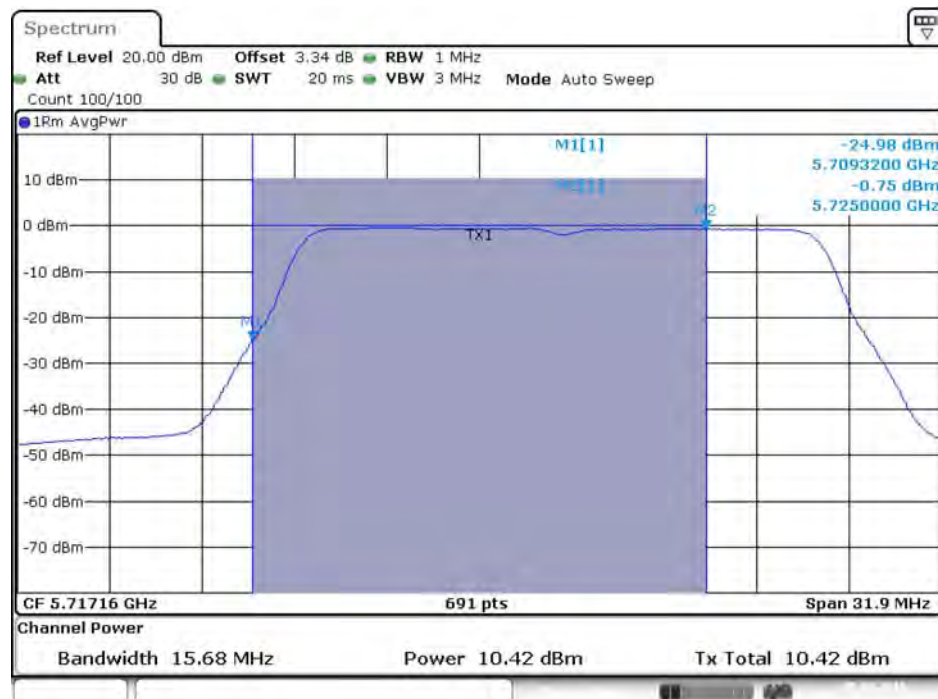


Date: 5.FEB.2016 10:36:17

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz
(UNII 3)



Date: 5.FEB.2016 10:35:59

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz
(UNII 3)

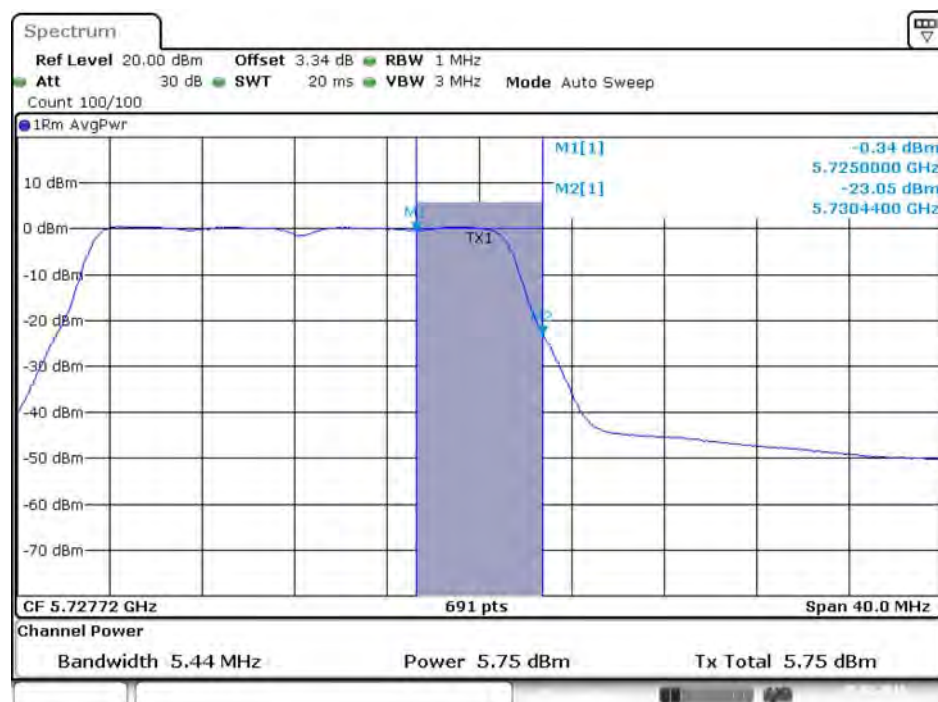


Date: 5.FEB.2016 10:36:06

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 3)




Date: 5.FEB.2016 10:36:13

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 3)

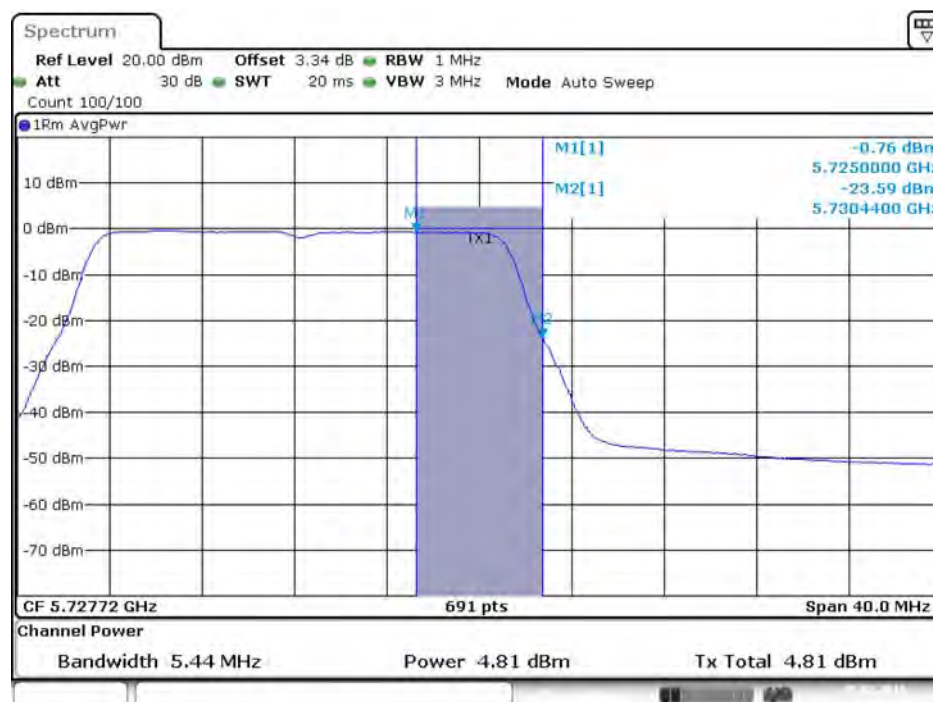


Date: 5.FEB.2016 10:36:21

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

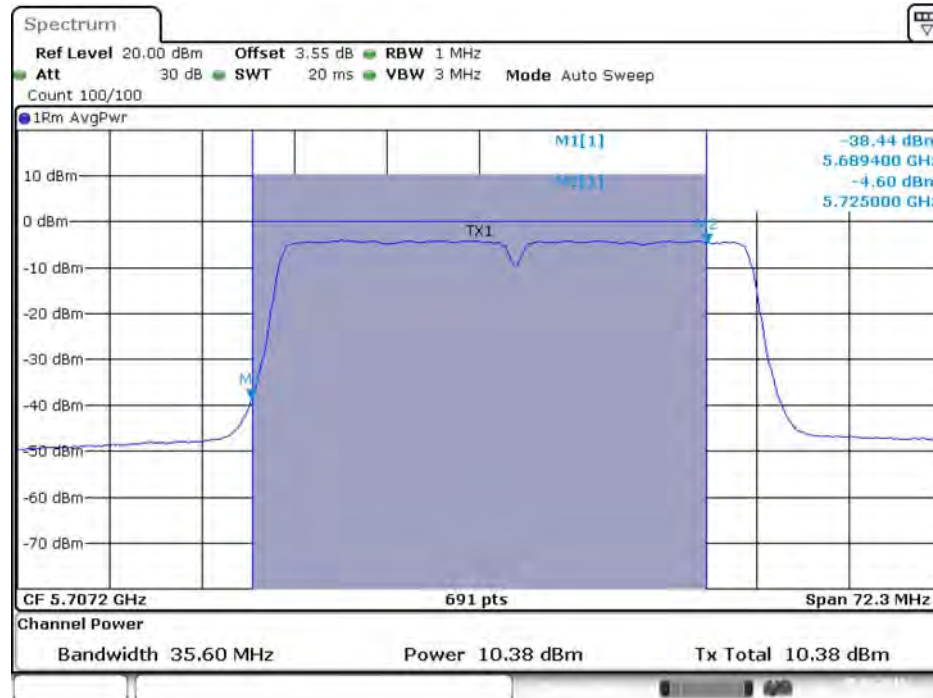


Date: 5.FEB.2016 10:45:43

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

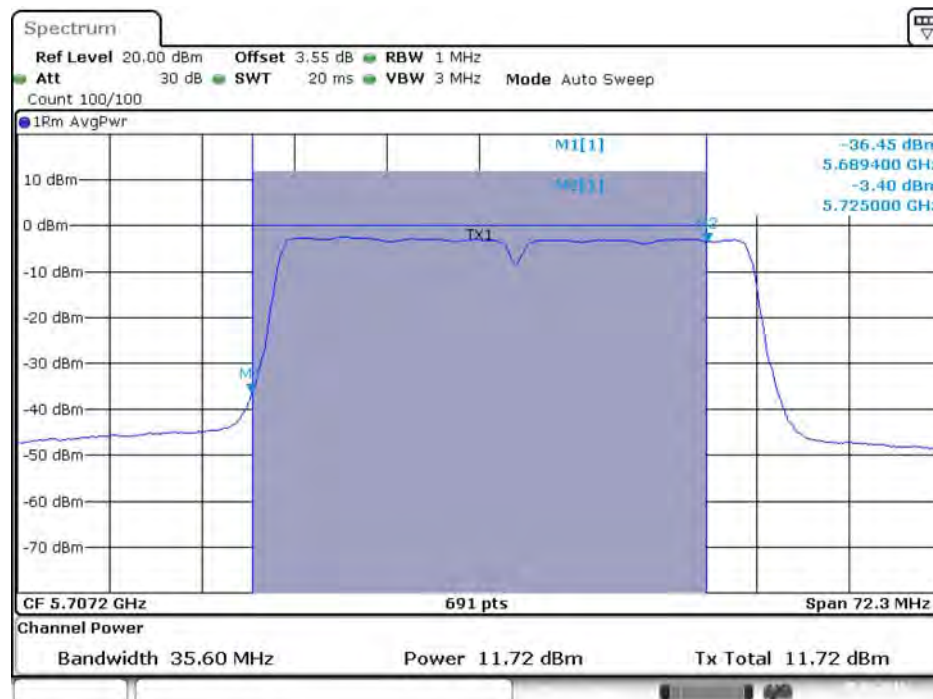


Date: 5.FEB.2016 10:45:50

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

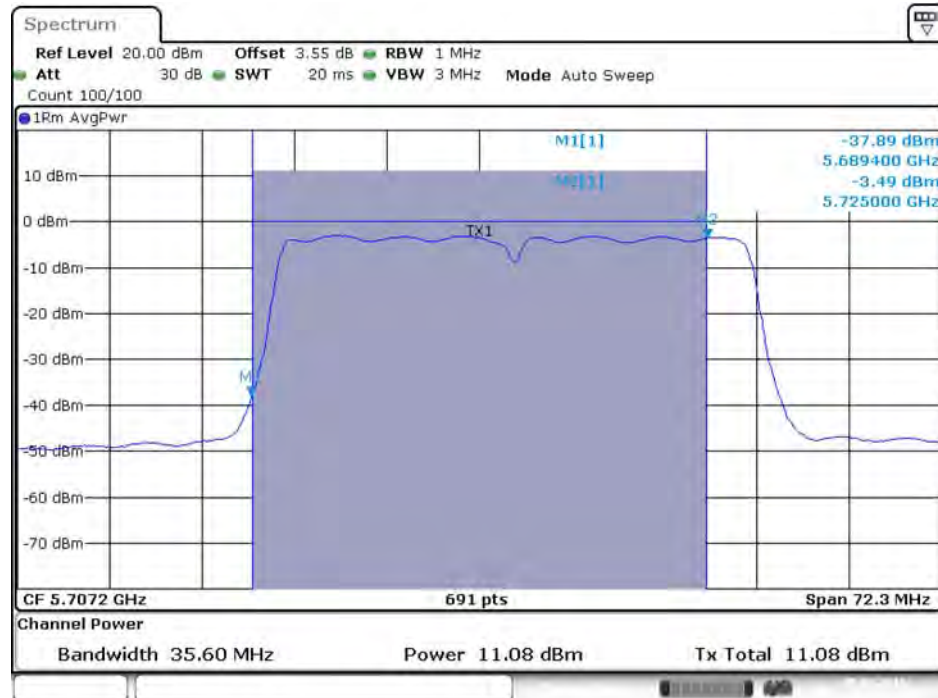

Date: 5.FEB.2016 10:45:57

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 2C)

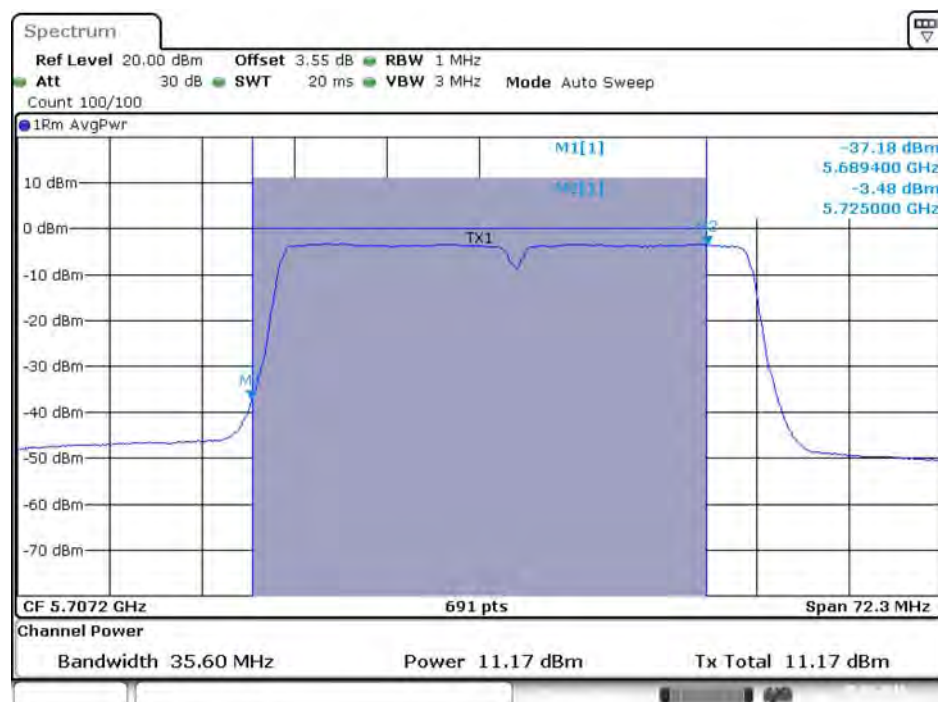

Date: 5.FEB.2016 10:46:04

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)




Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)




Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)



Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 3)

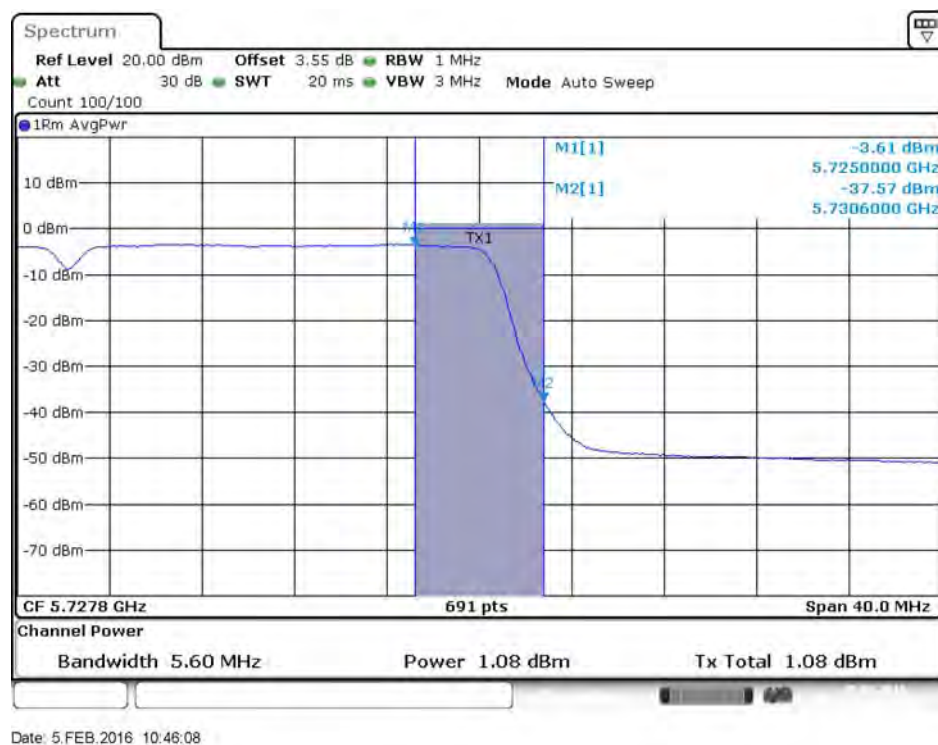


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

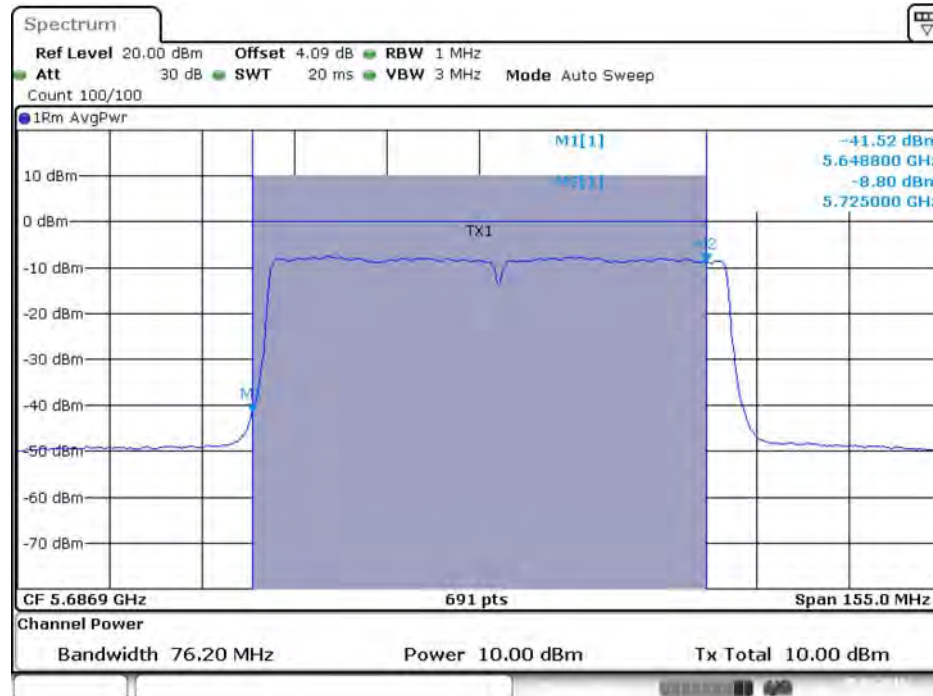


Date: 5.FEB.2016 10:56:31

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 2C)

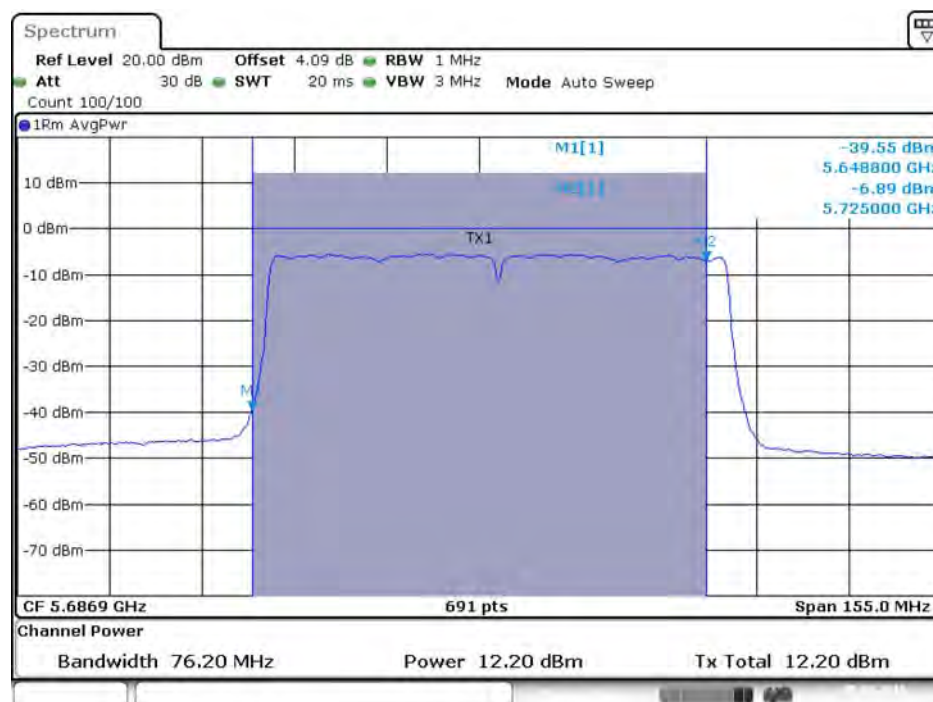


Date: 5.FEB.2016 10:56:39

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 2C)

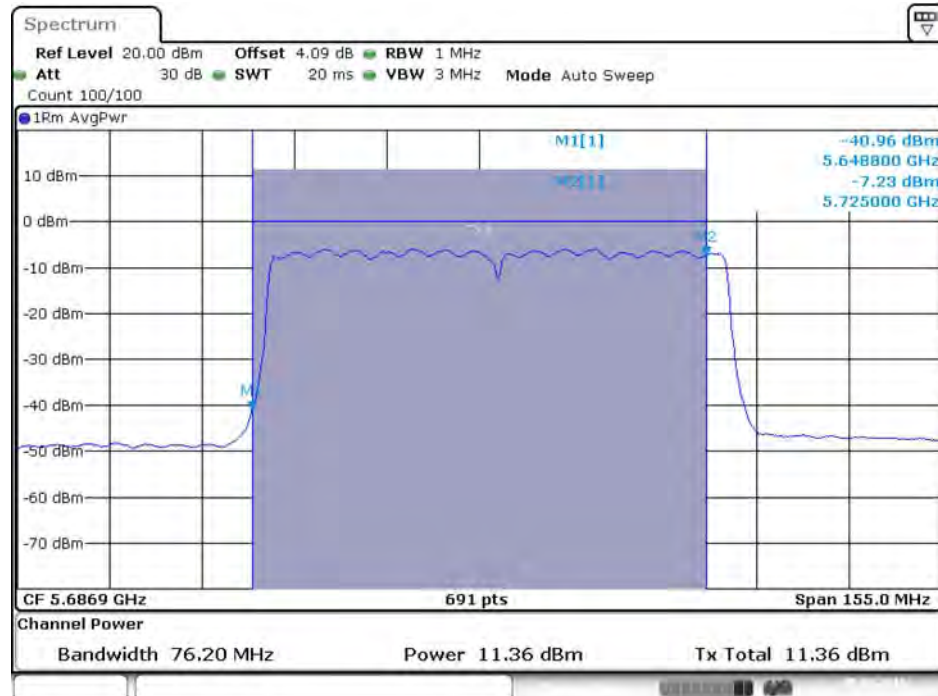

Date: 5.FEB.2016 10:56:46

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 2C)

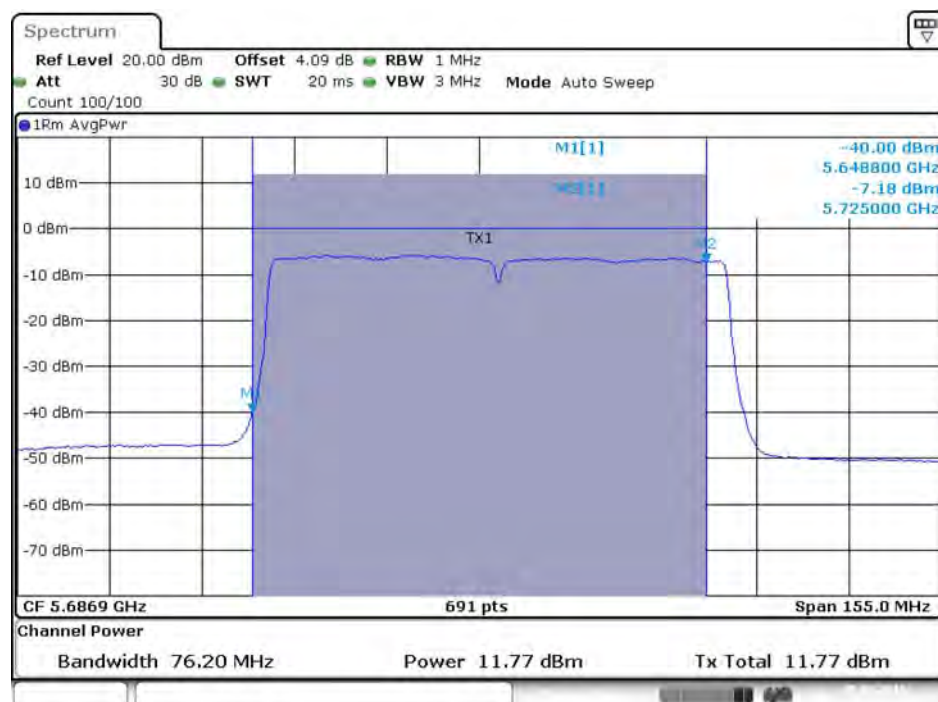


Date: 5.FEB.2016 10:56:53

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)




Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

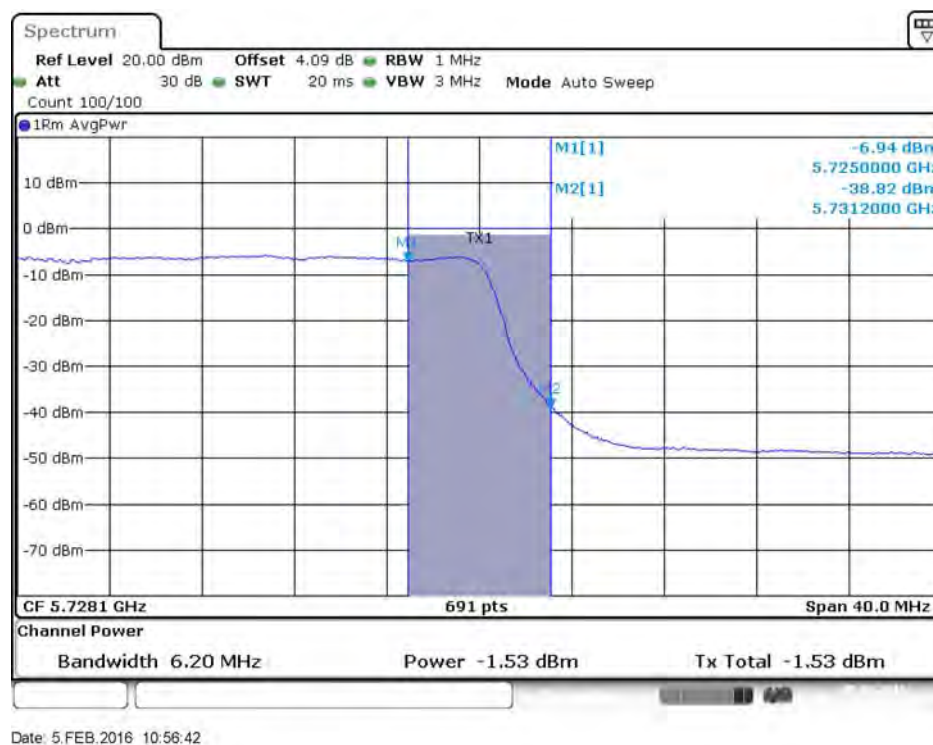

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)



Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 3)

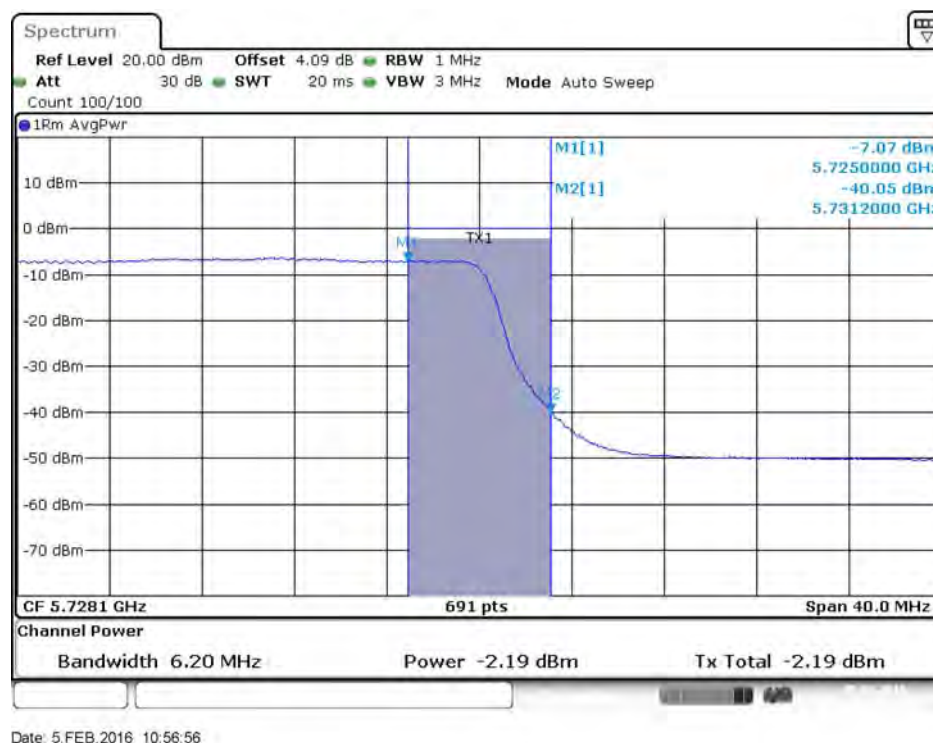

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
☒	5.25-5.35 GHz	11 dBm/MHz
☒	5.470-5.725 GHz	11 dBm/MHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

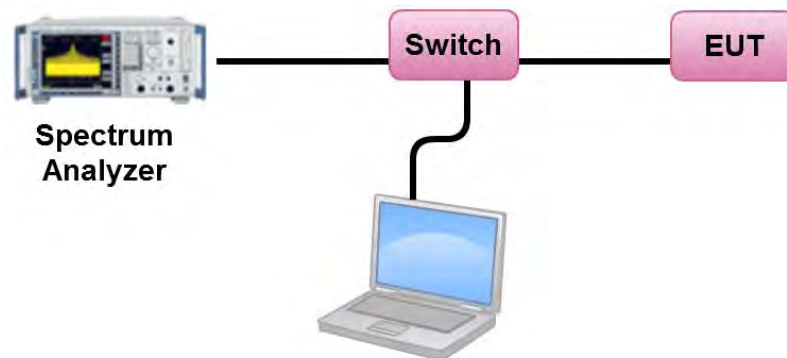

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

For Non-Beamforming Mode

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 1TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.82	11.00	Complies
	5320 MHz	7.91	11.00	Complies
	5500 MHz	7.72	11.00	Complies
	5580 MHz	7.72	11.00	Complies
	5700 MHz	5.41	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.78	11.00	Complies
	5320 MHz	7.34	11.00	Complies
	5500 MHz	7.44	11.00	Complies
	5580 MHz	7.82	11.00	Complies
	5700 MHz	5.01	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.83	11.00	Complies
	5310 MHz	-0.44	11.00	Complies
	5510 MHz	3.09	11.00	Complies
	5550 MHz	4.80	11.00	Complies
	5670 MHz	3.38	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-3.26	11.00	Complies
	5530 MHz	-0.54	11.00	Complies
	5610 MHz	0.74	11.00	Complies

Straddle Channel

Configuration IEEE 802.11a / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.68	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.74	-3.01	3.73	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.75	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.88	-3.01	2.87	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	3.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.41	-3.01	0.40	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	0.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.18	-3.01	-2.83	30.00	Complies

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	10.02	10.03	Complies
	5300 MHz	9.84	10.03	Complies
	5320 MHz	9.95	10.03	Complies
	5500 MHz	9.58	10.03	Complies
	5580 MHz	9.59	10.03	Complies
	5700 MHz	8.09	10.03	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.84	10.03	Complies
	5300 MHz	9.95	10.03	Complies
	5320 MHz	9.89	10.03	Complies
	5500 MHz	9.68	10.03	Complies
	5580 MHz	9.16	10.03	Complies
	5700 MHz	7.73	10.03	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	10.03	Complies
	5310 MHz	6.52	10.03	Complies
	5510 MHz	4.95	10.03	Complies
	5550 MHz	6.77	10.03	Complies
	5670 MHz	4.86	10.03	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.92	10.03	Complies
	5530 MHz	0.47	10.03	Complies
	5610 MHz	1.42	10.03	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (6.97 - 6) = 10.03\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.36	10.03	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (6.97 - 6) = 10.03 \text{ dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.31	-3.01	5.30	29.03	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (6.97 - 6) = 29.03 \text{ dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	10.03	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (6.97 - 6) = 10.03 \text{ dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	29.03	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (6.97 - 6) = 29.03 \text{ dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	10.03	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (6.97 - 6) = 10.03 \text{ dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	29.03	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (6.97 - 6) = 29.03 \text{ dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	10.03	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (6.97 - 6) = 10.03 \text{ dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	29.03	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (6.97 - 6) = 29.03 \text{ dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	8.26	8.27	Complies
	5300 MHz	8.16	8.27	Complies
	5320 MHz	8.17	8.27	Complies
	5500 MHz	8.25	8.27	Complies
	5580 MHz	8.24	8.27	Complies
	5700 MHz	8.20	8.27	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	8.19	8.27	Complies
	5300 MHz	8.26	8.27	Complies
	5320 MHz	8.26	8.27	Complies
	5500 MHz	8.21	8.27	Complies
	5580 MHz	8.17	8.27	Complies
	5700 MHz	8.19	8.27	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.70	8.27	Complies
	5310 MHz	1.38	8.27	Complies
	5510 MHz	5.27	8.27	Complies
	5550 MHz	7.66	8.27	Complies
	5670 MHz	4.84	8.27	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.45	8.27	Complies
	5530 MHz	-0.83	8.27	Complies
	5610 MHz	2.64	8.27	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (8.73 - 6) = 8.27\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.01	8.27	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.73 - 6) = 8.27 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.04	-3.01	5.03	27.27	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.73 - 6) = 27.27 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.76	8.27	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.73 - 6) = 8.27 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.55	-3.01	4.54	27.27	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.73 - 6) = 27.27 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.22	8.27	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.73 - 6) = 8.27 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.80	-3.01	3.79	27.27	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.73 - 6) = 27.27 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.47	8.27	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.73 - 6) = 8.27 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.98	-3.01	0.97	27.27	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.73 - 6) = 27.27 \text{ dBm/500kHz}$.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	6.95	7.02	Complies
	5300 MHz	6.96	7.02	Complies
	5320 MHz	6.91	7.02	Complies
	5500 MHz	6.98	7.02	Complies
	5580 MHz	6.91	7.02	Complies
	5700 MHz	6.94	7.02	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.00	7.02	Complies
	5300 MHz	7.01	7.02	Complies
	5320 MHz	6.90	7.02	Complies
	5500 MHz	6.99	7.02	Complies
	5580 MHz	6.93	7.02	Complies
	5700 MHz	6.96	7.02	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.55	7.02	Complies
	5310 MHz	1.81	7.02	Complies
	5510 MHz	6.27	7.02	Complies
	5550 MHz	6.48	7.02	Complies
	5670 MHz	5.66	7.02	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.61	7.02	Complies
	5530 MHz	0.94	7.02	Complies
	5610 MHz	3.03	7.02	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.98\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (9.98 - 6) = 7.02\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.90	7.02	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.98\text{dBi} > 6\text{dBi}$, so the limit $11 - (9.98 - 6) = 7.02\text{dBm/MHz}$.

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.53	-3.01	3.52	26.02	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.98\text{dBi} > 6\text{dBi}$, so the limit $30 - (9.98 - 6) = 26.02\text{dBm/500kHz}$.

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.95	7.02	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.98\text{dBi} > 6\text{dBi}$, so the limit $11 - (9.98 - 6) = 7.02\text{dBm/MHz}$.

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.99	-3.01	3.98	26.02	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.98\text{dBi} > 6\text{dBi}$, so the limit $30 - (9.98 - 6) = 26.02\text{dBm/500kHz}$.

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	6.58	7.02	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.98 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (9.98 - 6) = 7.02 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.55	-3.01	3.54	26.02	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.98 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (9.98 - 6) = 26.02 \text{ dBm/500kHz.}$$
Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.01	7.02	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.98 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (9.98 - 6) = 7.02 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.67	-3.01	-1.34	26.02	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.98 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (9.98 - 6) = 26.02 \text{ dBm/500kHz.}$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*1 / 1TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.82	11.00	Complies
	5320 MHz	7.91	11.00	Complies
	5500 MHz	7.72	11.00	Complies
	5580 MHz	7.72	11.00	Complies
	5700 MHz	5.41	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.78	11.00	Complies
	5320 MHz	7.34	11.00	Complies
	5500 MHz	7.44	11.00	Complies
	5580 MHz	7.82	11.00	Complies
	5700 MHz	5.01	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.83	11.00	Complies
	5310 MHz	-0.44	11.00	Complies
	5510 MHz	3.09	11.00	Complies
	5550 MHz	4.80	11.00	Complies
	5670 MHz	3.38	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-3.26	11.00	Complies
	5530 MHz	-0.54	11.00	Complies
	5610 MHz	0.74	11.00	Complies

Straddle Channel

Configuration IEEE 802.11a / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.68	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.74	-3.01	3.73	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.75	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.88	-3.01	2.87	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	3.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.41	-3.01	0.40	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	0.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.18	-3.01	-2.83	30.00	Complies

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*1, (2B)1.66dBi*1 / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	10.02	11.00	Complies
	5300 MHz	9.84	11.00	Complies
	5320 MHz	9.95	11.00	Complies
	5500 MHz	9.58	11.00	Complies
	5580 MHz	9.59	11.00	Complies
	5700 MHz	8.09	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.84	11.00	Complies
	5300 MHz	9.95	11.00	Complies
	5320 MHz	9.89	11.00	Complies
	5500 MHz	9.68	11.00	Complies
	5580 MHz	9.16	11.00	Complies
	5700 MHz	7.73	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	11.00	Complies
	5310 MHz	6.05	11.00	Complies
	5510 MHz	4.21	11.00	Complies
	5550 MHz	6.77	11.00	Complies
	5670 MHz	4.86	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.92	11.00	Complies
	5530 MHz	0.47	11.00	Complies
	5610 MHz	1.42	11.00	Complies

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.36	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.31	-3.01	5.30	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	30.00	Complies

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*1 / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	10.52	11.00	Complies
	5300 MHz	10.72	11.00	Complies
	5320 MHz	10.59	11.00	Complies
	5500 MHz	10.89	11.00	Complies
	5580 MHz	10.83	11.00	Complies
	5700 MHz	9.61	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	10.94	11.00	Complies
	5300 MHz	10.64	11.00	Complies
	5320 MHz	10.70	11.00	Complies
	5500 MHz	10.70	11.00	Complies
	5580 MHz	10.82	11.00	Complies
	5700 MHz	9.51	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.80	11.00	Complies
	5310 MHz	2.35	11.00	Complies
	5510 MHz	5.27	11.00	Complies
	5550 MHz	7.62	11.00	Complies
	5670 MHz	7.66	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.74	11.00	Complies
	5530 MHz	2.07	11.00	Complies
	5610 MHz	3.36	11.00	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81\text{dBi} < 6\text{dBi}, \text{ so the limit doesn't reduce.}$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	10.55	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	10.41	-3.01	7.40	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	10.18	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	10.11	-3.01	7.10	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.22	11.00	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi}$, so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.80	-3.01	3.79	30.00	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.47	11.00	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi}$, so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.98	-3.01	0.97	30.00	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi}$, so the limit doesn't reduce.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	9.84	9.90	Complies
	5300 MHz	9.82	9.90	Complies
	5320 MHz	9.76	9.90	Complies
	5500 MHz	9.80	9.90	Complies
	5580 MHz	9.82	9.90	Complies
	5700 MHz	9.84	9.90	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.87	9.90	Complies
	5300 MHz	9.76	9.90	Complies
	5320 MHz	9.78	9.90	Complies
	5500 MHz	9.71	9.90	Complies
	5580 MHz	9.77	9.90	Complies
	5700 MHz	9.80	9.90	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.46	9.90	Complies
	5310 MHz	2.56	9.90	Complies
	5510 MHz	6.82	9.90	Complies
	5550 MHz	7.47	9.90	Complies
	5670 MHz	7.31	9.90	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.66	9.90	Complies
	5530 MHz	3.28	9.90	Complies
	5610 MHz	4.56	9.90	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (7.10 - 6) = 9.90\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.37	9.90	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.10 - 6) = 9.90 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.08	-3.01	6.07	28.90	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.10 - 6) = 28.90 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.48	9.90	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.10 - 6) = 9.90 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.36	-3.01	6.35	28.90	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.10 - 6) = 28.90 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.87	9.90	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (7.10 - 6) = 9.90 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	7.60	-3.01	4.59	28.90	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (7.10 - 6) = 28.90 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.01	9.90	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (7.10 - 6) = 9.90 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.67	-3.01	-1.34	28.90	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (7.10 - 6) = 28.90 \text{ dBm/500kHz.}$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 1TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.82	11.00	Complies
	5320 MHz	7.91	11.00	Complies
	5500 MHz	7.72	11.00	Complies
	5580 MHz	7.72	11.00	Complies
	5700 MHz	5.99	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.78	11.00	Complies
	5320 MHz	7.48	11.00	Complies
	5500 MHz	7.54	11.00	Complies
	5580 MHz	7.82	11.00	Complies
	5700 MHz	5.88	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.83	11.00	Complies
	5310 MHz	-0.14	11.00	Complies
	5510 MHz	3.09	11.00	Complies
	5550 MHz	4.80	11.00	Complies
	5670 MHz	3.58	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-3.70	11.00	Complies
	5530 MHz	0.09	11.00	Complies
	5610 MHz	0.81	11.00	Complies

Straddle Channel

Configuration IEEE 802.11a / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.68	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.74	-3.01	3.73	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.75	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.88	-3.01	2.87	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	3.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.41	-3.01	0.40	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	0.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.18	-3.01	-2.83	30.00	Complies

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	10.02	11.00	Complies
	5300 MHz	9.84	11.00	Complies
	5320 MHz	9.95	11.00	Complies
	5500 MHz	9.58	11.00	Complies
	5580 MHz	9.59	11.00	Complies
	5700 MHz	8.61	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.84	11.00	Complies
	5300 MHz	9.95	11.00	Complies
	5320 MHz	9.89	11.00	Complies
	5500 MHz	9.68	11.00	Complies
	5580 MHz	9.16	11.00	Complies
	5700 MHz	8.63	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	11.00	Complies
	5310 MHz	2.52	11.00	Complies
	5510 MHz	4.54	11.00	Complies
	5550 MHz	6.77	11.00	Complies
	5670 MHz	6.74	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.22	11.00	Complies
	5530 MHz	0.25	11.00	Complies
	5610 MHz	3.67	11.00	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67\text{dBi} < 6\text{dBi}, \text{ so the limit doesn't reduce.}$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.36	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi}, \text{ so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.31	-3.01	5.30	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi}, \text{ so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi}, \text{ so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi}, \text{ so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi}, \text{ so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi}, \text{ so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi}, \text{ so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi}, \text{ so the limit doesn't reduce.}$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	9.44	9.57	Complies
	5300 MHz	9.50	9.57	Complies
	5320 MHz	9.47	9.57	Complies
	5500 MHz	9.46	9.57	Complies
	5580 MHz	9.54	9.57	Complies
	5700 MHz	9.17	9.57	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.51	9.57	Complies
	5300 MHz	9.53	9.57	Complies
	5320 MHz	9.51	9.57	Complies
	5500 MHz	9.51	9.57	Complies
	5580 MHz	9.47	9.57	Complies
	5700 MHz	9.44	9.57	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.47	9.57	Complies
	5310 MHz	3.36	9.57	Complies
	5510 MHz	5.11	9.57	Complies
	5550 MHz	7.25	9.57	Complies
	5670 MHz	6.89	9.57	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.45	9.57	Complies
	5530 MHz	-0.83	9.57	Complies
	5610 MHz	3.81	9.57	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (7.43 - 6) = 9.57\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.40	9.57	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi, so the limit } 11 - (7.43 - 6) = 9.57 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.22	-3.01	6.21	28.57	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi, so the limit } 30 - (7.43 - 6) = 28.57 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.41	9.57	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi, so the limit } 11 - (7.43 - 6) = 9.57 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.08	-3.01	6.07	28.57	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi, so the limit } 30 - (7.43 - 6) = 28.57 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.22	9.57	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.43 - 6) = 9.57 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.80	-3.01	3.79	28.57	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.43 - 6) = 28.57 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.47	9.57	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.43 - 6) = 9.57 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.98	-3.01	0.97	28.57	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.43 - 6) = 28.57 \text{ dBm/500kHz}$.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	8.26	8.32	Complies
	5300 MHz	8.28	8.32	Complies
	5320 MHz	8.30	8.32	Complies
	5500 MHz	8.24	8.32	Complies
	5580 MHz	8.28	8.32	Complies
	5700 MHz	8.24	8.32	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	8.28	8.32	Complies
	5300 MHz	8.23	8.32	Complies
	5320 MHz	8.24	8.32	Complies
	5500 MHz	8.24	8.32	Complies
	5580 MHz	8.26	8.32	Complies
	5700 MHz	8.25	8.32	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.46	8.32	Complies
	5310 MHz	1.81	8.32	Complies
	5510 MHz	6.27	8.32	Complies
	5550 MHz	7.47	8.32	Complies
	5670 MHz	6.48	8.32	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.43	8.32	Complies
	5530 MHz	-2.94	8.32	Complies
	5610 MHz	3.98	8.32	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.68\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (8.68 - 6) = 8.32\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.91	8.32	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 8.68\text{dBi} > 6\text{dBi}$, so the limit $11 - (8.68 - 6) = 8.32\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.92	-3.01	3.91	27.32	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 8.68\text{dBi} > 6\text{dBi}$, so the limit $30 - (8.68 - 6) = 27.32\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.17	8.32	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 8.68\text{dBi} > 6\text{dBi}$, so the limit $11 - (8.68 - 6) = 8.32\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.07	-3.01	5.06	27.32	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 8.68\text{dBi} > 6\text{dBi}$, so the limit $30 - (8.68 - 6) = 27.32\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.87	8.32	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 8.68\text{dBi} > 6\text{dBi}$, so the limit $11-(8.68-6)=8.32\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	7.60	-3.01	4.59	27.32	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 8.68\text{dBi} > 6\text{dBi}$, so the limit $30-(8.68-6)=27.32\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.01	8.32	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 8.68\text{dBi} > 6\text{dBi}$, so the limit $11-(8.68-6)=8.32\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.67	-3.01	-1.34	27.32	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 8.68\text{dBi} > 6\text{dBi}$, so the limit $30-(8.68-6)=27.32\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 1TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.82	11.00	Complies
	5320 MHz	7.91	11.00	Complies
	5500 MHz	7.72	11.00	Complies
	5580 MHz	7.72	11.00	Complies
	5700 MHz	6.73	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.78	11.00	Complies
	5320 MHz	7.48	11.00	Complies
	5500 MHz	7.54	11.00	Complies
	5580 MHz	7.82	11.00	Complies
	5700 MHz	7.48	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.83	11.00	Complies
	5310 MHz	2.10	11.00	Complies
	5510 MHz	3.69	11.00	Complies
	5550 MHz	4.80	11.00	Complies
	5670 MHz	4.10	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.13	11.00	Complies
	5530 MHz	0.09	11.00	Complies
	5610 MHz	0.81	11.00	Complies

Straddle Channel

Configuration IEEE 802.11a / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.68	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.74	-3.01	3.73	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.75	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.88	-3.01	2.87	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	3.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.41	-3.01	0.40	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	0.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.18	-3.01	-2.83	30.00	Complies

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	10.02	11.00	Complies
	5300 MHz	9.84	11.00	Complies
	5320 MHz	9.95	11.00	Complies
	5500 MHz	9.58	11.00	Complies
	5580 MHz	9.59	11.00	Complies
	5700 MHz	9.01	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.84	11.00	Complies
	5300 MHz	9.95	11.00	Complies
	5320 MHz	9.89	11.00	Complies
	5500 MHz	9.68	11.00	Complies
	5580 MHz	9.16	11.00	Complies
	5700 MHz	8.29	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	11.00	Complies
	5310 MHz	2.88	11.00	Complies
	5510 MHz	4.95	11.00	Complies
	5550 MHz	6.77	11.00	Complies
	5670 MHz	6.60	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.21	11.00	Complies
	5530 MHz	0.94	11.00	Complies
	5610 MHz	3.67	11.00	Complies

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.36	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.31	-3.01	5.30	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	30.00	Complies

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	10.30	11.00	Complies
	5300 MHz	10.45	11.00	Complies
	5320 MHz	10.01	11.00	Complies
	5500 MHz	9.92	11.00	Complies
	5580 MHz	10.19	11.00	Complies
	5700 MHz	8.87	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	10.13	11.00	Complies
	5300 MHz	9.94	11.00	Complies
	5320 MHz	10.35	11.00	Complies
	5500 MHz	9.93	11.00	Complies
	5580 MHz	9.64	11.00	Complies
	5700 MHz	8.19	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.70	11.00	Complies
	5310 MHz	1.65	11.00	Complies
	5510 MHz	5.27	11.00	Complies
	5550 MHz	7.66	11.00	Complies
	5670 MHz	7.11	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.34	11.00	Complies
	5530 MHz	-0.82	11.00	Complies
	5610 MHz	2.64	11.00	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65\text{dBi} < 6\text{dBi}, \text{ so the limit doesn't reduce.}$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	10.94	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}, \text{ so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	10.84	-3.01	7.83	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}, \text{ so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	10.89	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}, \text{ so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	10.82	-3.01	7.81	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}, \text{ so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.22	11.00	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}$, so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.80	-3.01	3.79	30.00	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	6.34	11.00	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}$, so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	5.63	-3.01	2.62	30.00	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}$, so the limit doesn't reduce.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	9.98	10.10	Complies
	5300 MHz	9.77	10.10	Complies
	5320 MHz	9.89	10.10	Complies
	5500 MHz	9.93	10.10	Complies
	5580 MHz	10.00	10.10	Complies
	5700 MHz	8.40	10.10	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	10.08	10.10	Complies
	5300 MHz	9.75	10.10	Complies
	5320 MHz	9.65	10.10	Complies
	5500 MHz	9.41	10.10	Complies
	5580 MHz	10.05	10.10	Complies
	5700 MHz	9.61	10.10	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.25	10.10	Complies
	5310 MHz	2.46	10.10	Complies
	5510 MHz	5.78	10.10	Complies
	5550 MHz	7.66	10.10	Complies
	5670 MHz	5.74	10.10	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	0.64	10.10	Complies
	5530 MHz	1.79	10.10	Complies
	5610 MHz	3.98	10.10	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (6.90 - 6) = 10.10\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.45	10.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (6.90 - 6) = 10.10 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.83	-3.01	5.82	29.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (6.90 - 6) = 29.10 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.92	10.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (6.90 - 6) = 10.10 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.61	-3.01	6.60	29.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (6.90 - 6) = 29.10 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.87	10.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (6.90 - 6) = 10.10 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	7.60	-3.01	4.59	29.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (6.90 - 6) = 29.10 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.01	10.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (6.90 - 6) = 10.10 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.67	-3.01	-1.34	29.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (6.90 - 6) = 29.10 \text{ dBm/500kHz.}$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 5 (Set 8 Patch antenna / 3.26dBi / 1TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.82	11.00	Complies
	5320 MHz	7.91	11.00	Complies
	5500 MHz	7.72	11.00	Complies
	5580 MHz	7.72	11.00	Complies
	5700 MHz	6.12	11.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.81	11.00	Complies
	5300 MHz	7.78	11.00	Complies
	5320 MHz	7.48	11.00	Complies
	5500 MHz	7.54	11.00	Complies
	5580 MHz	7.82	11.00	Complies
	5700 MHz	7.48	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.83	11.00	Complies
	5310 MHz	1.52	11.00	Complies
	5510 MHz	3.53	11.00	Complies
	5550 MHz	4.80	11.00	Complies
	5670 MHz	4.10	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-3.26	11.00	Complies
	5530 MHz	0.08	11.00	Complies
	5610 MHz	0.81	11.00	Complies

Straddle Channel

Configuration IEEE 802.11a / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.68	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.74	-3.01	3.73	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.75	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.88	-3.01	2.87	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	3.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.41	-3.01	0.40	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	0.65	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.18	-3.01	-2.83	30.00	Complies

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 5 (Set 8 Patch antenna / 3.26dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	10.02	10.73	Complies
	5300 MHz	9.84	10.73	Complies
	5320 MHz	9.95	10.73	Complies
	5500 MHz	9.58	10.73	Complies
	5580 MHz	9.59	10.73	Complies
	5700 MHz	9.40	10.73	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.84	10.73	Complies
	5300 MHz	9.95	10.73	Complies
	5320 MHz	9.89	10.73	Complies
	5500 MHz	9.68	10.73	Complies
	5580 MHz	9.16	10.73	Complies
	5700 MHz	9.04	10.73	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	10.73	Complies
	5310 MHz	4.40	10.73	Complies
	5510 MHz	4.95	10.73	Complies
	5550 MHz	6.77	10.73	Complies
	5670 MHz	6.74	10.73	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.92	10.73	Complies
	5530 MHz	0.49	10.73	Complies
	5610 MHz	3.67	10.73	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (6.27 - 6) = 10.73\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.36	10.73	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi, so the limit } 11 - (6.27 - 6) = 10.73 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.31	-3.01	5.30	29.73	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi, so the limit } 30 - (6.27 - 6) = 29.73 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	10.73	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi, so the limit } 11 - (6.27 - 6) = 10.73 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	29.73	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi, so the limit } 30 - (6.27 - 6) = 29.73 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	10.73	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (6.27 - 6) = 10.73 \text{ dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	29.73	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (6.27 - 6) = 29.73 \text{ dBm/500kHz}.$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	10.73	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (6.27 - 6) = 10.73 \text{ dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	29.73	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (6.27 - 6) = 29.73 \text{ dBm/500kHz}.$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 5 (Set 8 Patch antenna / 3.26dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	8.26	8.97	Complies
	5300 MHz	8.16	8.97	Complies
	5320 MHz	8.17	8.97	Complies
	5500 MHz	8.25	8.97	Complies
	5580 MHz	8.24	8.97	Complies
	5700 MHz	8.20	8.97	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	8.19	8.97	Complies
	5300 MHz	8.26	8.97	Complies
	5320 MHz	8.26	8.97	Complies
	5500 MHz	8.21	8.97	Complies
	5580 MHz	8.17	8.97	Complies
	5700 MHz	8.19	8.97	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.70	8.97	Complies
	5310 MHz	3.60	8.97	Complies
	5510 MHz	5.69	8.97	Complies
	5550 MHz	7.66	8.97	Complies
	5670 MHz	7.38	8.97	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.05	8.97	Complies
	5530 MHz	2.28	8.97	Complies
	5610 MHz	4.35	8.97	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (8.03 - 6) = 8.97\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.83	8.97	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.03 - 6) = 8.97 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.57	-3.01	5.56	27.97	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.03 - 6) = 27.97 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.87	8.97	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.03 - 6) = 8.97 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.55	-3.01	5.54	27.97	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.03 - 6) = 27.97 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.22	8.97	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{dBi} > 6 \text{dBi}$, so the limit $11 - (8.03 - 6) = 8.97 \text{dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.80	-3.01	3.79	27.97	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{dBi} > 6 \text{dBi}$, so the limit $30 - (8.03 - 6) = 27.97 \text{dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.47	8.97	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{dBi} > 6 \text{dBi}$, so the limit $11 - (8.03 - 6) = 8.97 \text{dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.98	-3.01	0.97	27.97	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{dBi} > 6 \text{dBi}$, so the limit $30 - (8.03 - 6) = 27.97 \text{dBm/500kHz}$.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 5 (Set 8 Patch antenna / 3.26dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	7.62	7.72	Complies
	5300 MHz	7.52	7.72	Complies
	5320 MHz	7.67	7.72	Complies
	5500 MHz	7.59	7.72	Complies
	5580 MHz	7.67	7.72	Complies
	5700 MHz	7.58	7.72	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.67	7.72	Complies
	5300 MHz	7.56	7.72	Complies
	5320 MHz	7.68	7.72	Complies
	5500 MHz	7.70	7.72	Complies
	5580 MHz	7.67	7.72	Complies
	5700 MHz	7.54	7.72	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.65	7.72	Complies
	5310 MHz	4.41	7.72	Complies
	5510 MHz	7.09	7.72	Complies
	5550 MHz	7.63	7.72	Complies
	5670 MHz	7.31	7.72	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.17	7.72	Complies
	5530 MHz	2.62	7.72	Complies
	5610 MHz	4.42	7.72	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.28\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (9.28 - 6) = 7.72\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.55	7.72	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.28\text{dBi} > 6\text{dBi}$, so the limit $11 - (9.28 - 6) = 7.72\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.77	-3.01	3.76	26.72	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.28\text{dBi} > 6\text{dBi}$, so the limit $30 - (9.28 - 6) = 26.72\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.69	7.72	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.28\text{dBi} > 6\text{dBi}$, so the limit $11 - (9.28 - 6) = 7.72\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.43	-3.01	4.42	26.72	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.28\text{dBi} > 6\text{dBi}$, so the limit $30 - (9.28 - 6) = 26.72\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.55	7.72	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.28\text{dBi} > 6\text{dBi}$, so the limit $11-(9.28-6)=7.72\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.87	-3.01	3.86	26.72	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.28\text{dBi} > 6\text{dBi}$, so the limit $30-(9.28-6)=26.72\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.01	7.72	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.28\text{dBi} > 6\text{dBi}$, so the limit $11-(9.28-6)=7.72\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.67	-3.01	-1.34	26.72	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.28\text{dBi} > 6\text{dBi}$, so the limit $30-(9.28-6)=26.72\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi / 1TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	7.81	10.20	Complies
	5300 MHz	7.82	10.20	Complies
	5320 MHz	6.92	10.20	Complies
	5500 MHz	6.61	10.20	Complies
	5580 MHz	7.72	10.20	Complies
	5700 MHz	4.50	10.20	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.81	10.20	Complies
	5300 MHz	7.78	10.20	Complies
	5320 MHz	6.50	10.20	Complies
	5500 MHz	6.22	10.20	Complies
	5580 MHz	7.82	10.20	Complies
	5700 MHz	4.50	10.20	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.83	10.20	Complies
	5310 MHz	-2.76	10.20	Complies
	5510 MHz	0.98	10.20	Complies
	5550 MHz	4.80	10.20	Complies
	5670 MHz	2.51	10.20	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-6.11	10.20	Complies
	5530 MHz	-0.54	10.20	Complies
	5610 MHz	-0.33	10.20	Complies

Note: Antenna gain=6.80dBi > 6dBi, so the limit $11-(6.80-6)=10.20$ dBm/MHz.

Straddle Channel

Configuration IEEE 802.11a / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.68	10.20	Complies

Note: Antenna gain=6.80dBi > 6dBi, so the limit $11-(6.80-6)=10.20$ dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.74	-3.01	3.73	29.20	Complies

Note: Antenna gain=6.80dBi > 6dBi, so the limit $30-(6.80-6)=29.20$ dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.75	10.20	Complies

Note: Antenna gain=6.80dBi > 6dBi, so the limit $11-(6.80-6)=10.20$ dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.88	-3.01	2.87	29.20	Complies

Note: Antenna gain=6.80dBi > 6dBi, so the limit $30-(6.80-6)=29.20$ dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	3.65	10.20	Complies

Note: Antenna gain=6.80dBi > 6dBi, so the limit $11-(6.80-6)=10.20$ dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.41	-3.01	0.40	29.20	Complies

Note: Antenna gain=6.80dBi > 6dBi, so the limit $30-(6.80-6)=29.20$ dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	0.65	10.20	Complies

Note: Antenna gain=6.80dBi > 6dBi, so the limit $11-(6.80-6)=10.20$ dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.18	-3.01	-2.83	29.20	Complies

Note: Antenna gain=6.80dBi > 6dBi, so the limit $30-(6.80-6)=29.20$ dBm/500kHz.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	7.15	7.24	Complies
	5300 MHz	6.88	7.24	Complies
	5320 MHz	6.88	7.24	Complies
	5500 MHz	7.12	7.24	Complies
	5580 MHz	7.22	7.24	Complies
	5700 MHz	7.10	7.24	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.21	7.24	Complies
	5300 MHz	6.94	7.24	Complies
	5320 MHz	7.05	7.24	Complies
	5500 MHz	7.17	7.24	Complies
	5580 MHz	7.15	7.24	Complies
	5700 MHz	7.00	7.24	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	7.24	Complies
	5310 MHz	1.06	7.24	Complies
	5510 MHz	4.21	7.24	Complies
	5550 MHz	6.77	7.24	Complies
	5670 MHz	4.86	7.24	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.86	7.24	Complies
	5530 MHz	0.19	7.24	Complies
	5610 MHz	3.67	7.24	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (9.76 - 6) = 7.24\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.88	7.24	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (9.76 - 6) = 7.24 \text{ dBm/MHz}$.

$$\text{Directional Gain} = 10 \cdot \log$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.45	-3.01	3.44	26.24	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (9.76 - 6) = 26.24 \text{ dBm/500kHz}$.

$$\text{Directional Gain} = 10 \cdot \log$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.13	7.24	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (9.76 - 6) = 7.24 \text{ dBm/MHz}$.

$$\text{Directional Gain} = 10 \cdot \log$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.90	-3.01	3.89	26.24	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (9.76 - 6) = 26.24 \text{ dBm/500kHz}$.

$$\text{Directional Gain} = 10 \cdot \log$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	7.24	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 11 - (9.76 - 6) = 7.24 \text{dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	26.24	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 30 - (9.76 - 6) = 26.24 \text{dBm/500kHz}.$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	7.24	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 11 - (9.76 - 6) = 7.24 \text{dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	26.24	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 30 - (9.76 - 6) = 26.24 \text{dBm/500kHz}.$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	5.51	5.53	Complies
	5300 MHz	5.17	5.53	Complies
	5320 MHz	5.25	5.53	Complies
	5500 MHz	5.37	5.53	Complies
	5580 MHz	5.46	5.53	Complies
	5700 MHz	5.08	5.53	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	5.41	5.53	Complies
	5300 MHz	5.21	5.53	Complies
	5320 MHz	5.15	5.53	Complies
	5500 MHz	5.24	5.53	Complies
	5580 MHz	5.06	5.53	Complies
	5700 MHz	5.22	5.53	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	5.13	5.53	Complies
	5310 MHz	-0.83	5.53	Complies
	5510 MHz	5.11	5.53	Complies
	5550 MHz	5.28	5.53	Complies
	5670 MHz	3.55	5.53	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-5.23	5.53	Complies
	5530 MHz	-2.89	5.53	Complies
	5610 MHz	1.97	5.53	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (11.47 - 6) = 5.53\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.34	5.53	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47\text{dBi} > 6\text{dBi}$, so the limit $11-(11.47-6)=5.53\text{dBm/MHz}$.
 $\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.21	-3.01	1.99	24.53	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47\text{dBi} > 6\text{dBi}$, so the limit $30-(11.47-6)=24.53\text{dBm/500kHz}$.
 $\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.38	5.53	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47\text{dBi} > 6\text{dBi}$, so the limit $11-(11.47-6)=5.53\text{dBm/MHz}$.
 $\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.35	-3.01	2.34	24.53	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47\text{dBi} > 6\text{dBi}$, so the limit $30-(11.47-6)=24.53\text{dBm/500kHz}$.
 $\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	5.36	5.53	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (11.47 - 6) = 5.53 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.82	-3.01	1.81	24.53	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (11.47 - 6) = 24.53 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.08	5.53	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (11.47 - 6) = 5.53 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.67	-3.01	0.66	24.53	Complies

Note:
 $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (11.47 - 6) = 24.53 \text{ dBm/500kHz}$.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi, Chain 4: 5.9dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	4.35	4.47	Complies
	5300 MHz	4.22	4.47	Complies
	5320 MHz	4.23	4.47	Complies
	5500 MHz	4.38	4.47	Complies
	5580 MHz	4.46	4.47	Complies
	5700 MHz	4.13	4.47	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	4.15	4.47	Complies
	5300 MHz	4.10	4.47	Complies
	5320 MHz	4.19	4.47	Complies
	5500 MHz	4.16	4.47	Complies
	5580 MHz	4.34	4.47	Complies
	5700 MHz	4.27	4.47	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.31	4.47	Complies
	5310 MHz	0.35	4.47	Complies
	5510 MHz	4.34	4.47	Complies
	5550 MHz	4.34	4.47	Complies
	5670 MHz	4.15	4.47	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-4.09	4.47	Complies
	5530 MHz	-2.55	4.47	Complies
	5610 MHz	3.71	4.47	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.53\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (12.53 - 6) = 4.47\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	4.22	4.47	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 12.53\text{dBi} > 6\text{dBi}$, so the limit $11-(12.53-6)=4.47\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	3.39	-3.01	0.38	23.47	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 12.53\text{dBi} > 6\text{dBi}$, so the limit $30-(12.53-6)=23.47\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	4.34	4.47	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 12.53\text{dBi} > 6\text{dBi}$, so the limit $11-(12.53-6)=4.47\text{dBm/MHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	4.20	-3.01	1.19	23.47	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 12.53\text{dBi} > 6\text{dBi}$, so the limit $30-(12.53-6)=23.47\text{dBm/500kHz}$.

$$Directional Gain = 10 \cdot \log$$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.44	4.47	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.53 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (12.53 - 6) = 4.47 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.72	-3.01	0.71	23.47	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.53 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (12.53 - 6) = 23.47 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	1.92	4.47	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.53 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (12.53 - 6) = 4.47 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.64	-3.01	-1.37	23.47	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.53 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (12.53 - 6) = 23.47 \text{ dBm/500kHz.}$$

For Beamforming Mode

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.65	10.03	Complies
	5300 MHz	9.87	10.03	Complies
	5320 MHz	9.61	10.03	Complies
	5500 MHz	9.68	10.03	Complies
	5580 MHz	9.16	10.03	Complies
	5700 MHz	7.19	10.03	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	10.03	Complies
	5310 MHz	2.44	10.03	Complies
	5510 MHz	3.97	10.03	Complies
	5550 MHz	6.77	10.03	Complies
	5670 MHz	4.86	10.03	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-3.87	10.03	Complies
	5530 MHz	-0.58	10.03	Complies
	5610 MHz	1.31	10.03	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (6.97 - 6) = 10.03\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	10.03	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (6.97 - 6) = 10.03 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	29.03	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (6.97 - 6) = 29.03 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	10.03	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (6.97 - 6) = 10.03 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	29.03	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (6.97 - 6) = 29.03 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	10.03	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97\text{dBi} > 6\text{dBi}$, so the limit $11-(6.97-6)=10.03\text{dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	$10\log(500\text{kHz/RBW})$ Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	29.03	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97\text{dBi} > 6\text{dBi}$, so the limit $30-(6.97-6)=29.03\text{dBm/500kHz}$.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.88	8.27	Complies
	5300 MHz	8.12	8.27	Complies
	5320 MHz	7.97	8.27	Complies
	5500 MHz	8.03	8.27	Complies
	5580 MHz	8.19	8.27	Complies
	5700 MHz	7.88	8.27	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.81	8.27	Complies
	5310 MHz	0.84	8.27	Complies
	5510 MHz	4.89	8.27	Complies
	5550 MHz	4.62	8.27	Complies
	5670 MHz	4.52	8.27	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.46	8.27	Complies
	5530 MHz	2.14	8.27	Complies
	5610 MHz	1.36	8.27	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (8.73 - 6) = 8.27\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.76	8.27	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.73 - 6) = 8.27 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.55	-3.01	4.54	27.27	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.73 - 6) = 27.27 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	5.67	8.27	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.73 - 6) = 8.27 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.95	-3.01	1.94	27.27	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.73 - 6) = 27.27 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.28	8.27	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 11 - (8.73 - 6) = 8.27 \text{dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.91	-3.01	-1.10	27.27	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.73 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 30 - (8.73 - 6) = 27.27 \text{dBm/500kHz}.$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	6.73	7.02	Complies
	5300 MHz	6.64	7.02	Complies
	5320 MHz	6.65	7.02	Complies
	5500 MHz	6.59	7.02	Complies
	5580 MHz	6.54	7.02	Complies
	5700 MHz	6.79	7.02	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	3.14	7.02	Complies
	5310 MHz	1.81	7.02	Complies
	5510 MHz	3.70	7.02	Complies
	5550 MHz	3.73	7.02	Complies
	5670 MHz	3.80	7.02	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.94	7.02	Complies
	5530 MHz	0.41	7.02	Complies
	5610 MHz	0.60	7.02	Complies

Note: $Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.98\text{dBi} > 6\text{dBi}$, so the limit $11 - (9.98 - 6) = 7.02\text{dBm/MHz}$.

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.30	7.02	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.98\text{dBi} > 6\text{dBi}$, so the limit $11 - (9.98 - 6) = 7.02\text{dBm/MHz}$.

$$\text{Directional Gain} = 10 \cdot \log$$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.21	-3.01	2.20	26.02	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.98\text{dBi} > 6\text{dBi}$, so the limit $30 - (9.98 - 6) = 26.02\text{dBm/500kHz}$.

$$\text{Directional Gain} = 10 \cdot \log$$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	3.92	7.02	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.98\text{dBi} > 6\text{dBi}$, so the limit $11 - (9.98 - 6) = 7.02\text{dBm/MHz}$.

$$\text{Directional Gain} = 10 \cdot \log$$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.62	-3.01	0.61	26.02	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 9.98\text{dBi} > 6\text{dBi}$, so the limit $30 - (9.98 - 6) = 26.02\text{dBm/500kHz}$.

$$\text{Directional Gain} = 10 \cdot \log$$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	0.71	7.02	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.98 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 11 - (9.98 - 6) = 7.02 \text{dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.22	-3.01	-2.79	26.02	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.98 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 30 - (9.98 - 6) = 26.02 \text{dBm/500kHz}.$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*1, (2B)1.66dBi*1 / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.84	11.00	Complies
	5300 MHz	9.95	11.00	Complies
	5320 MHz	9.89	11.00	Complies
	5500 MHz	9.68	11.00	Complies
	5580 MHz	9.16	11.00	Complies
	5700 MHz	6.46	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	11.00	Complies
	5310 MHz	1.82	11.00	Complies
	5510 MHz	2.11	11.00	Complies
	5550 MHz	6.77	11.00	Complies
	5670 MHz	6.39	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	0.81	11.00	Complies
	5530 MHz	2.14	11.00	Complies
	5610 MHz	1.42	11.00	Complies

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	30.00	Complies

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*1 / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	10.94	11.00	Complies
	5300 MHz	10.64	11.00	Complies
	5320 MHz	10.70	11.00	Complies
	5500 MHz	10.70	11.00	Complies
	5580 MHz	10.82	11.00	Complies
	5700 MHz	6.82	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.80	11.00	Complies
	5310 MHz	2.31	11.00	Complies
	5510 MHz	3.86	11.00	Complies
	5550 MHz	7.62	11.00	Complies
	5670 MHz	4.88	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.09	11.00	Complies
	5530 MHz	1.47	11.00	Complies
	5610 MHz	4.28	11.00	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81\text{ dBi} < 6\text{ dBi}, \text{ so the limit doesn't reduce.}$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	10.18	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	10.11	-3.01	7.10	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.22	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.80	-3.01	3.79	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.47	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.98	-3.01	0.97	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.81 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.78	9.90	Complies
	5300 MHz	9.60	9.90	Complies
	5320 MHz	9.37	9.90	Complies
	5500 MHz	9.71	9.90	Complies
	5580 MHz	9.55	9.90	Complies
	5700 MHz	9.41	9.90	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.55	9.90	Complies
	5310 MHz	2.56	9.90	Complies
	5510 MHz	6.37	9.90	Complies
	5550 MHz	6.33	9.90	Complies
	5670 MHz	6.37	9.90	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.66	9.90	Complies
	5530 MHz	2.77	9.90	Complies
	5610 MHz	3.68	9.90	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (7.10 - 6) = 9.90 \text{ dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.48	9.90	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.10 - 6) = 9.90 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.36	-3.01	6.35	28.90	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.10 - 6) = 28.90 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	6.67	9.90	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.10 - 6) = 9.90 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.40	-3.01	3.39	28.90	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.10 - 6) = 28.90 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.01	9.90	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10\text{dBi} > 6\text{dBi}$, so the limit $11-(7.10-6)=9.90\text{dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	$10\log(500\text{kHz/RBW})$ Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.67	-3.01	-1.34	28.90	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.10\text{dBi} > 6\text{dBi}$, so the limit $30-(7.10-6)=28.90\text{dBm/500kHz}$.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.84	11.00	Complies
	5300 MHz	9.95	11.00	Complies
	5320 MHz	7.46	11.00	Complies
	5500 MHz	7.36	11.00	Complies
	5580 MHz	9.16	11.00	Complies
	5700 MHz	5.88	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	11.00	Complies
	5310 MHz	2.27	11.00	Complies
	5510 MHz	2.51	11.00	Complies
	5550 MHz	6.77	11.00	Complies
	5670 MHz	3.75	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-3.42	11.00	Complies
	5530 MHz	-1.61	11.00	Complies
	5610 MHz	1.42	11.00	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67\text{dBi} < 6\text{dBi}, \text{ so the limit doesn't reduce.}$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{dBi} < 6 \text{dBi}, \text{ so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.67 \text{dBi} < 6 \text{dBi}, \text{ so the limit doesn't reduce.}$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.28	9.57	Complies
	5300 MHz	9.15	9.57	Complies
	5320 MHz	9.13	9.57	Complies
	5500 MHz	9.51	9.57	Complies
	5580 MHz	9.18	9.57	Complies
	5700 MHz	9.20	9.57	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.22	9.57	Complies
	5310 MHz	3.01	9.57	Complies
	5510 MHz	4.94	9.57	Complies
	5550 MHz	6.13	9.57	Complies
	5670 MHz	5.60	9.57	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.06	9.57	Complies
	5530 MHz	0.35	9.57	Complies
	5610 MHz	2.57	9.57	Complies

Note: $Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43\text{dBi} > 6\text{dBi}$, so the limit $11-(7.43-6)=9.57\text{dBm/MHz}$.

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.28	9.57	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.43 - 6) = 9.57 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.34	-3.01	5.33	28.57	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.43 - 6) = 28.57 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	6.36	9.57	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.43 - 6) = 9.57 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	5.89	-3.01	2.88	28.57	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.43 - 6) = 28.57 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	3.62	9.57	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43\text{dBi} > 6\text{dBi}$, so the limit $11-(7.43-6)=9.57\text{dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	$10\log(500\text{kHz/RBW})$ Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	2.97	-3.01	-0.04	28.57	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.43\text{dBi} > 6\text{dBi}$, so the limit $30-(7.43-6)=28.57\text{dBm/500kHz}$.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	8.28	8.32	Complies
	5300 MHz	8.23	8.32	Complies
	5320 MHz	8.24	8.32	Complies
	5500 MHz	8.24	8.32	Complies
	5580 MHz	8.26	8.32	Complies
	5700 MHz	8.25	8.32	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.86	8.32	Complies
	5310 MHz	2.39	8.32	Complies
	5510 MHz	4.65	8.32	Complies
	5550 MHz	4.88	8.32	Complies
	5670 MHz	4.53	8.32	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.27	8.32	Complies
	5530 MHz	1.06	8.32	Complies
	5610 MHz	1.43	8.32	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.68\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (8.68 - 6) = 8.32\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.86	8.32	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.68 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.68 - 6) = 8.32 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.58	-3.01	3.57	27.32	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.68 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.68 - 6) = 27.32 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	5.78	8.32	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.68 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.68 - 6) = 8.32 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	5.18	-3.01	2.17	27.32	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.68 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.68 - 6) = 27.32 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	0.71	8.32	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.68 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 11 - (8.68 - 6) = 8.32 \text{dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.22	-3.01	-2.79	27.32	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.68 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 30 - (8.68 - 6) = 27.32 \text{dBm/500kHz}.$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.84	11.00	Complies
	5300 MHz	9.95	11.00	Complies
	5320 MHz	9.89	11.00	Complies
	5500 MHz	9.68	11.00	Complies
	5580 MHz	9.16	11.00	Complies
	5700 MHz	4.68	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	11.00	Complies
	5310 MHz	2.40	11.00	Complies
	5510 MHz	2.74	11.00	Complies
	5550 MHz	6.77	11.00	Complies
	5670 MHz	4.83	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.49	11.00	Complies
	5530 MHz	-0.58	11.00	Complies
	5610 MHz	3.46	11.00	Complies

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	30.00	Complies

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	8.17	11.00	Complies
	5300 MHz	7.60	11.00	Complies
	5320 MHz	7.75	11.00	Complies
	5500 MHz	8.11	11.00	Complies
	5580 MHz	8.37	11.00	Complies
	5700 MHz	8.15	11.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.86	11.00	Complies
	5310 MHz	3.12	11.00	Complies
	5510 MHz	4.83	11.00	Complies
	5550 MHz	5.34	11.00	Complies
	5670 MHz	4.56	11.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.02	11.00	Complies
	5530 MHz	2.10	11.00	Complies
	5610 MHz	1.61	11.00	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65\text{dBi} < 6\text{dBi}, \text{ so the limit doesn't reduce.}$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	10.89	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	10.82	-3.01	7.81	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.22	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.80	-3.01	3.79	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	6.34	11.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}, \text{ so the limit doesn't reduce.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	5.63	-3.01	2.62	30.00	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.65 \text{dBi} < 6 \text{dBi}, \text{ so the limit doesn't reduce.}$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.91	10.10	Complies
	5300 MHz	9.75	10.10	Complies
	5320 MHz	9.65	10.10	Complies
	5500 MHz	9.53	10.10	Complies
	5580 MHz	9.38	10.10	Complies
	5700 MHz	9.11	10.10	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	10.10	Complies
	5310 MHz	5.61	10.10	Complies
	5510 MHz	6.29	10.10	Complies
	5550 MHz	6.62	10.10	Complies
	5670 MHz	6.70	10.10	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	0.13	10.10	Complies
	5530 MHz	2.57	10.10	Complies
	5610 MHz	3.98	10.10	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (6.90 - 6) = 10.10\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.82	10.10	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90\text{dBi} > 6\text{dBi}$, so the limit $11-(6.90-6)=10.10\text{dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.74	-3.01	6.73	29.10	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90\text{dBi} > 6\text{dBi}$, so the limit $30-(6.90-6)=29.10\text{dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	8.68	10.10	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90\text{dBi} > 6\text{dBi}$, so the limit $11-(6.90-6)=10.10\text{dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	8.28	-3.01	5.27	29.10	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90\text{dBi} > 6\text{dBi}$, so the limit $30-(6.90-6)=29.10\text{dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.01	10.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 11 - (6.90 - 6) = 10.10 \text{dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.67	-3.01	-1.34	29.10	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.90 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 30 - (6.90 - 6) = 29.10 \text{dBm/500kHz}.$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 5 (Set 8 Patch antenna / 3.26dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.84	10.73	Complies
	5300 MHz	9.95	10.73	Complies
	5320 MHz	9.89	10.73	Complies
	5500 MHz	9.68	10.73	Complies
	5580 MHz	9.16	10.73	Complies
	5700 MHz	7.56	10.73	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.63	10.73	Complies
	5310 MHz	0.61	10.73	Complies
	5510 MHz	4.17	10.73	Complies
	5550 MHz	6.77	10.73	Complies
	5670 MHz	5.32	10.73	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-3.87	10.73	Complies
	5530 MHz	0.50	10.73	Complies
	5610 MHz	3.46	10.73	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (6.27 - 6) = 10.73\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.68	10.73	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (6.27 - 6) = 10.73 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.68	-3.01	4.67	29.73	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (6.27 - 6) = 29.73 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.99	10.73	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (6.27 - 6) = 10.73 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.63	-3.01	1.62	29.73	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (6.27 - 6) = 29.73 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.26	10.73	Complies

Note: $\left[\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 \right] = 6.27 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (6.27 - 6) = 10.73 \text{ dBm/MHz}$.

$Directional Gain = 10 \cdot \log$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	$10 \log(500 \text{ kHz/RBW})$ Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.77	-3.01	-1.24	29.73	Complies

Note: $\left[\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 \right] = 6.27 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (6.27 - 6) = 29.73 \text{ dBm/500kHz}$.

$Directional Gain = 10 \cdot \log$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 5 (Set 8 Patch antenna / 3.26dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	8.68	8.97	Complies
	5300 MHz	8.69	8.97	Complies
	5320 MHz	8.44	8.97	Complies
	5500 MHz	8.64	8.97	Complies
	5580 MHz	8.63	8.97	Complies
	5700 MHz	8.47	8.97	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	5.22	8.97	Complies
	5310 MHz	0.73	8.97	Complies
	5510 MHz	5.71	8.97	Complies
	5550 MHz	5.70	8.97	Complies
	5670 MHz	5.76	8.97	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.79	8.97	Complies
	5530 MHz	2.50	8.97	Complies
	5610 MHz	2.62	8.97	Complies

Note: $Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03\text{dBi} > 6\text{dBi}$, so the limit $11-(8.03-6)=8.97\text{dBm/MHz}$.

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.59	8.97	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.03 - 6) = 8.97 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.44	-3.01	4.43	27.97	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.03 - 6) = 27.97 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	6.54	8.97	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.03 - 6) = 8.97 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	5.47	-3.01	2.46	27.97	Complies

Note: $\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.03 - 6) = 27.97 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	2.87	8.97	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 11 - (8.03 - 6) = 8.97 \text{dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	2.08	-3.01	-0.93	27.97	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.03 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 30 - (8.03 - 6) = 27.97 \text{dBm/500kHz}.$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 5 (Set 8 Patch antenna / 3.26dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.13	7.72	Complies
	5300 MHz	7.21	7.72	Complies
	5320 MHz	7.00	7.72	Complies
	5500 MHz	7.29	7.72	Complies
	5580 MHz	6.93	7.72	Complies
	5700 MHz	7.12	7.72	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.49	7.72	Complies
	5310 MHz	2.20	7.72	Complies
	5510 MHz	4.62	7.72	Complies
	5550 MHz	4.36	7.72	Complies
	5670 MHz	4.03	7.72	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	0.92	7.72	Complies
	5530 MHz	1.30	7.72	Complies
	5610 MHz	1.14	7.72	Complies

Note: $Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.28\text{dBi} > 6\text{dBi}$, so the limit $11-(9.28-6)=7.72\text{dBm/MHz}$.

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.13	7.72	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.28\text{dBi} > 6\text{dBi}$, so the limit $11-(9.28-6)=7.72\text{dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.06	-3.01	3.05	26.72	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.28\text{dBi} > 6\text{dBi}$, so the limit $30-(9.28-6)=26.72\text{dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	4.44	7.72	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.28\text{dBi} > 6\text{dBi}$, so the limit $11-(9.28-6)=7.72\text{dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.72	-3.01	0.71	26.72	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.28\text{dBi} > 6\text{dBi}$, so the limit $30-(9.28-6)=26.72\text{dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	1.63	7.72	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.28 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (9.28 - 6) = 7.72 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.76	-3.01	-2.25	26.72	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.28 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (9.28 - 6) = 26.72 \text{ dBm/500kHz.}$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi / 2TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	6.93	7.24	Complies
	5300 MHz	6.93	7.24	Complies
	5320 MHz	6.96	7.24	Complies
	5500 MHz	6.83	7.24	Complies
	5580 MHz	6.83	7.24	Complies
	5700 MHz	5.10	7.24	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	4.06	7.24	Complies
	5310 MHz	-0.50	7.24	Complies
	5510 MHz	2.95	7.24	Complies
	5550 MHz	3.98	7.24	Complies
	5670 MHz	3.58	7.24	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-3.42	7.24	Complies
	5530 MHz	-1.11	7.24	Complies
	5610 MHz	0.61	7.24	Complies

Note: $Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76\text{dBi} > 6\text{dBi}$, so the limit $11 - (9.76 - 6) = 7.24\text{dBm/MHz}$.

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.52	7.24	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (9.76 - 6) = 7.24 \text{ dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.36	-3.01	2.35	26.24	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (9.76 - 6) = 26.24 \text{ dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	3.70	7.24	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (9.76 - 6) = 7.24 \text{ dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.04	-3.01	0.03	26.24	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (9.76 - 6) = 26.24 \text{ dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	1.03	7.24	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76\text{dBi} > 6\text{dBi}$, so the limit $11-(9.76-6)=7.24\text{dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	$10\log(500\text{kHz/RBW})$ Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	0.35	-3.01	-2.66	26.24	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.76\text{dBi} > 6\text{dBi}$, so the limit $30-(9.76-6)=26.24\text{dBm/500kHz}$.

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi / 3TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	4.84	5.53	Complies
	5300 MHz	5.05	5.53	Complies
	5320 MHz	4.89	5.53	Complies
	5500 MHz	5.23	5.53	Complies
	5580 MHz	5.42	5.53	Complies
	5700 MHz	4.96	5.53	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	2.03	5.53	Complies
	5310 MHz	0.94	5.53	Complies
	5510 MHz	2.15	5.53	Complies
	5550 MHz	2.13	5.53	Complies
	5670 MHz	2.06	5.53	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-0.79	5.53	Complies
	5530 MHz	-0.81	5.53	Complies
	5610 MHz	-0.87	5.53	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (11.47 - 6) = 5.53\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	4.07	5.53	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 11.47\text{dBi} > 6\text{dBi}$, so the limit $11-(11.47-6)=5.53\text{dBm/MHz}$.

Directional Gain = $10 \cdot \log$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	4.00	-3.01	0.99	24.53	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 11.47\text{dBi} > 6\text{dBi}$, so the limit $30-(11.47-6)=24.53\text{dBm/500kHz}$.

Directional Gain = $10 \cdot \log$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	1.99	5.53	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 11.47\text{dBi} > 6\text{dBi}$, so the limit $11-(11.47-6)=5.53\text{dBm/MHz}$.

Directional Gain = $10 \cdot \log$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	1.44	-3.01	-1.57	24.53	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 11.47\text{dBi} > 6\text{dBi}$, so the limit $30-(11.47-6)=24.53\text{dBm/500kHz}$.

Directional Gain = $10 \cdot \log$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	-0.56	5.53	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47\text{dBi} > 6\text{dBi}$, so the limit $11-(11.47-6)=5.53\text{dBm/MHz}$.

$Directional Gain = 10 \cdot \log$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Channel	Frequency	Power Density (dBm/MHz)	$10\log(500\text{kHz/RBW})$ Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	-0.98	-3.01	-3.99	24.53	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.47\text{dBi} > 6\text{dBi}$, so the limit $30-(11.47-6)=24.53\text{dBm/500kHz}$.

$Directional Gain = 10 \cdot \log$

$$\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Temperature	25°C	Humidity	46%
Test Engineer	Eddie Weng		
Test Mode	Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi, Chain 4: 5.9dBi / 4TX)		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5260 MHz	4.40	4.47	Complies
	5300 MHz	3.87	4.47	Complies
	5320 MHz	3.88	4.47	Complies
	5500 MHz	4.26	4.47	Complies
	5580 MHz	4.05	4.47	Complies
	5700 MHz	3.88	4.47	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	0.79	4.47	Complies
	5310 MHz	0.89	4.47	Complies
	5510 MHz	1.32	4.47	Complies
	5550 MHz	1.00	4.47	Complies
	5670 MHz	0.91	4.47	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.90	4.47	Complies
	5530 MHz	-1.61	4.47	Complies
	5610 MHz	-2.12	4.47	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.53\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (12.53 - 6) = 4.47\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	3.10	4.47	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 12.53\text{dBi} > 6\text{dBi}$, so the limit $11-(12.53-6)=4.47\text{dBm/MHz}$.

Directional Gain = $10 \cdot \log$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	3.01	-3.01	0.00	23.47	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 12.53\text{dBi} > 6\text{dBi}$, so the limit $30-(12.53-6)=23.47\text{dBm/500kHz}$.

Directional Gain = $10 \cdot \log$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	1.04	4.47	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 12.53\text{dBi} > 6\text{dBi}$, so the limit $11-(12.53-6)=4.47\text{dBm/MHz}$.

Directional Gain = $10 \cdot \log$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	0.75	-3.01	-2.26	23.47	Complies

Note: $\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 = 12.53\text{dBi} > 6\text{dBi}$, so the limit $30-(12.53-6)=23.47\text{dBm/500kHz}$.

Directional Gain = $10 \cdot \log$

$$\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	-1.94	4.47	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.53 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 11 - (12.53 - 6) = 4.47 \text{dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	-2.82	-3.01	-5.83	23.47	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.53 \text{dBi} > 6 \text{dBi}, \text{ so the limit } 30 - (12.53 - 6) = 23.47 \text{dBm/500kHz}.$$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


For Non-Beamforming Mode

Mode 1 (Set 1 Dipole antenna / 3.96dBi / 1TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5320 MHz

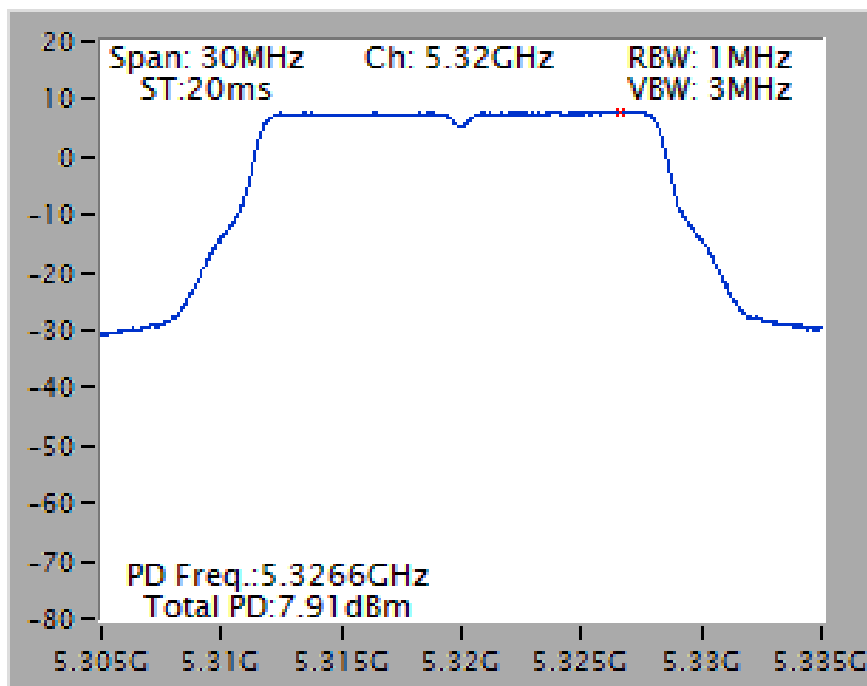


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5500 MHz

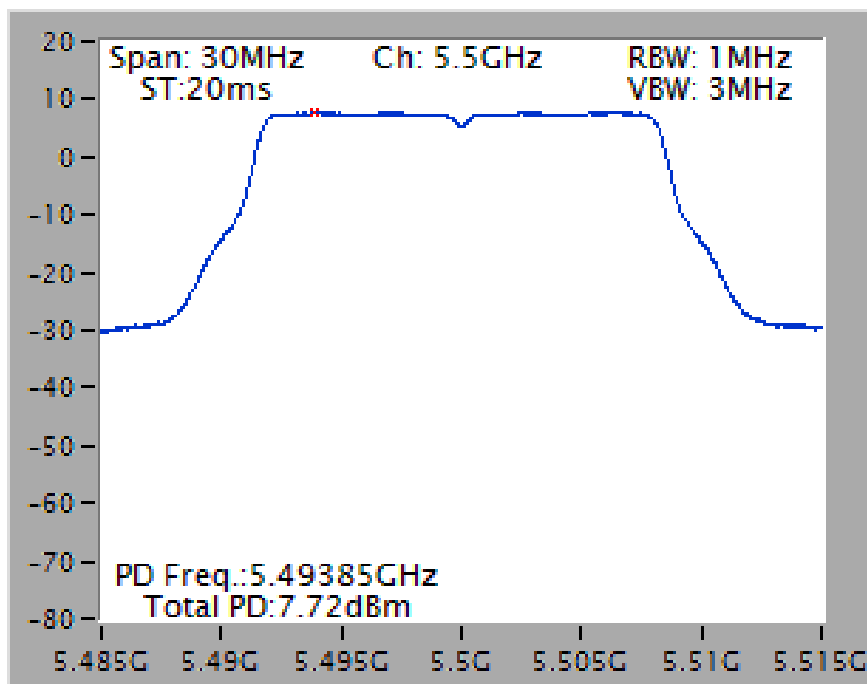


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5260 MHz

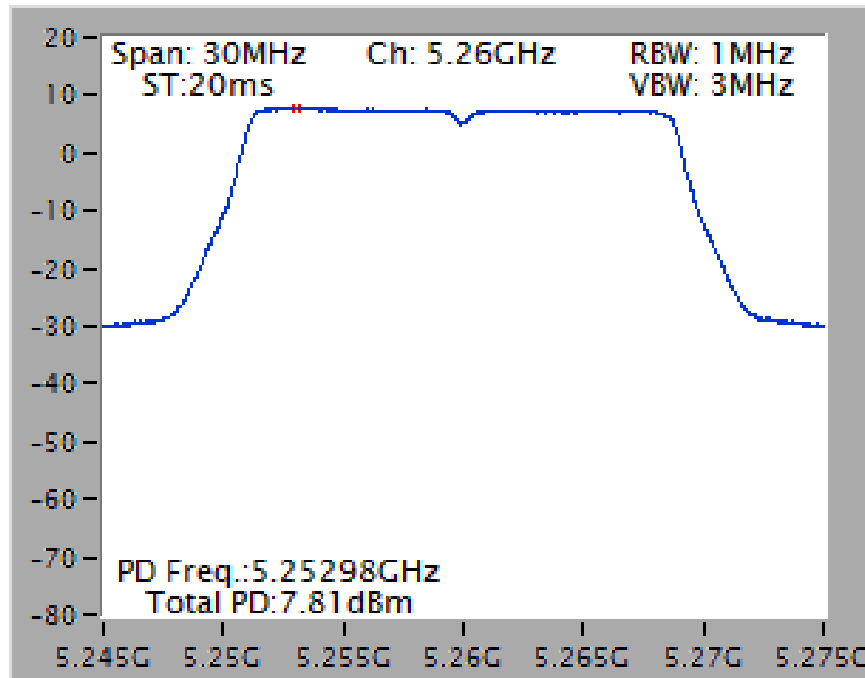


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5580 MHz

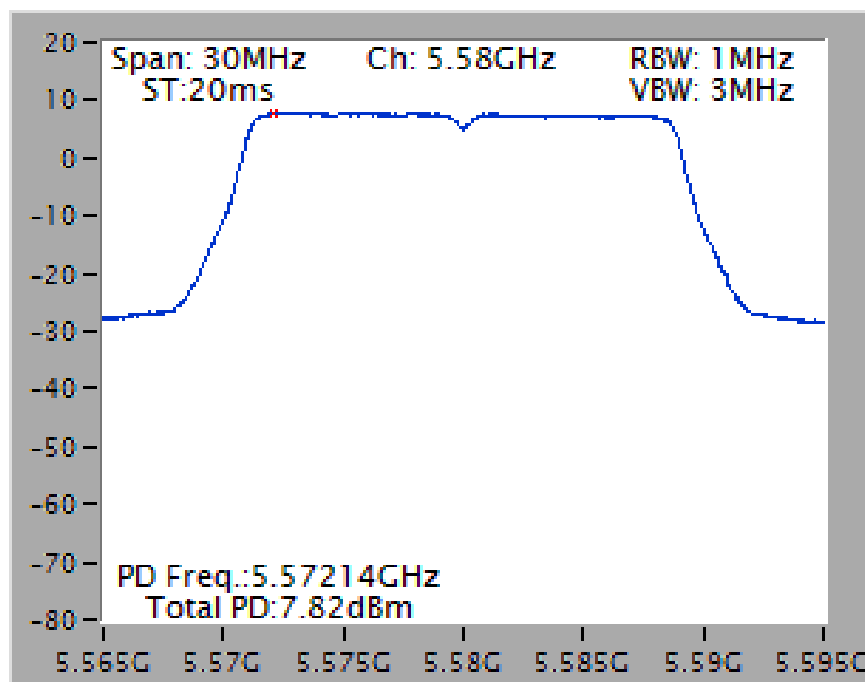


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5270 MHz

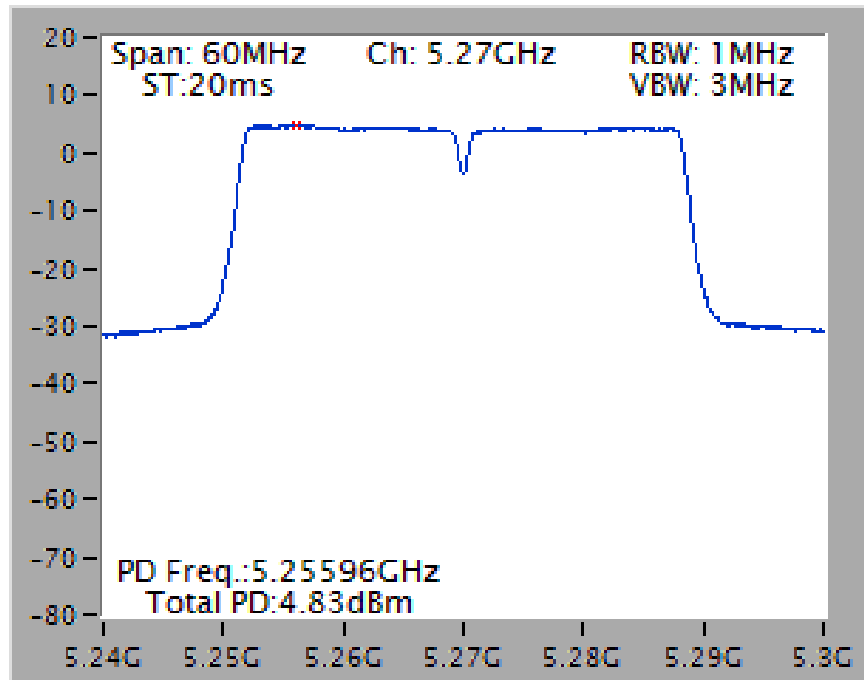


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5550 MHz

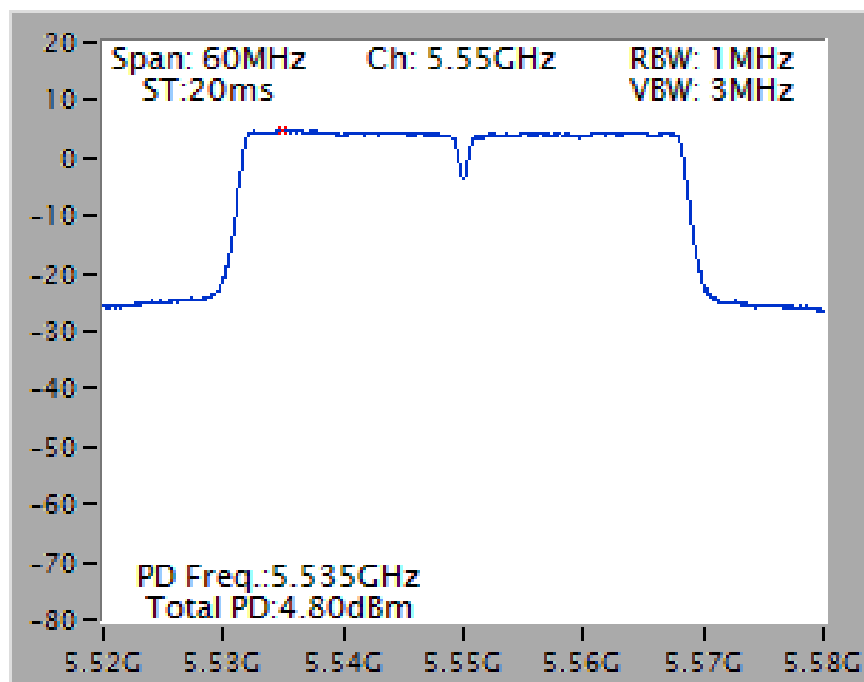

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5290 MHz

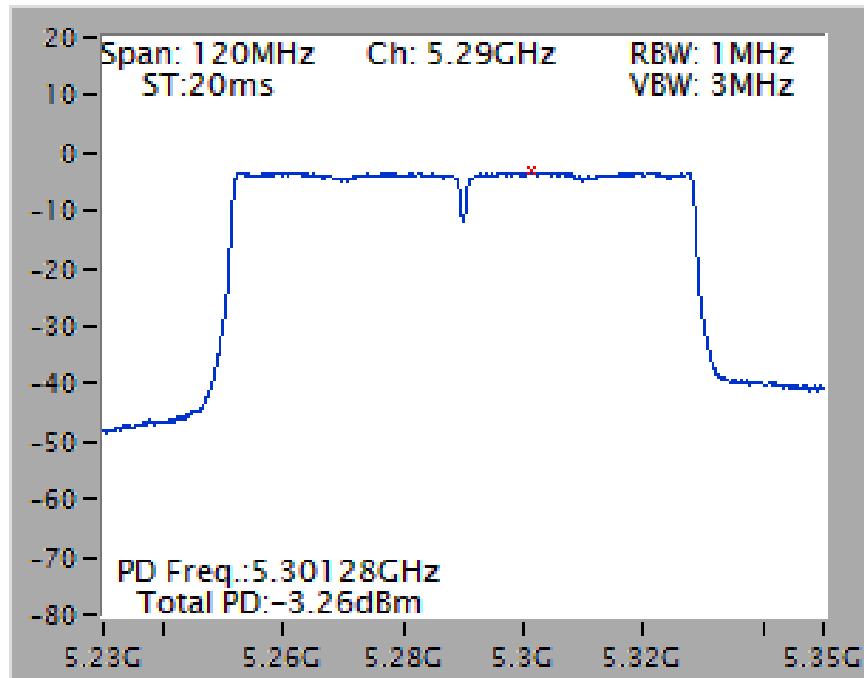


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5610 MHz

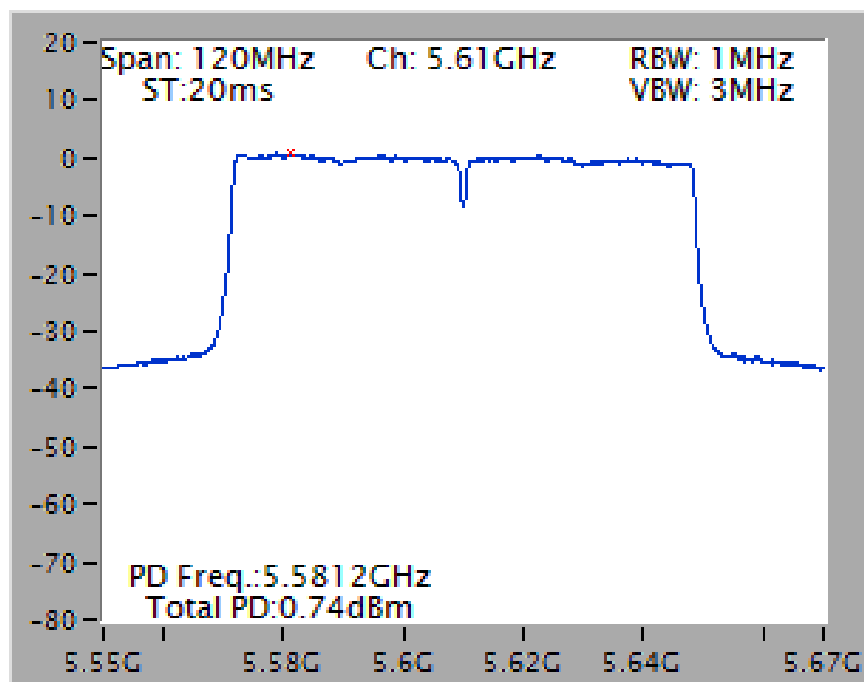


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 2C)

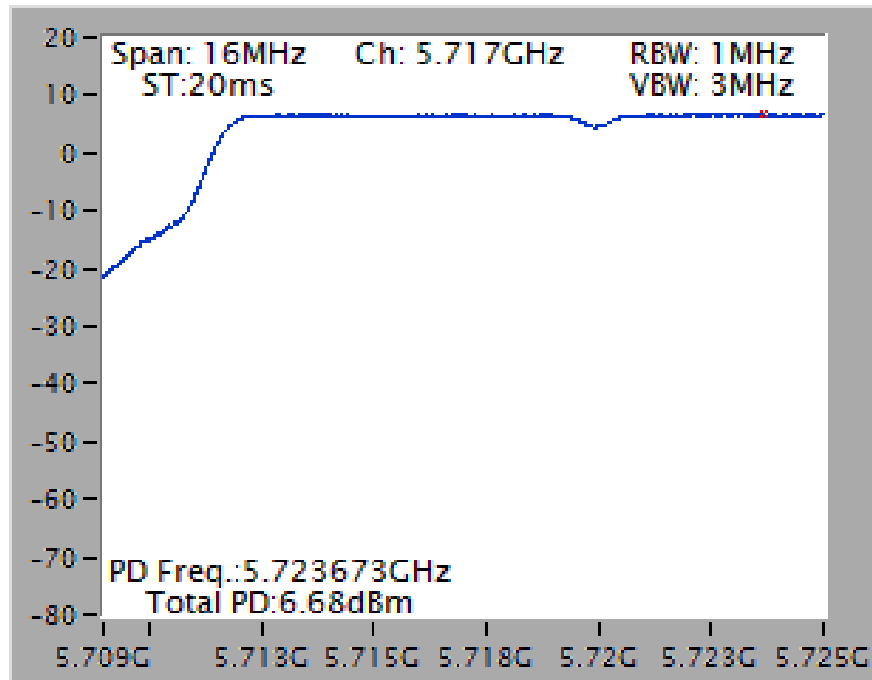


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 3)

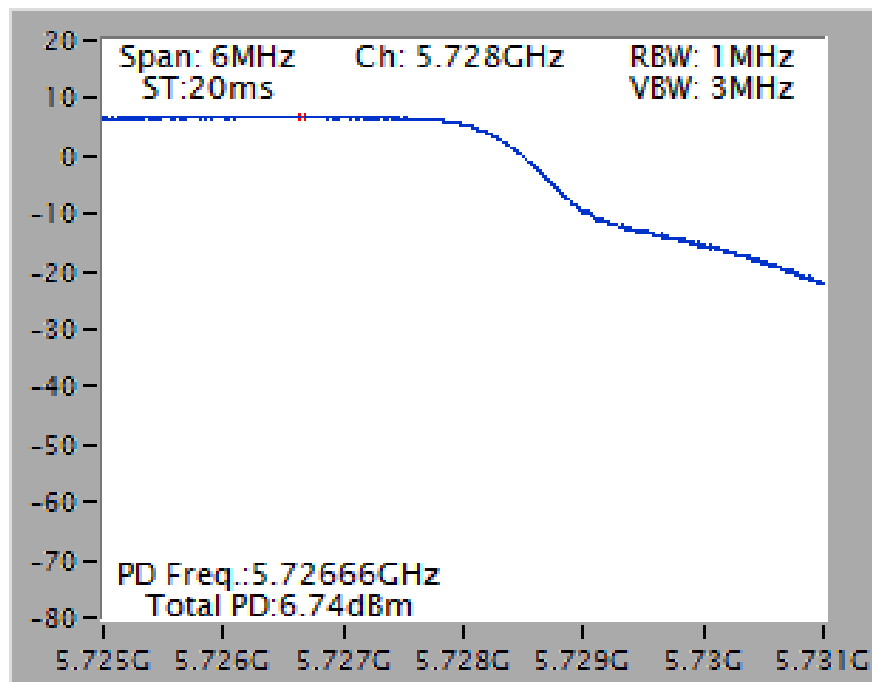


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

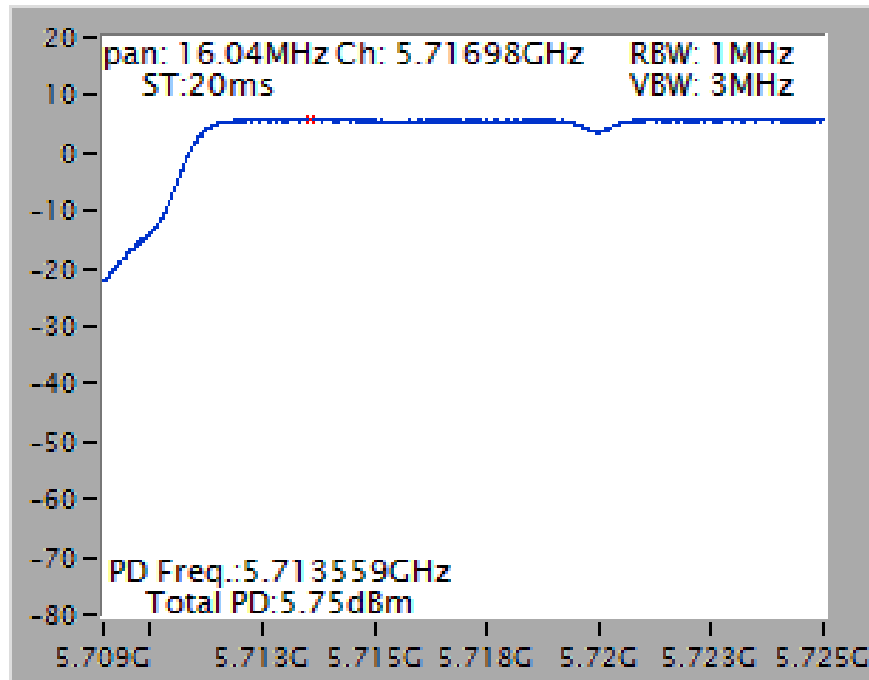


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

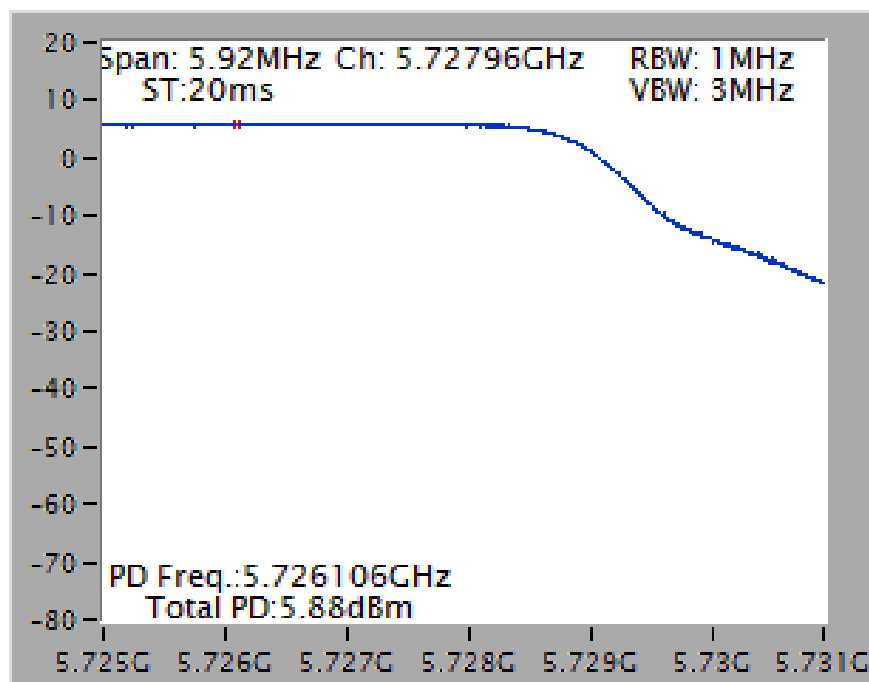


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

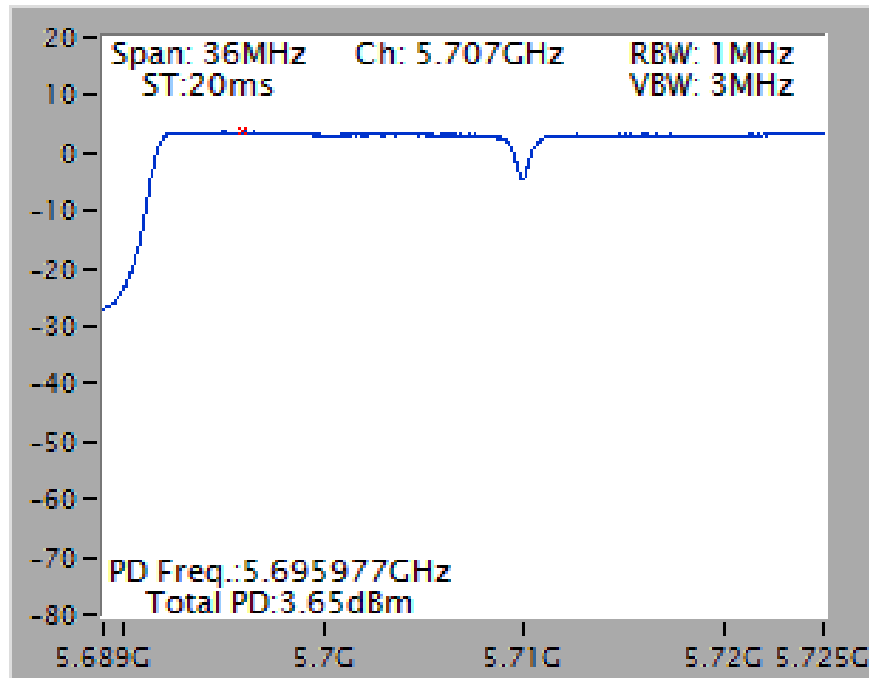


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)

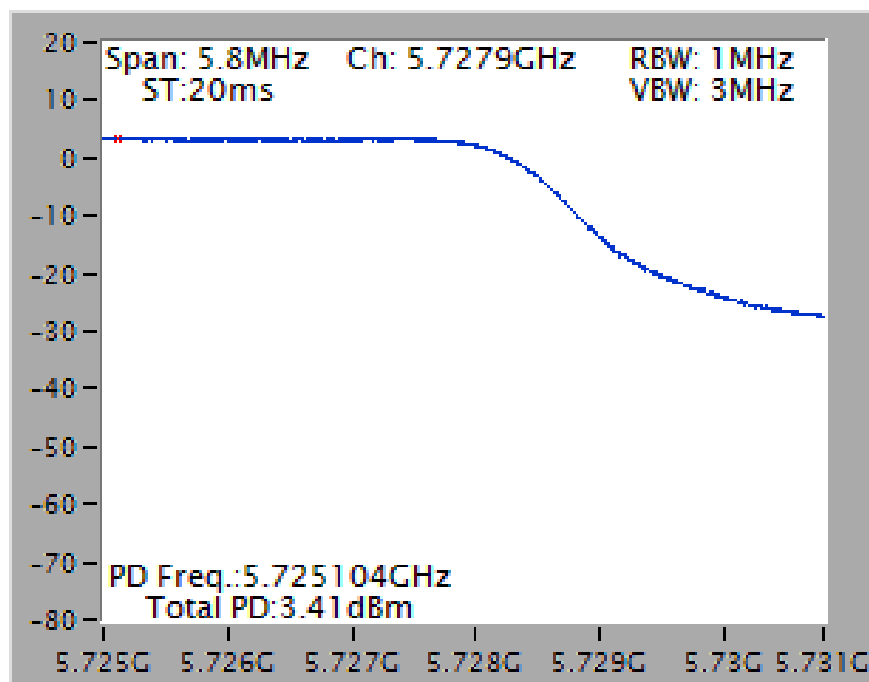

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

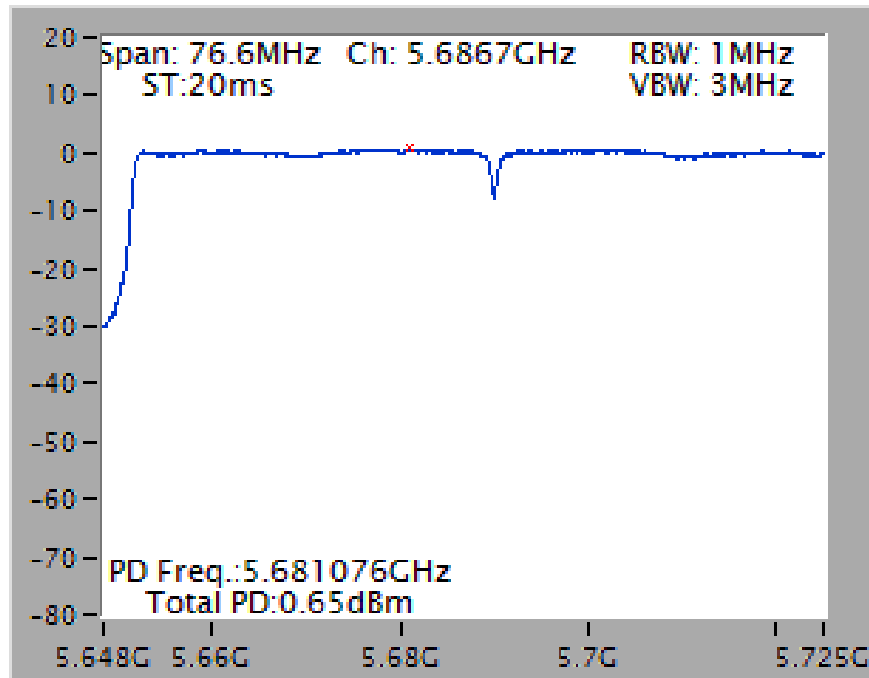


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

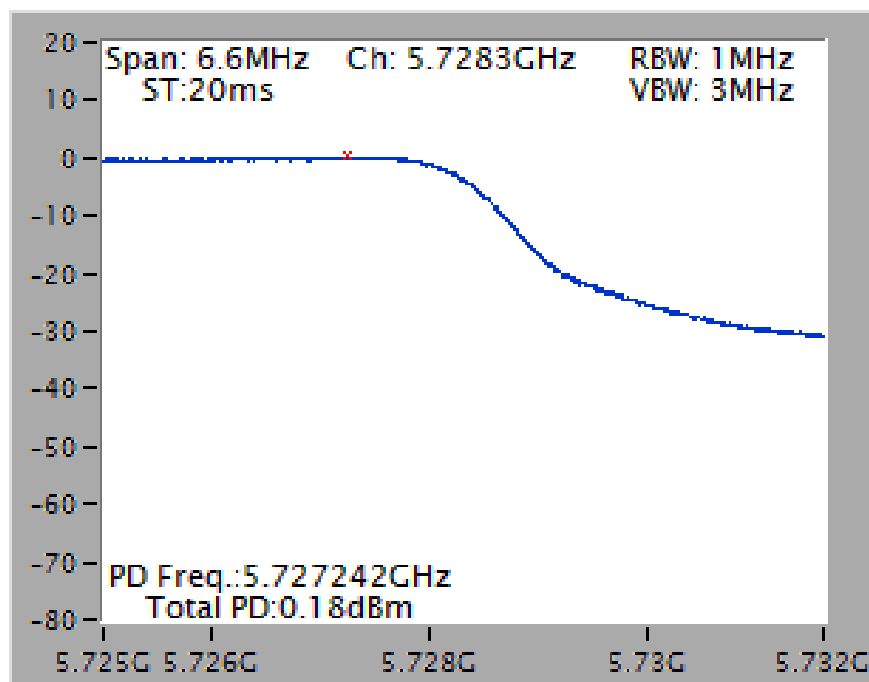


Mode 1 (Set 1 Dipole antenna / 3.96dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5260 MHz

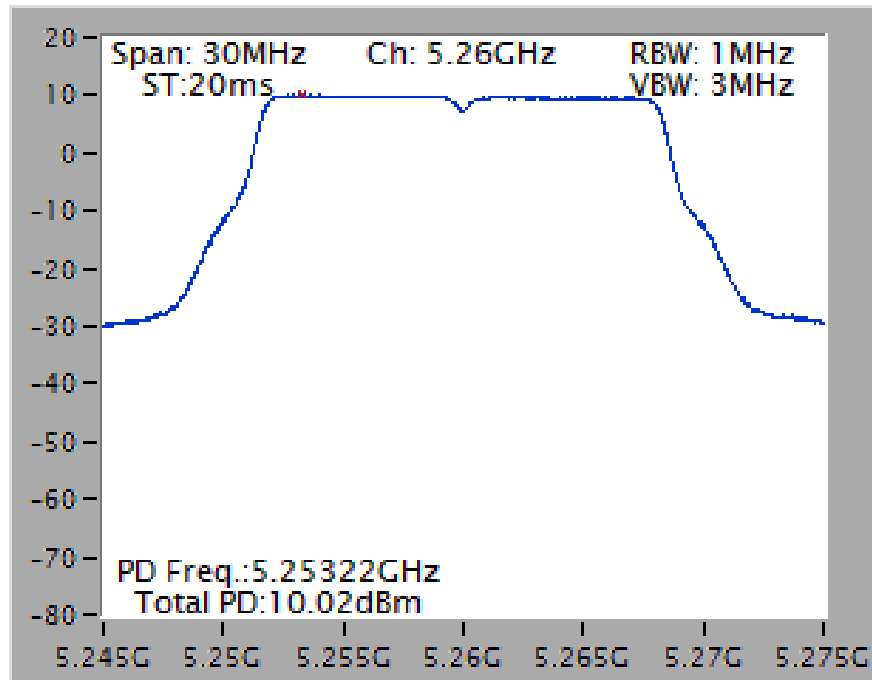


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5580 MHz

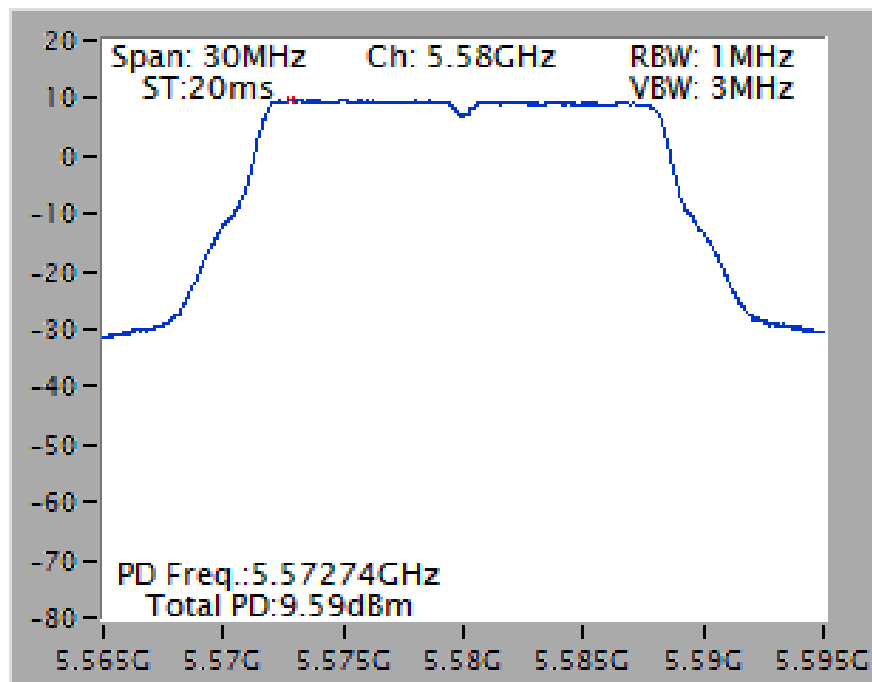


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5300 MHz

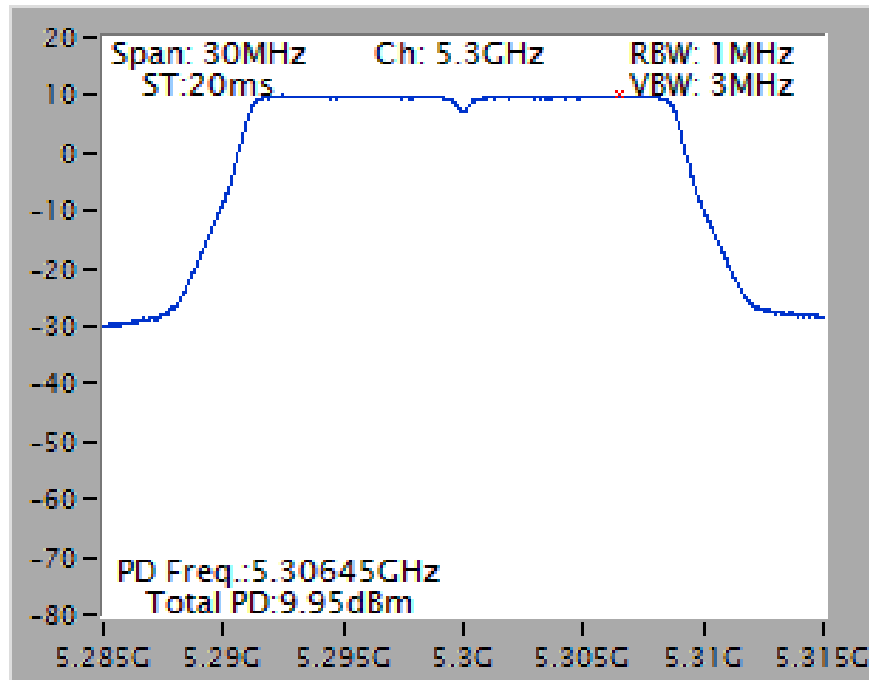


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5500 MHz

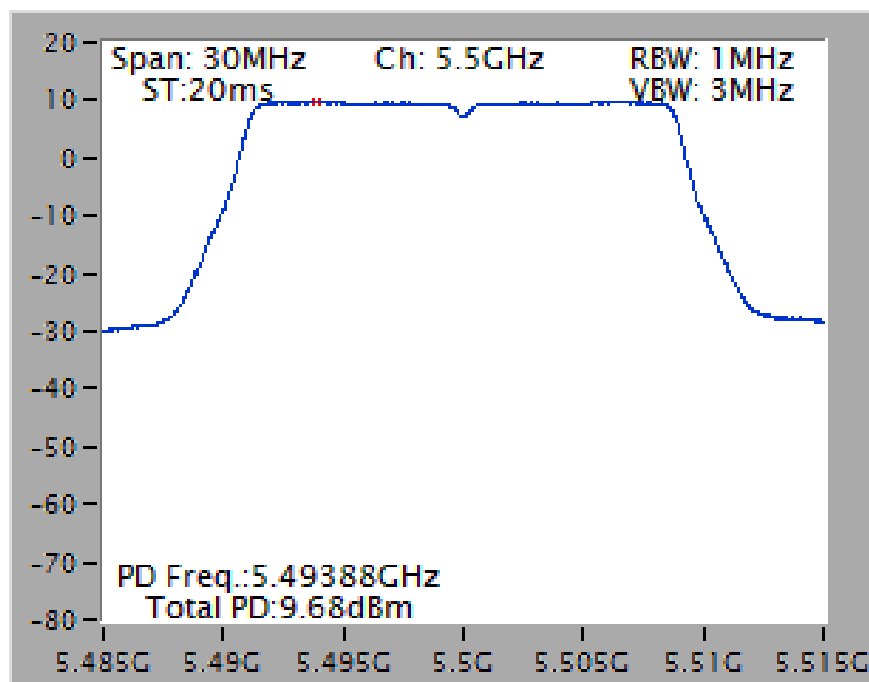


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5270 MHz

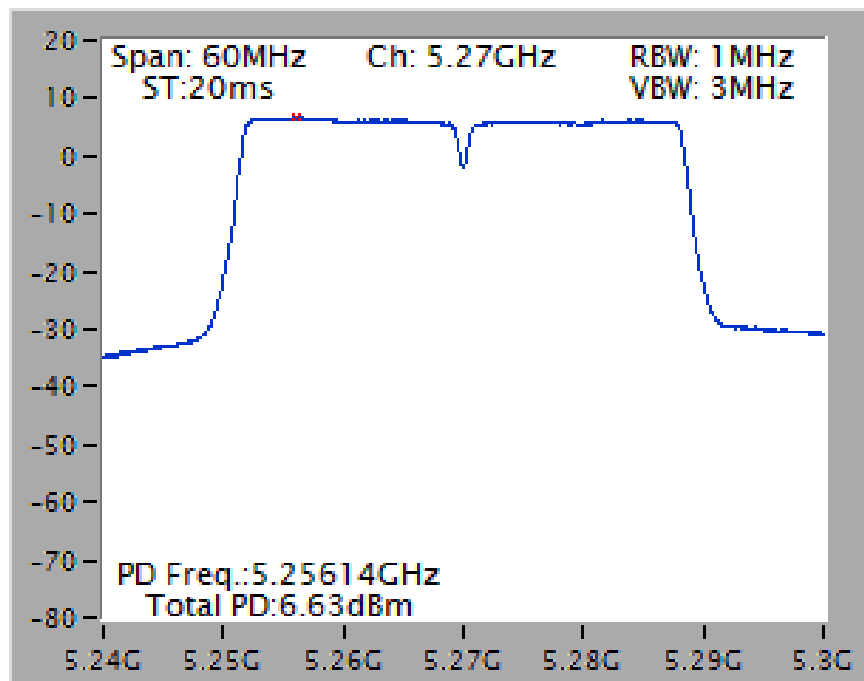


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5550 MHz

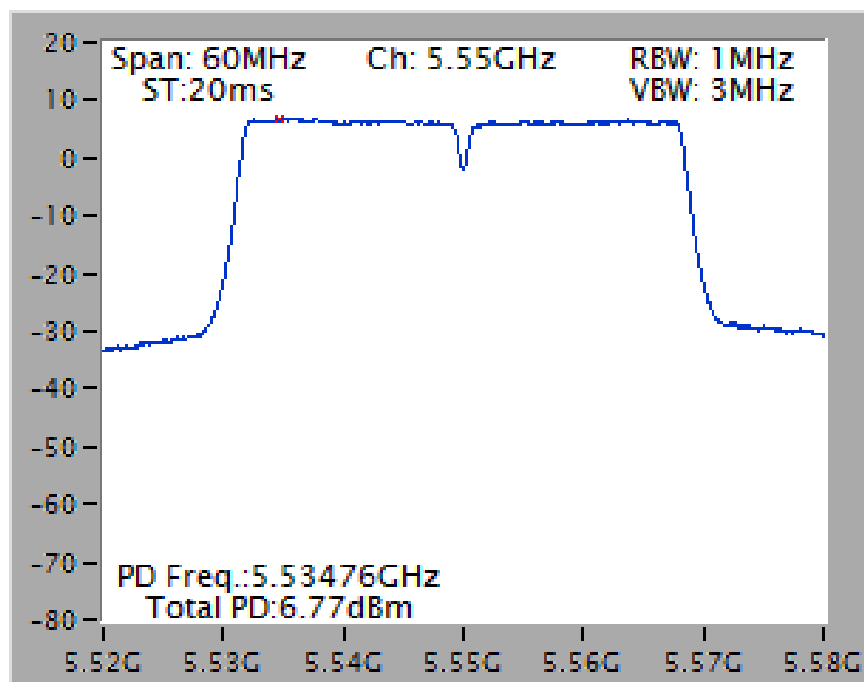

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5290 MHz

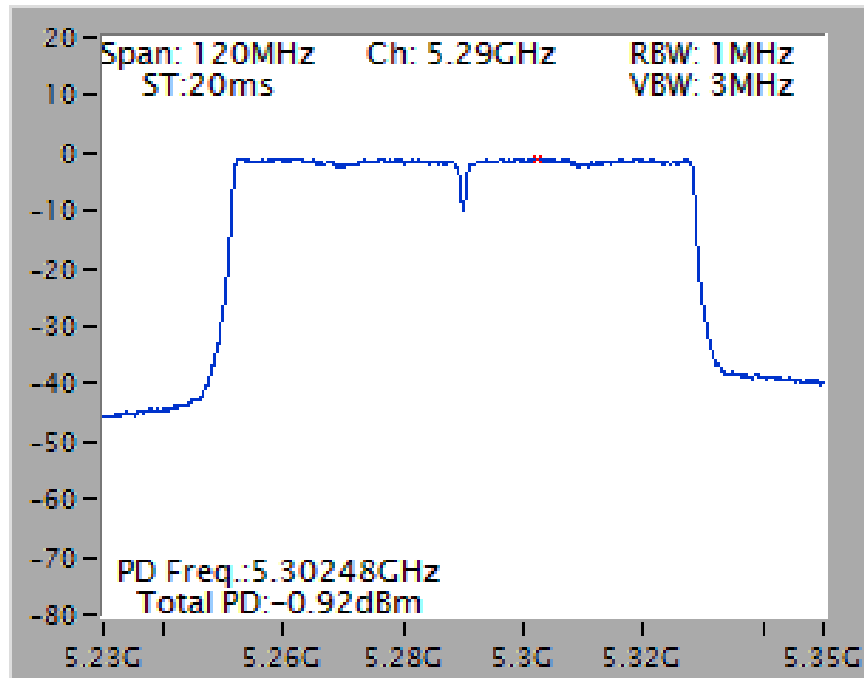


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5610 MHz

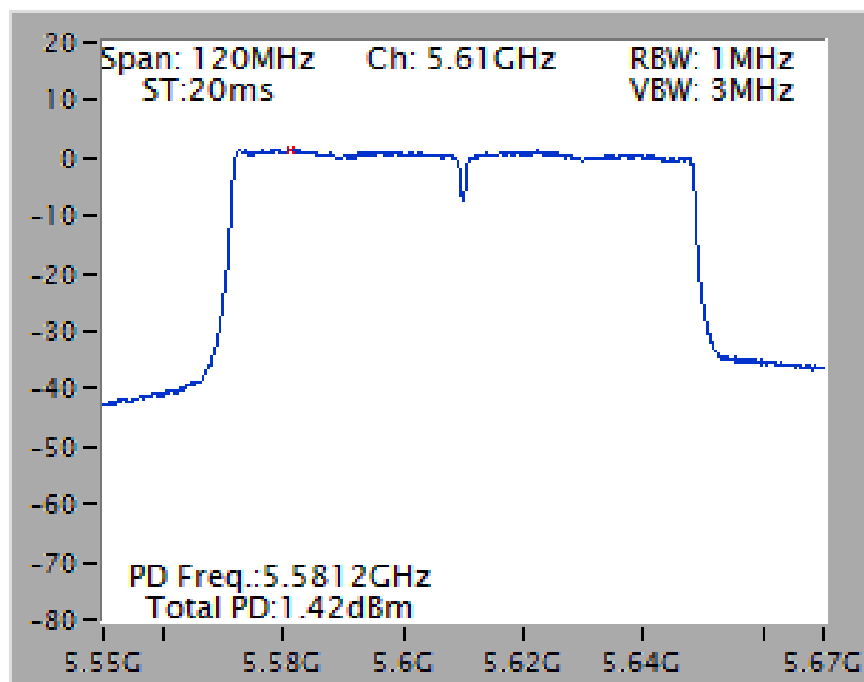


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5720 MHz (UNII 2C)

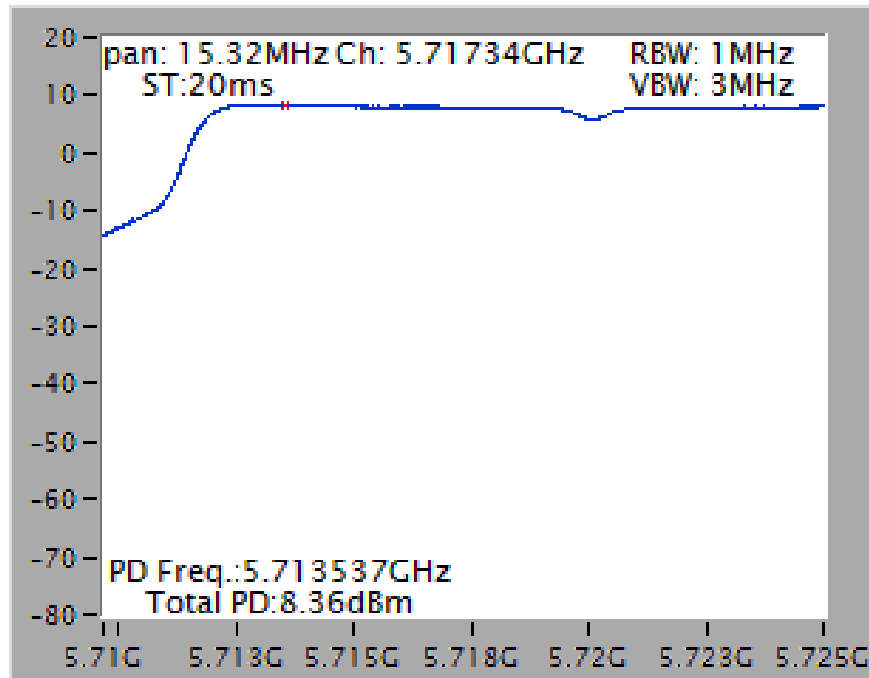


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5720 MHz (UNII 3)

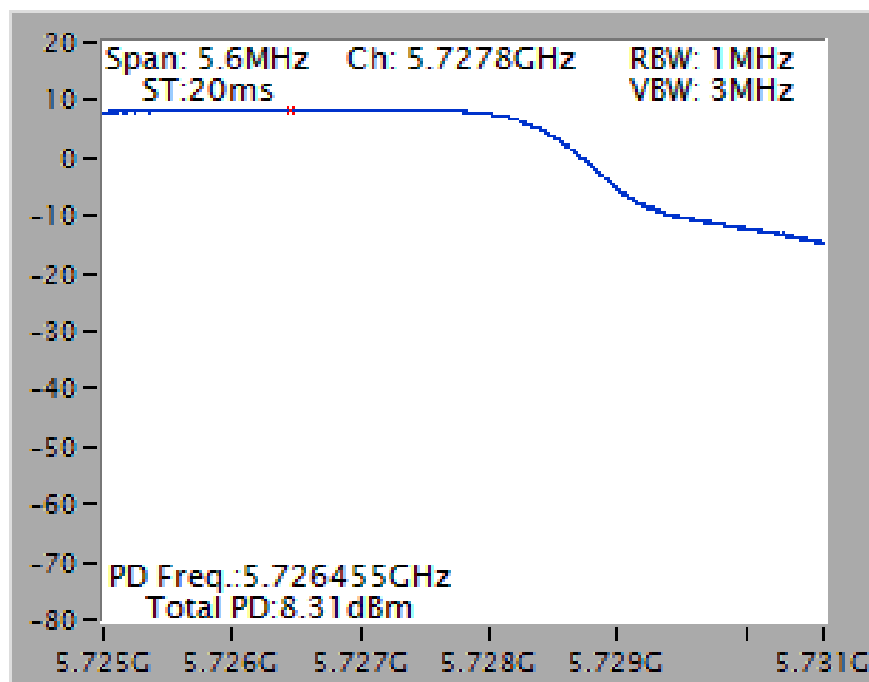


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5720 MHz
(UNII 2C)

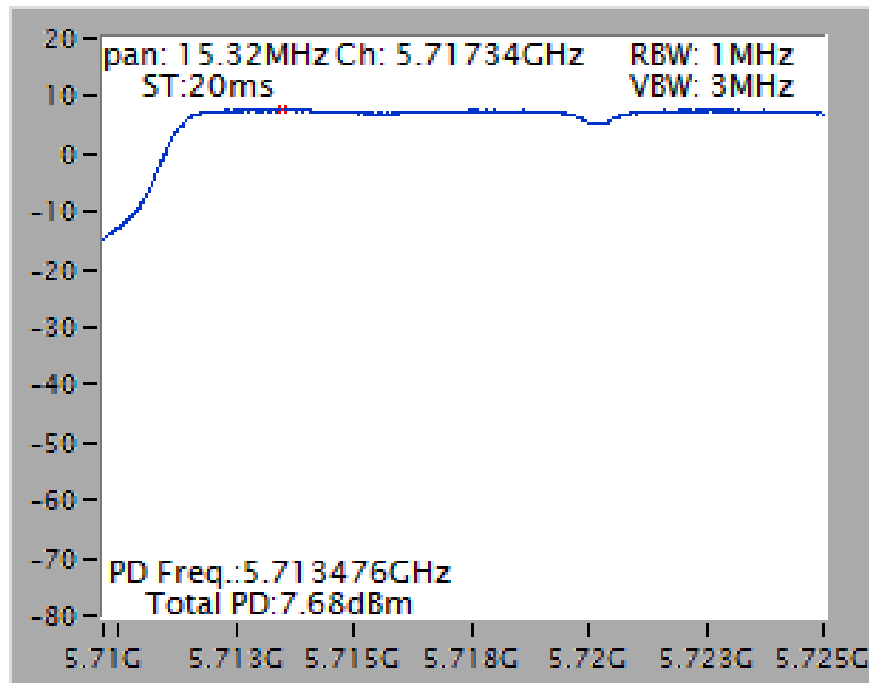


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5720 MHz
(UNII 3)

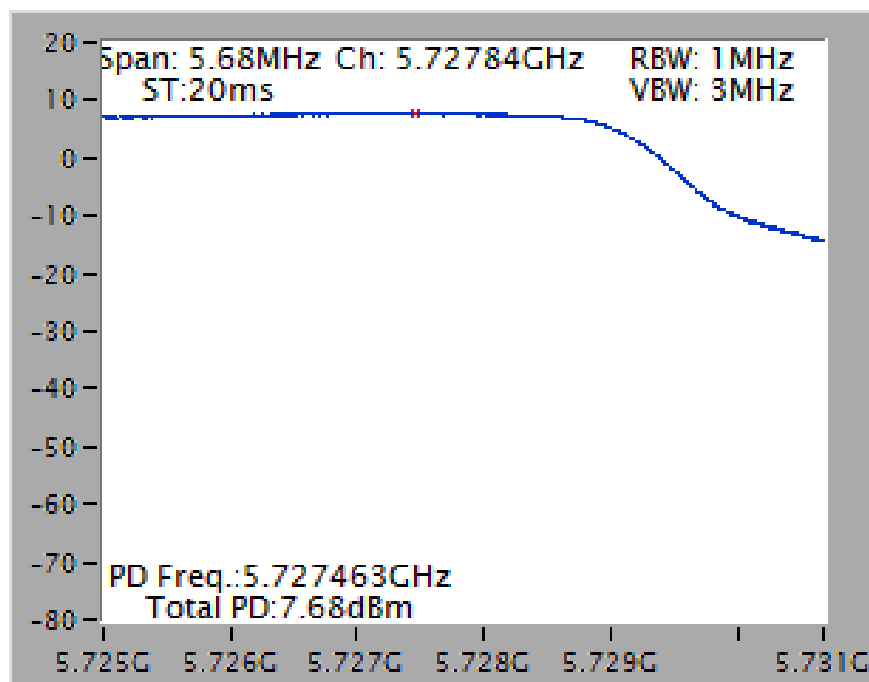


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5710 MHz
(UNII 2C)

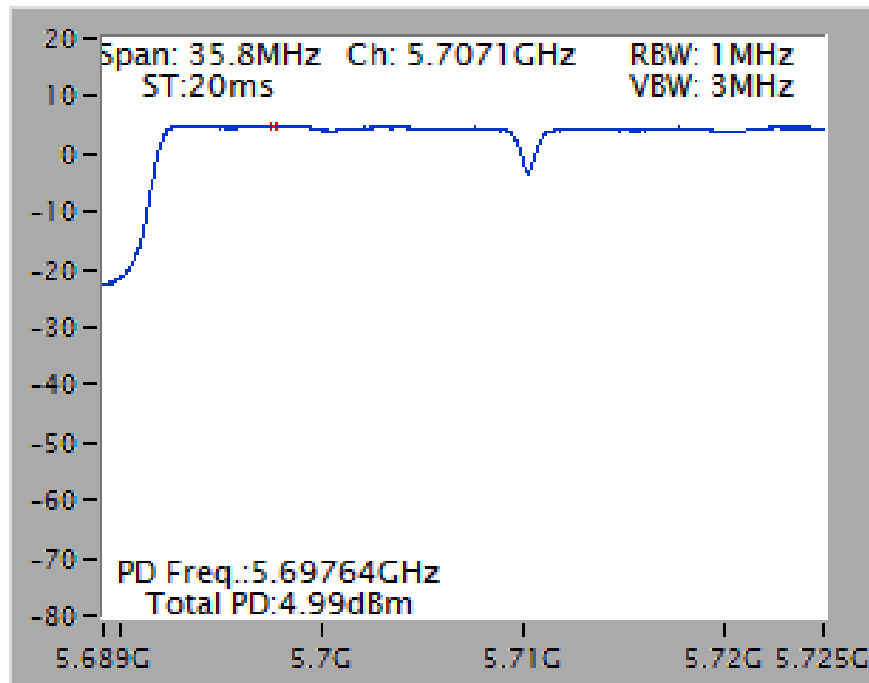


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5710 MHz
(UNII 3)

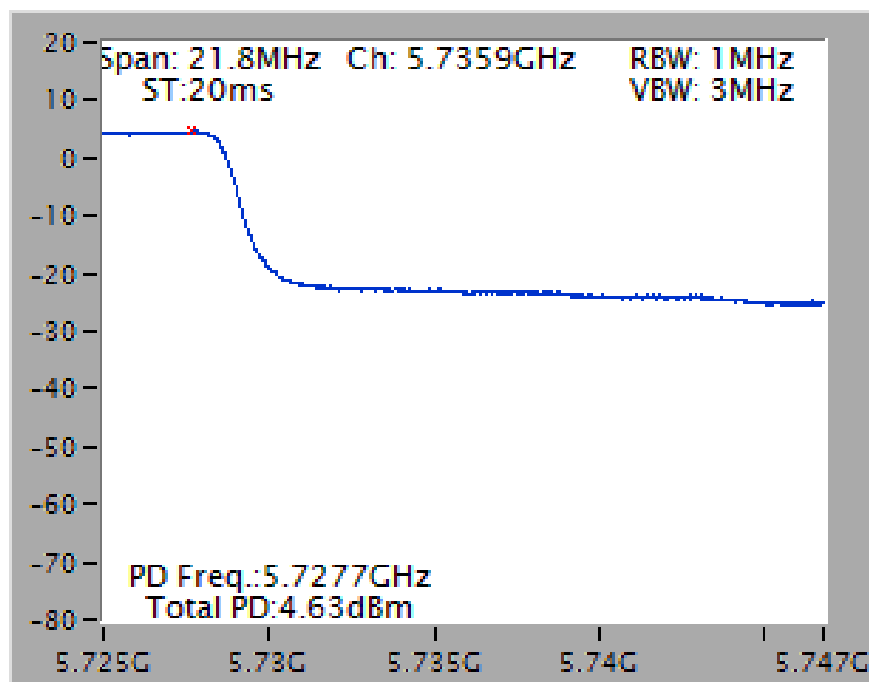

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5690 MHz
(UNII 2C)

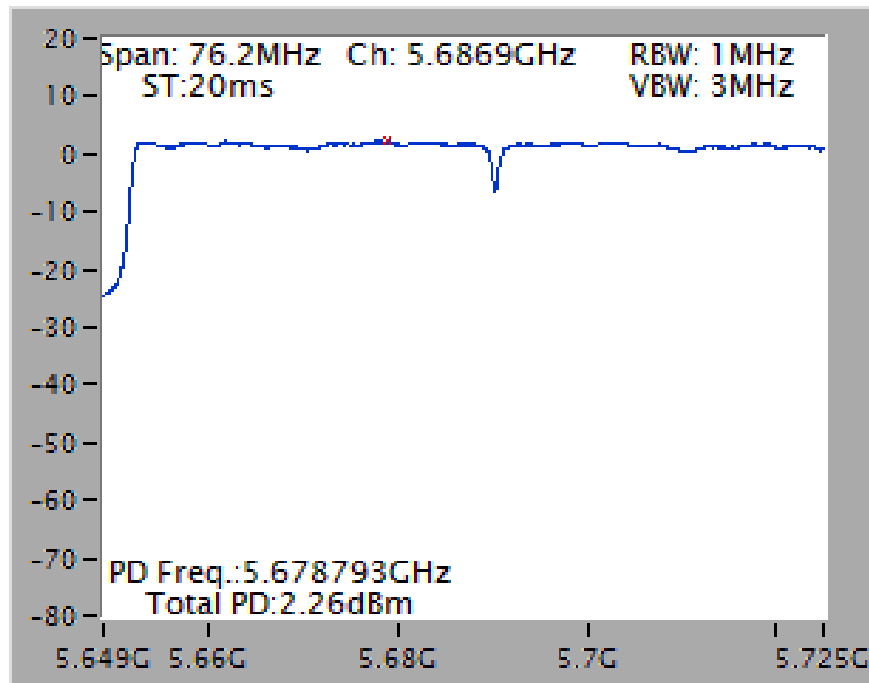


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5690 MHz
(UNII 3)

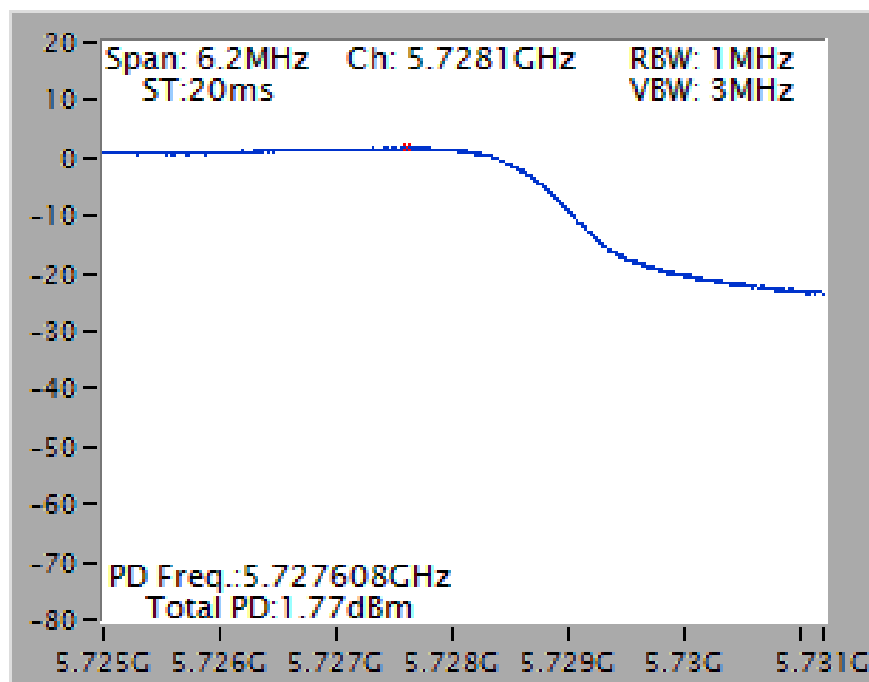


Mode 1 (Set 1 Dipole antenna / 3.96dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5260 MHz

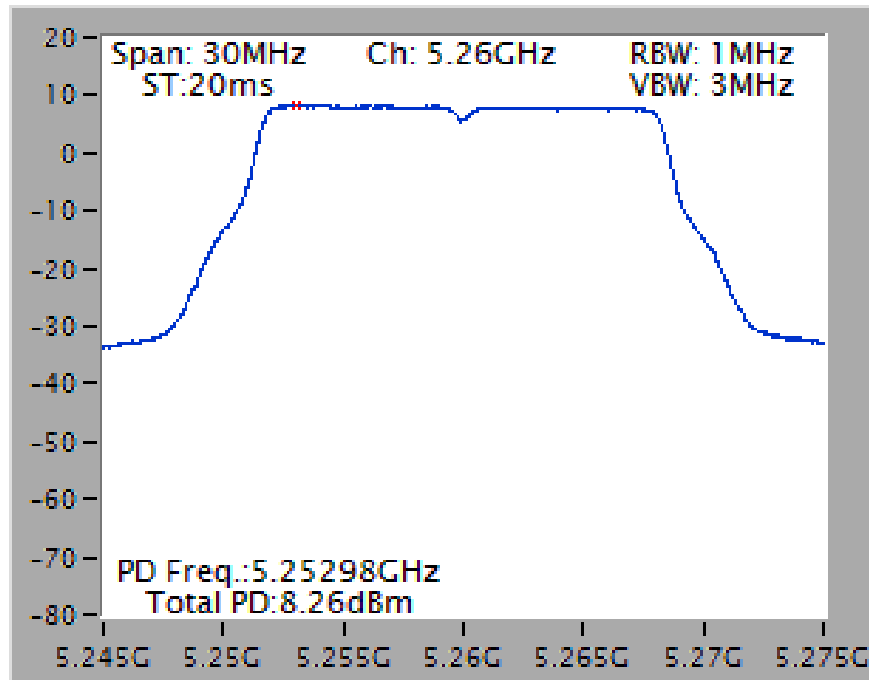


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5500 MHz

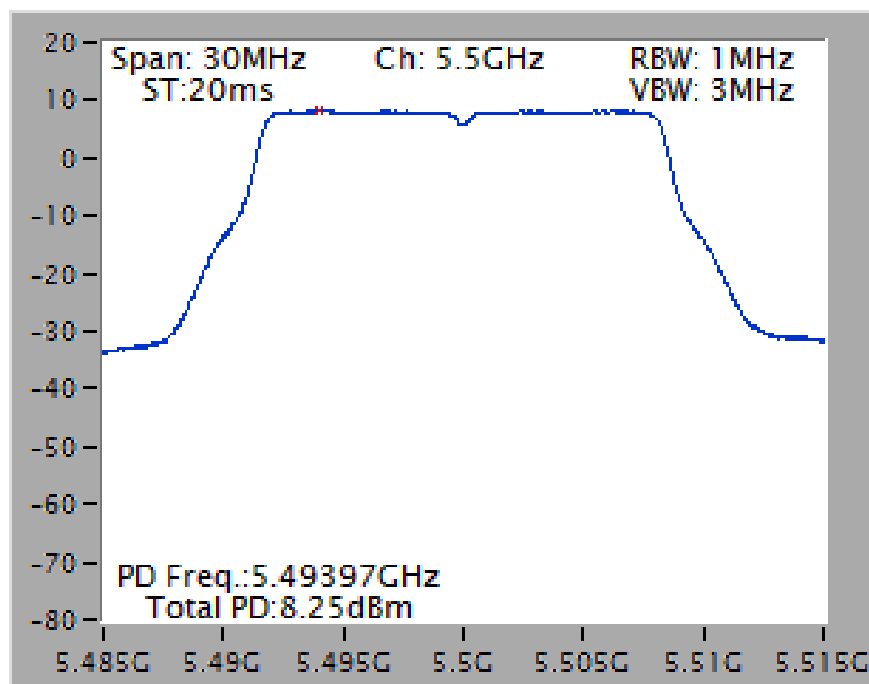


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5300 MHz

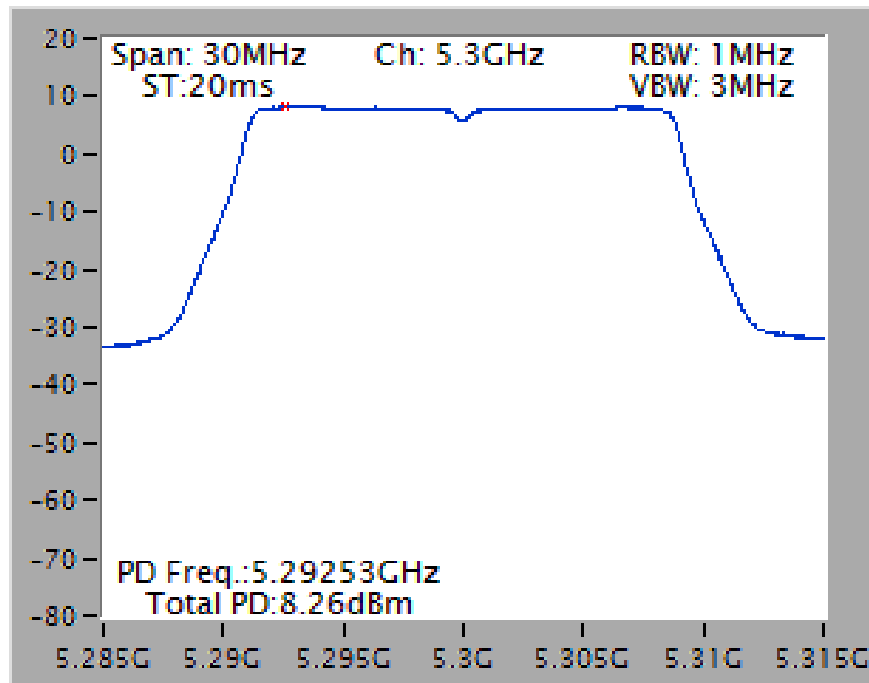


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5500 MHz

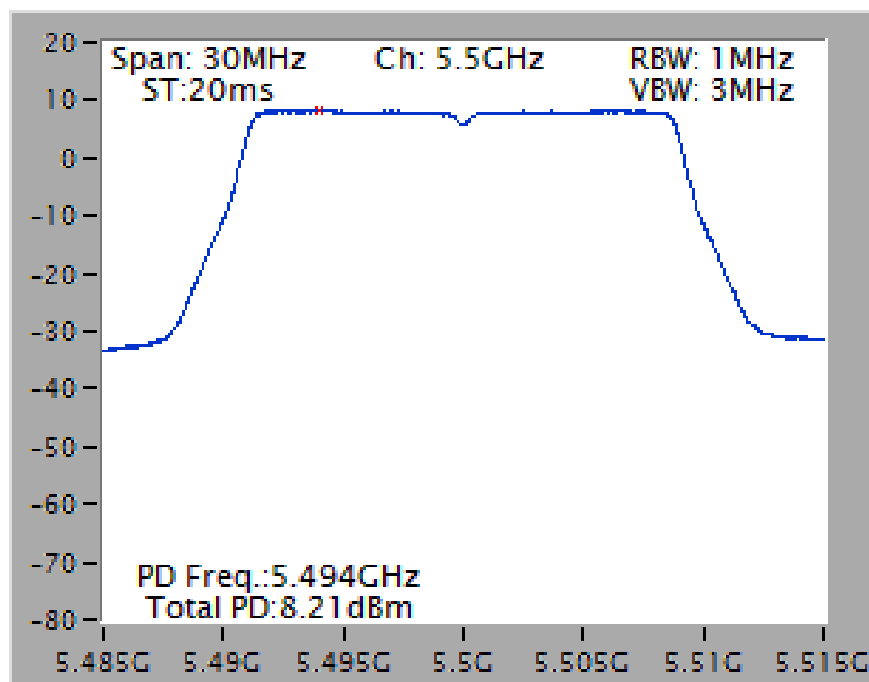


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5270 MHz

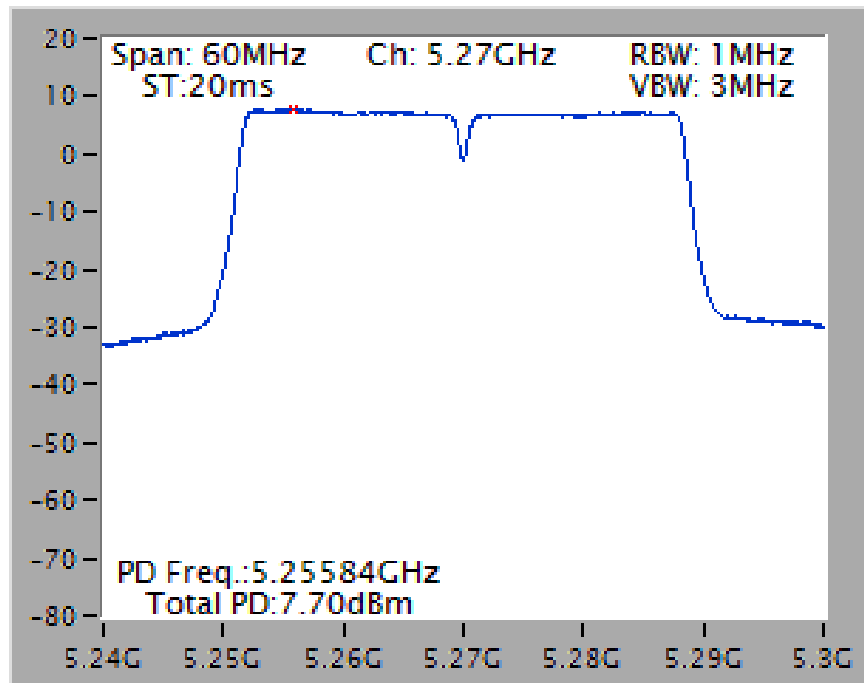


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5550 MHz

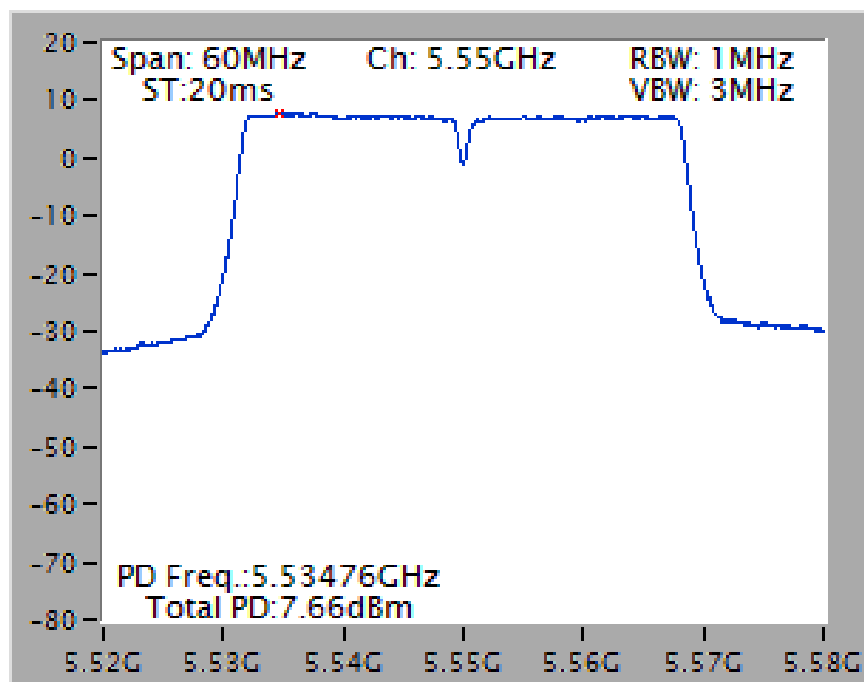

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5290 MHz

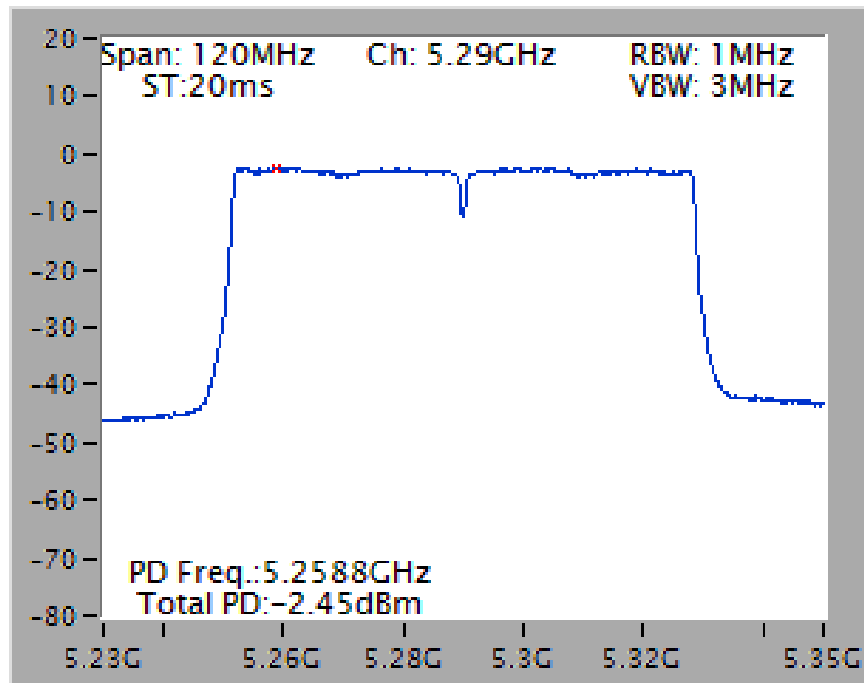


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5610 MHz

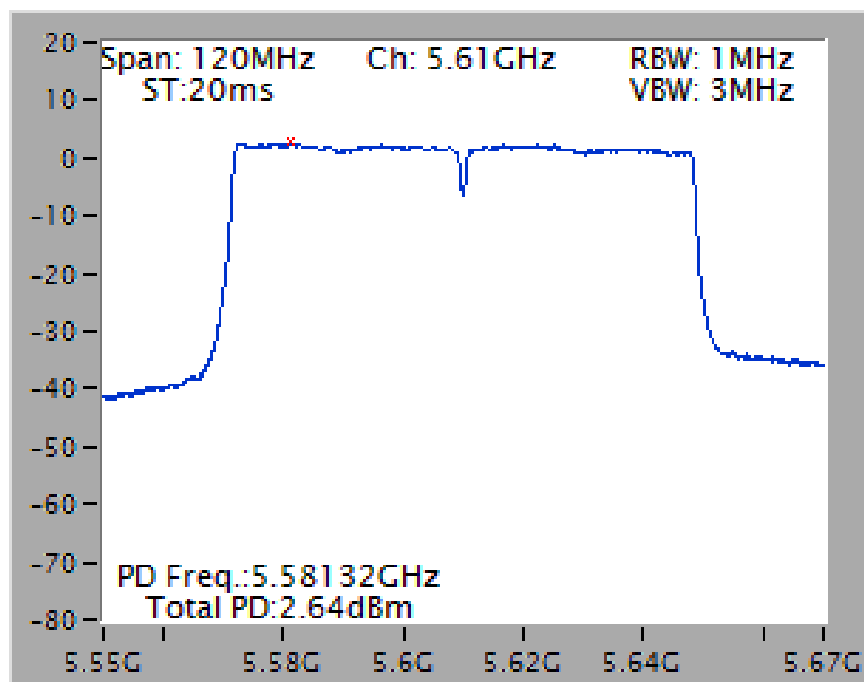


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5720 MHz (UNII 2C)

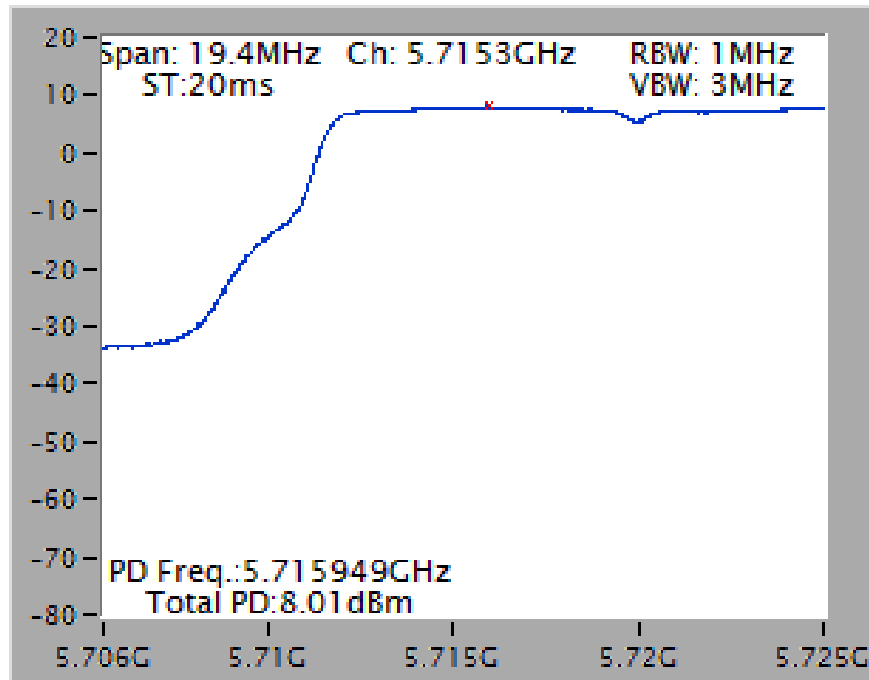


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5720 MHz (UNII 3)

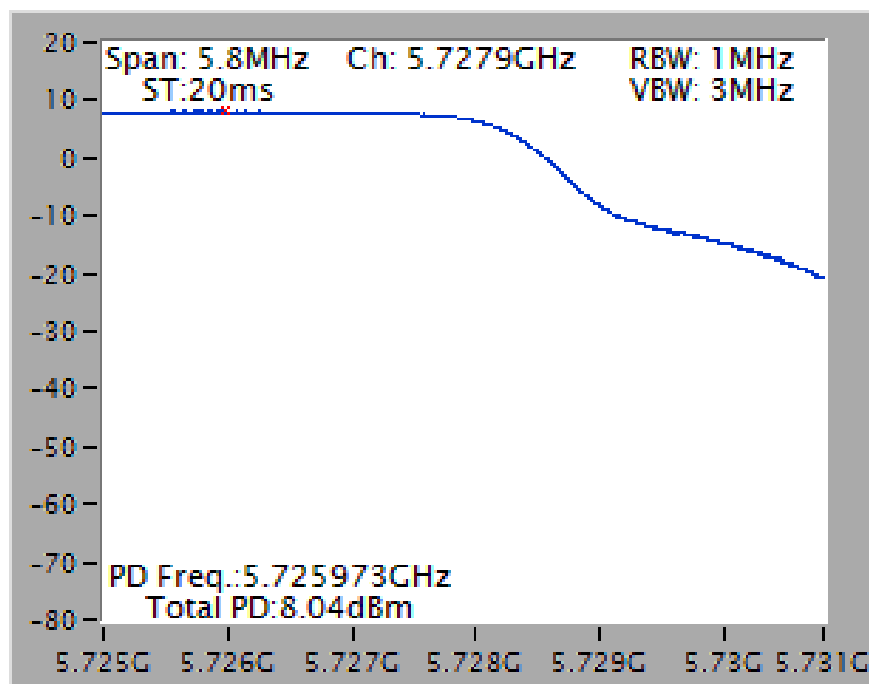


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5720 MHz (UNII 2C)

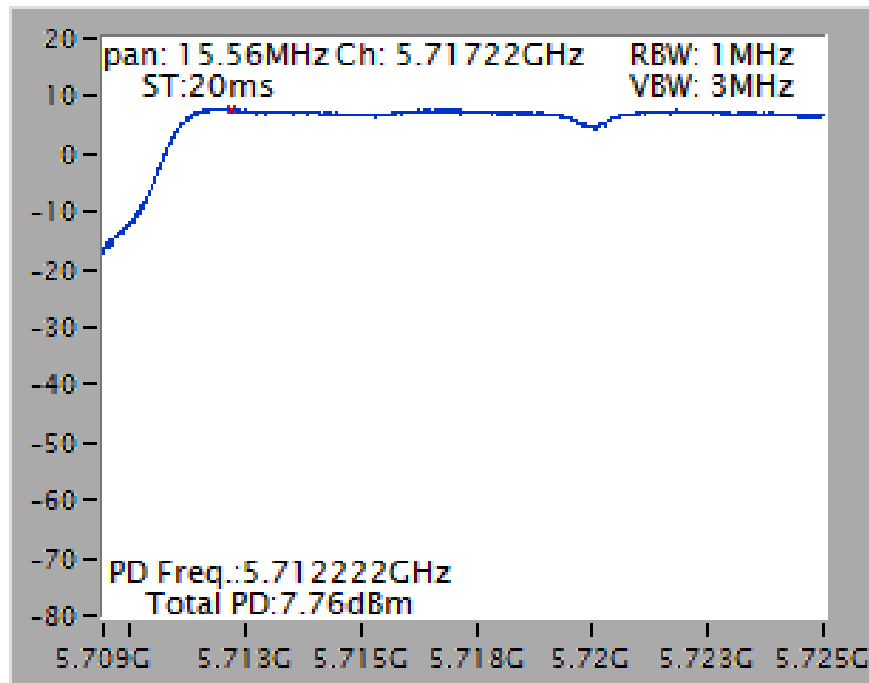


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5720 MHz (UNII 3)

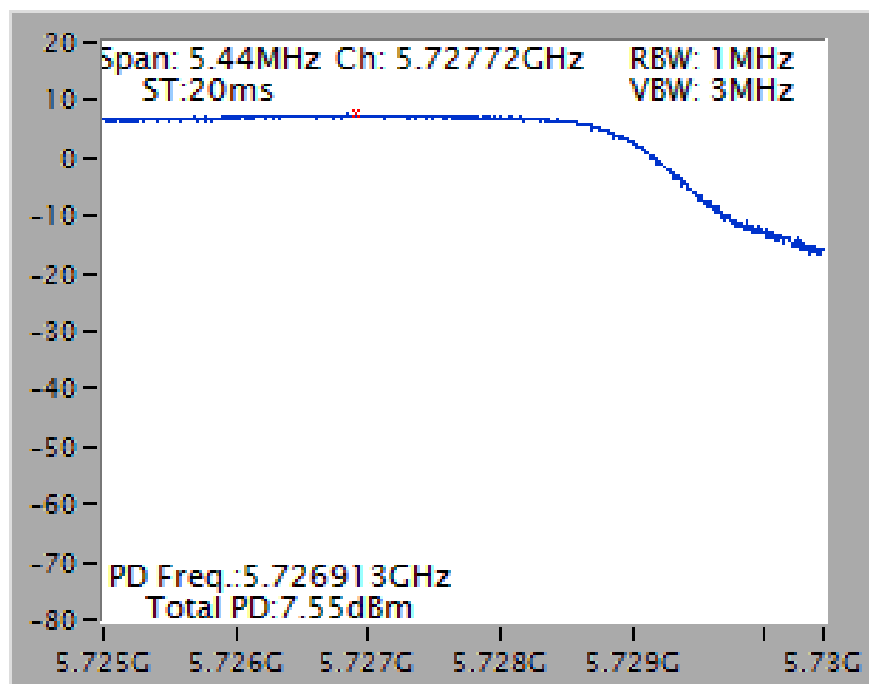


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 / 5710 MHz (UNII 2C)

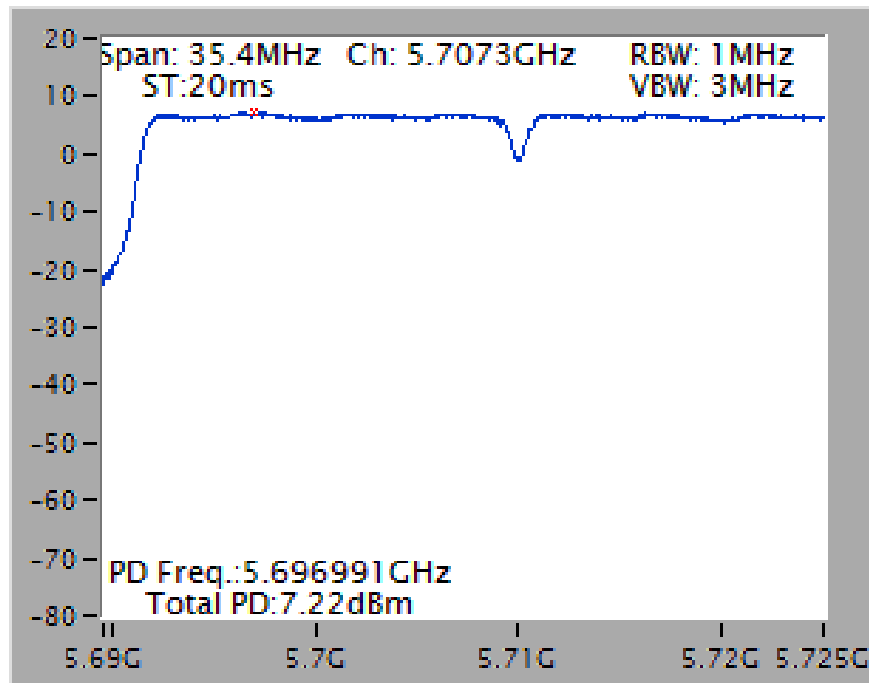


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 / 5710 MHz (UNII 3)

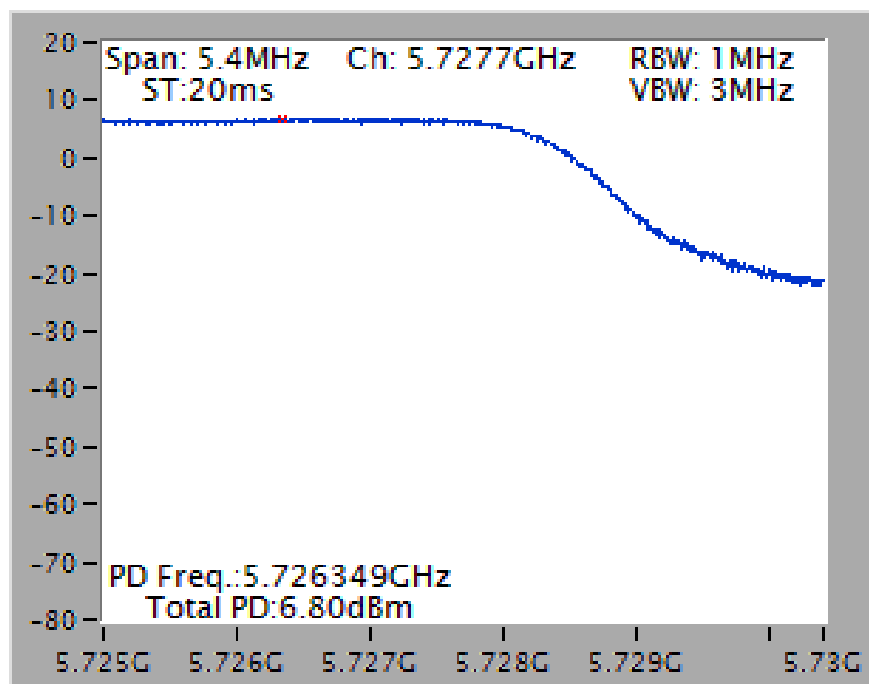

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5690 MHz (UNII 2C)

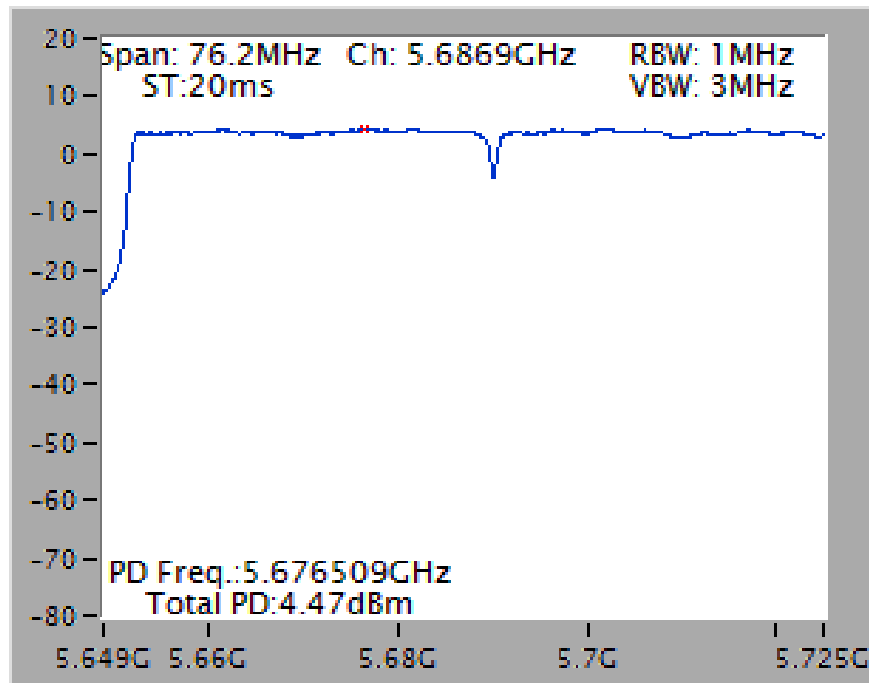


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5690 MHz (UNII 3)

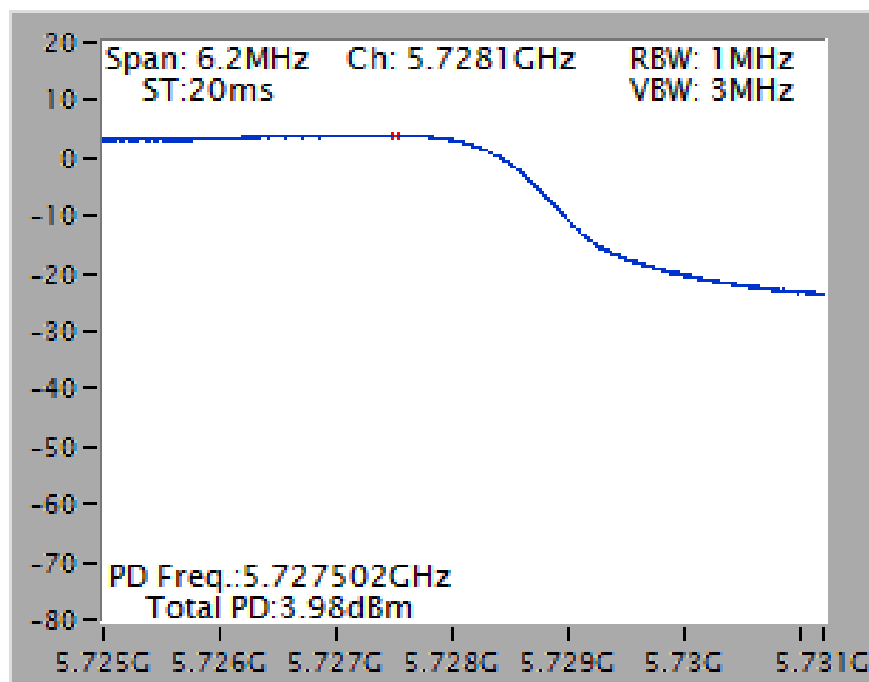


Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

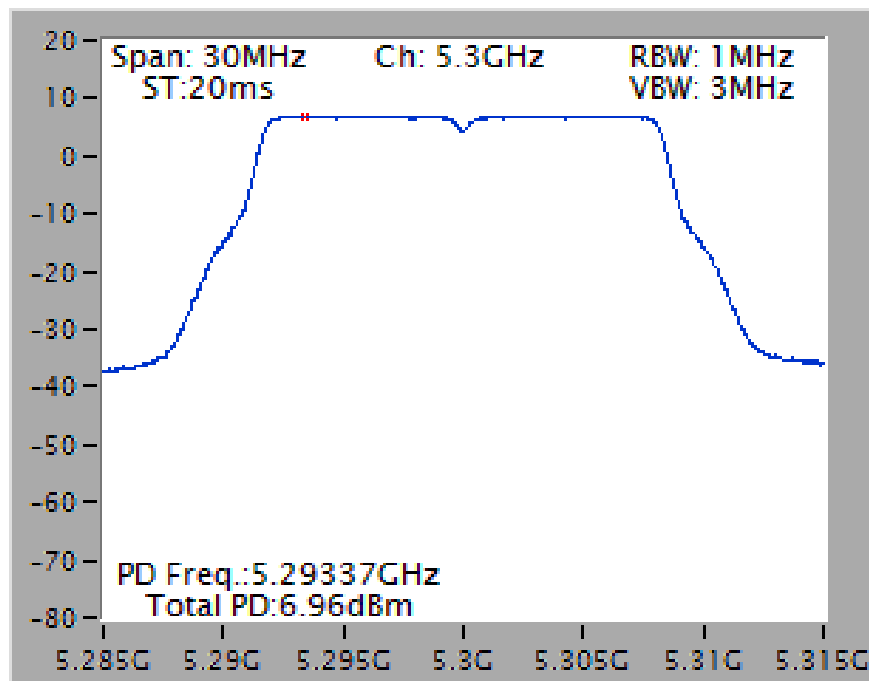


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5500 MHz

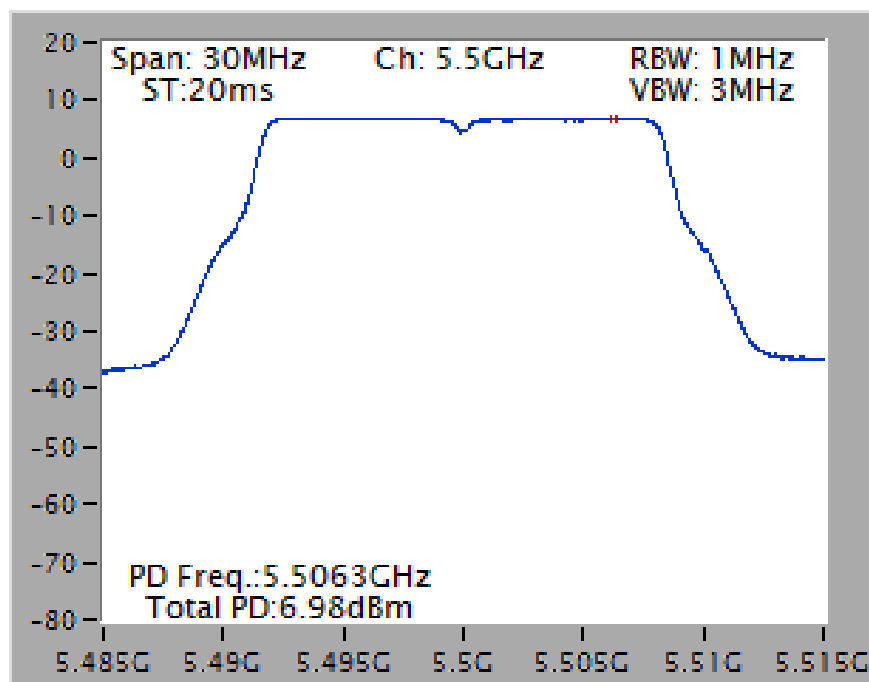


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

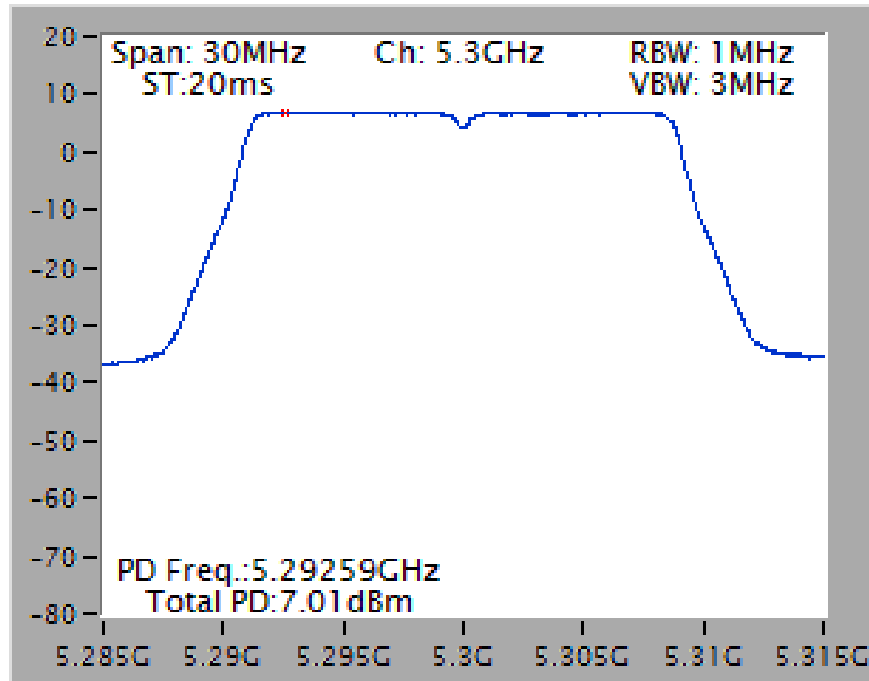


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5500 MHz

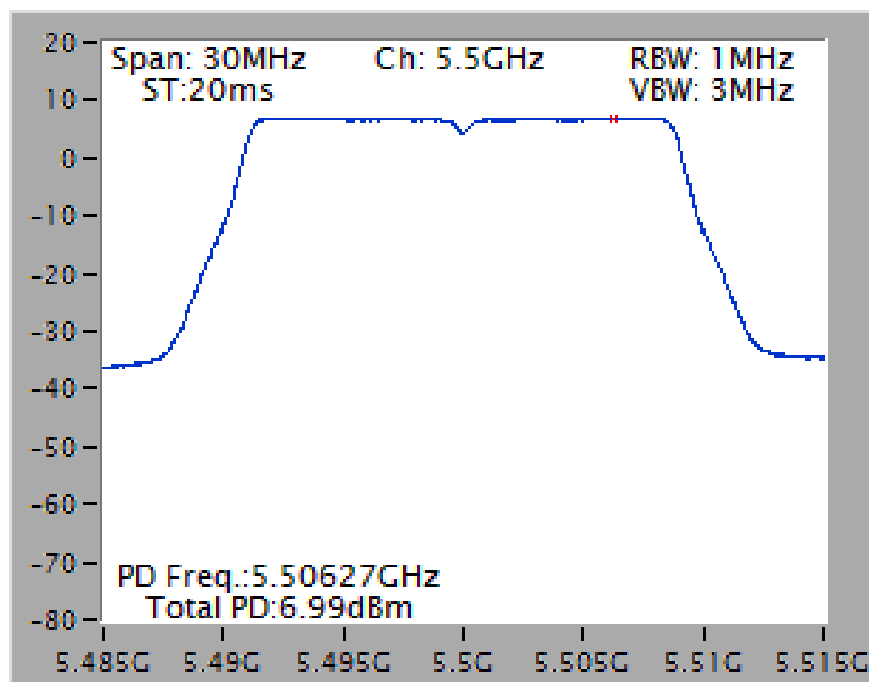


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

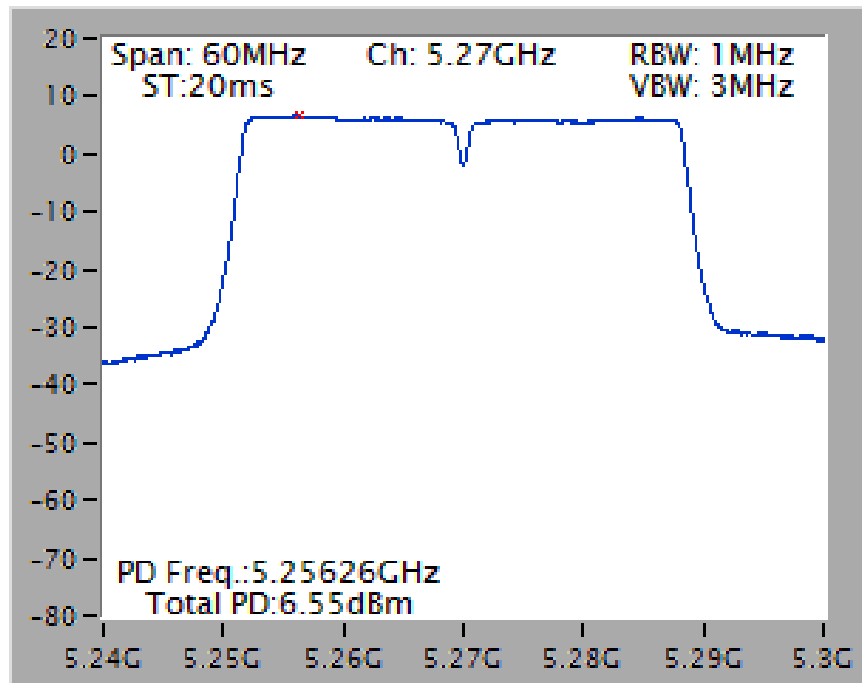


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5550 MHz

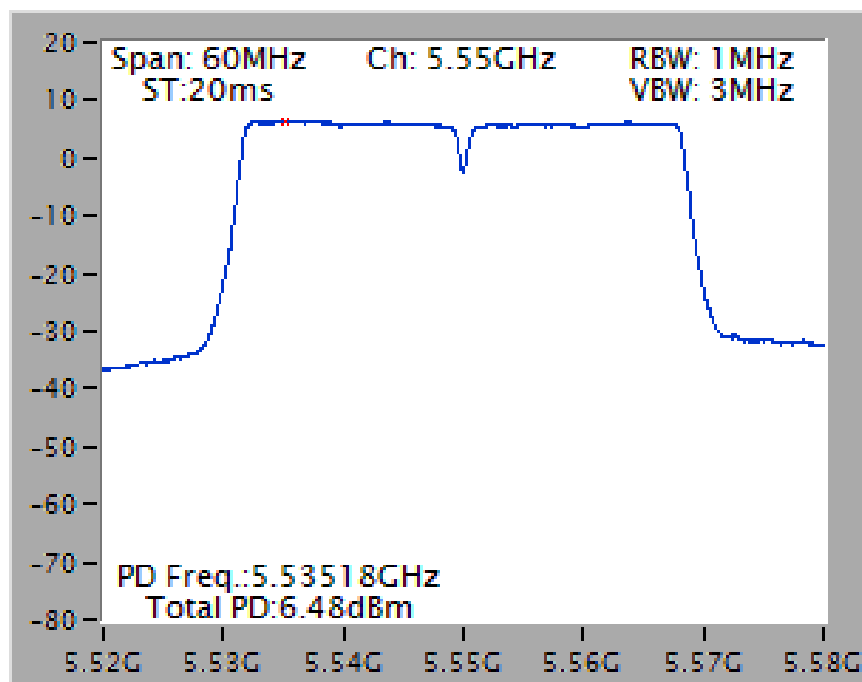

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

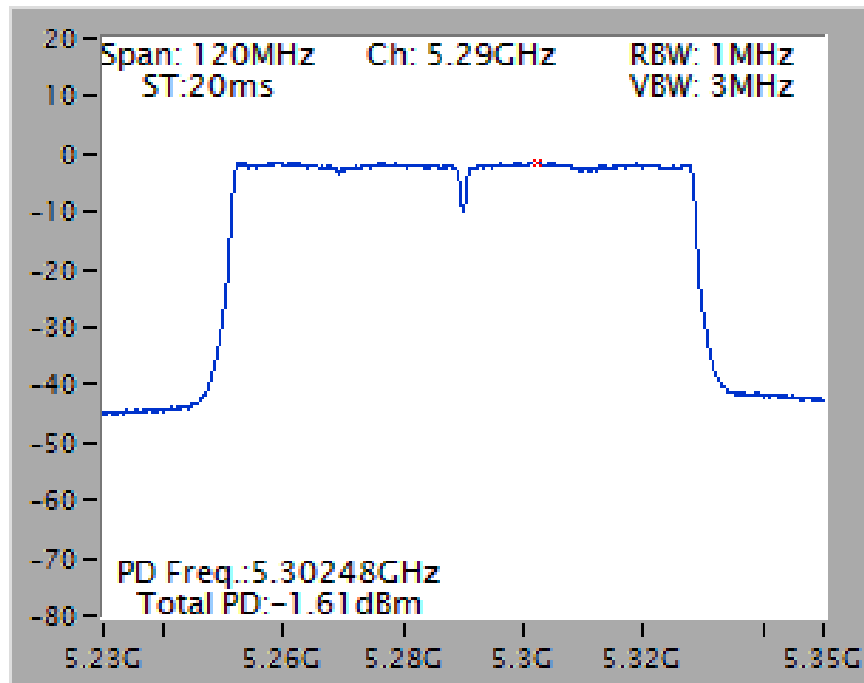


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

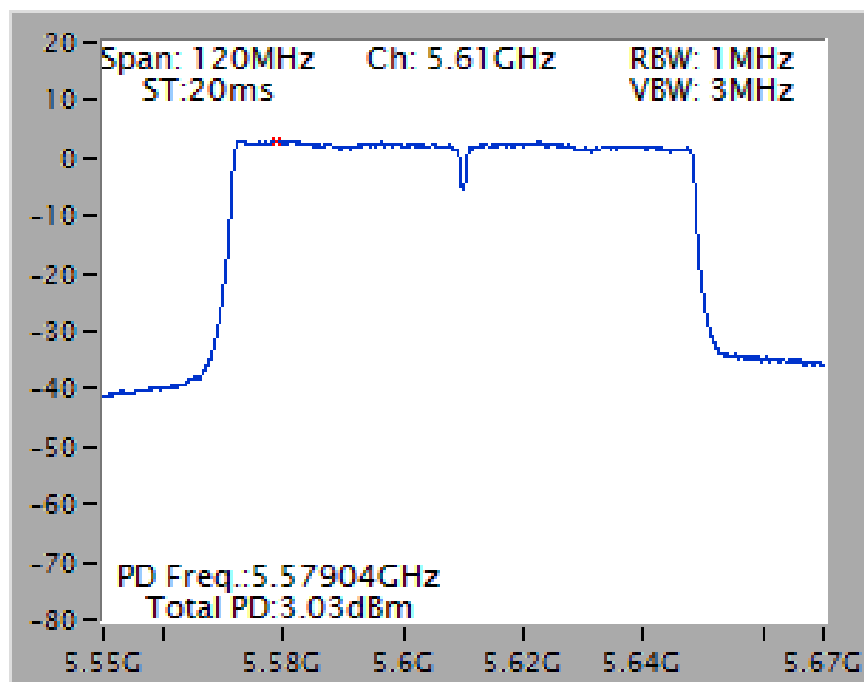


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

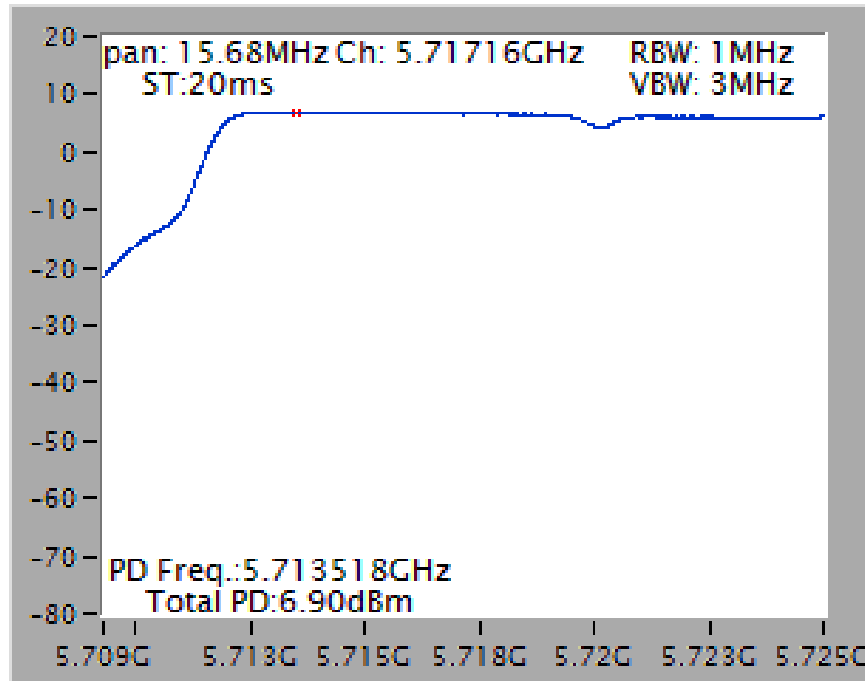


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

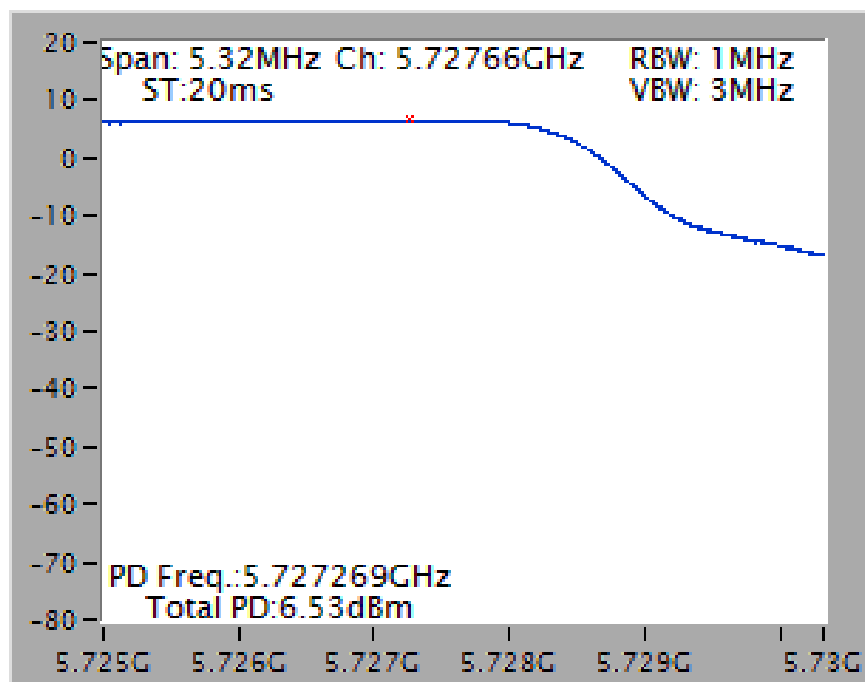


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

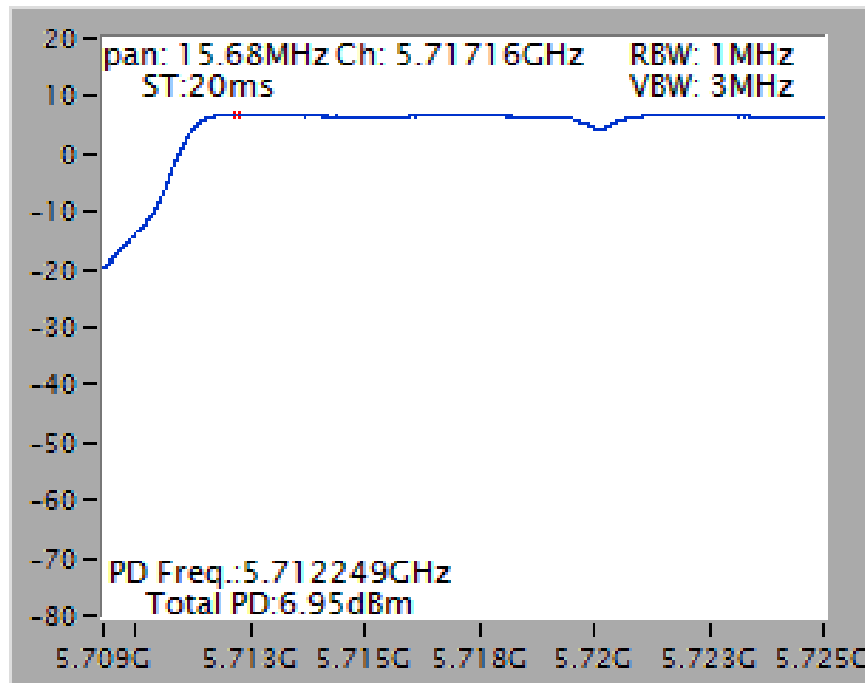


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

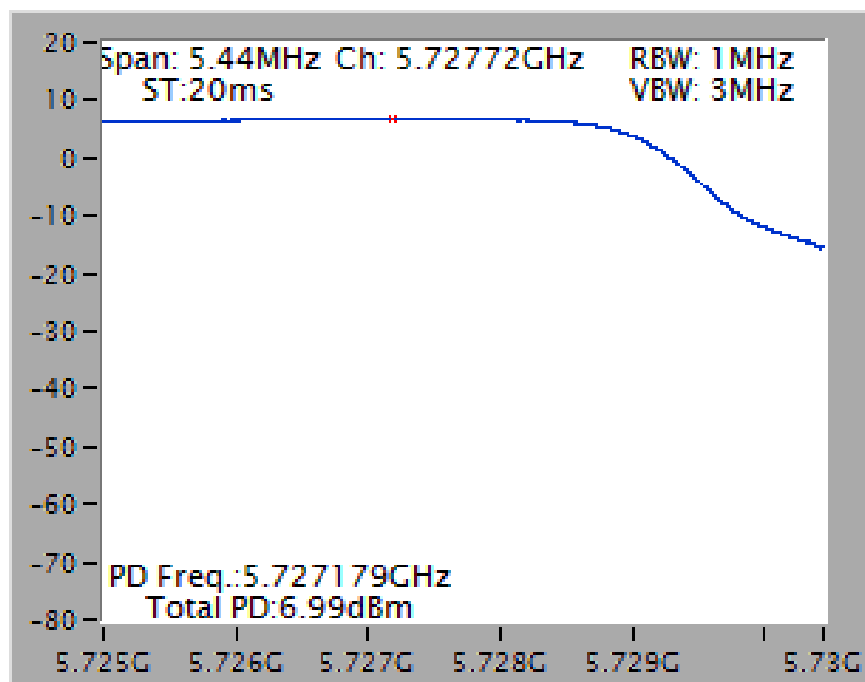


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

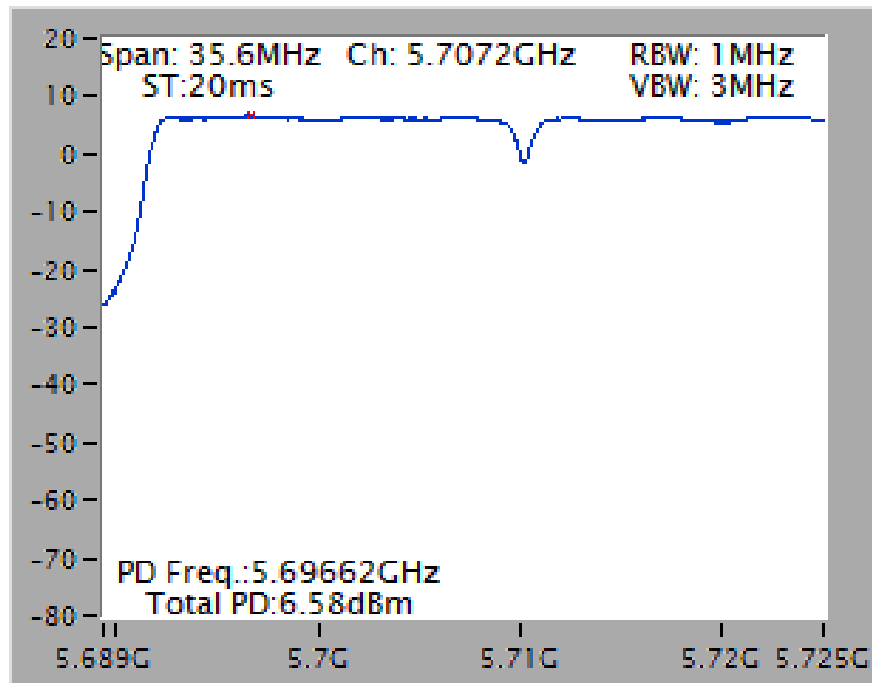


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

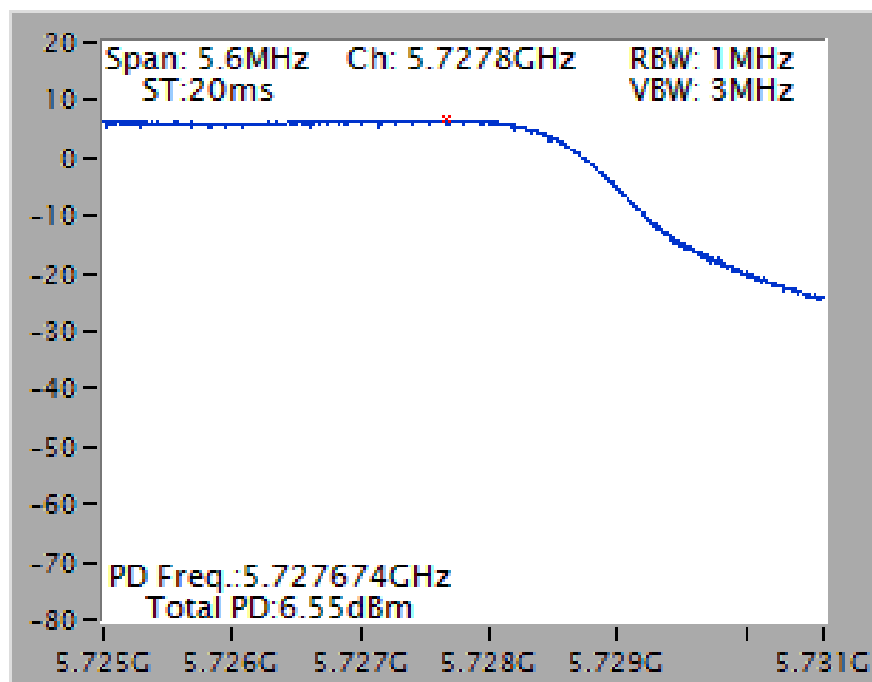

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

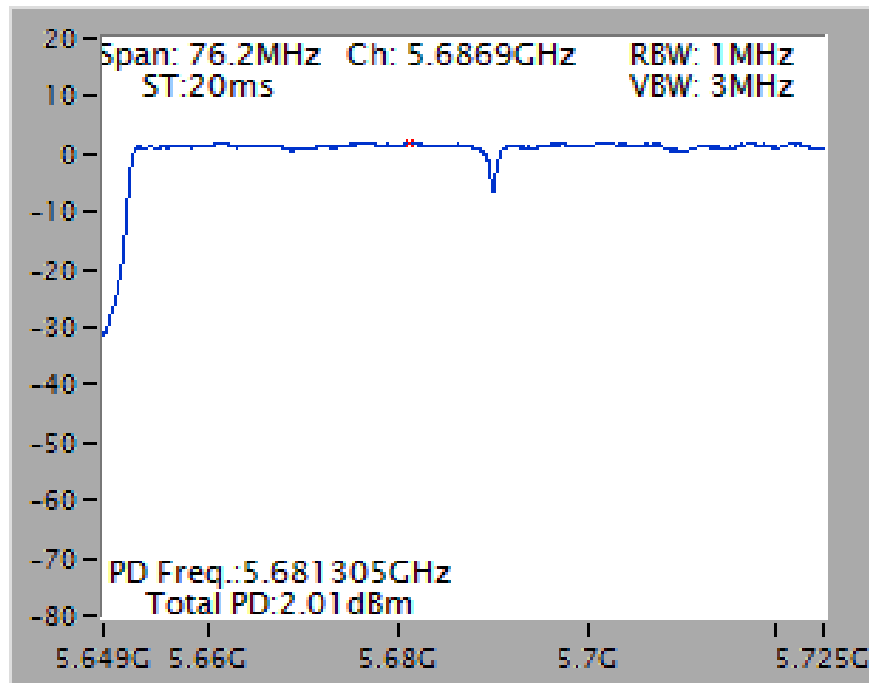


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

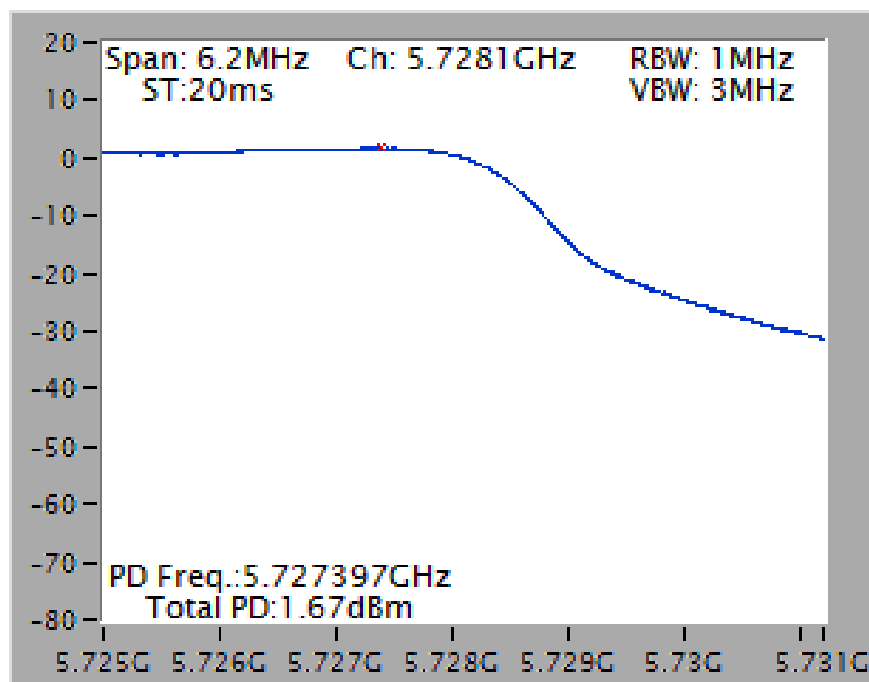


Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*1 / 1TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5320 MHz

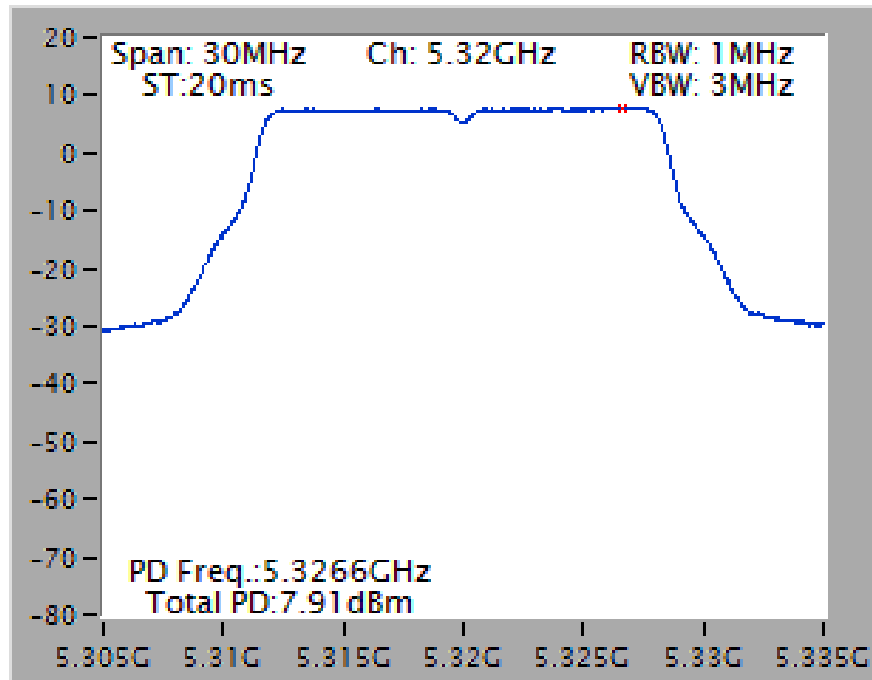


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5500 MHz

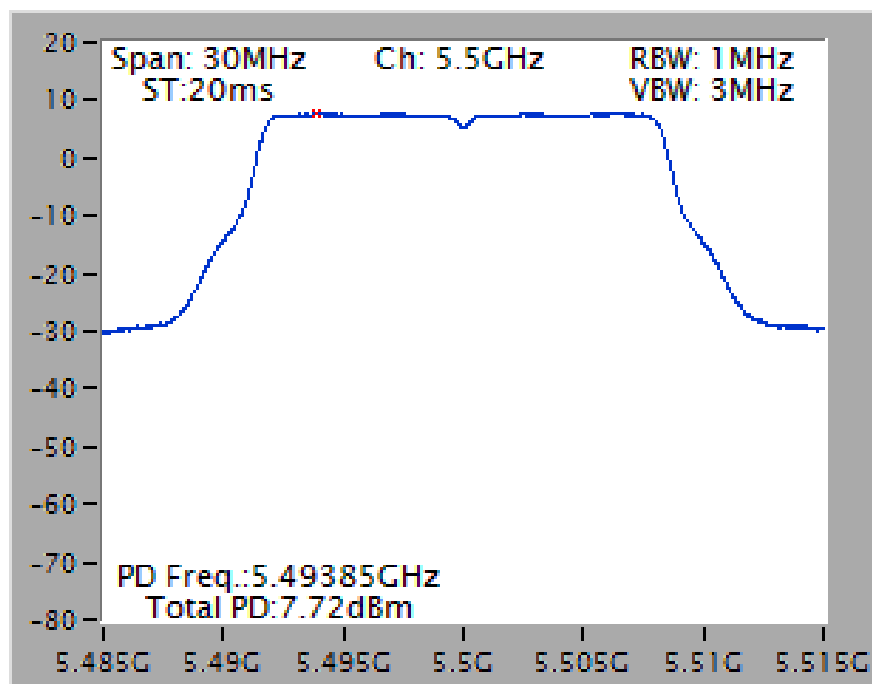


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5260 MHz

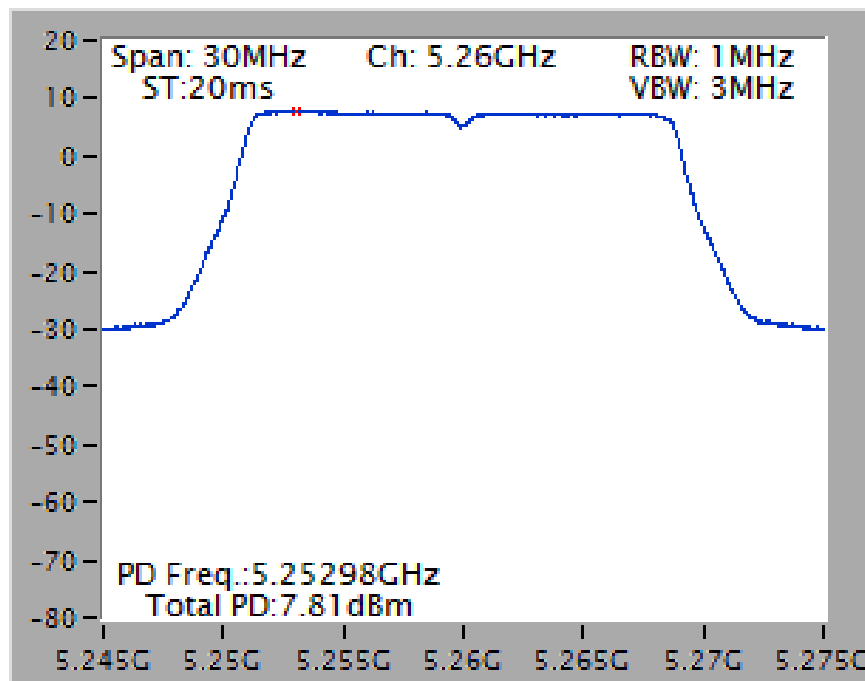


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5580 MHz

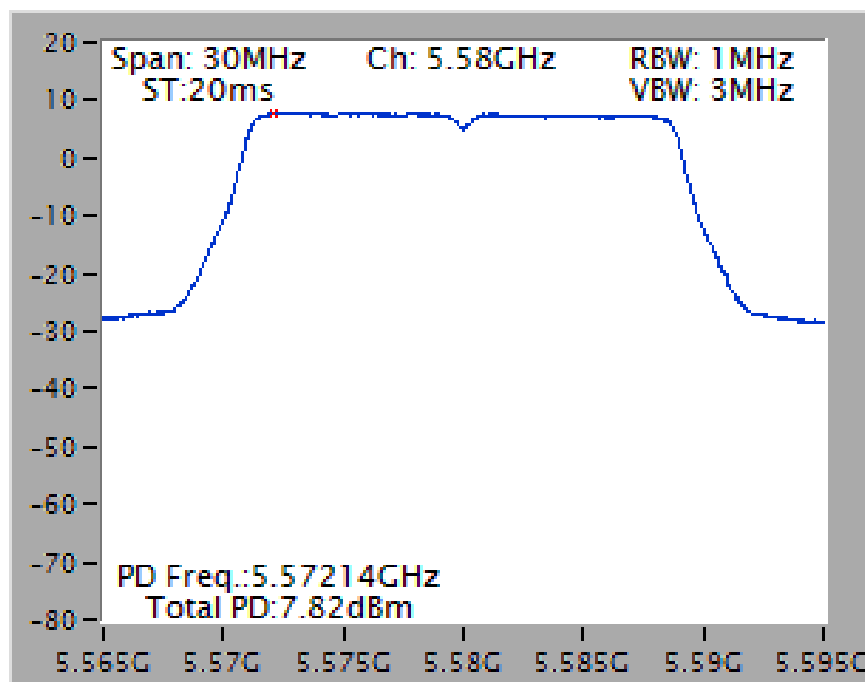


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5270 MHz

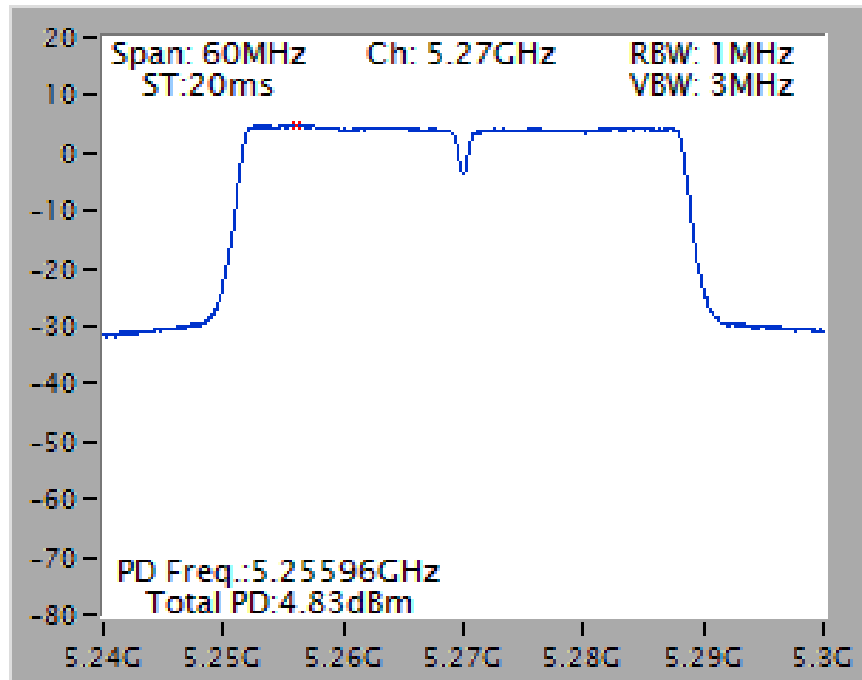


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5550 MHz

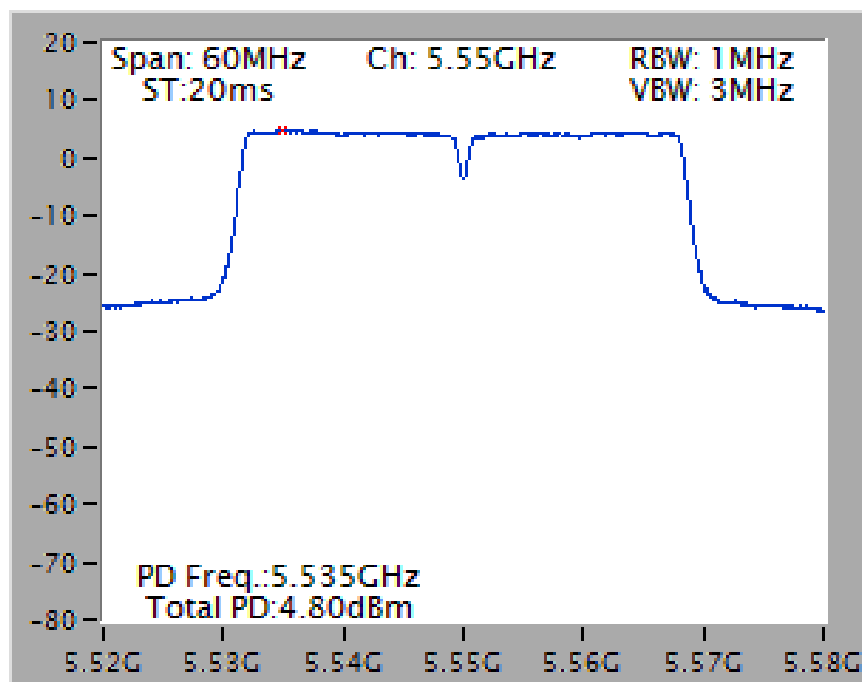

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5290 MHz

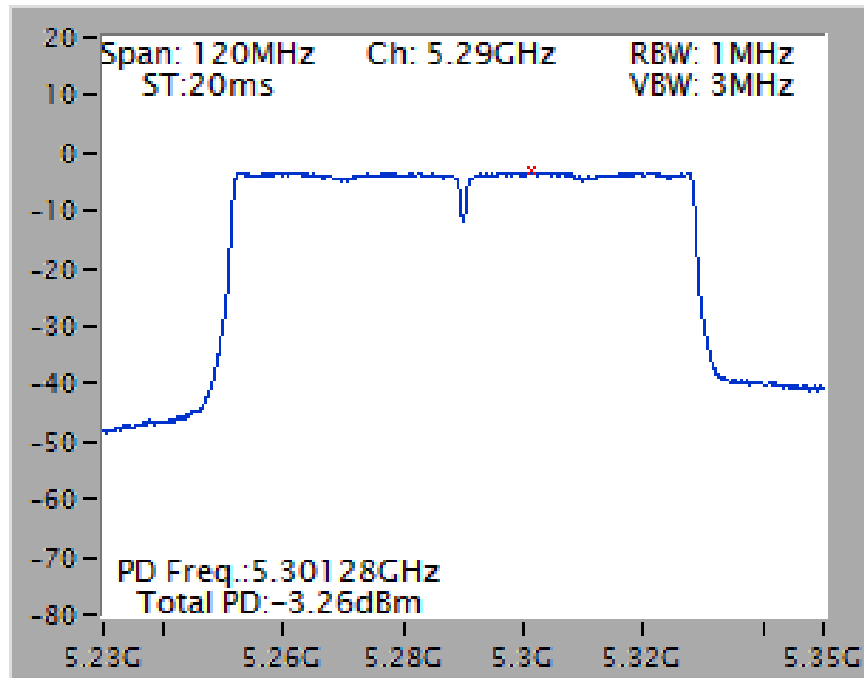


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5610 MHz

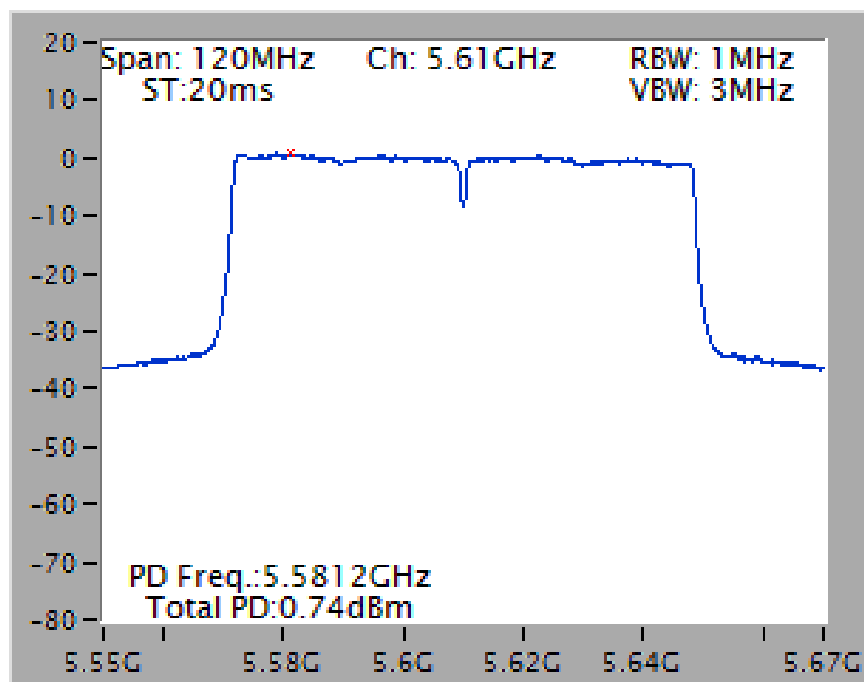


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 2C)

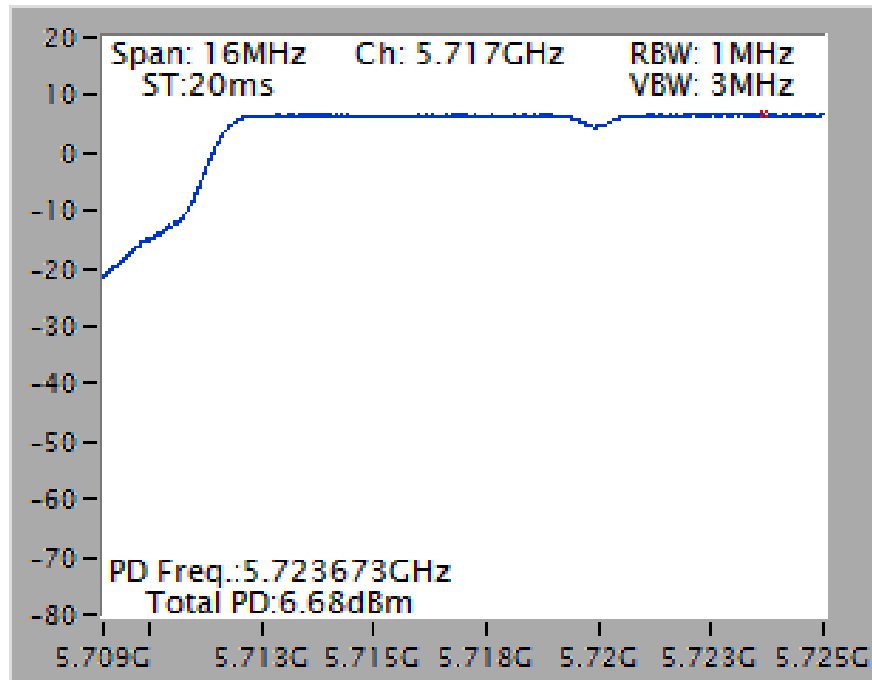


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 3)

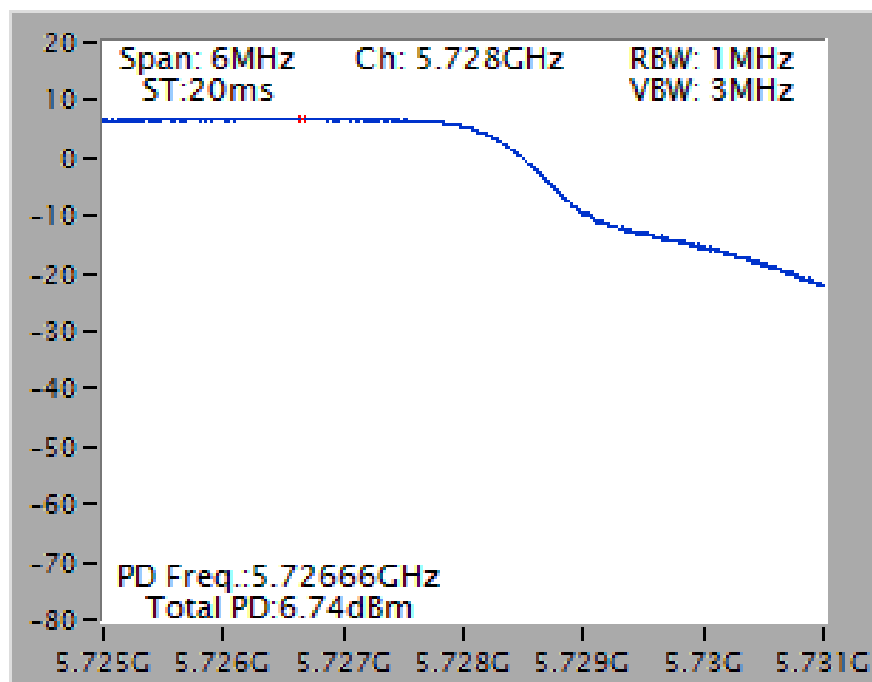


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

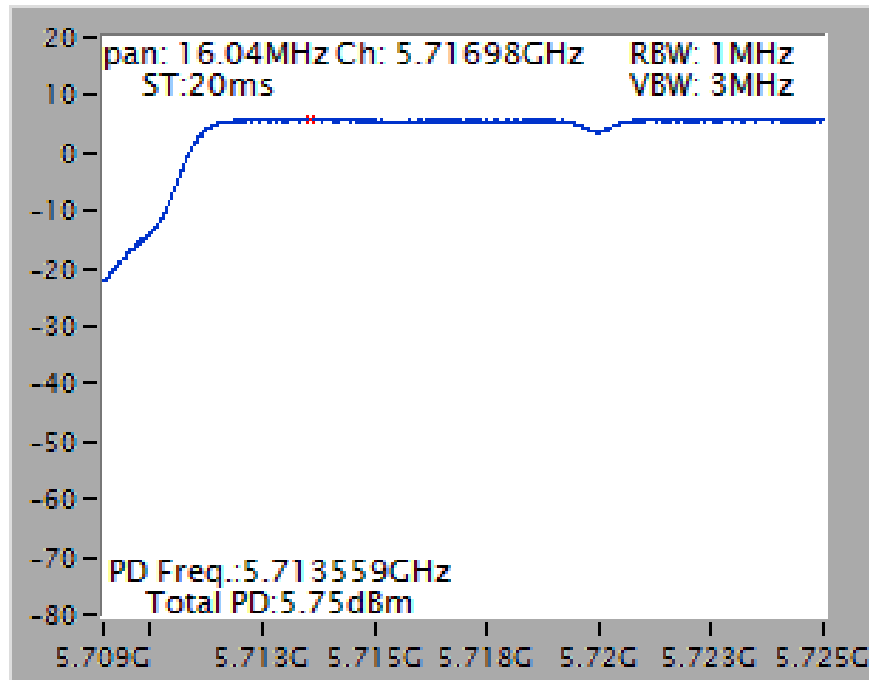


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

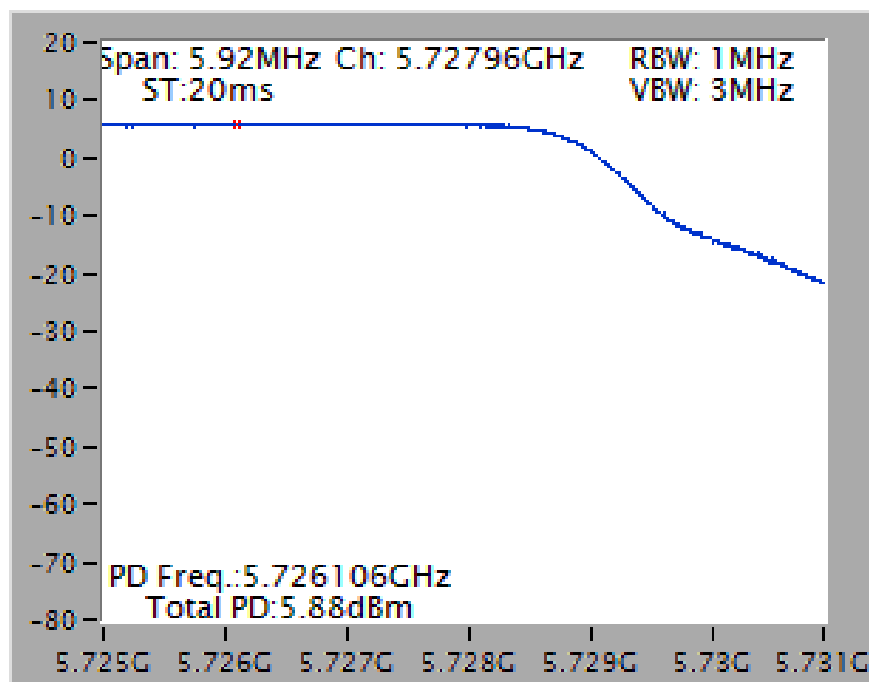


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

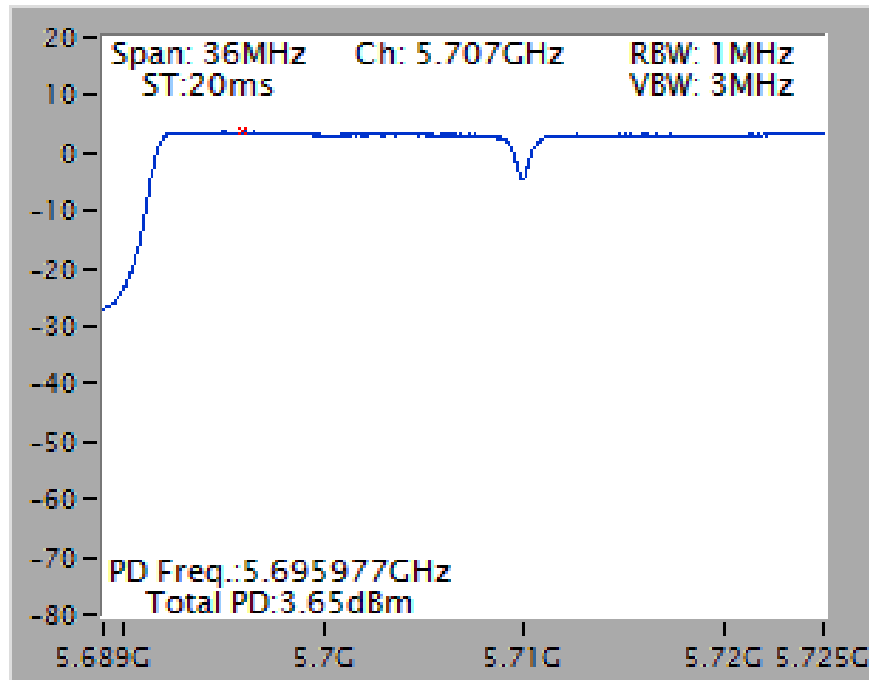


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)

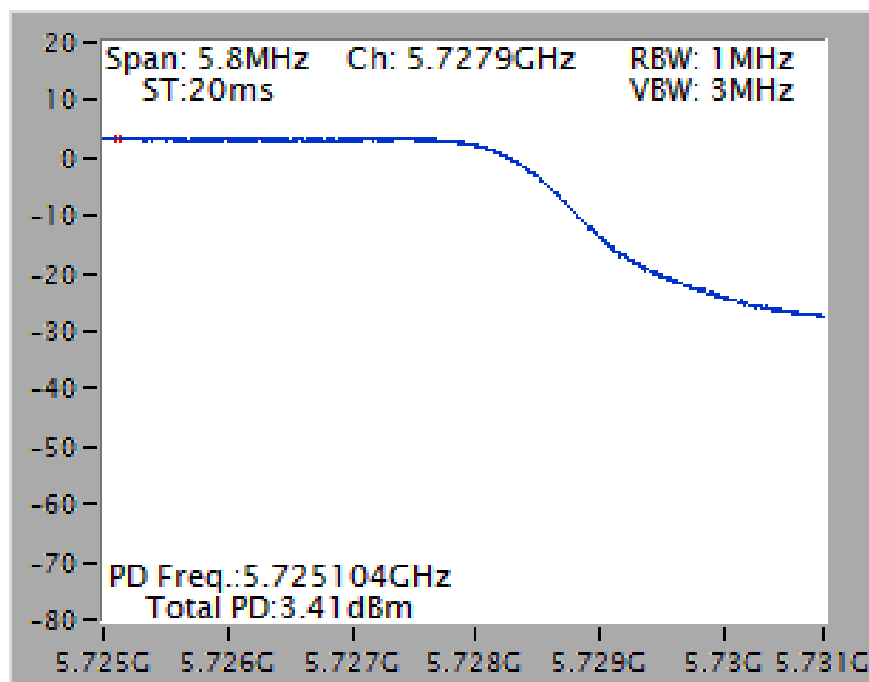

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

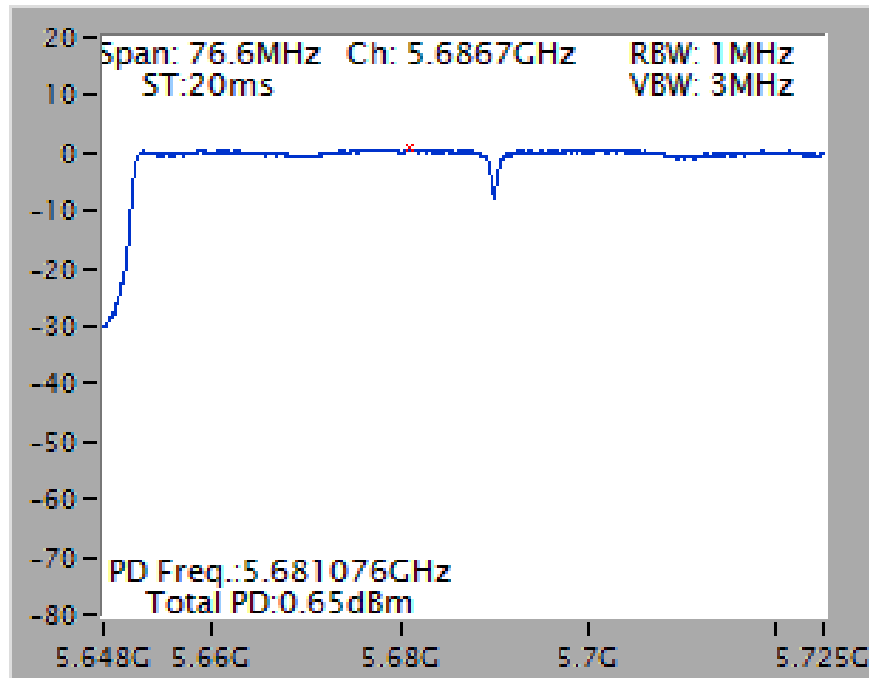


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

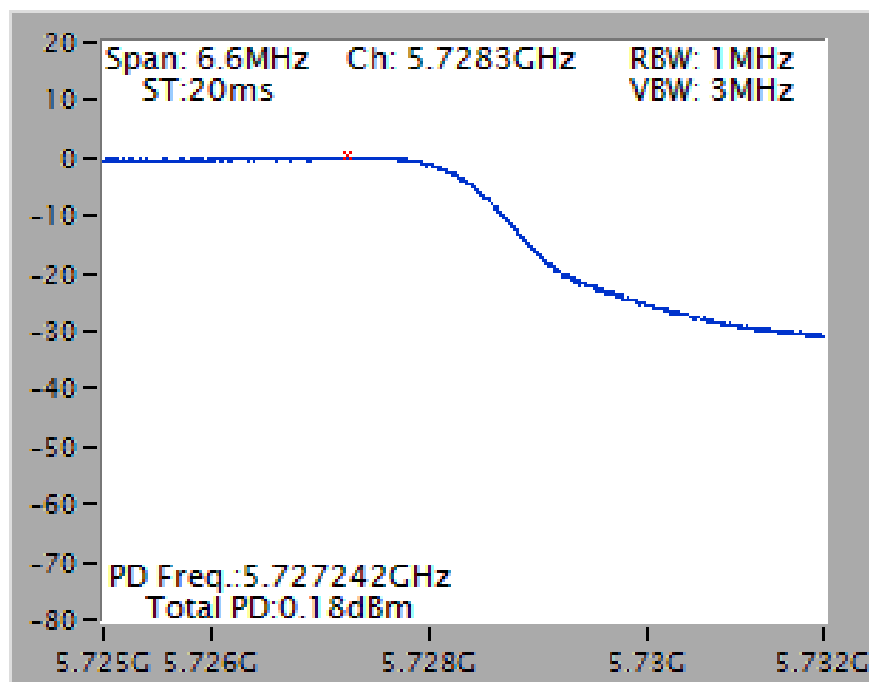


Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*1, (2B)1.66dBi*1 / 2TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5260 MHz

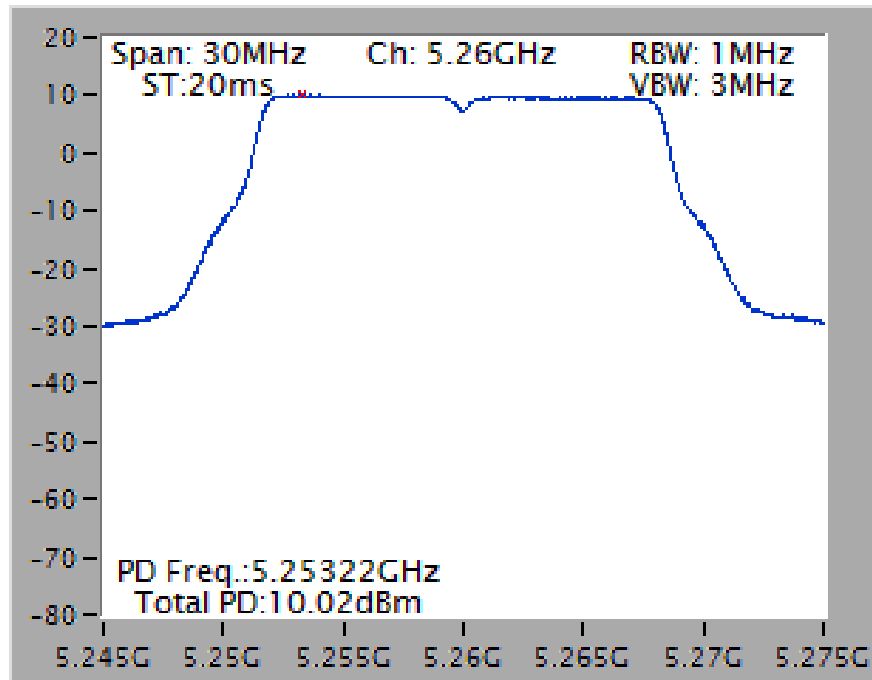


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5580 MHz

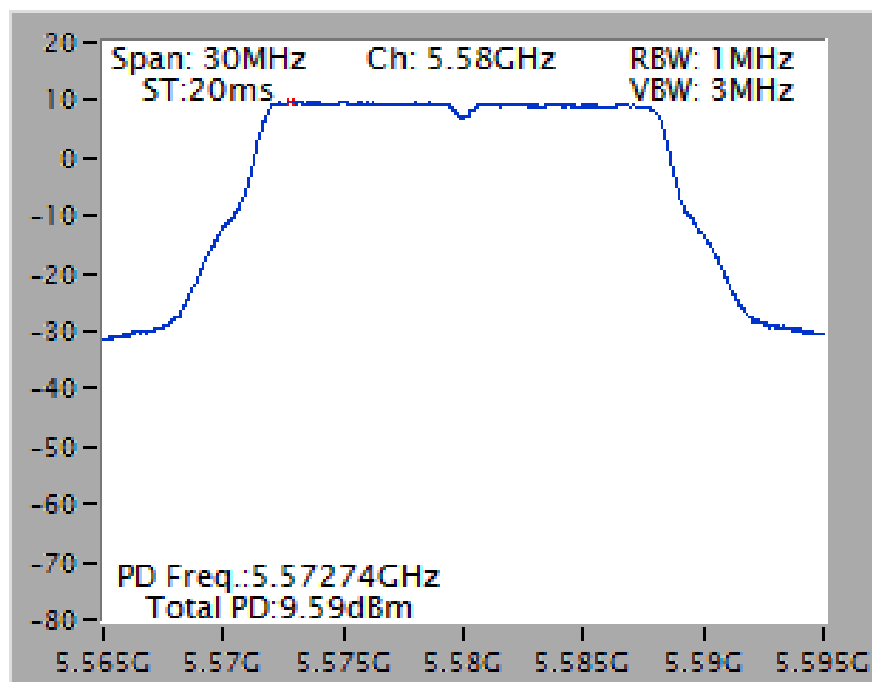


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5300 MHz

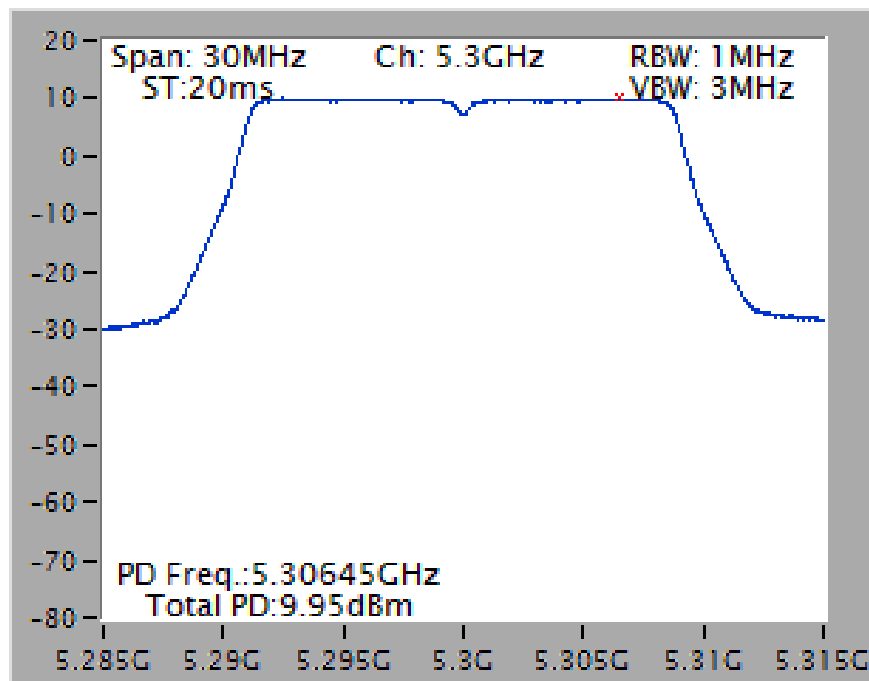


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5500 MHz

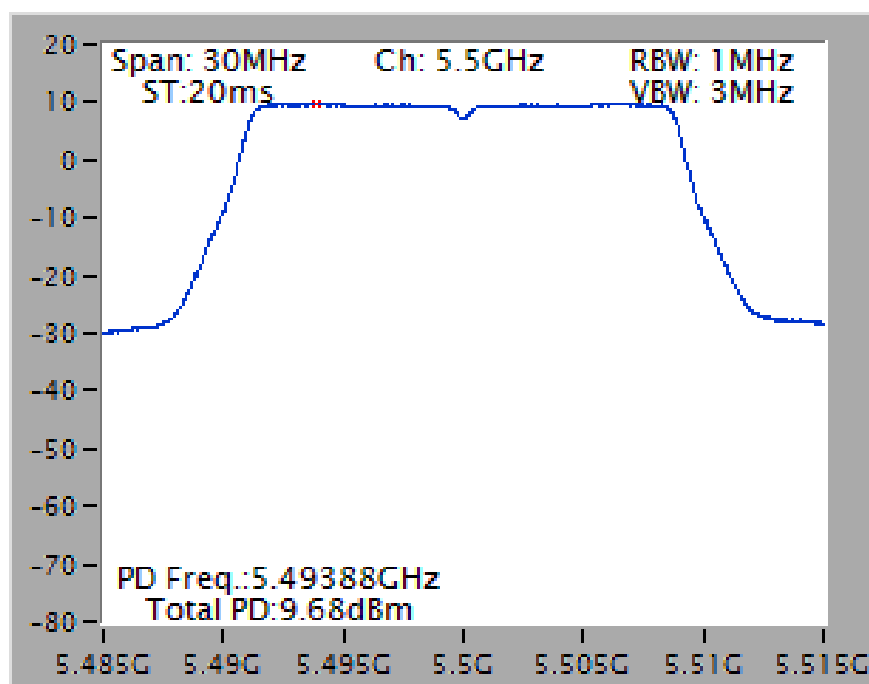


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5270 MHz

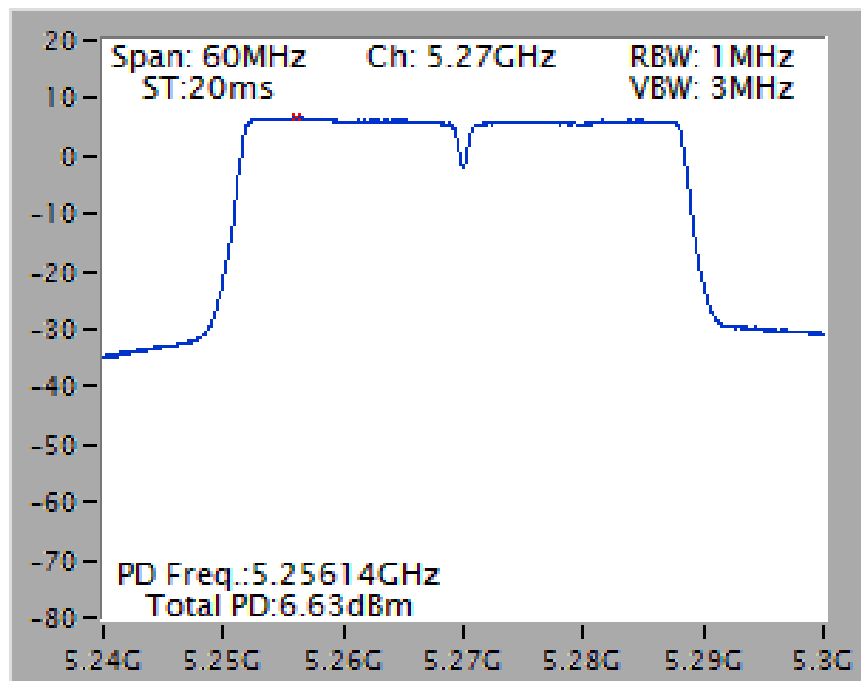


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5550 MHz

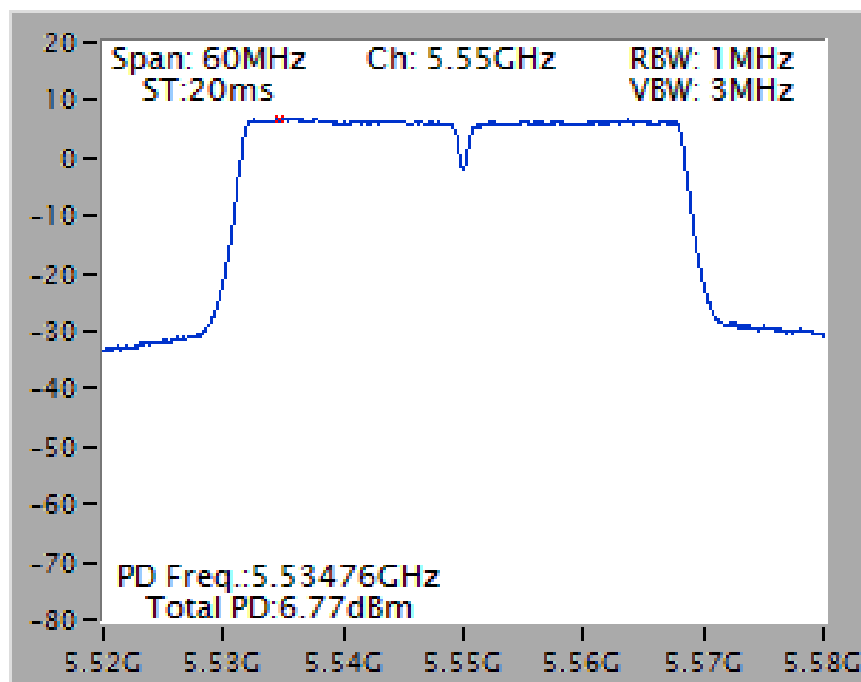

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5290 MHz

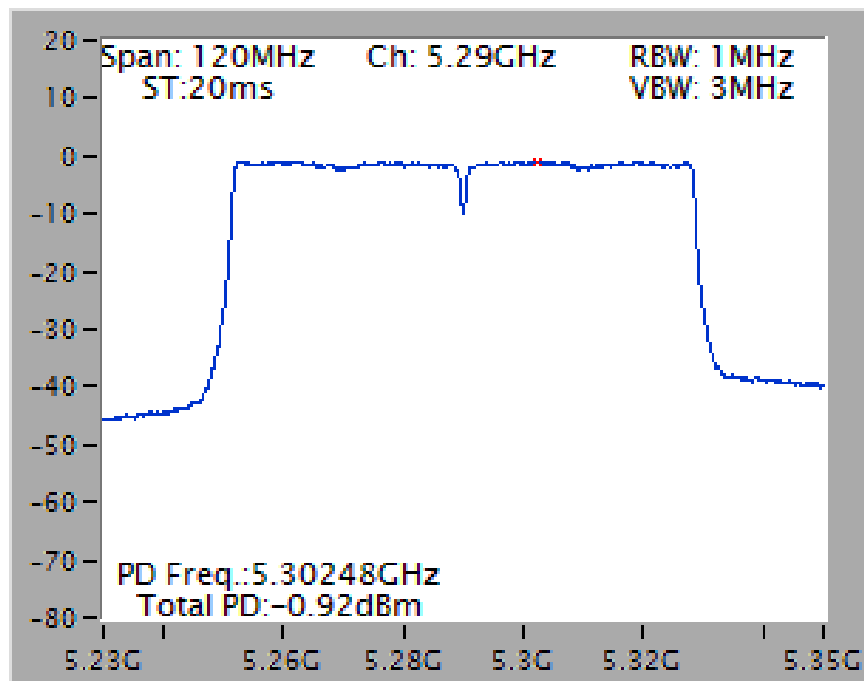


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5610 MHz

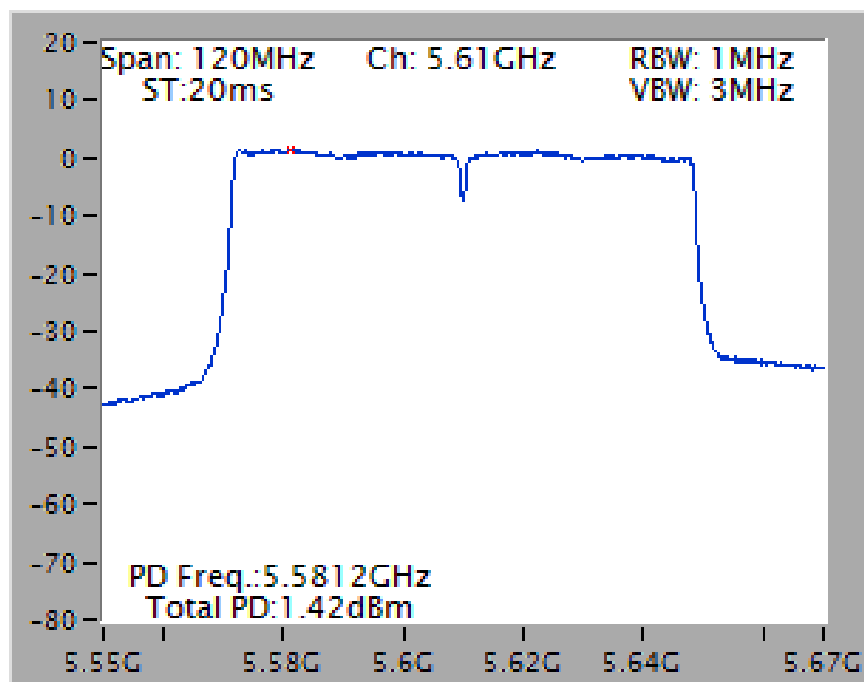


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5720 MHz (UNII 2C)

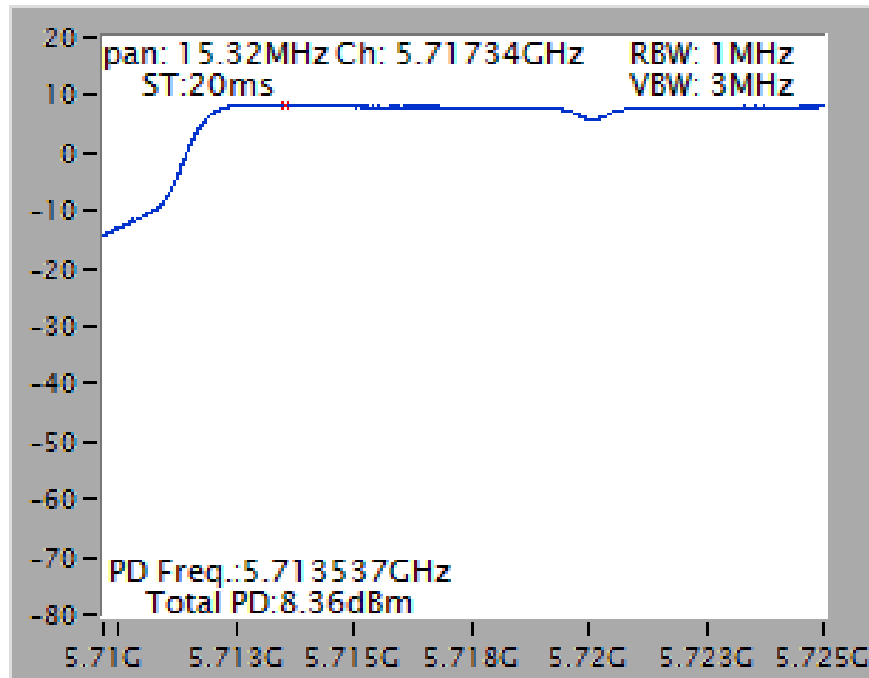


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5720 MHz (UNII 3)

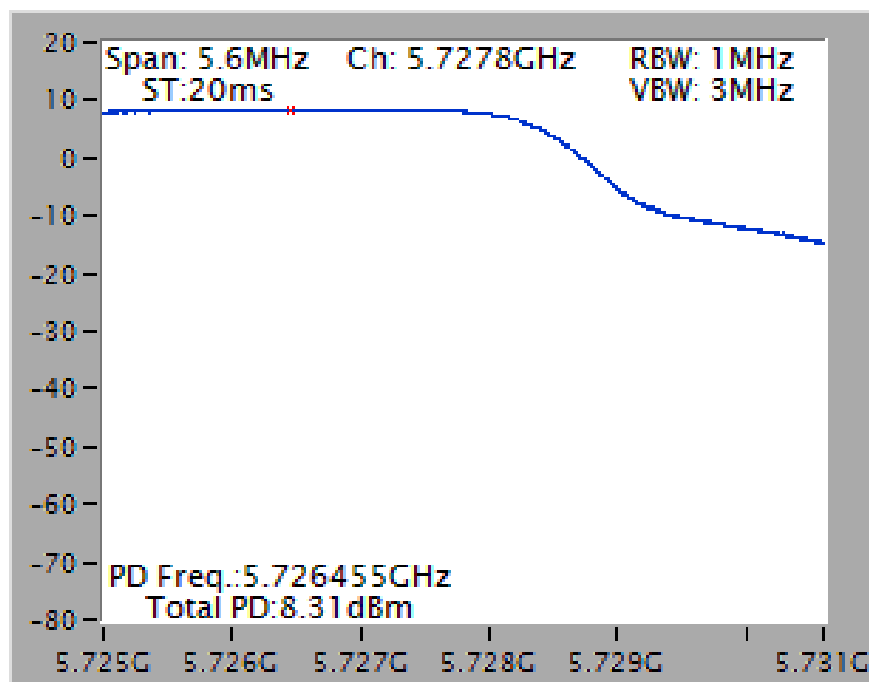


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5720 MHz
(UNII 2C)

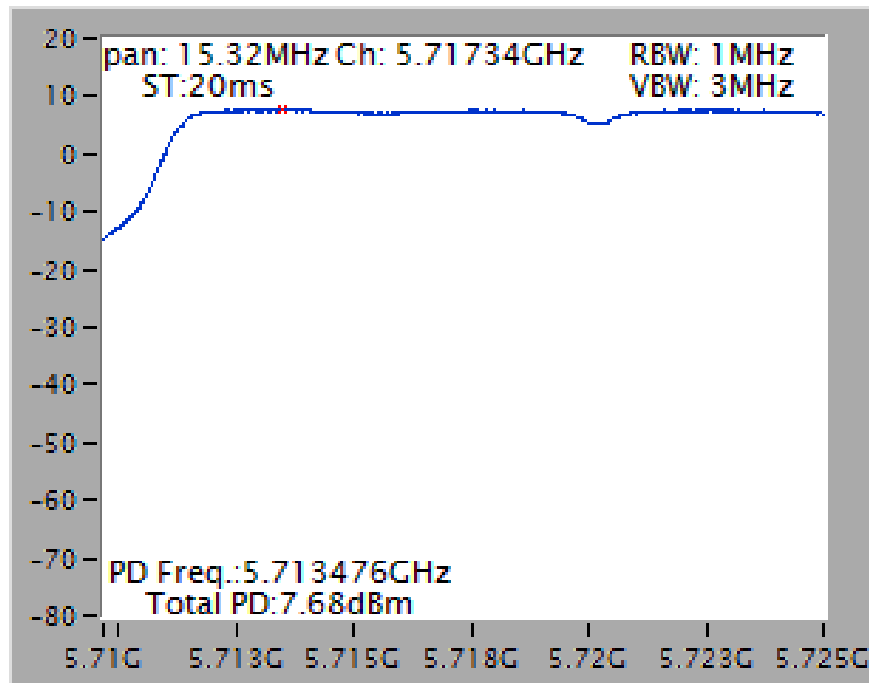


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5720 MHz
(UNII 3)

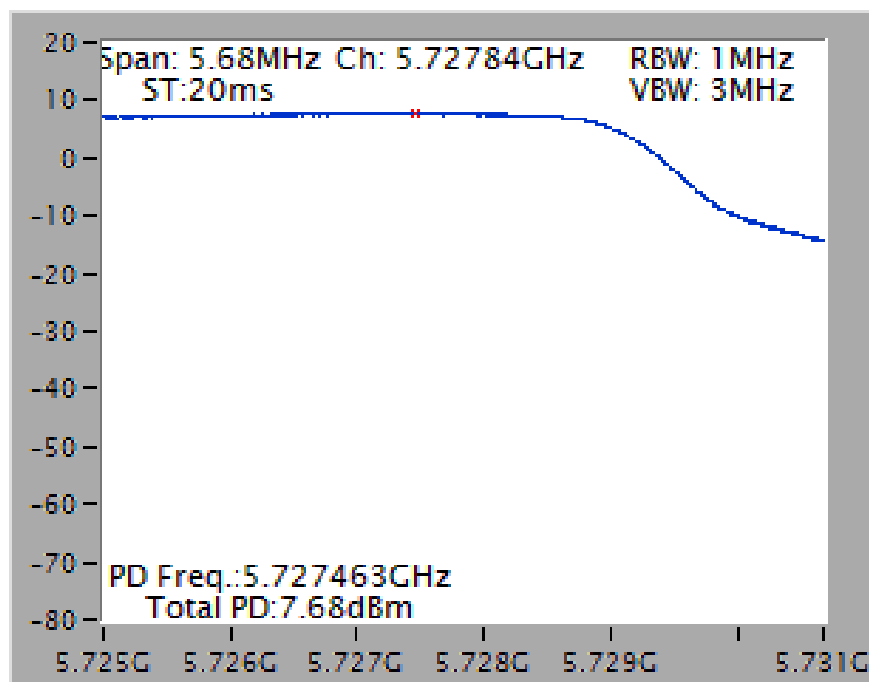


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5710 MHz
(UNII 2C)

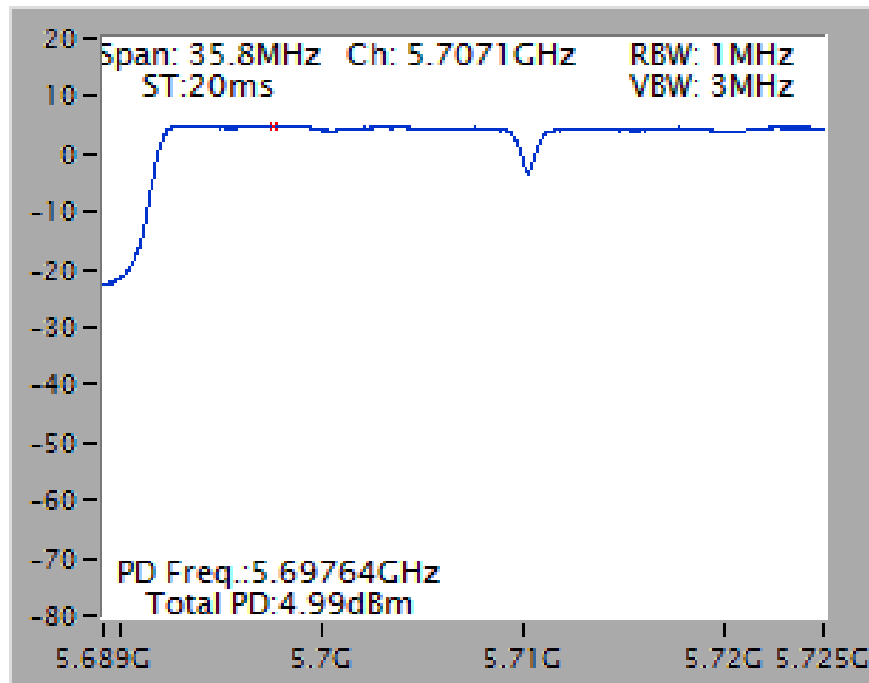


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5710 MHz
(UNII 3)

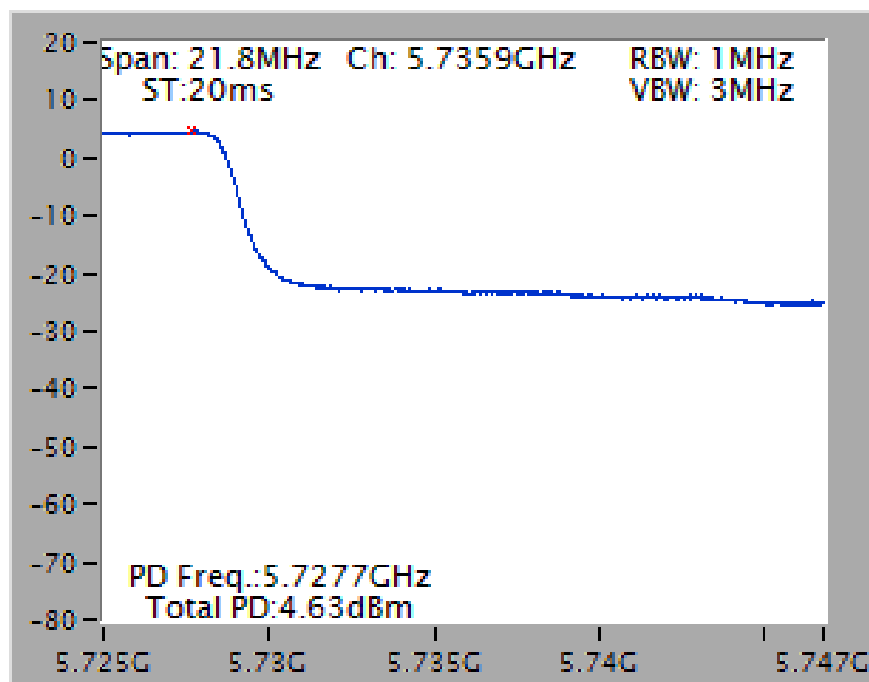

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5690 MHz
(UNII 2C)

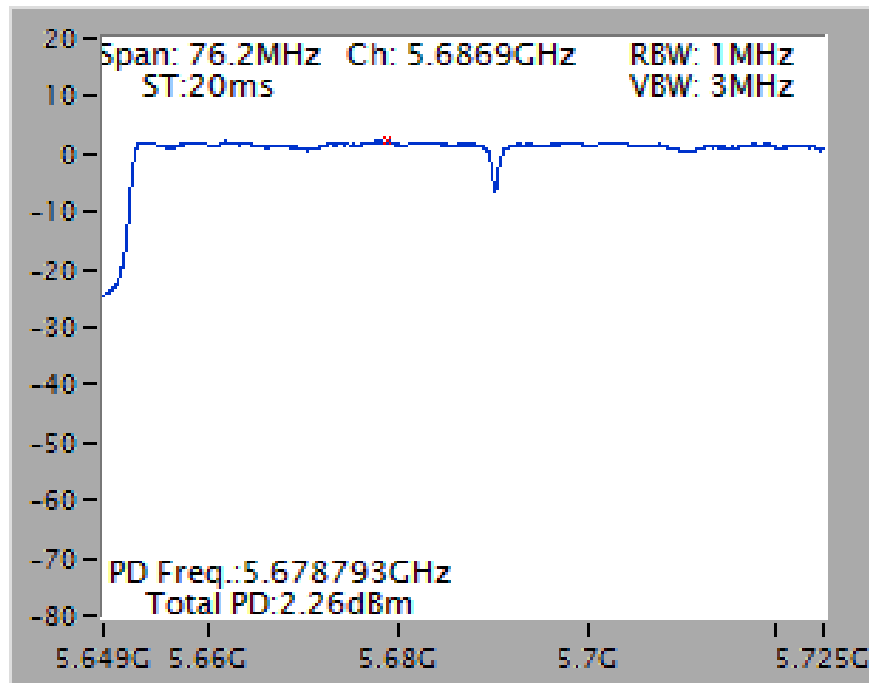


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5690 MHz
(UNII 3)

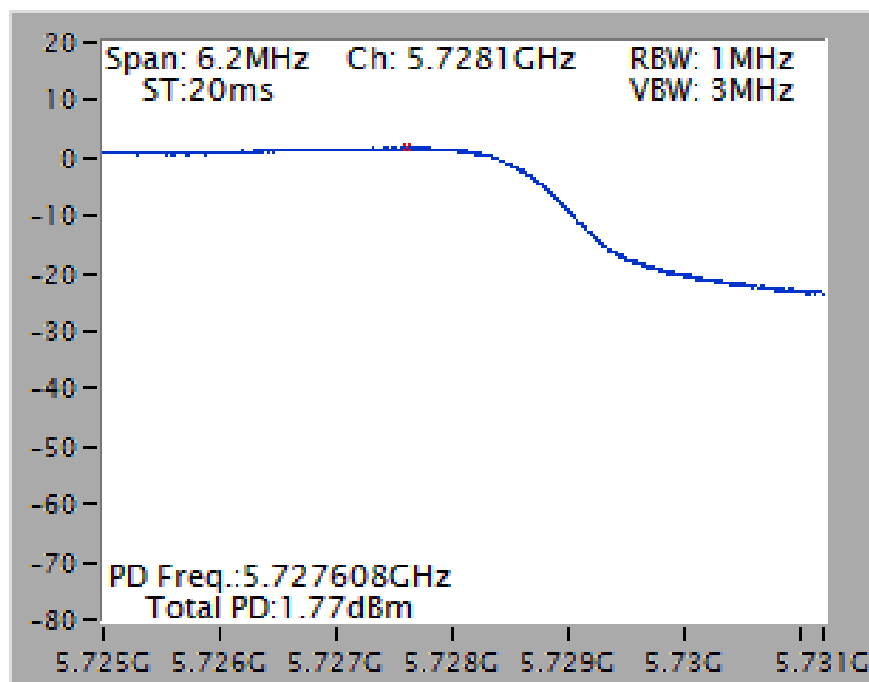


Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*1 / 3TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5300 MHz

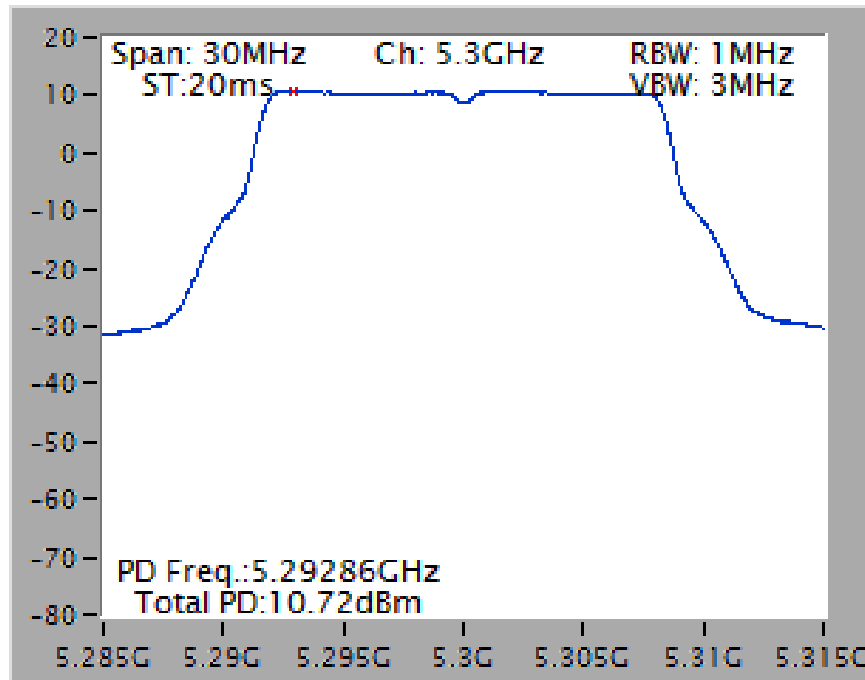


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5500 MHz

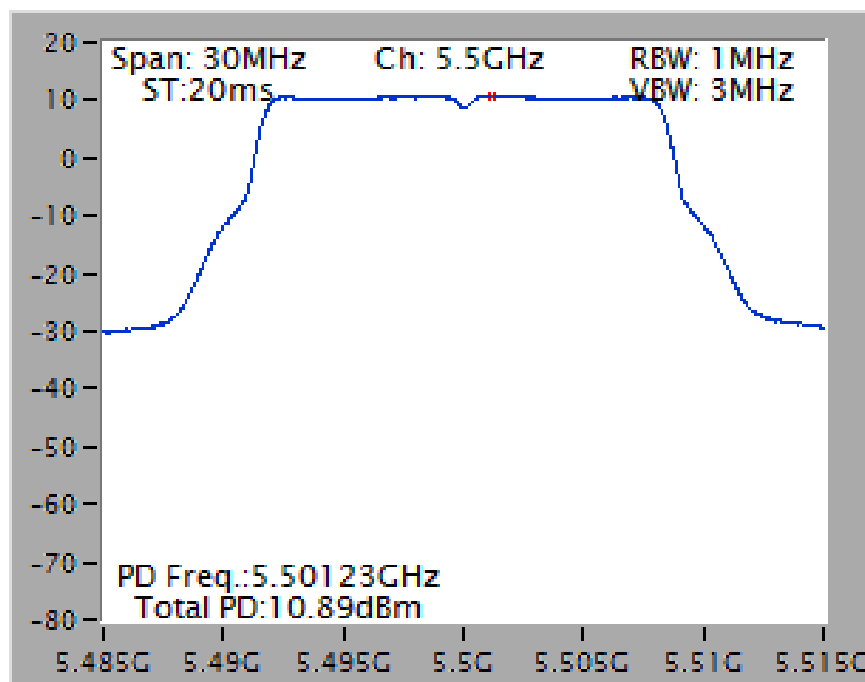


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5260 MHz

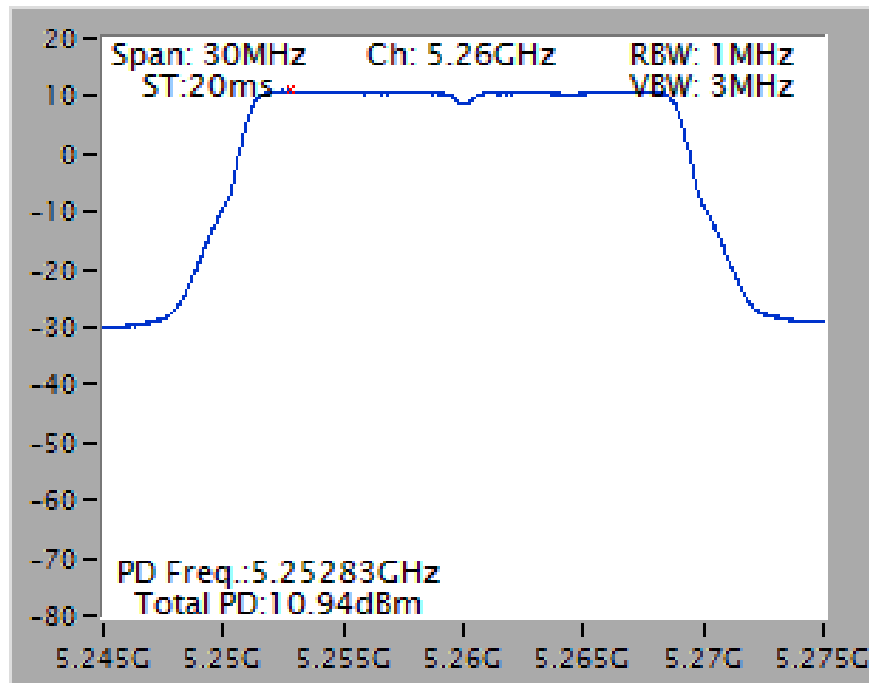


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5580 MHz

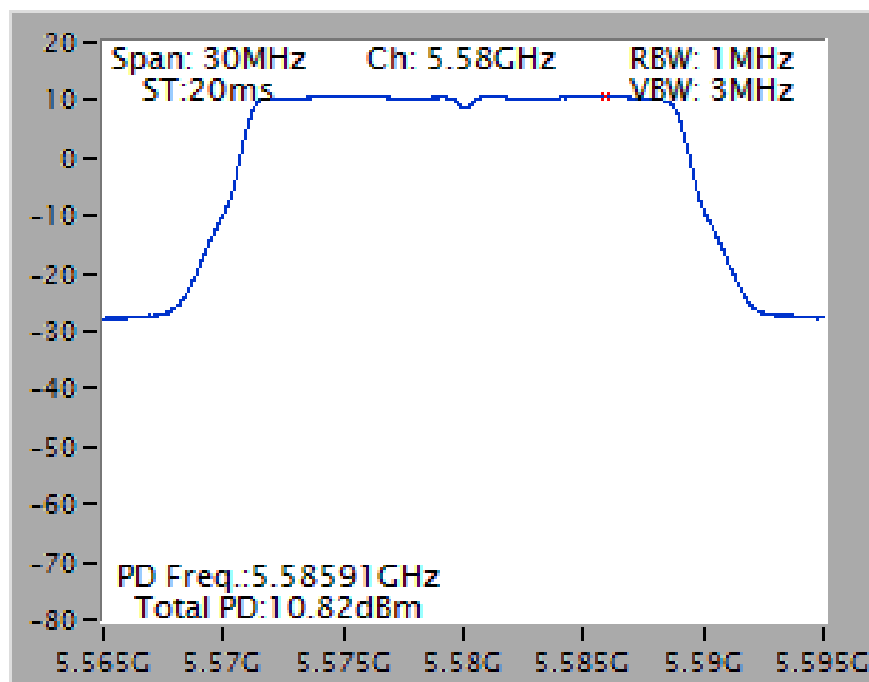


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5270 MHz

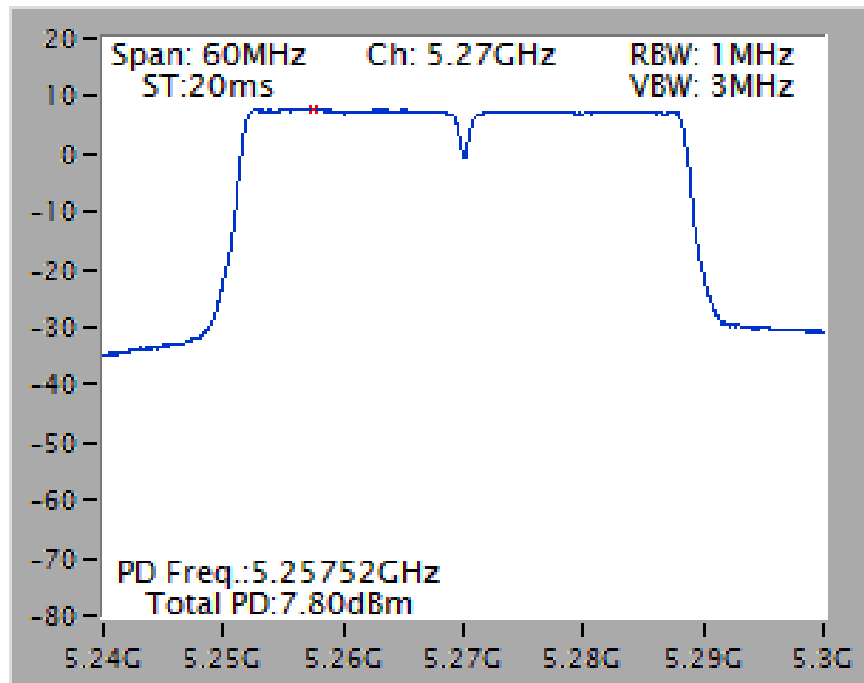


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5670 MHz

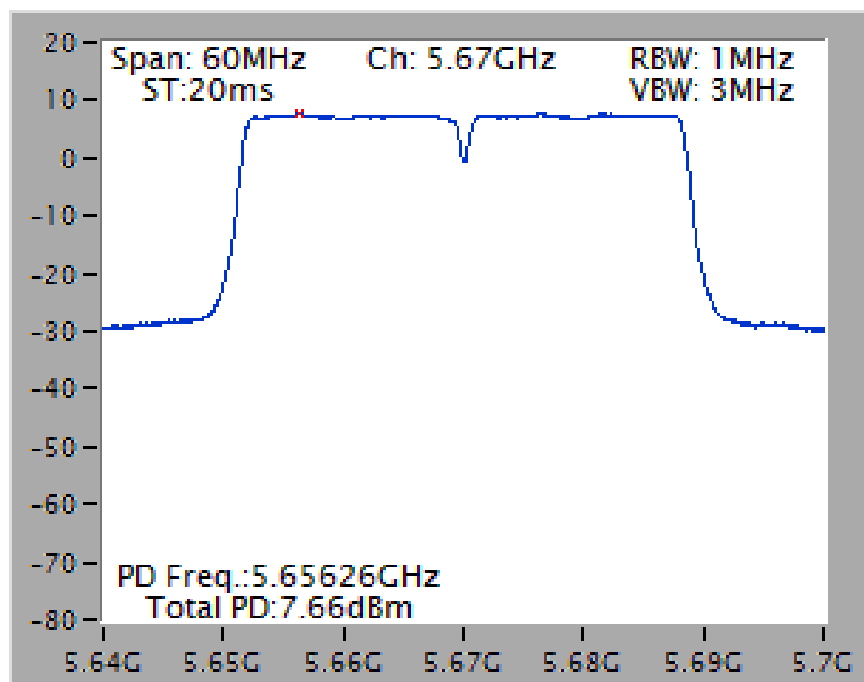

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5290 MHz

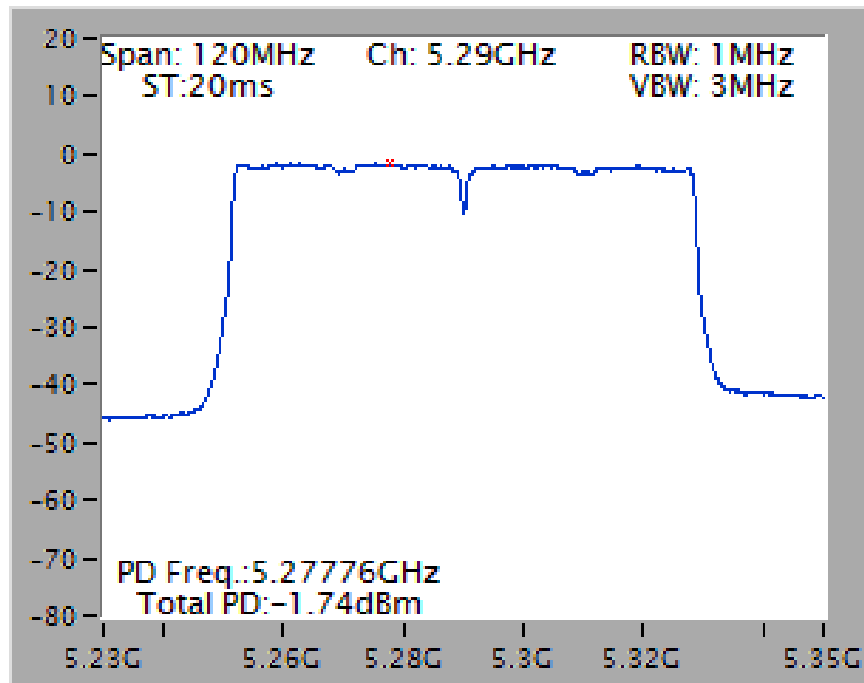


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5610 MHz

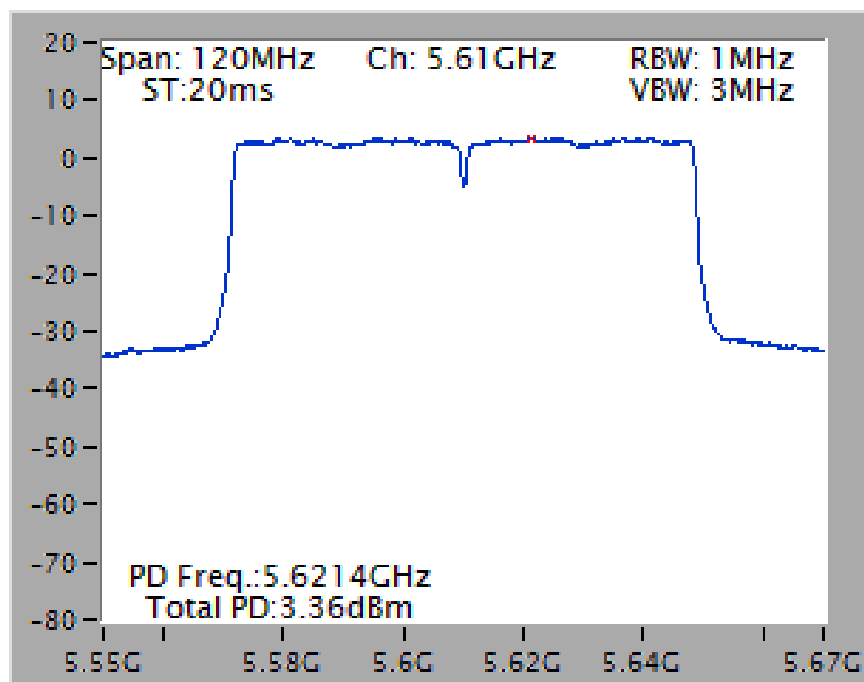


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5720 MHz (UNII 2C)

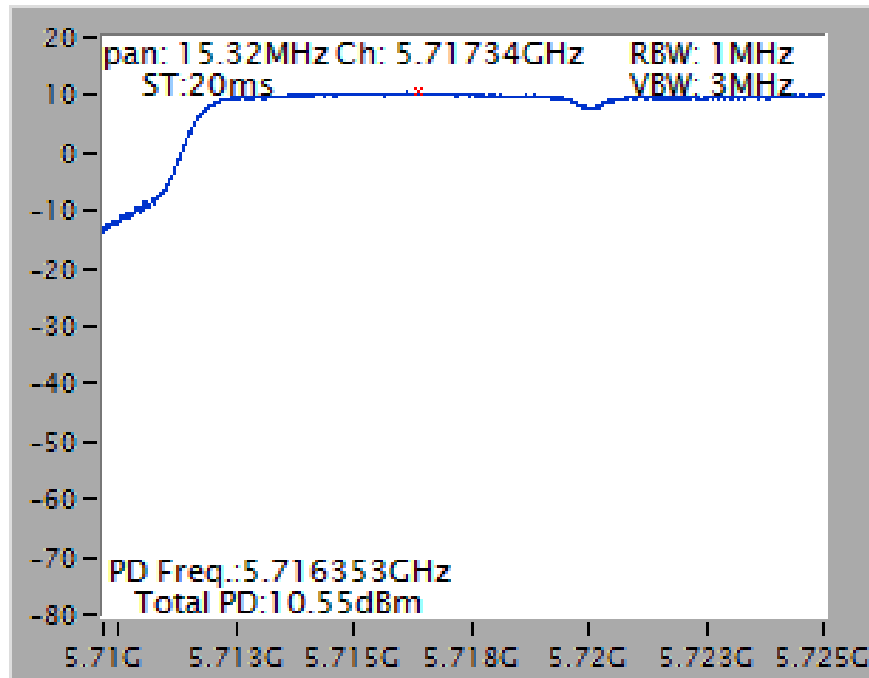


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5720 MHz (UNII 3)

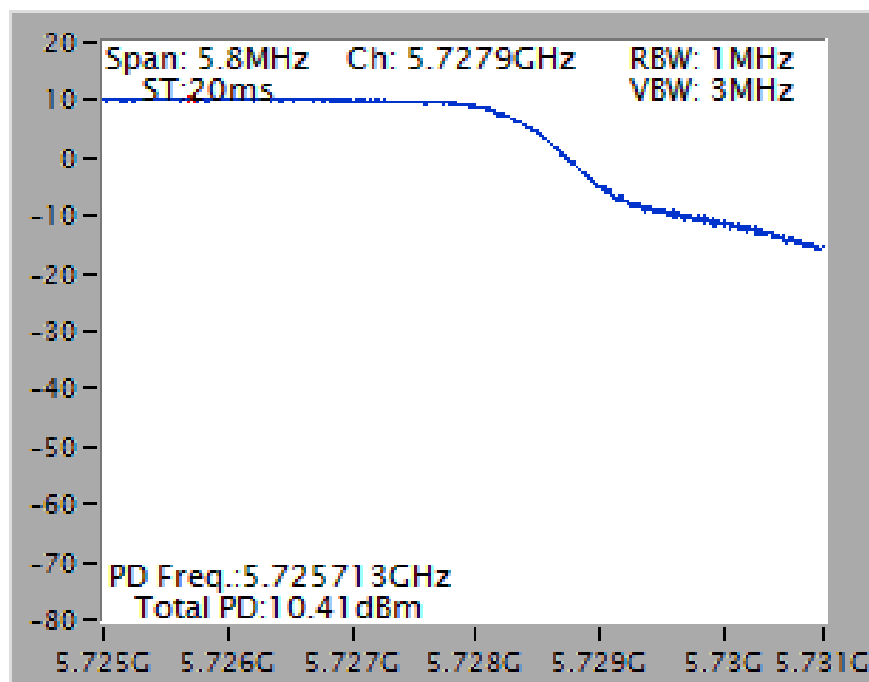


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5720 MHz (UNII 2C)

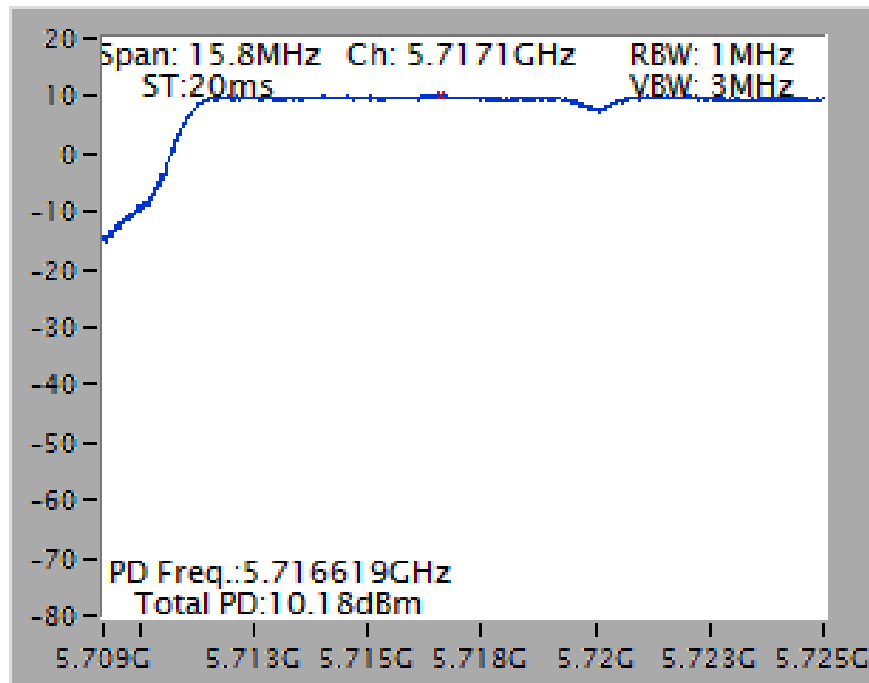


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5720 MHz (UNII 3)

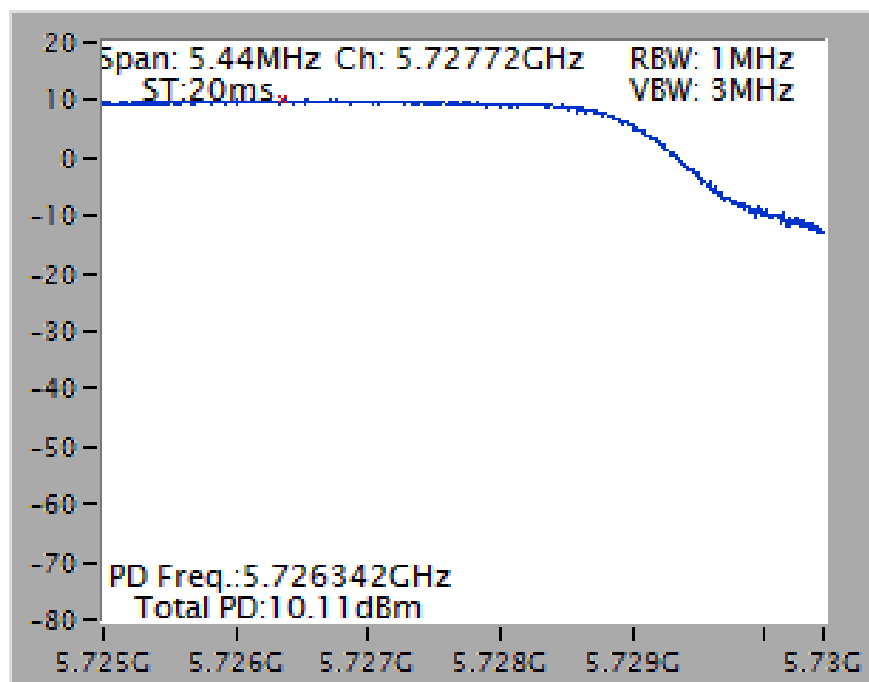


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5710 MHz (UNII 2C)

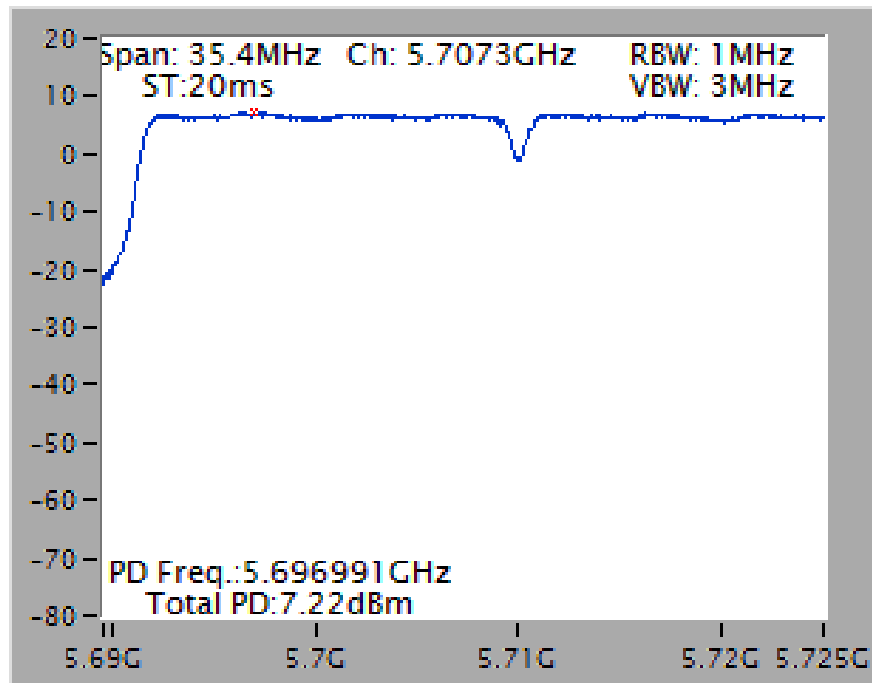


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5710 MHz (UNII 3)

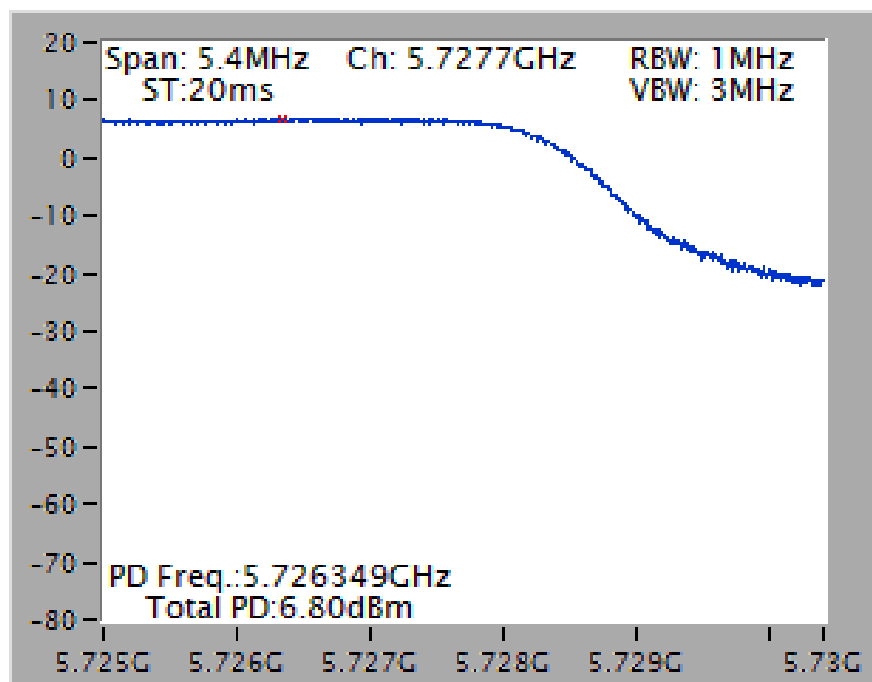

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5690 MHz (UNII 2C)

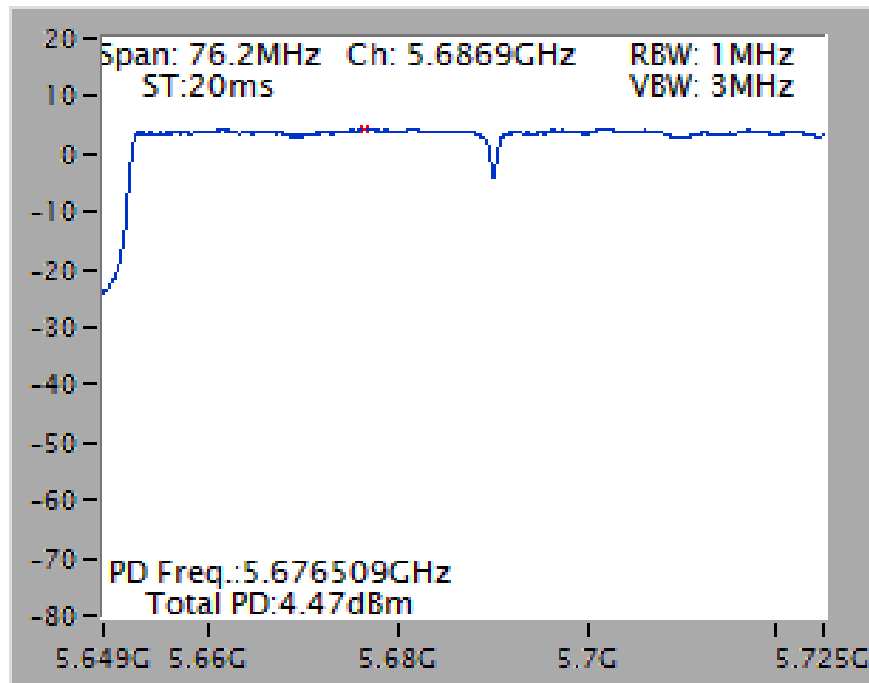


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5690 MHz (UNII 3)

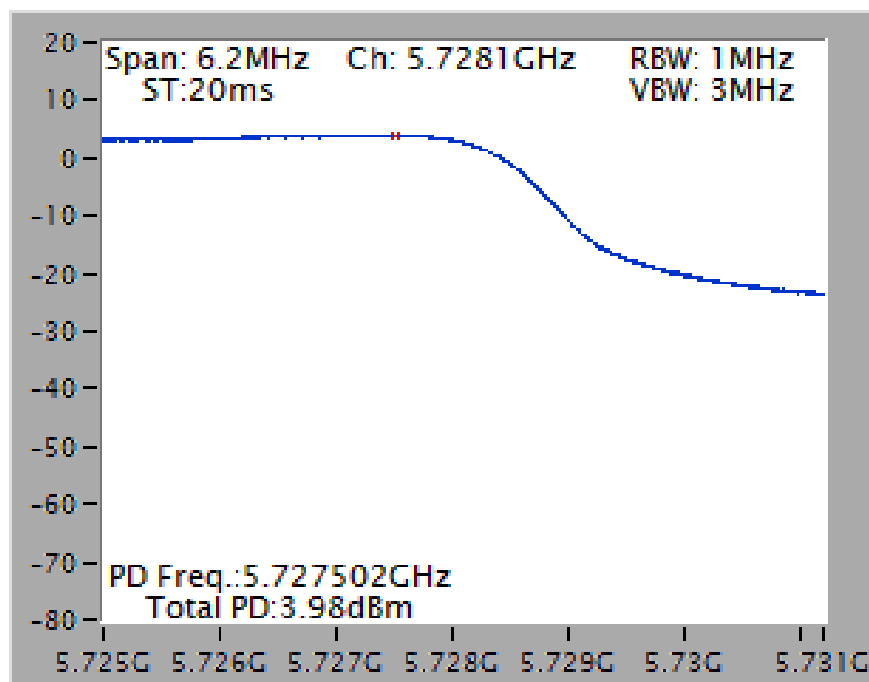


Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

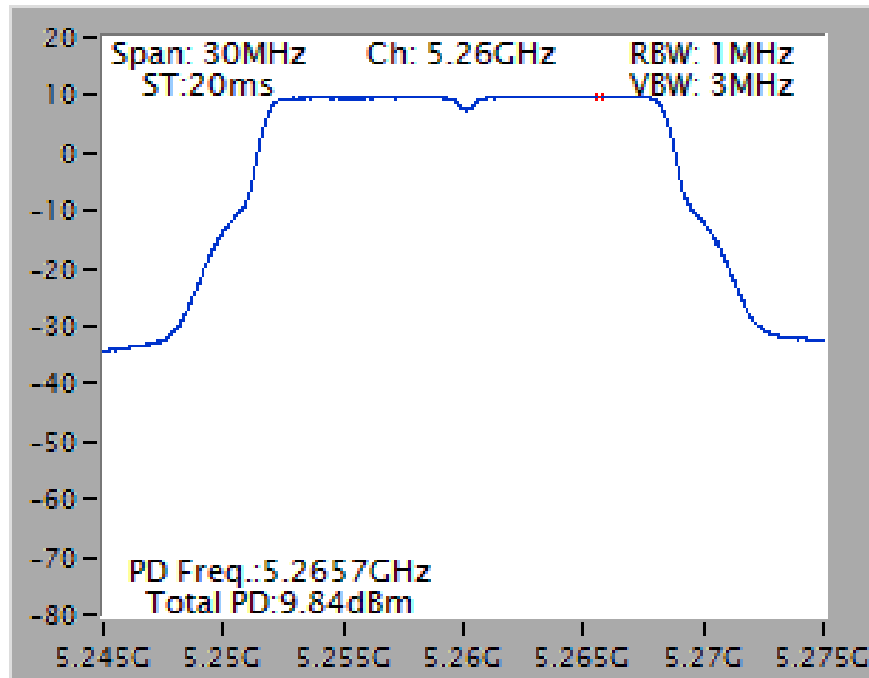


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

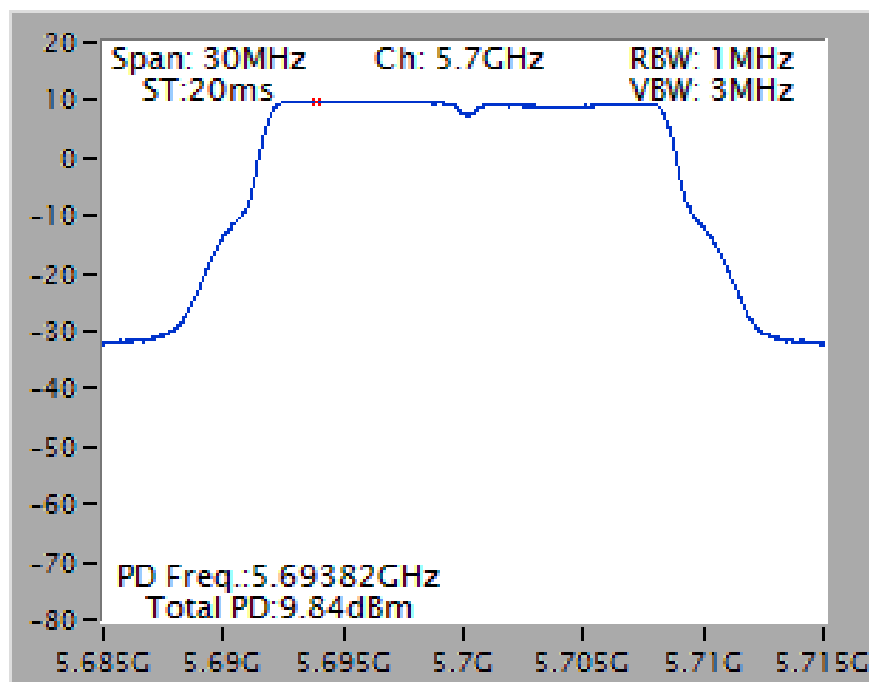


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

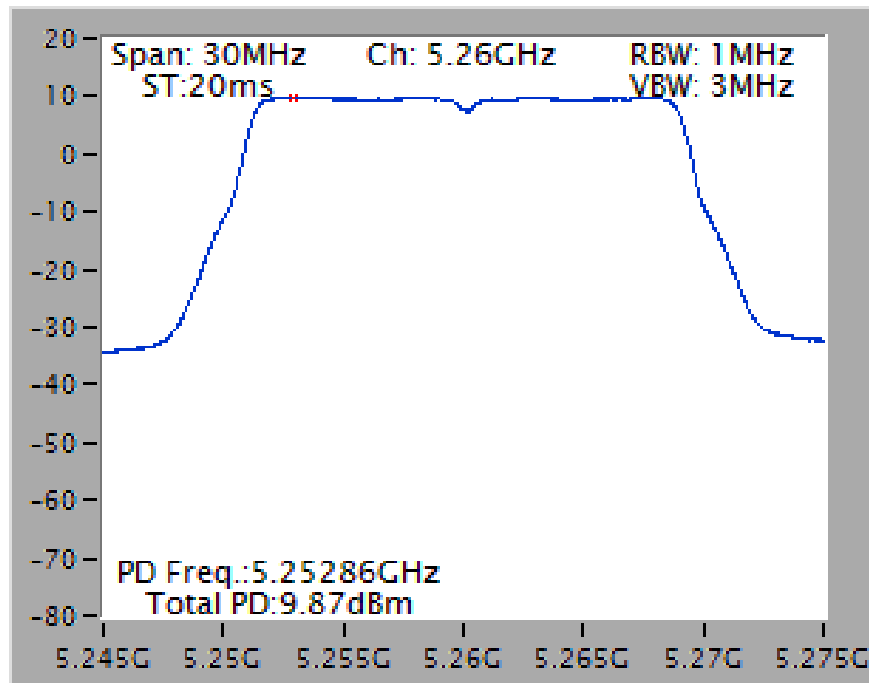


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

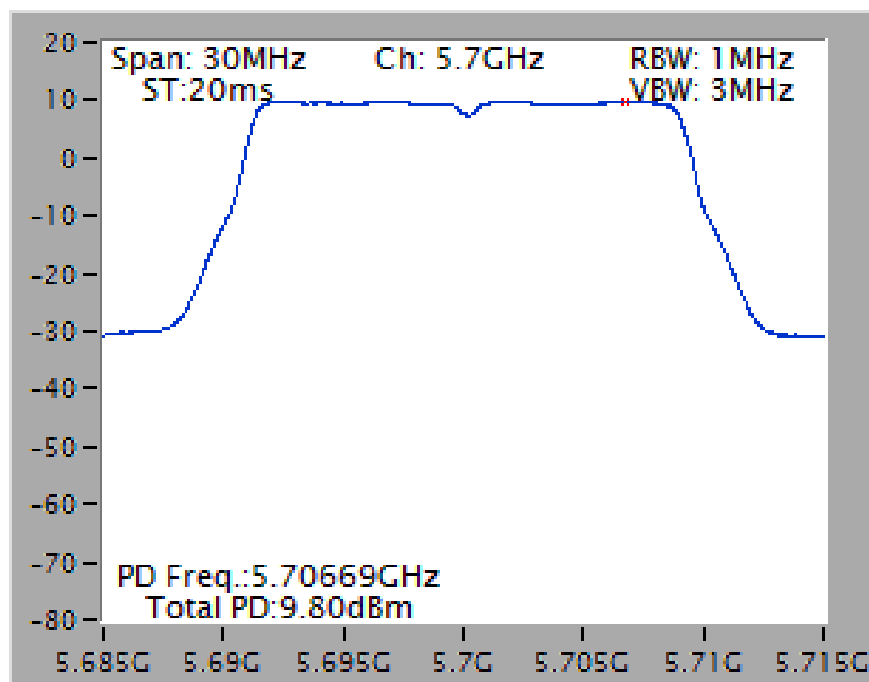


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

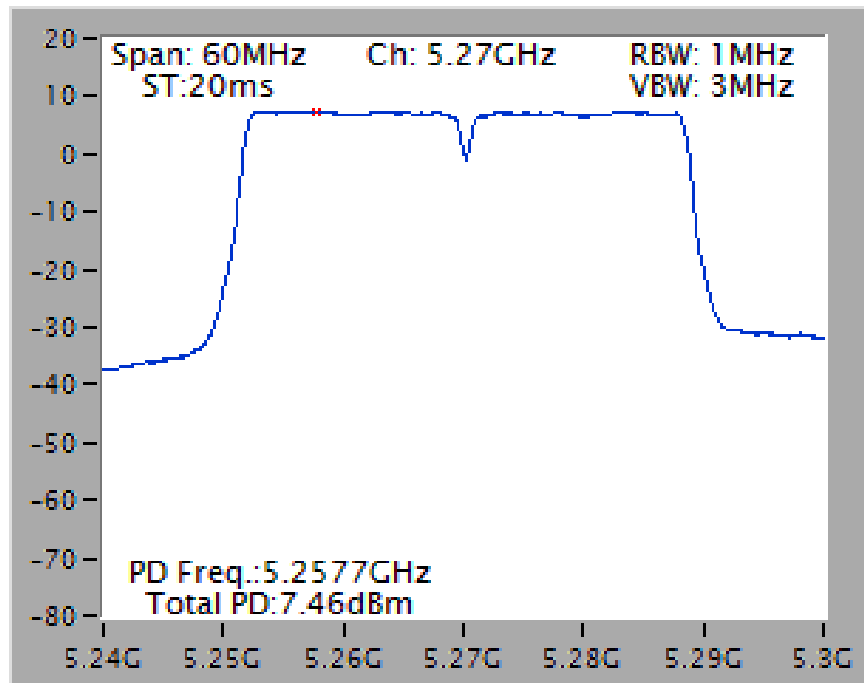


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5550 MHz

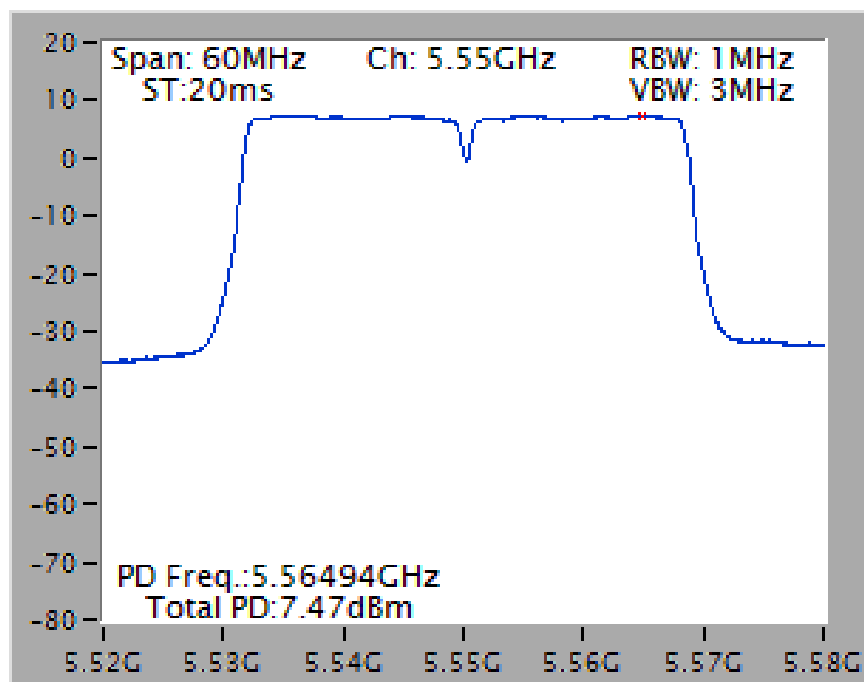

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

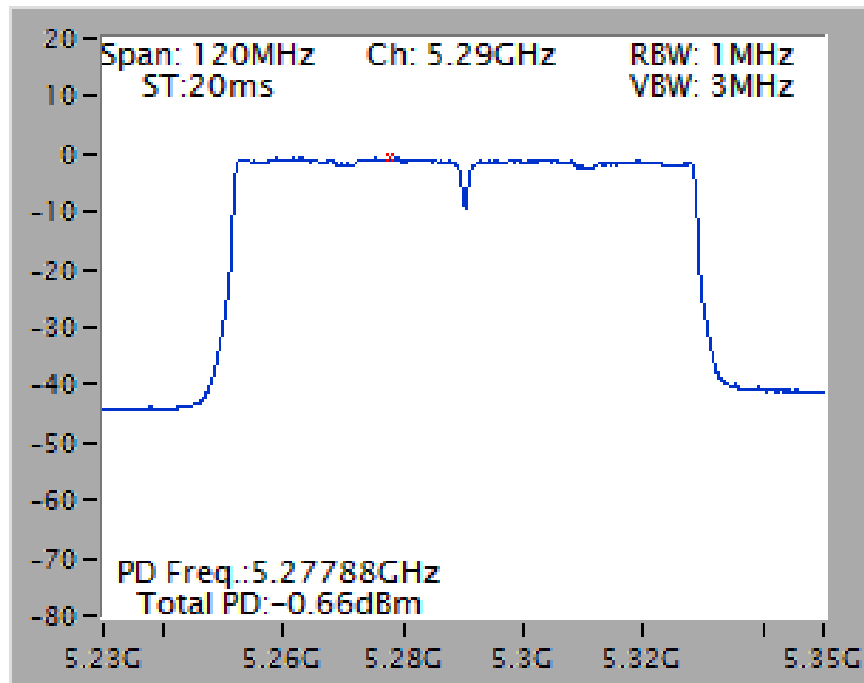


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

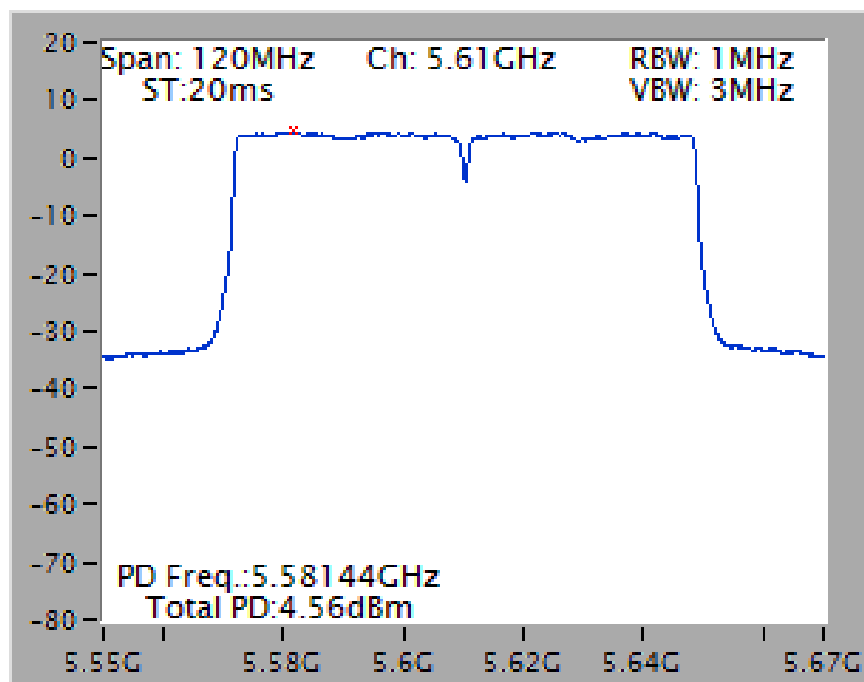


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

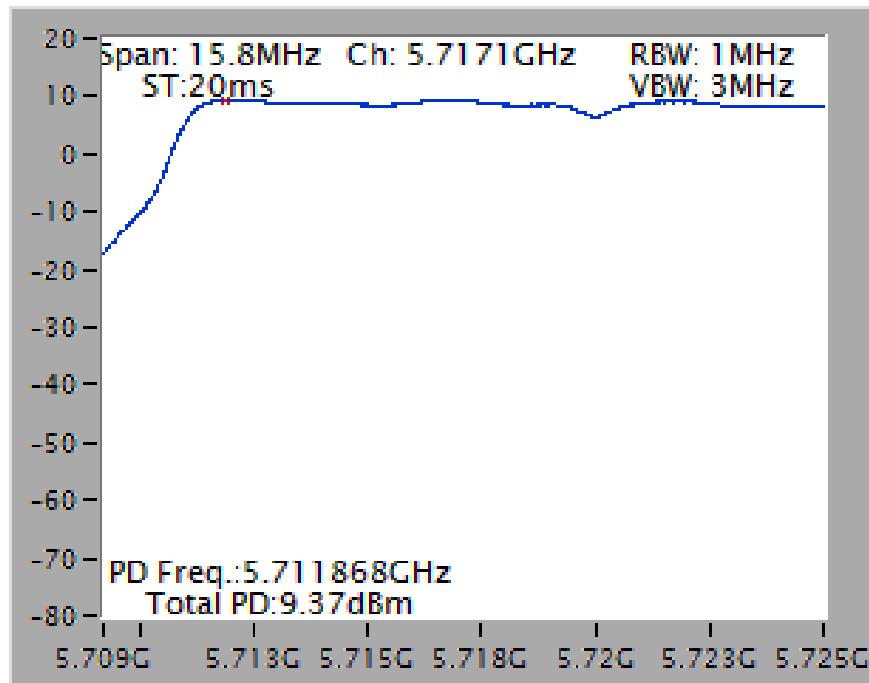


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

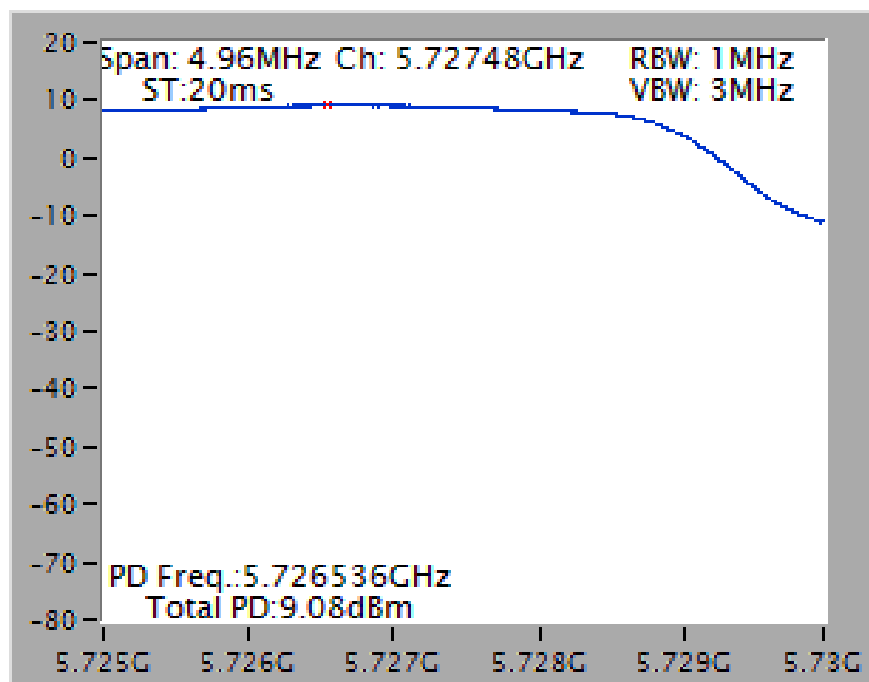


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

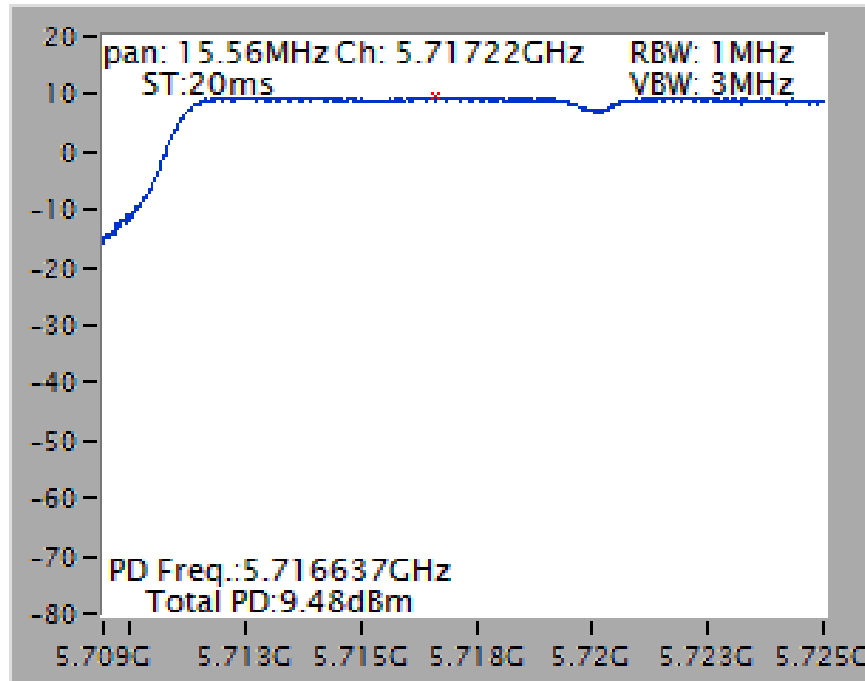


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

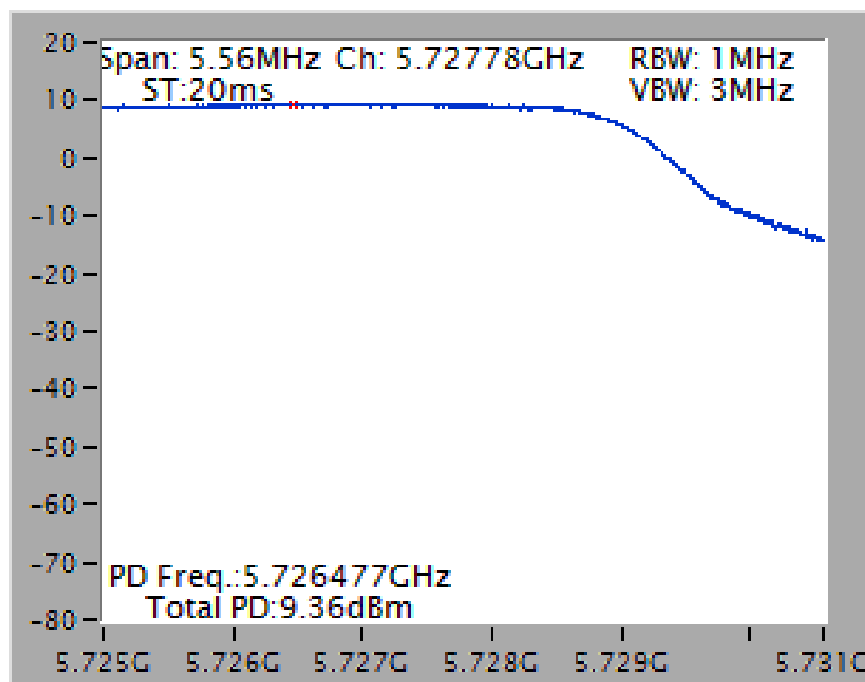


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

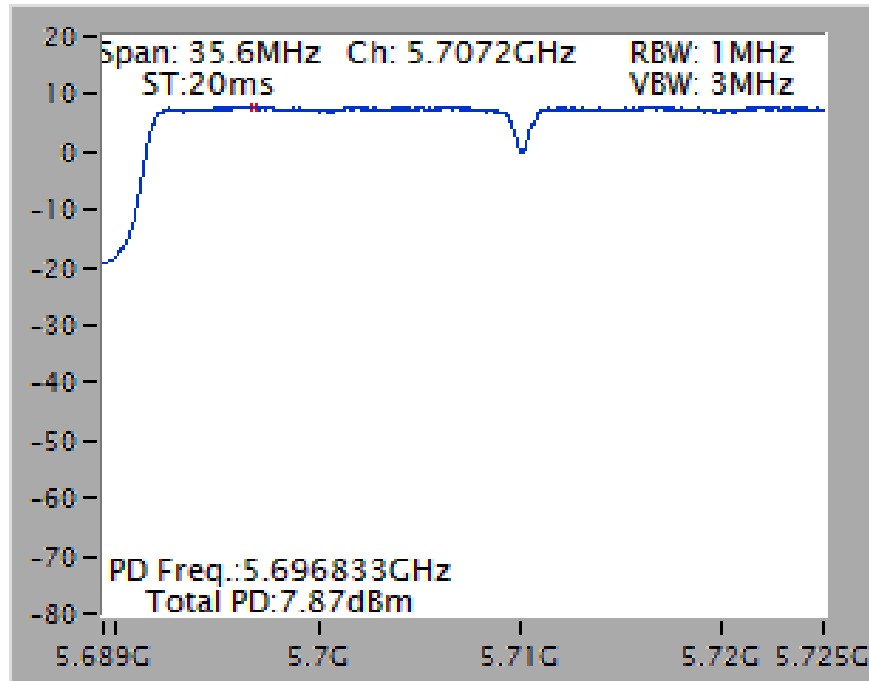


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

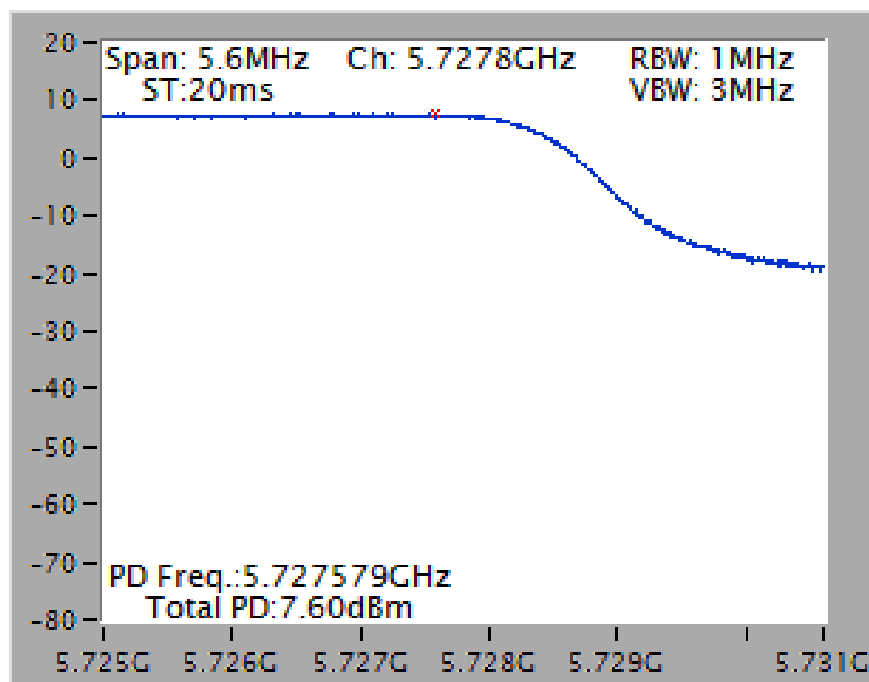

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

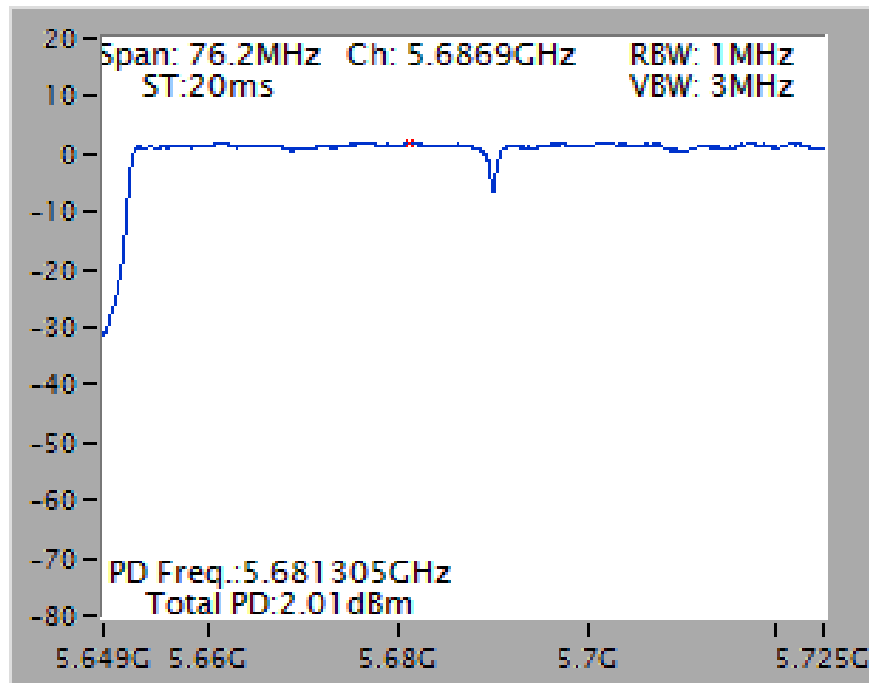


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

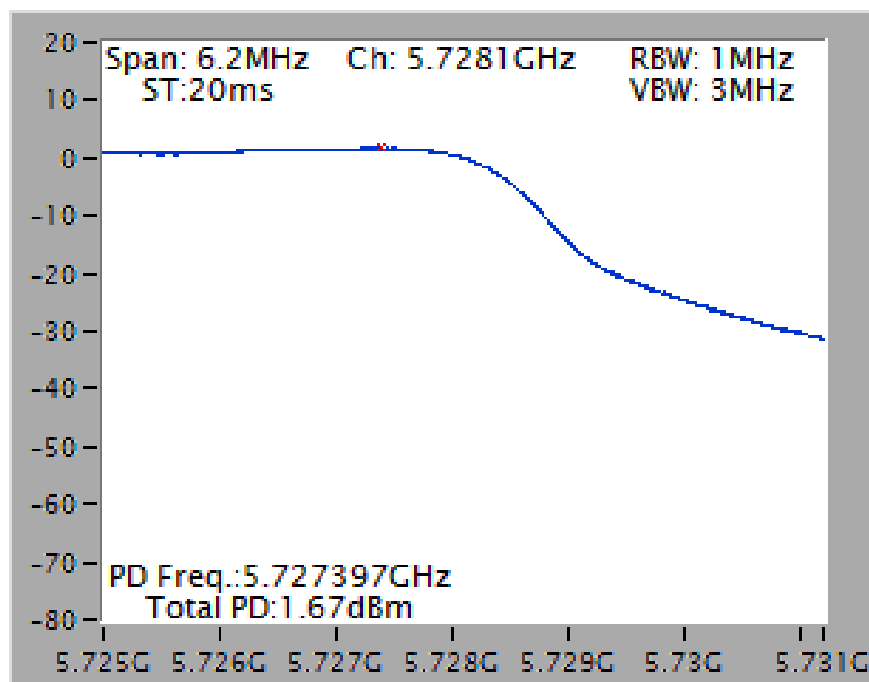


Mode 3 (Set 6 Panel antenna / 2.66dBi / 1TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5320 MHz

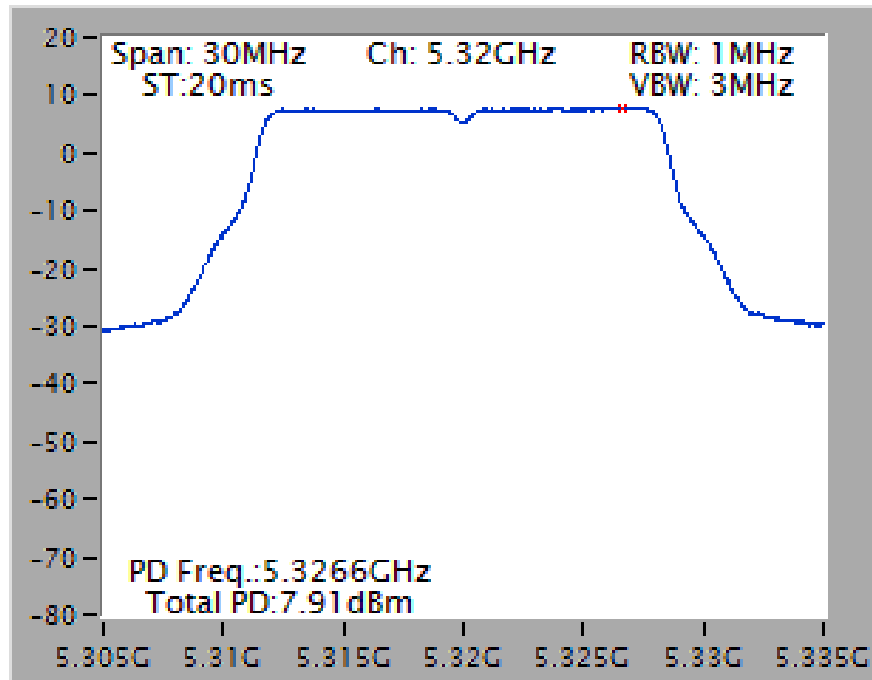


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5580 MHz

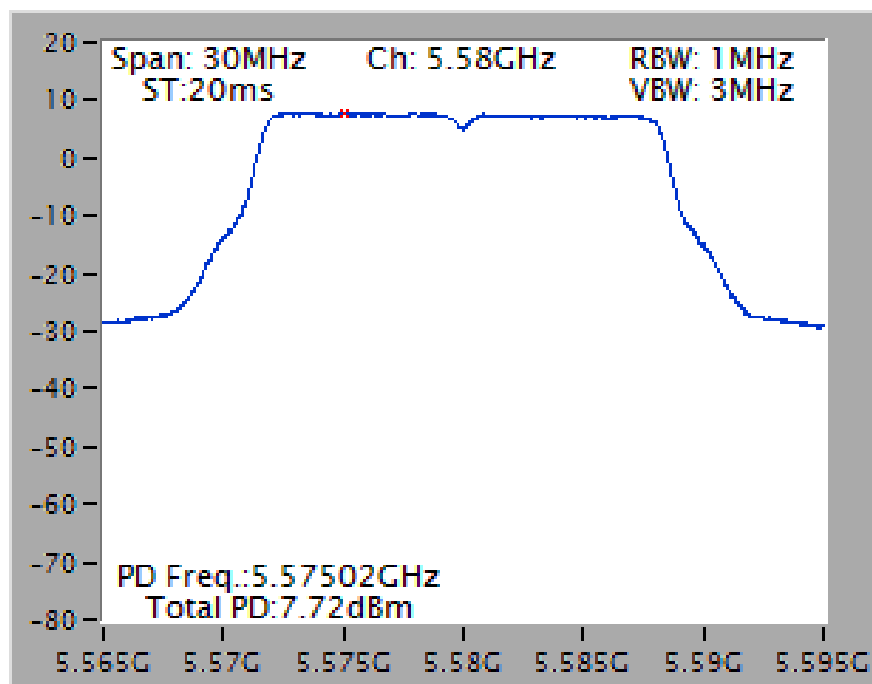


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5260 MHz

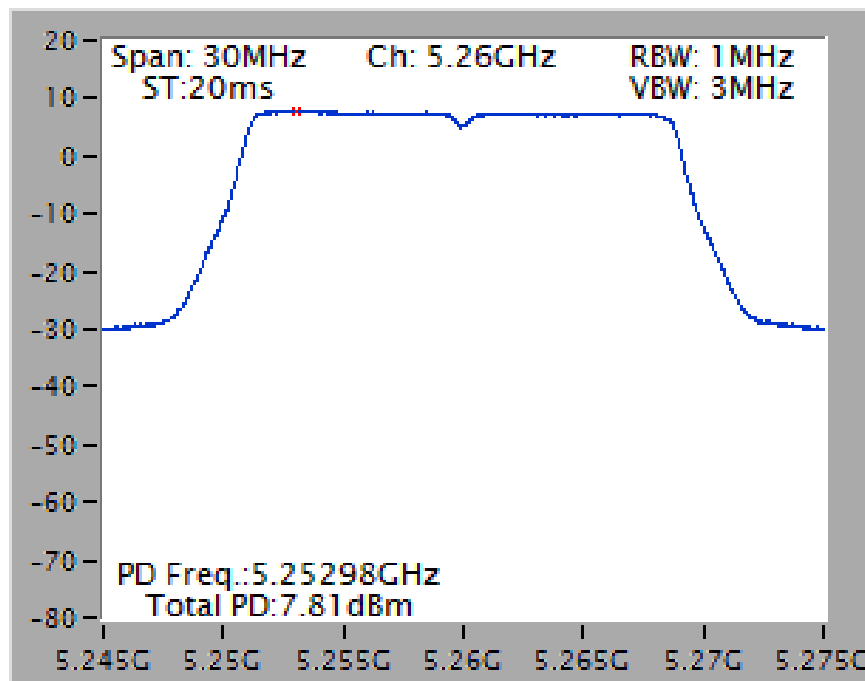


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5580 MHz

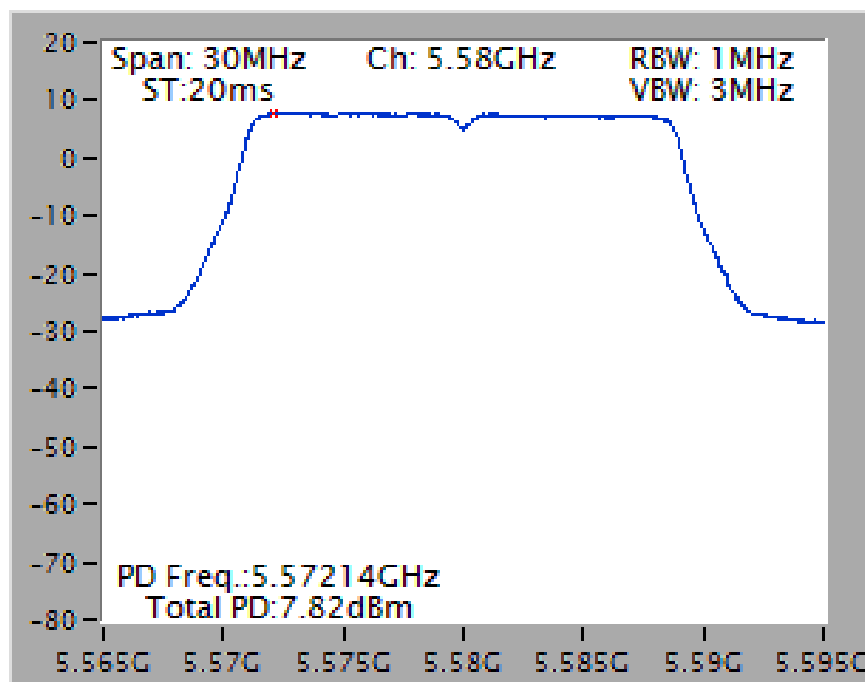


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5270 MHz

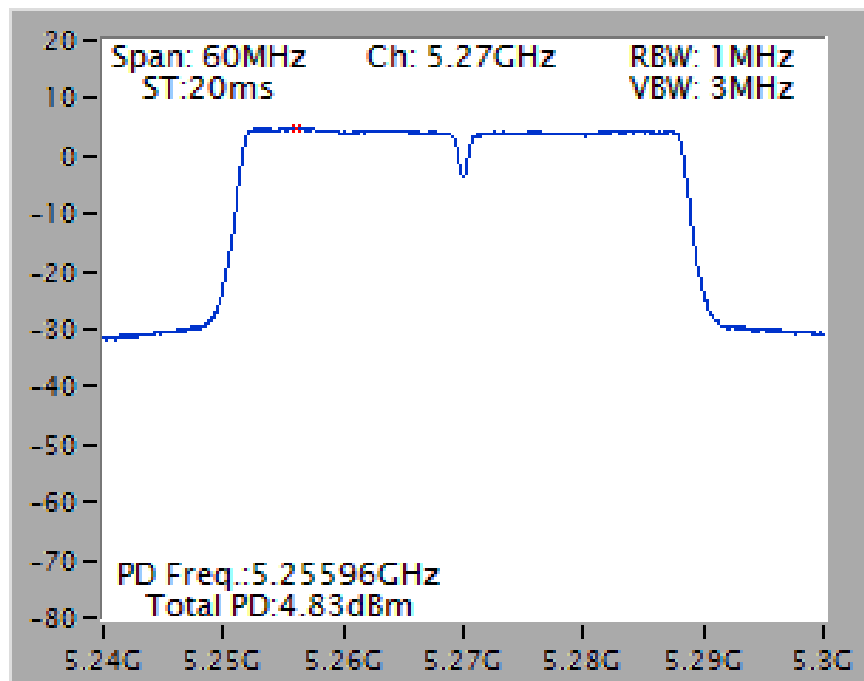


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5550 MHz

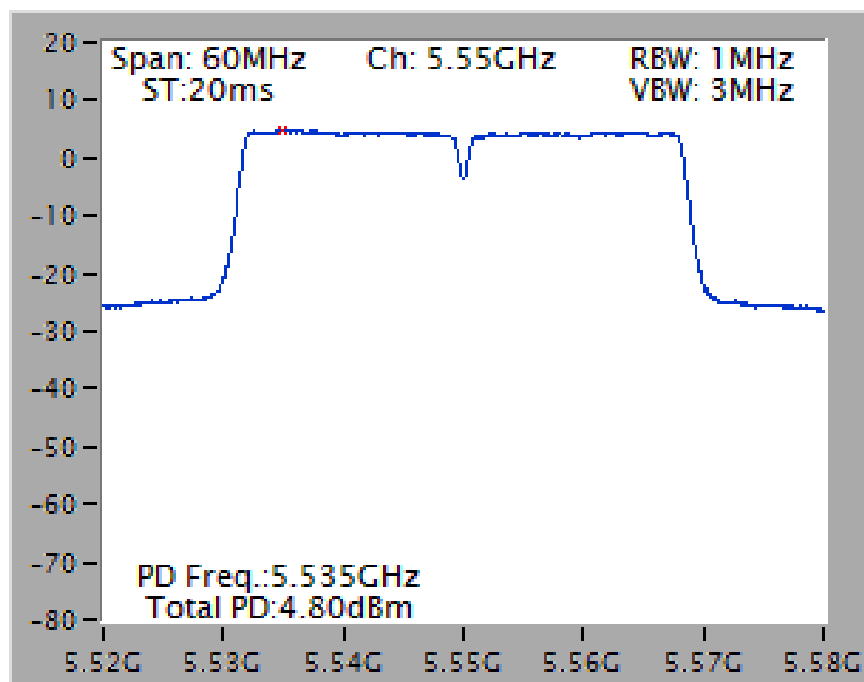

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5290 MHz

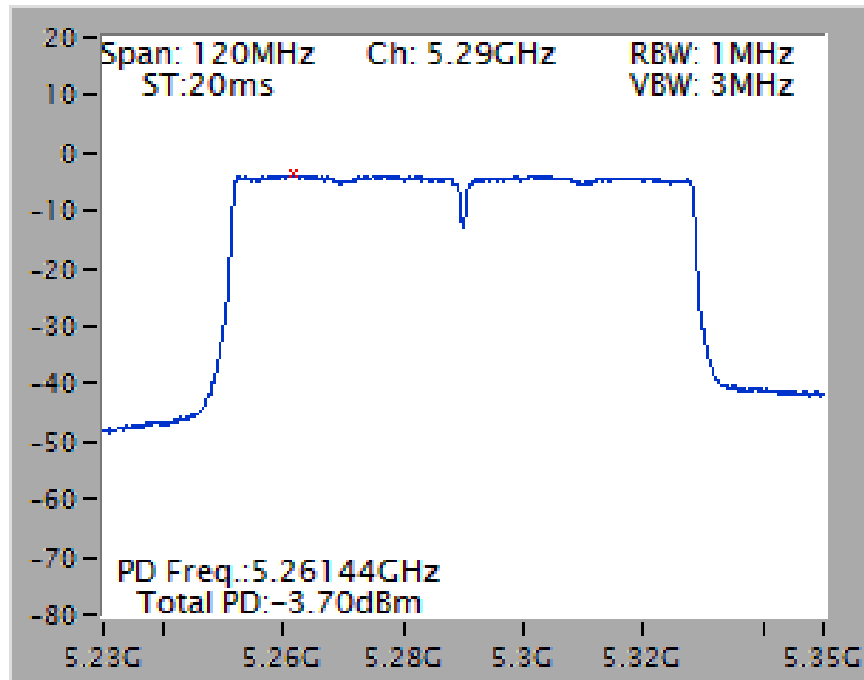


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5610 MHz

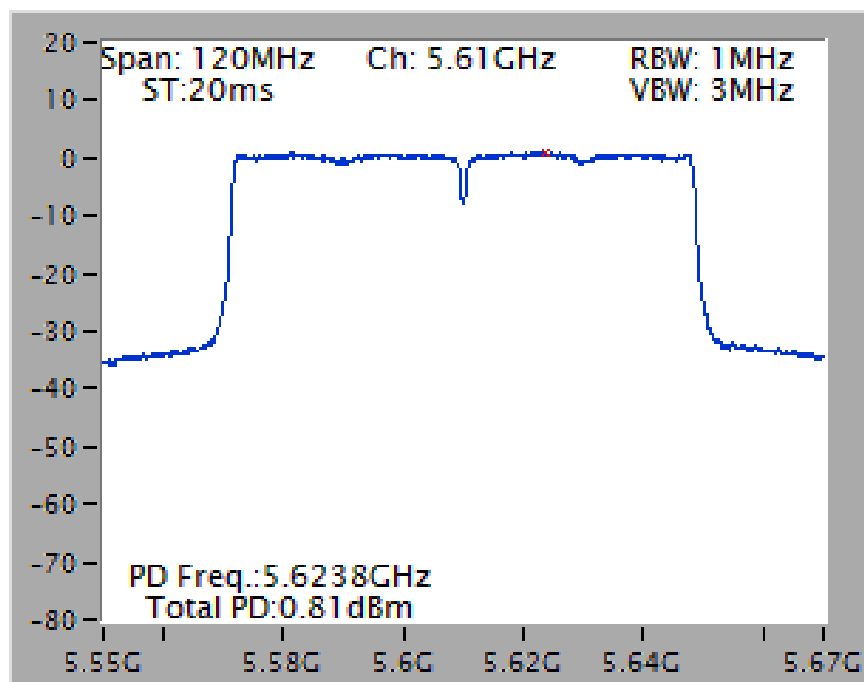


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 2C)

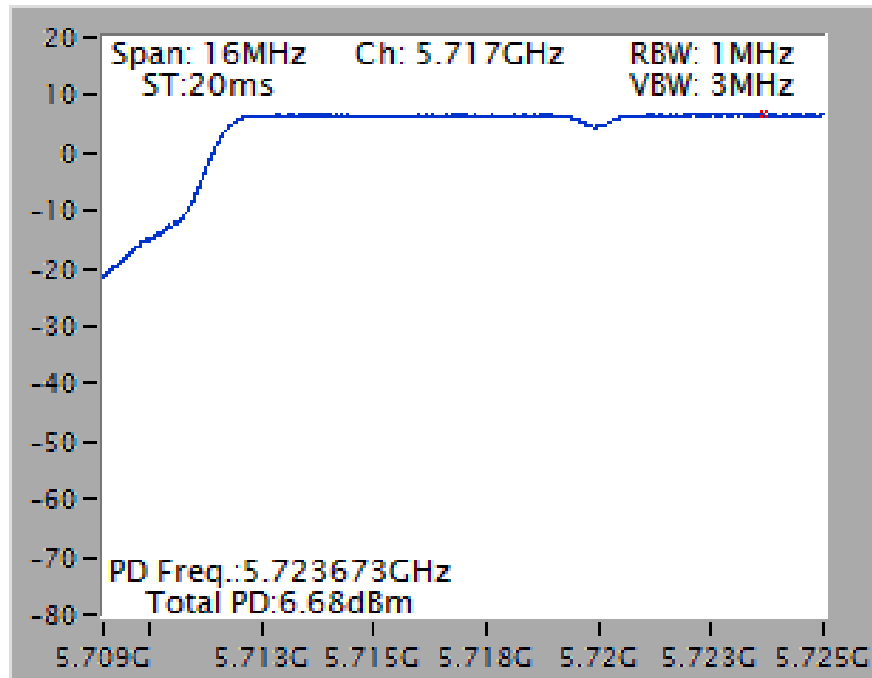


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 3)

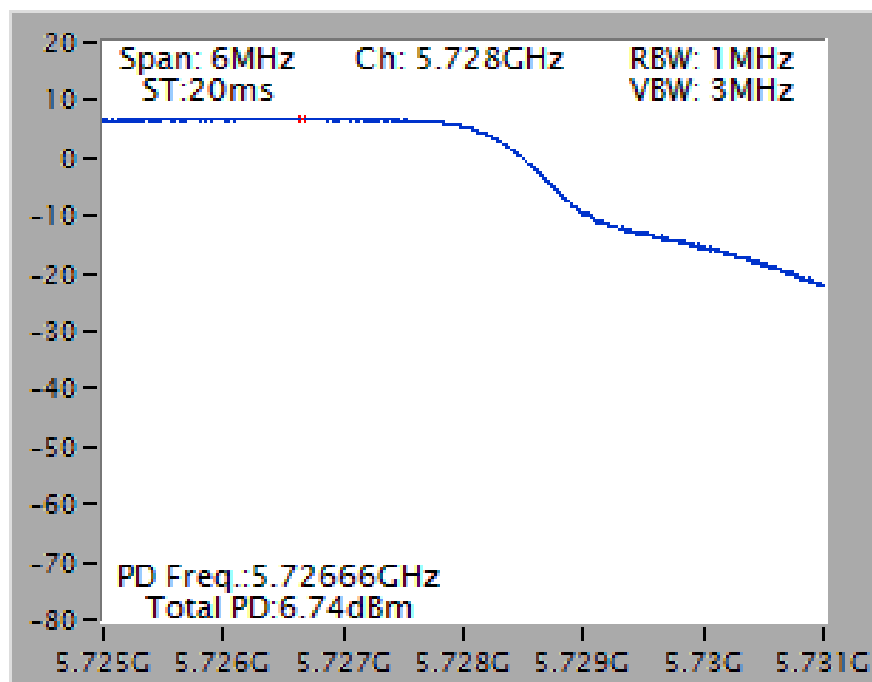


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

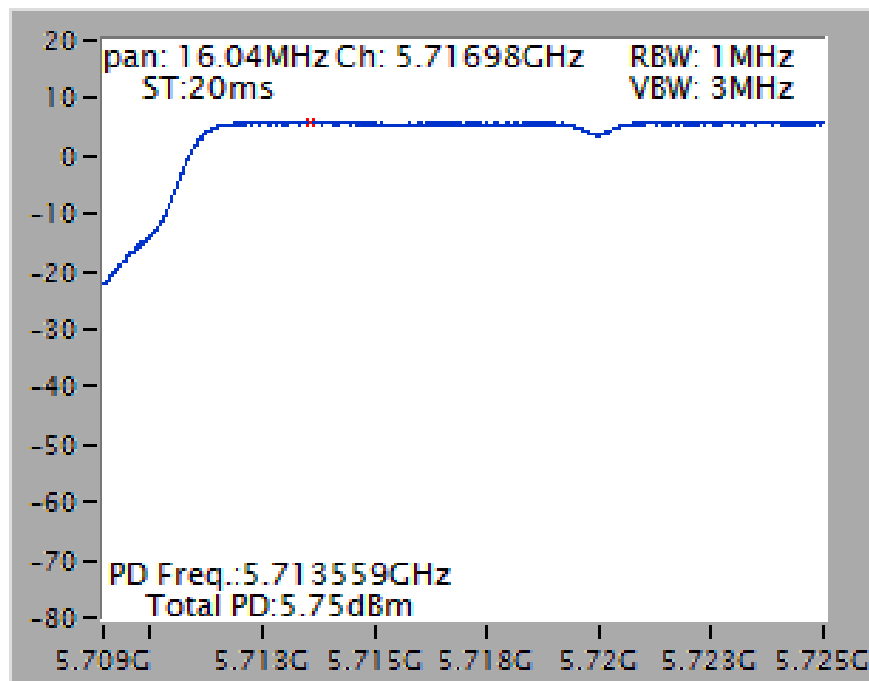


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

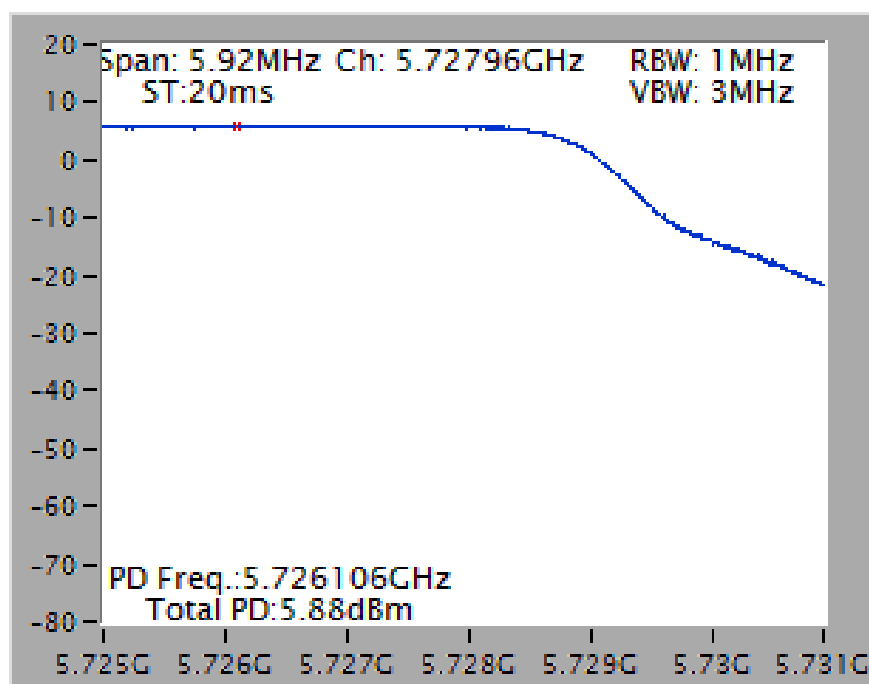


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

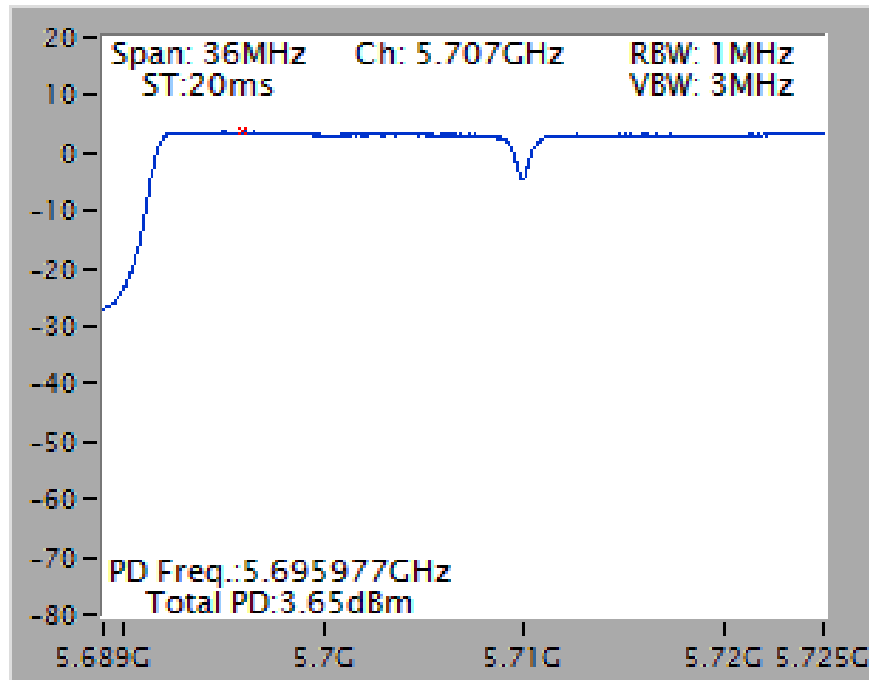


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)

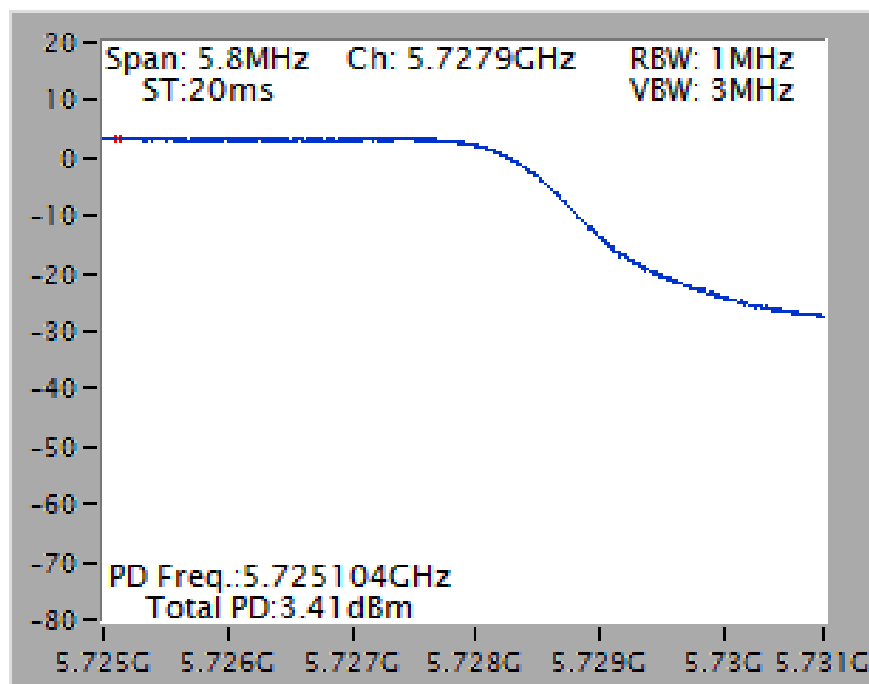

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

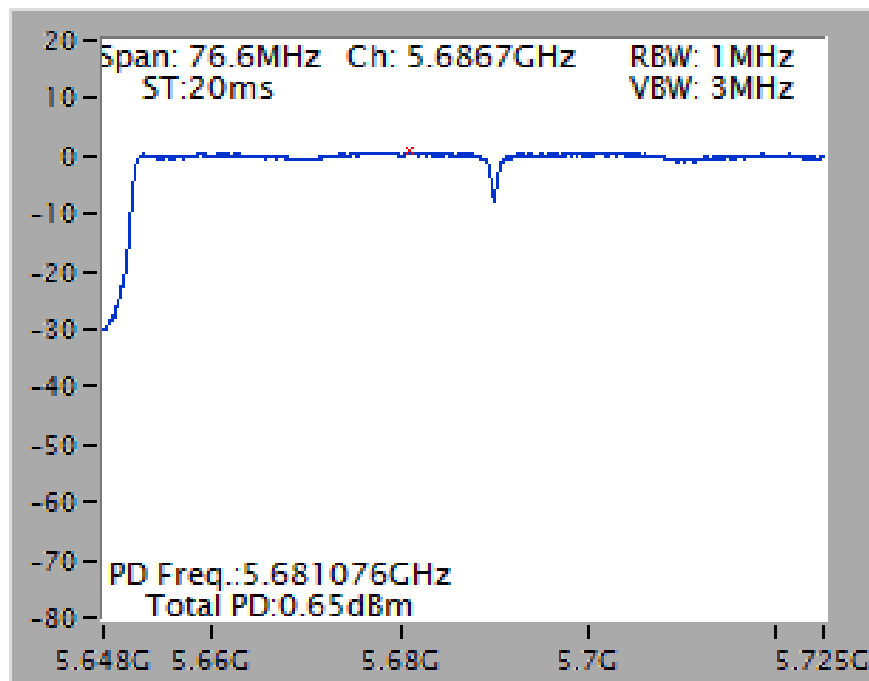


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

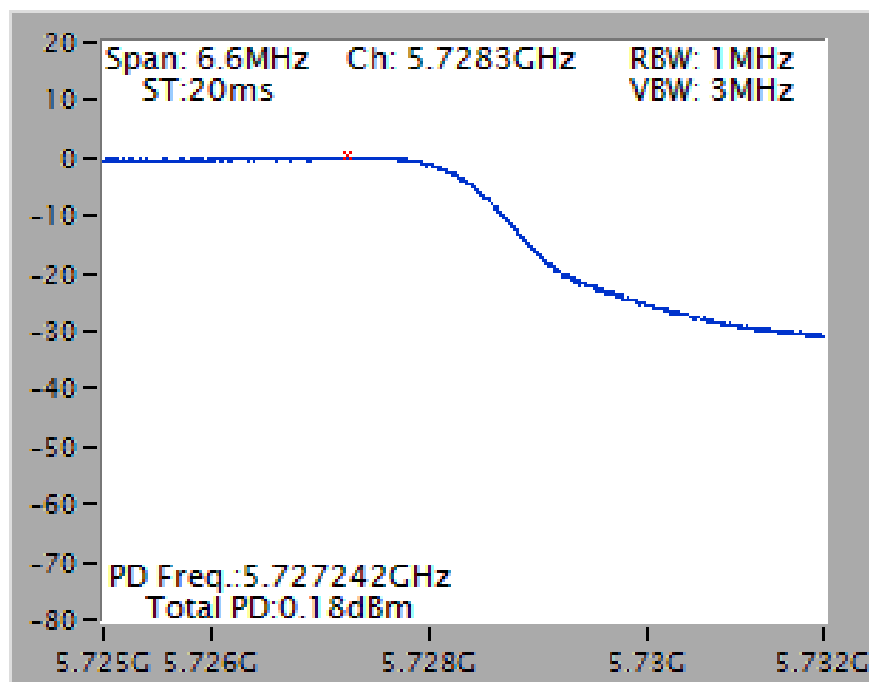


Mode 3 (Set 6 Panel antenna / 2.66dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5260 MHz

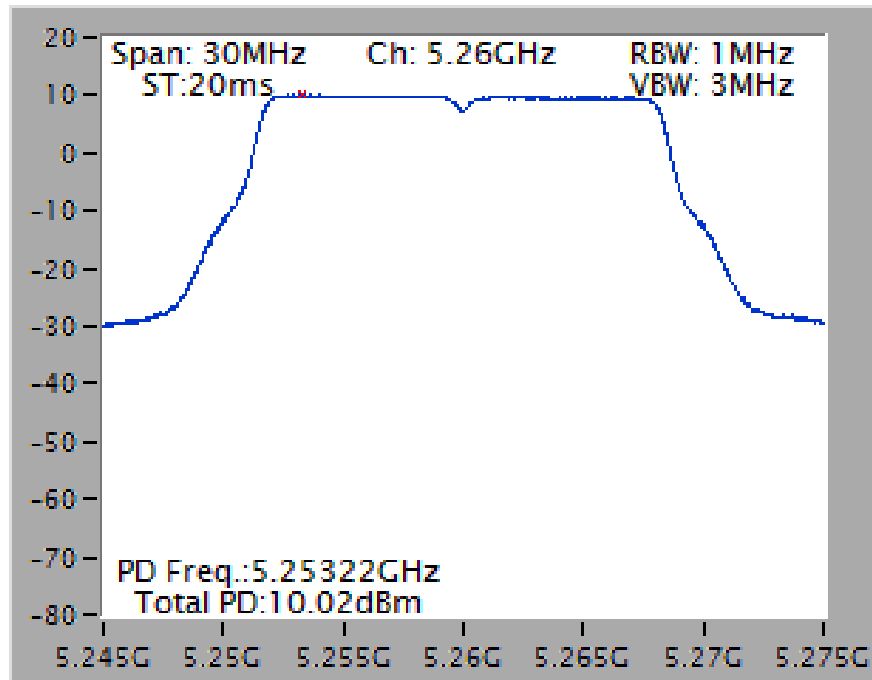


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5580 MHz

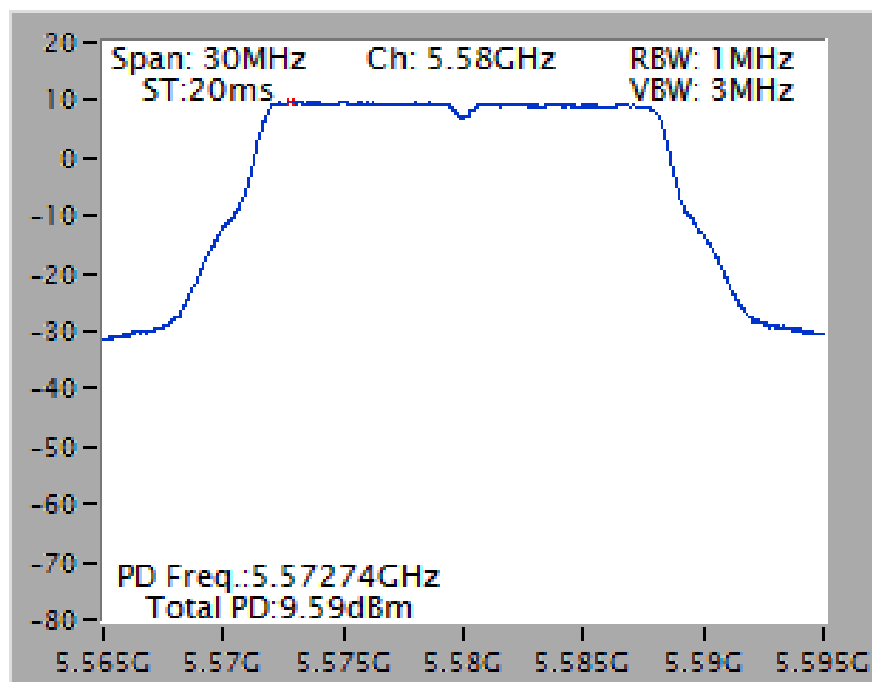


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5300 MHz

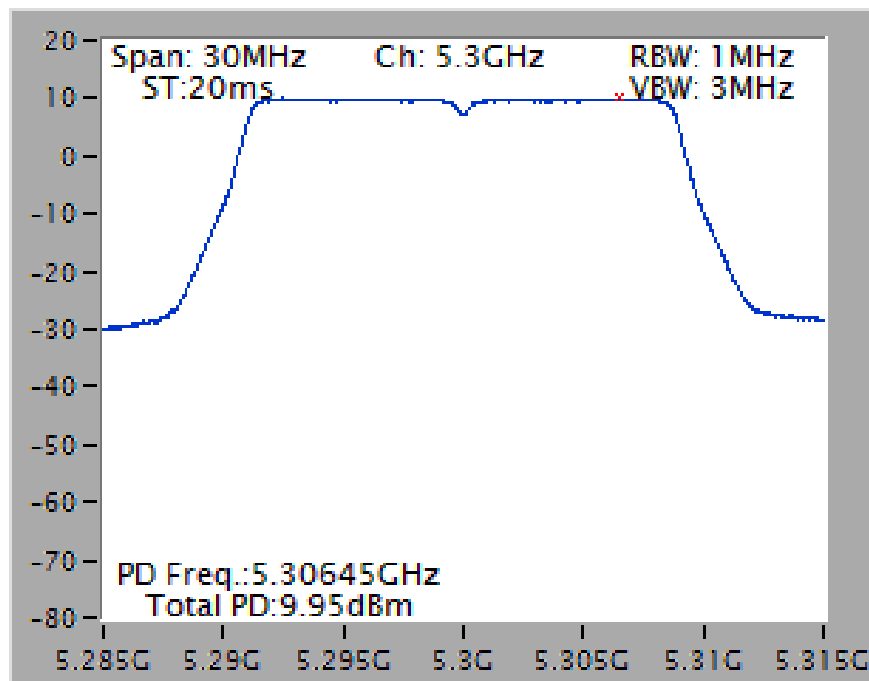


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5500 MHz

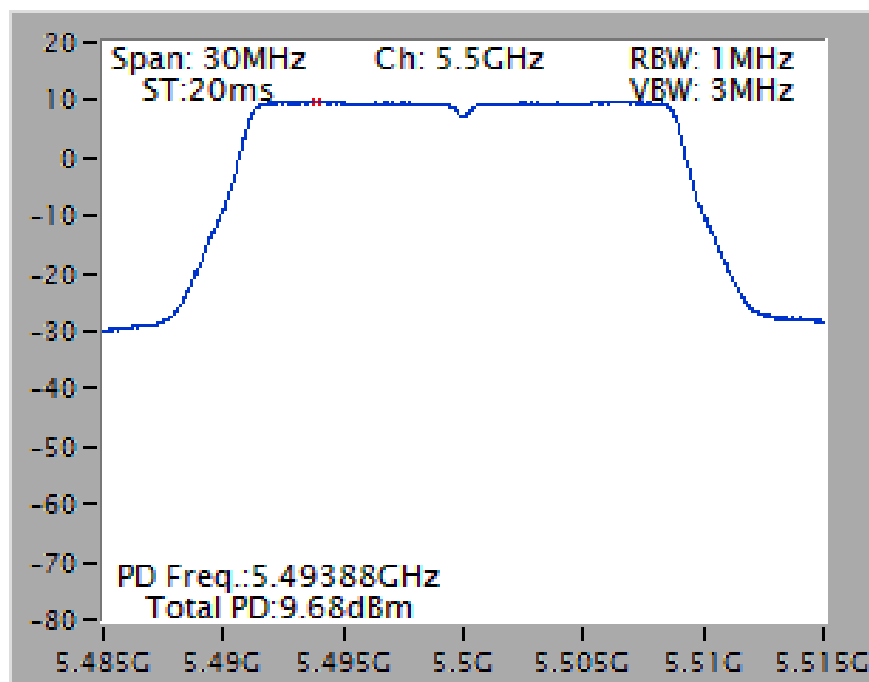


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5270 MHz

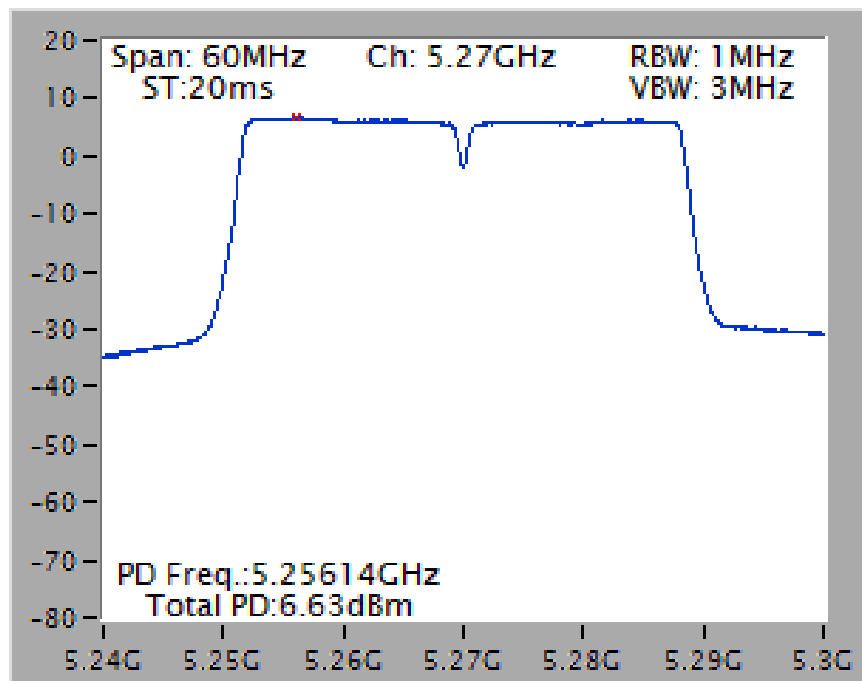


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5550 MHz

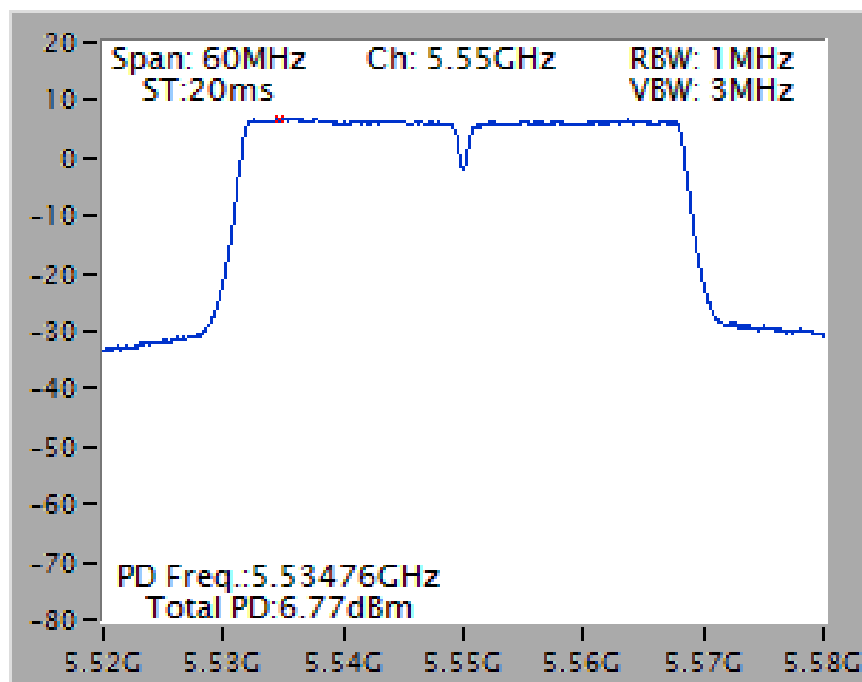

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5290 MHz

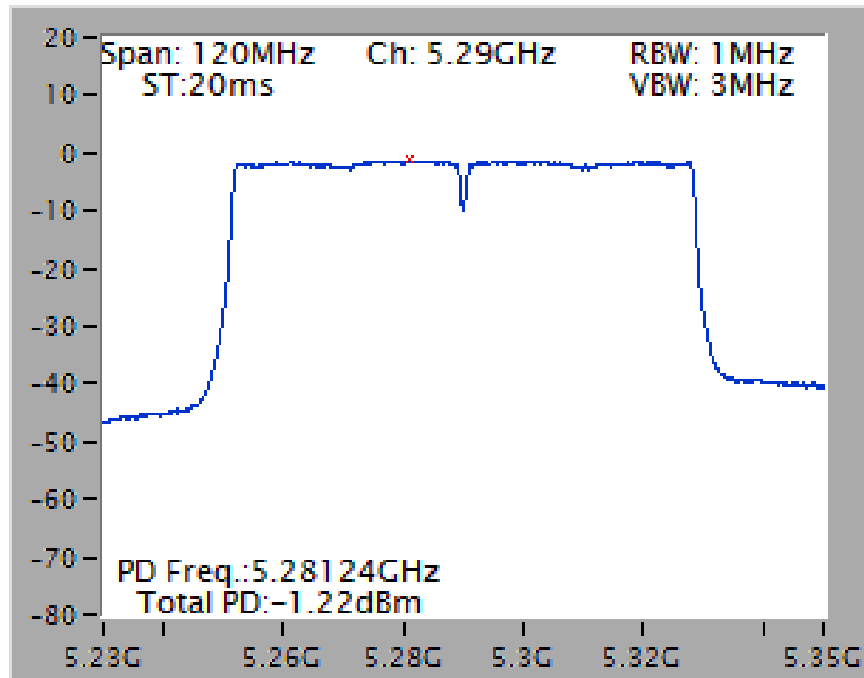


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5610 MHz

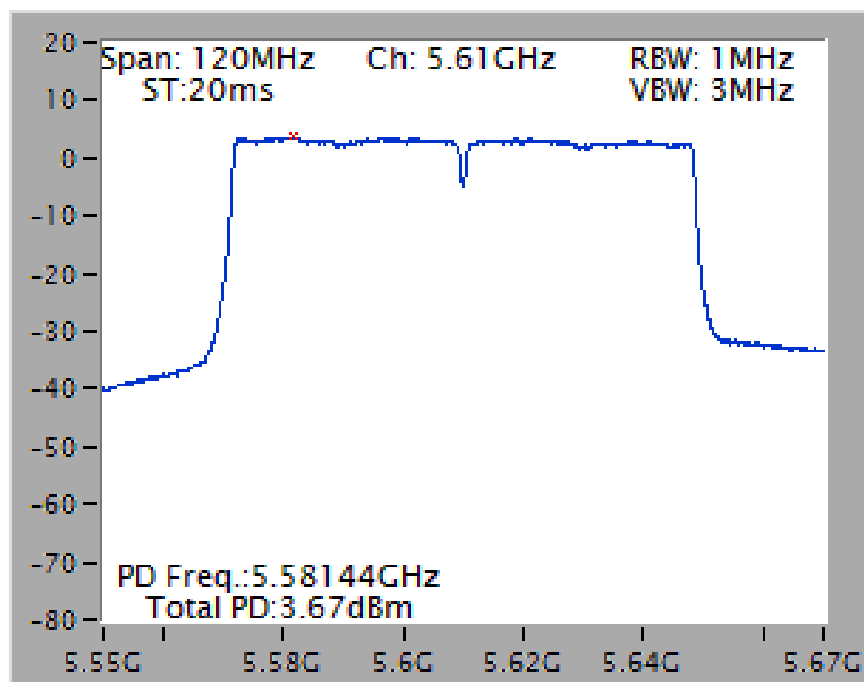


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5720 MHz (UNII 2C)

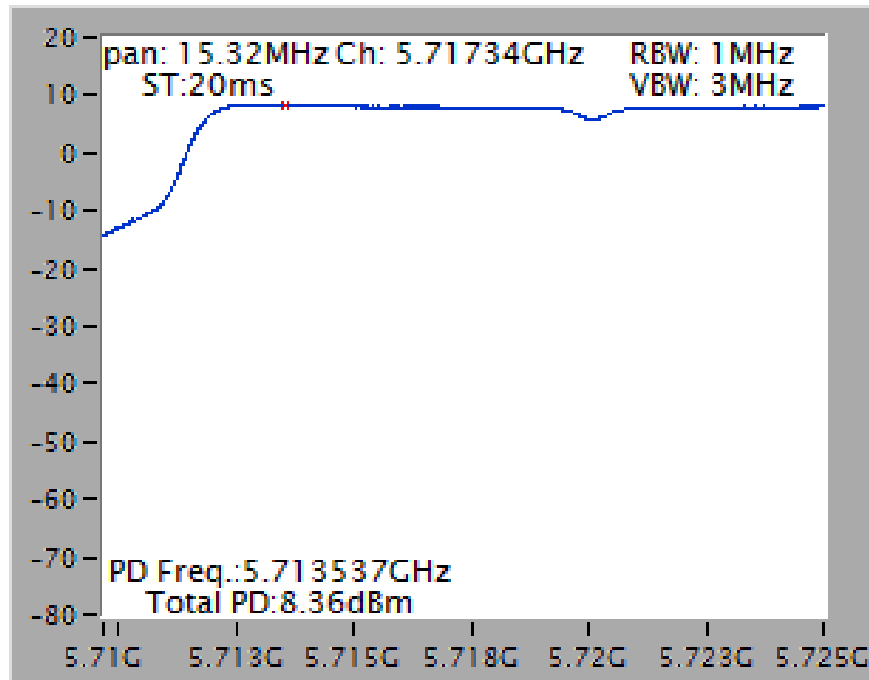


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5720 MHz (UNII 3)

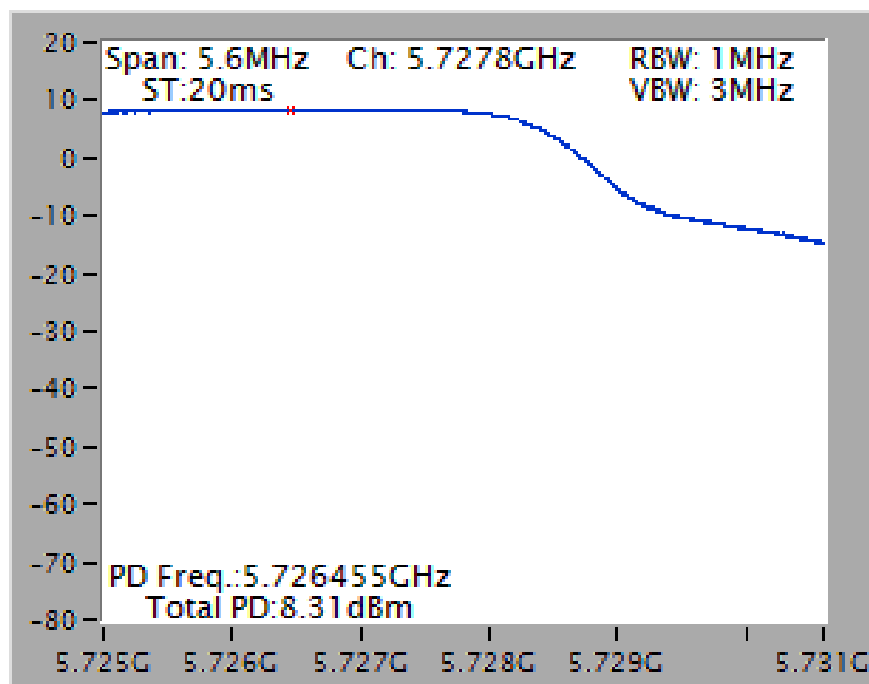


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5720 MHz
(UNII 2C)

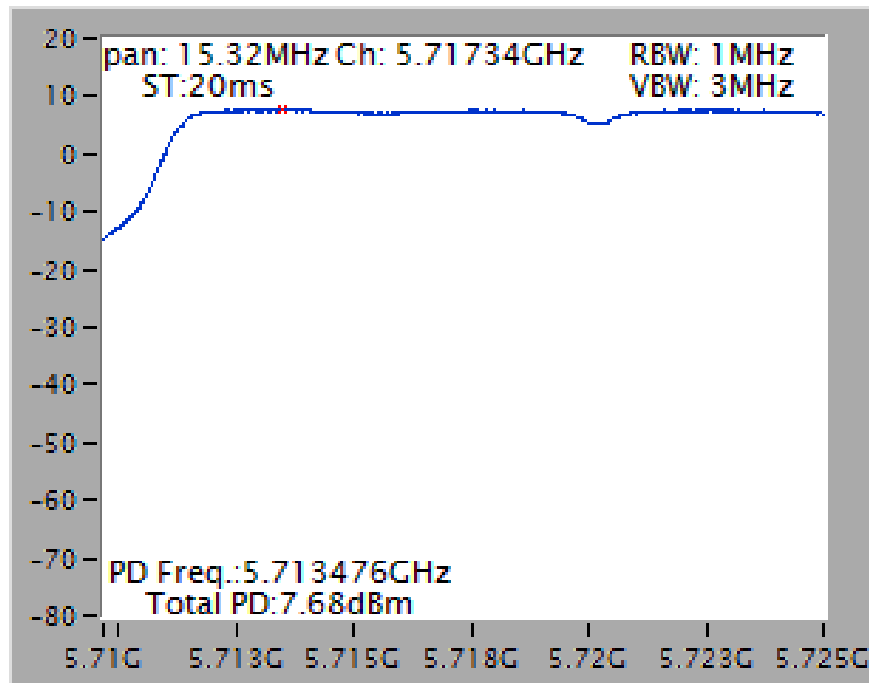


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5720 MHz
(UNII 3)

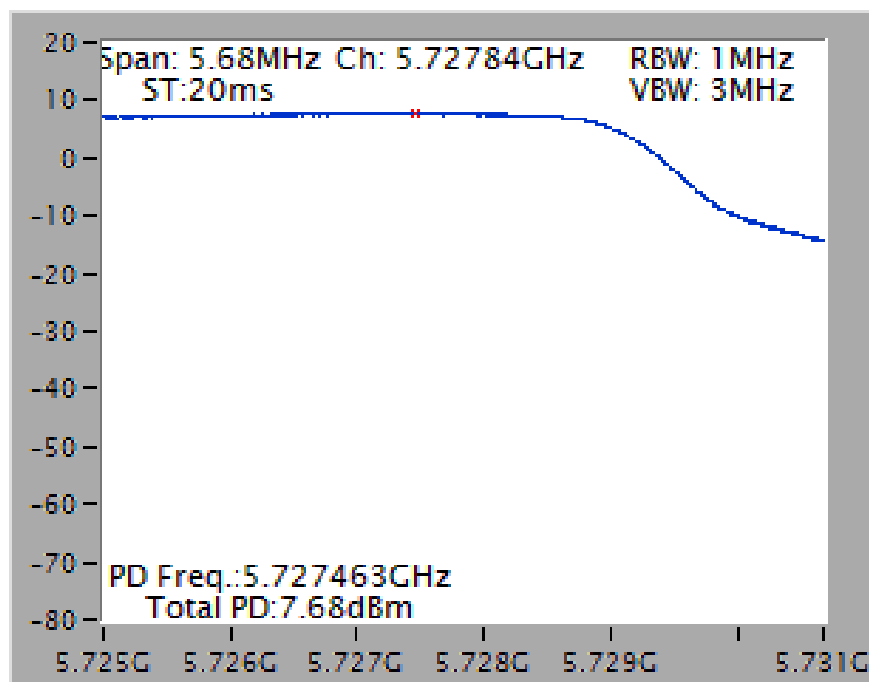


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5710 MHz
(UNII 2C)

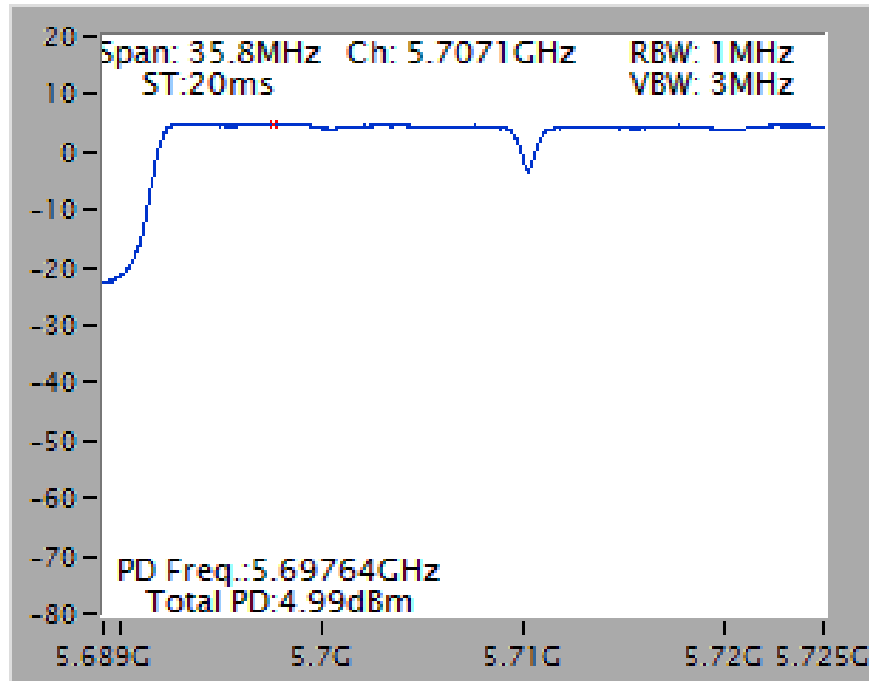


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5710 MHz
(UNII 3)

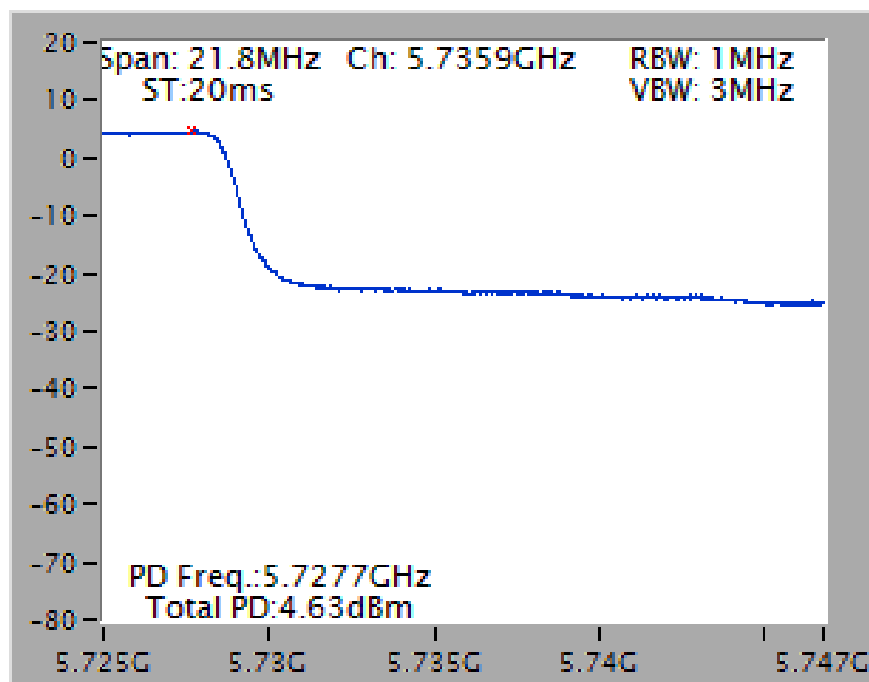

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5690 MHz
(UNII 2C)

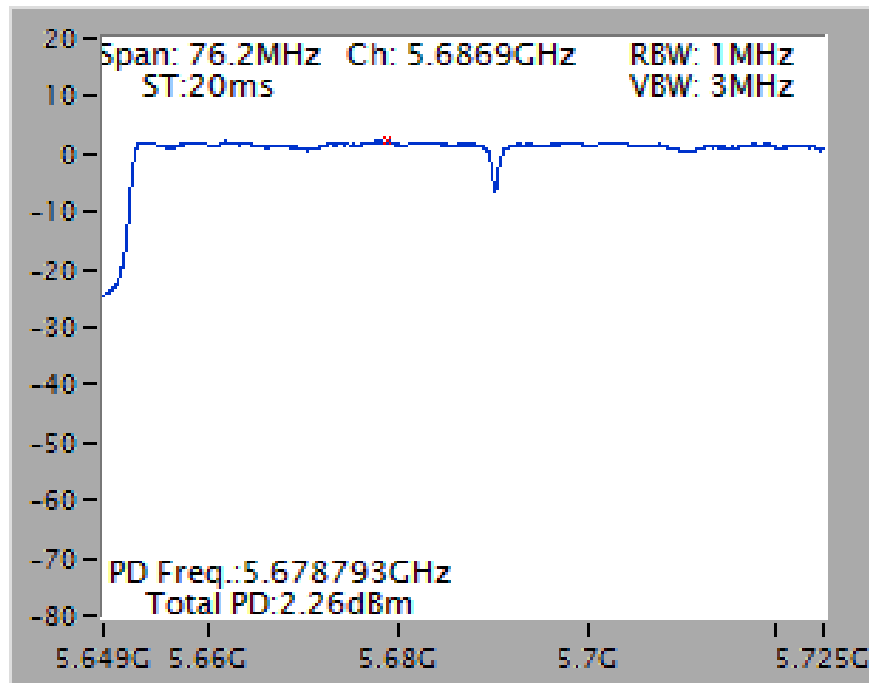


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5690 MHz
(UNII 3)

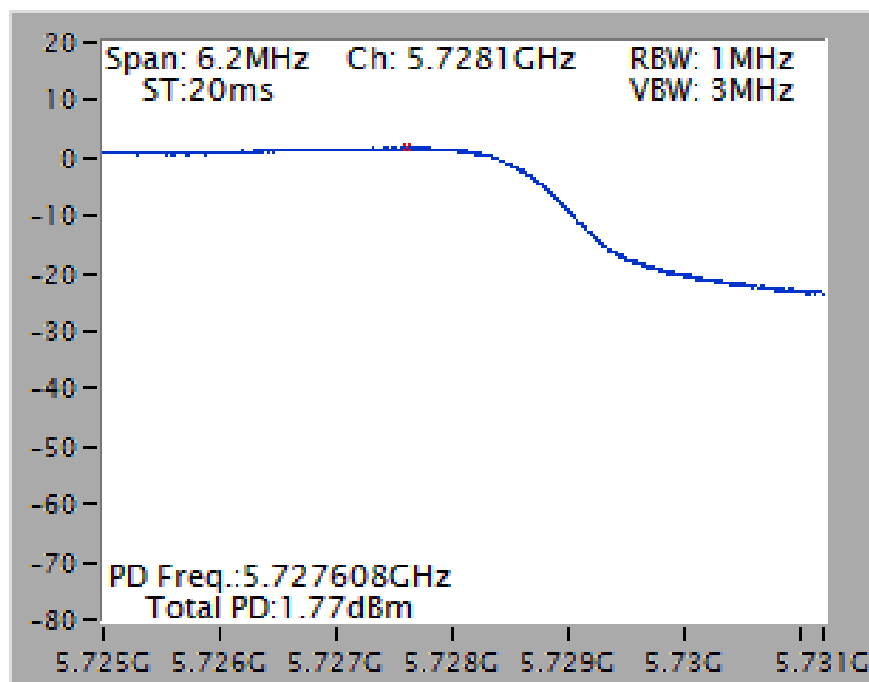


Mode 3 (Set 6 Panel antenna / 2.66dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5300 MHz

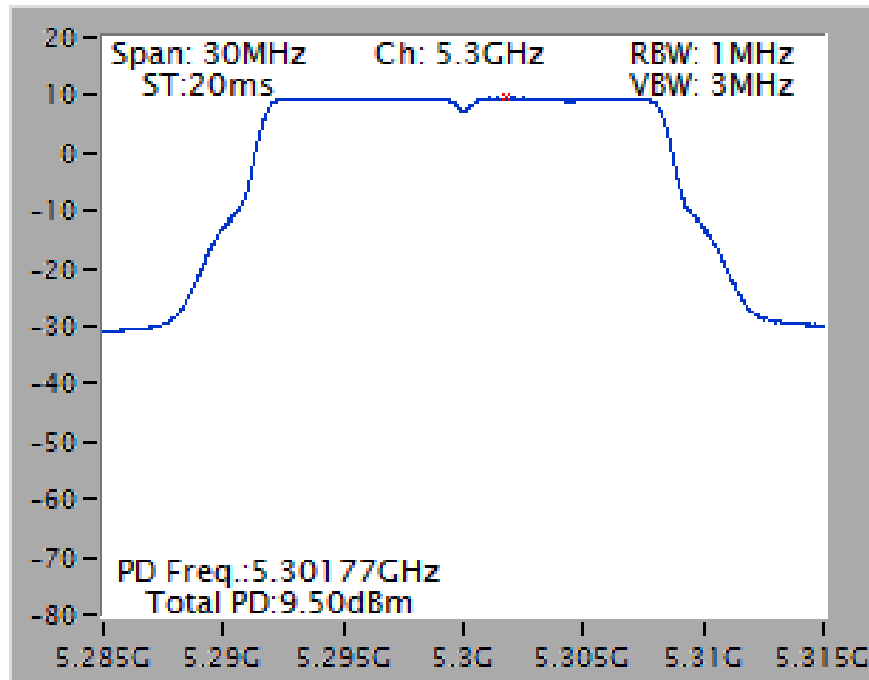


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5580 MHz

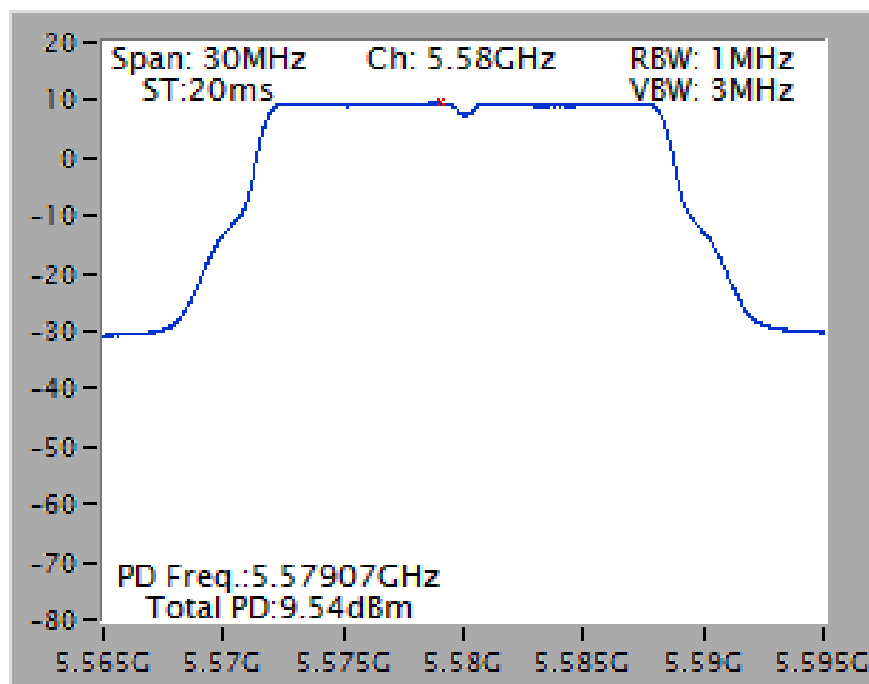


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5300 MHz

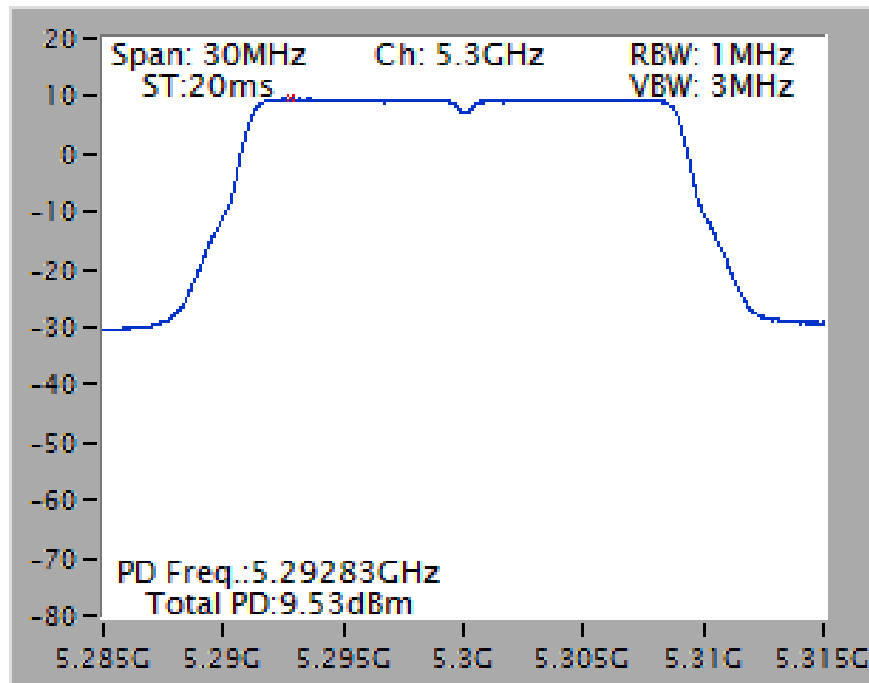


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5500 MHz

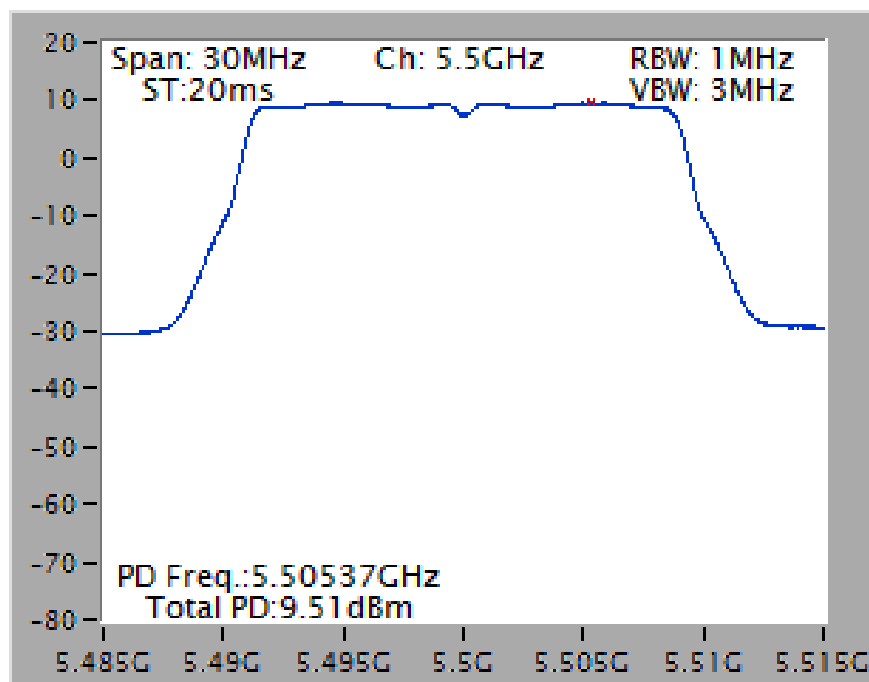


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5270 MHz

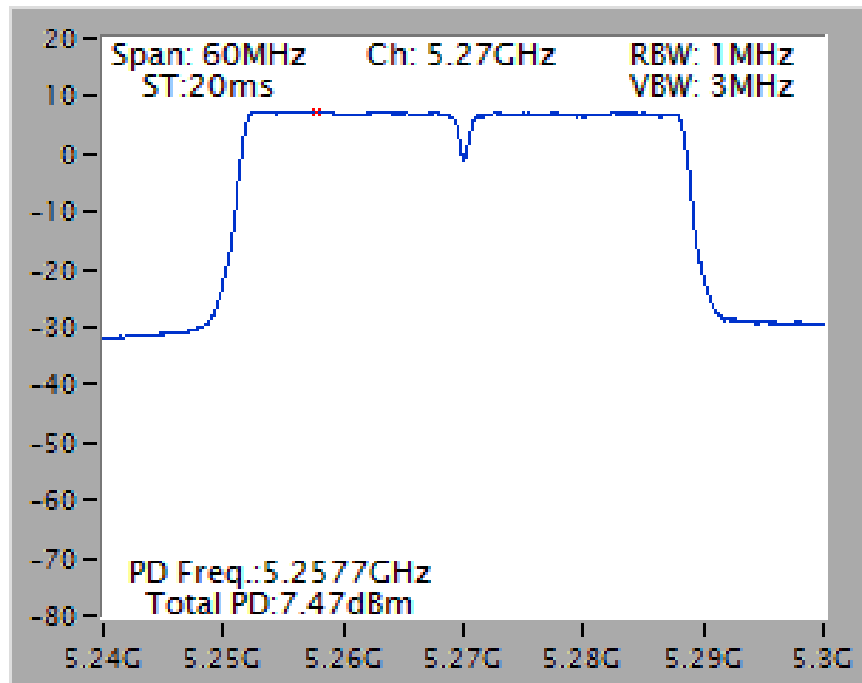


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5550 MHz

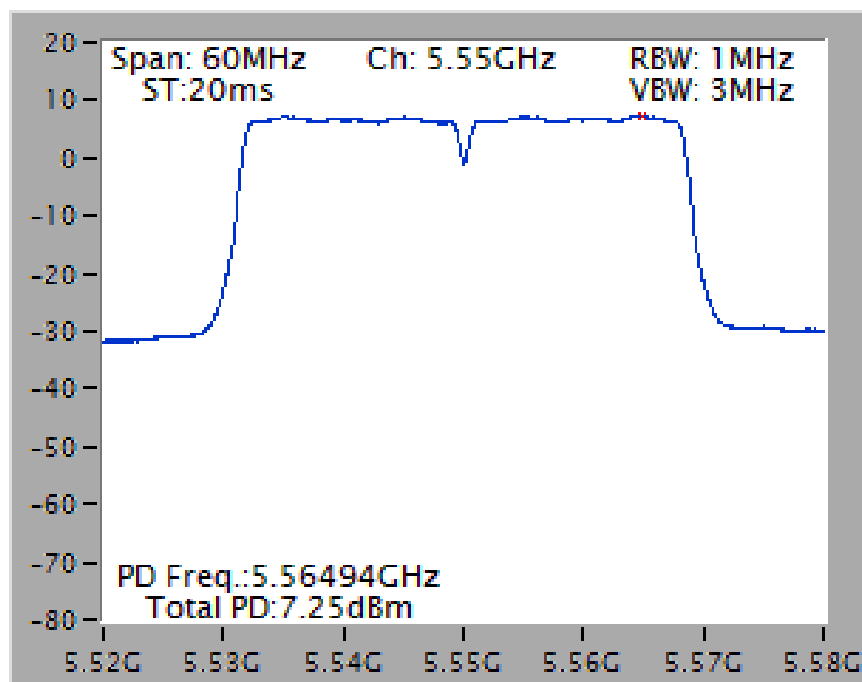

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5290 MHz

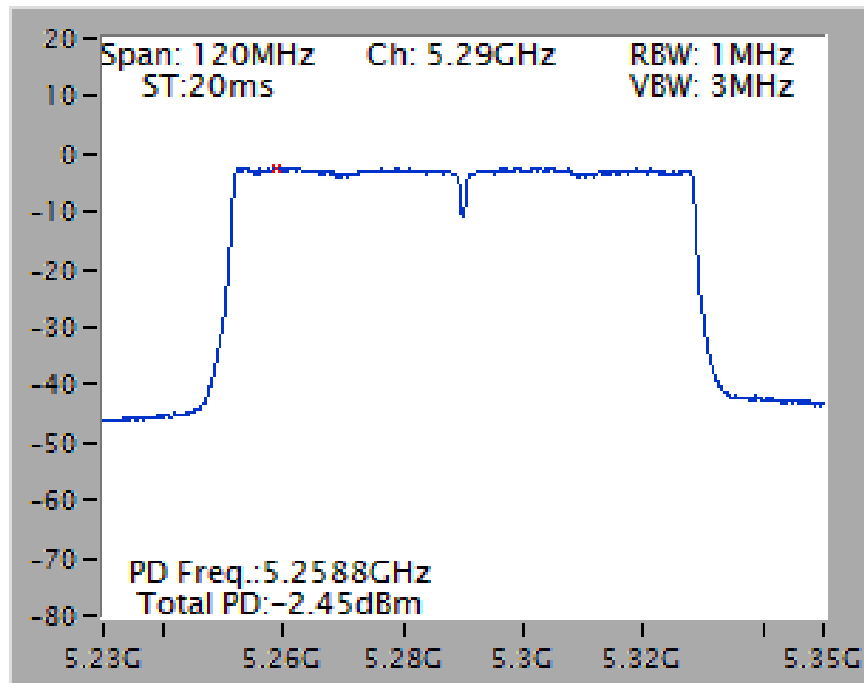


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5610 MHz

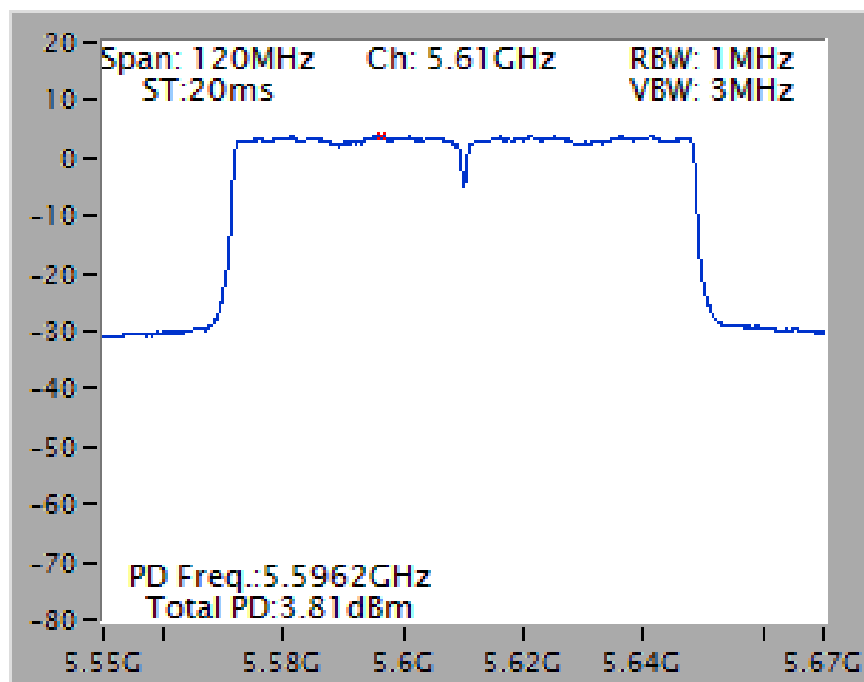


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5720 MHz (UNII 2C)

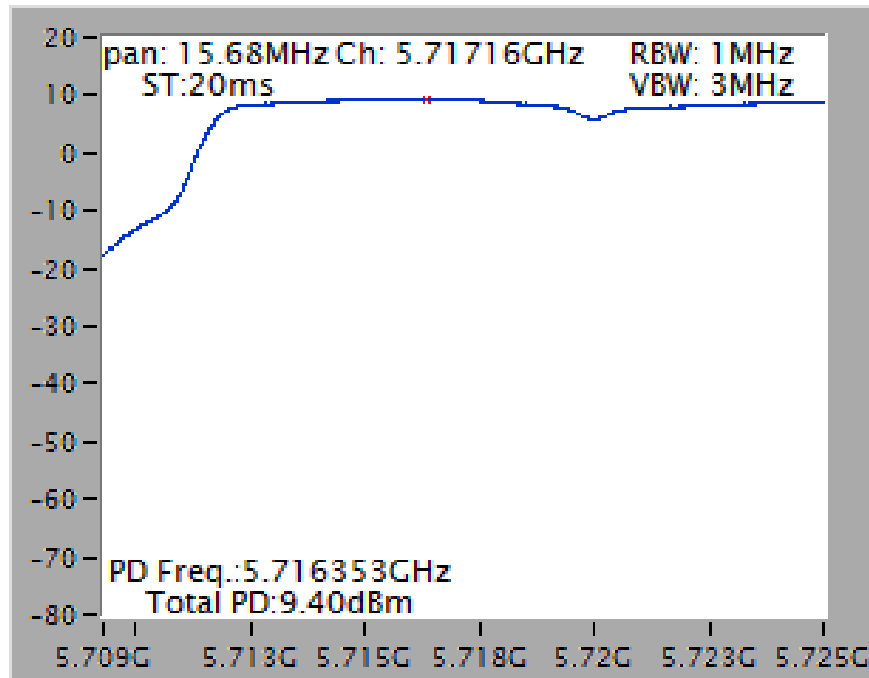


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5720 MHz (UNII 3)

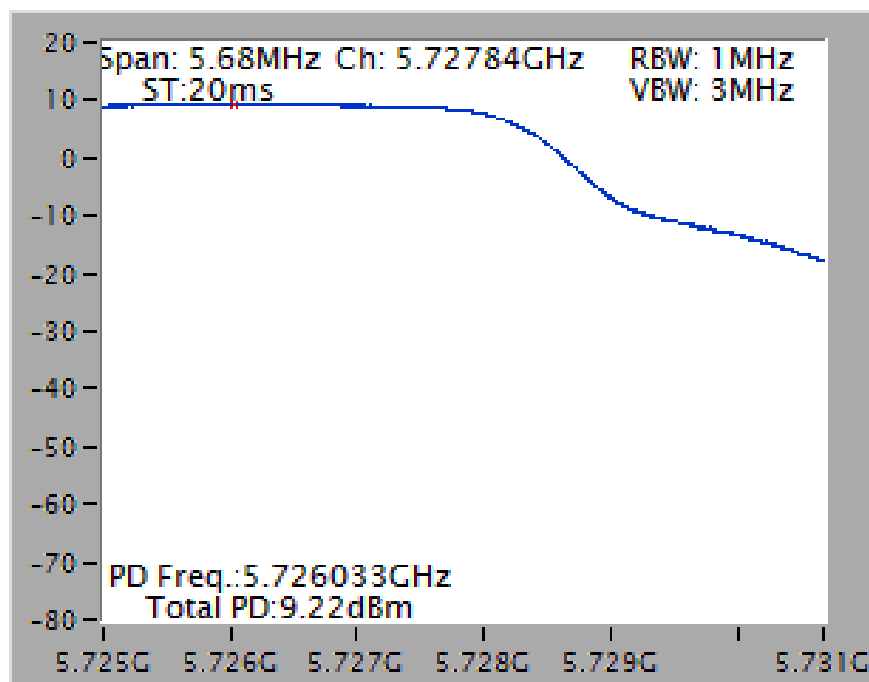


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5720 MHz (UNII 2C)

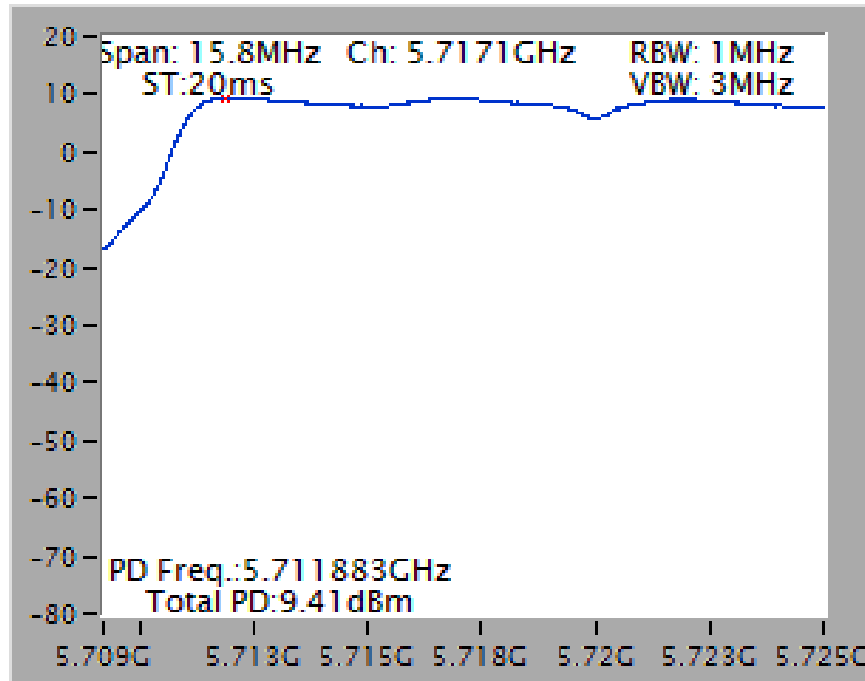


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5720 MHz (UNII 3)

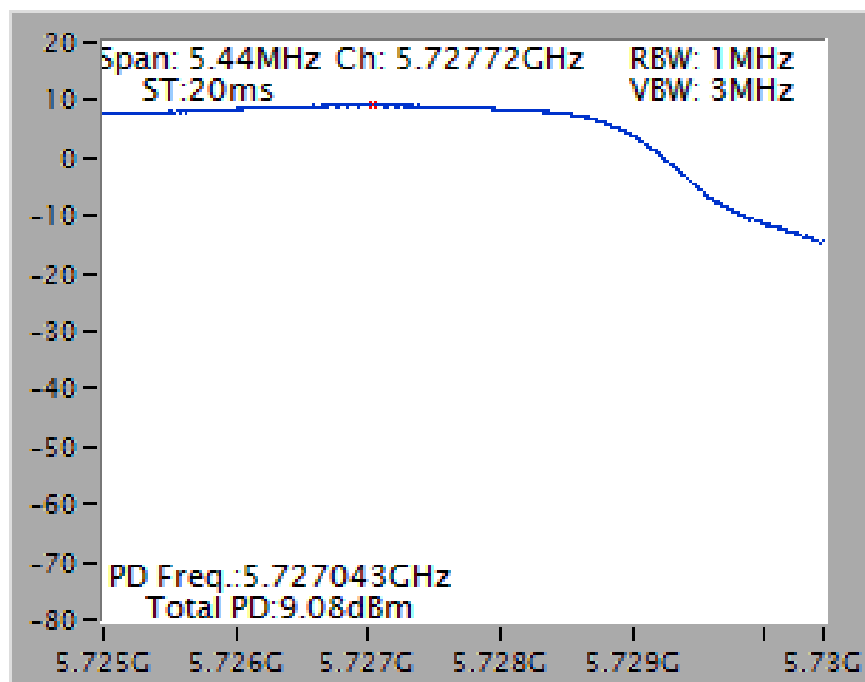


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5710 MHz (UNII 2C)

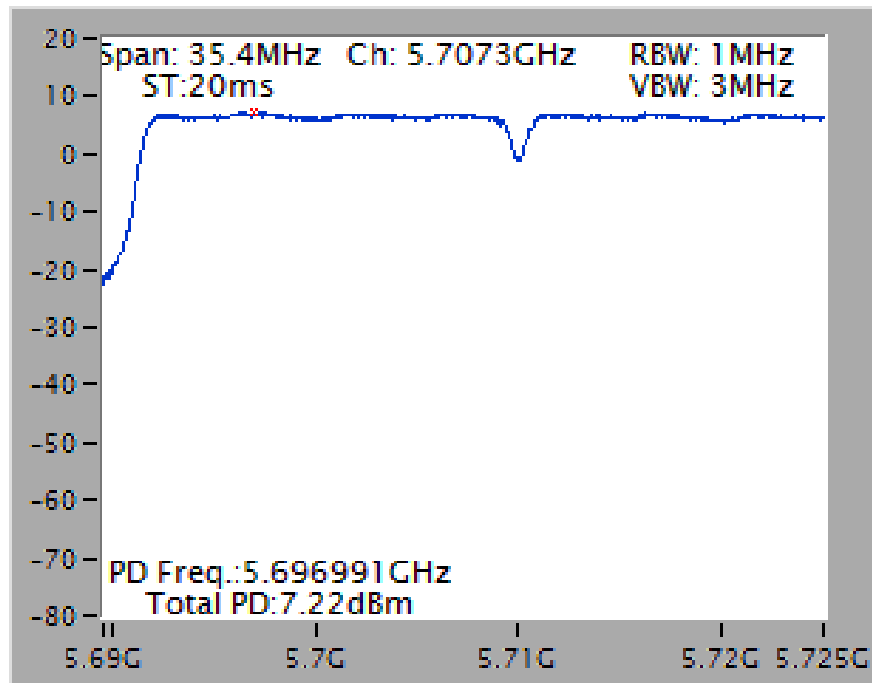


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5710 MHz (UNII 3)

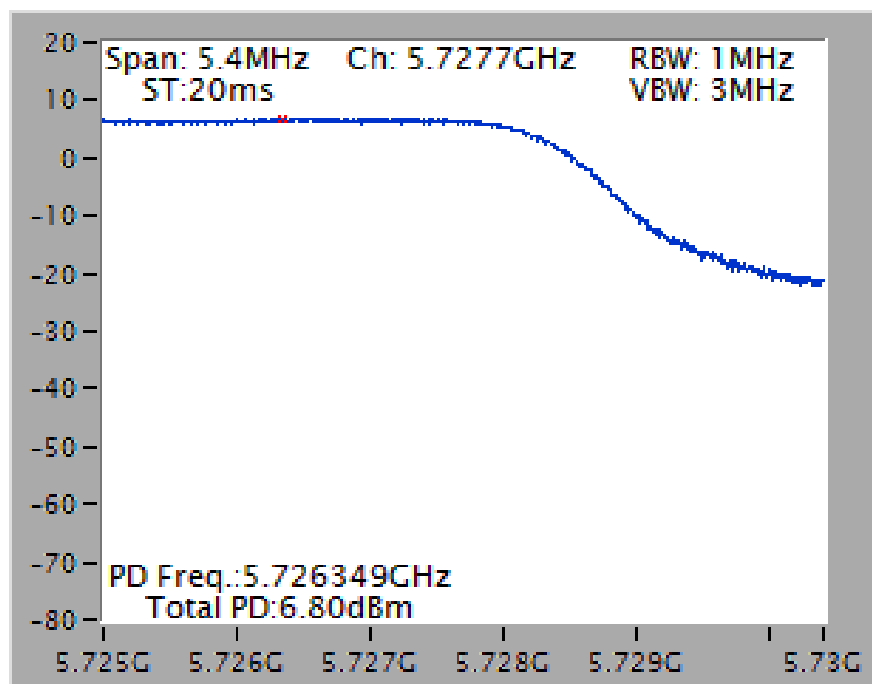

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5690 MHz (UNII 2C)

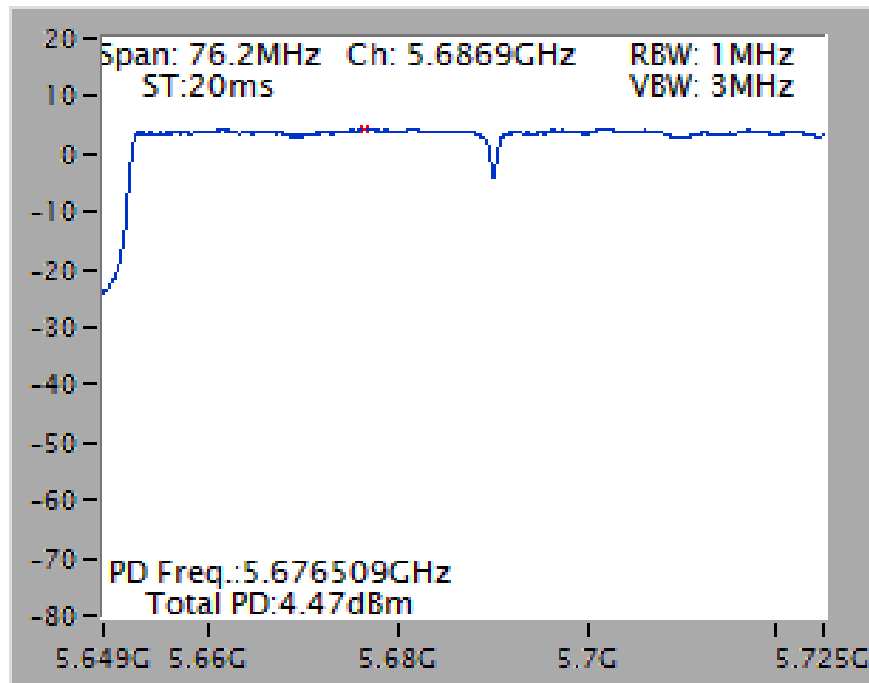


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5690 MHz (UNII 3)

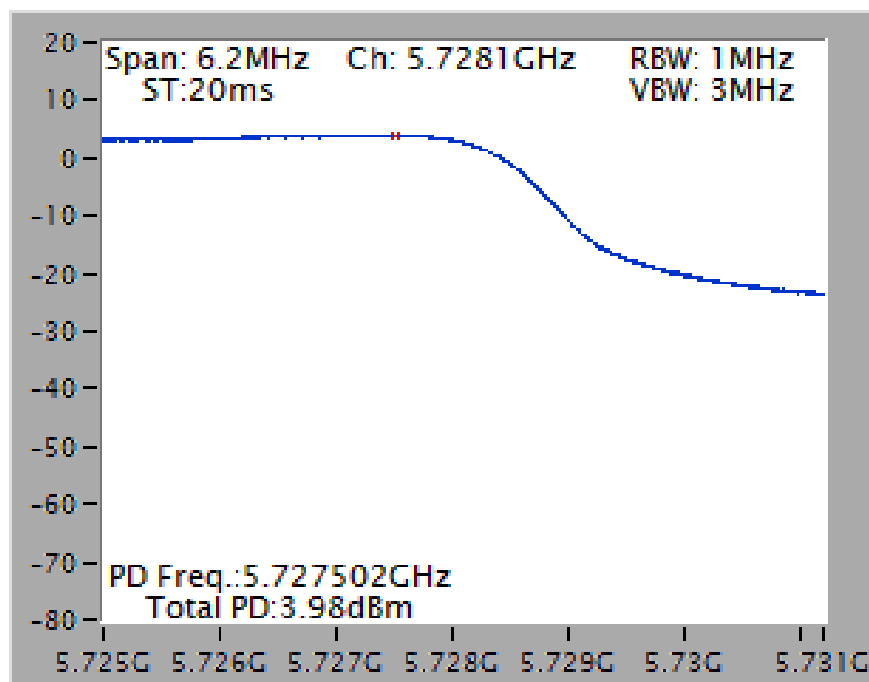


Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5320 MHz

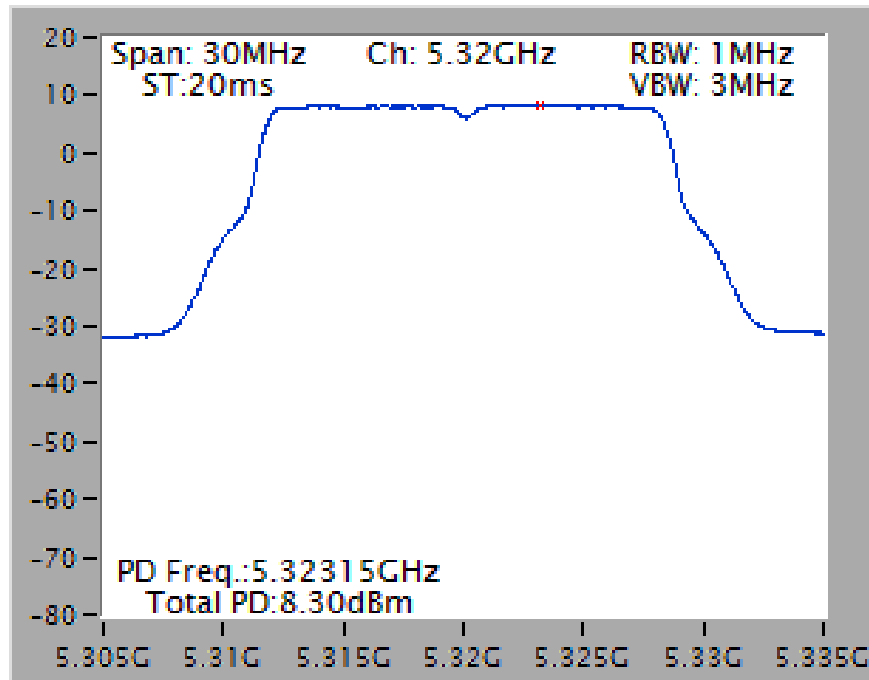


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5580 MHz

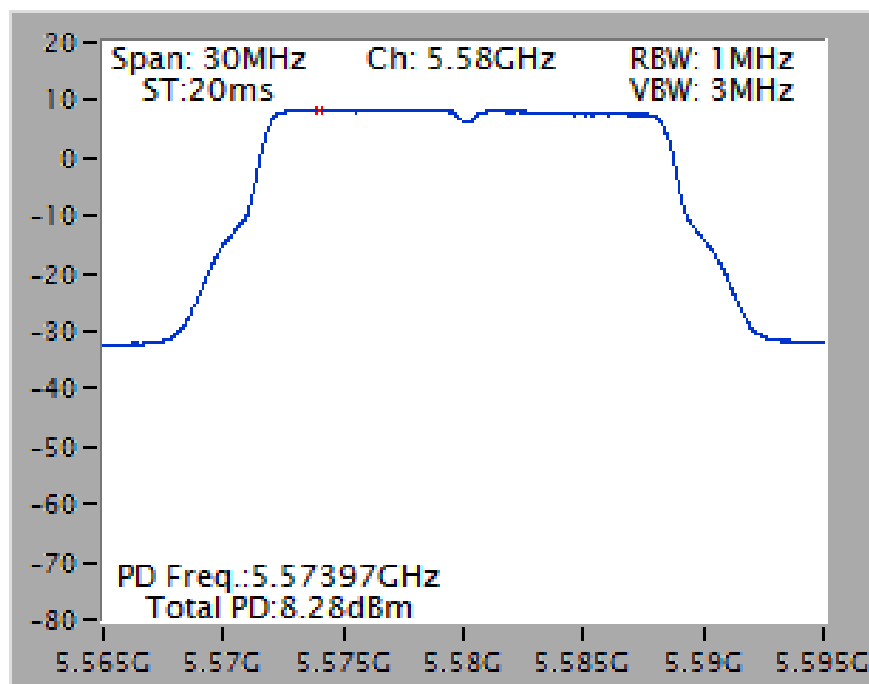


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

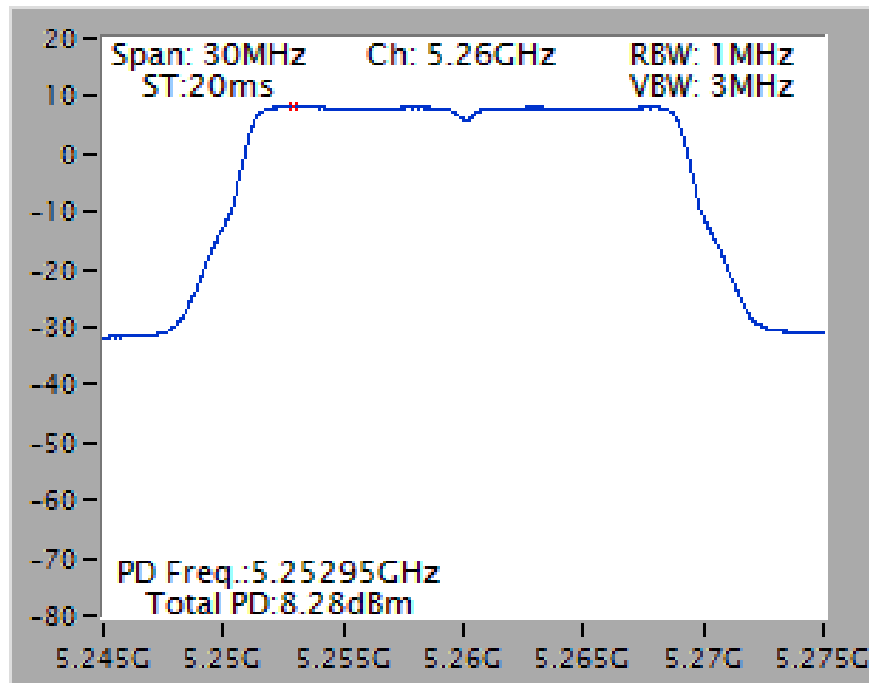


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5580 MHz

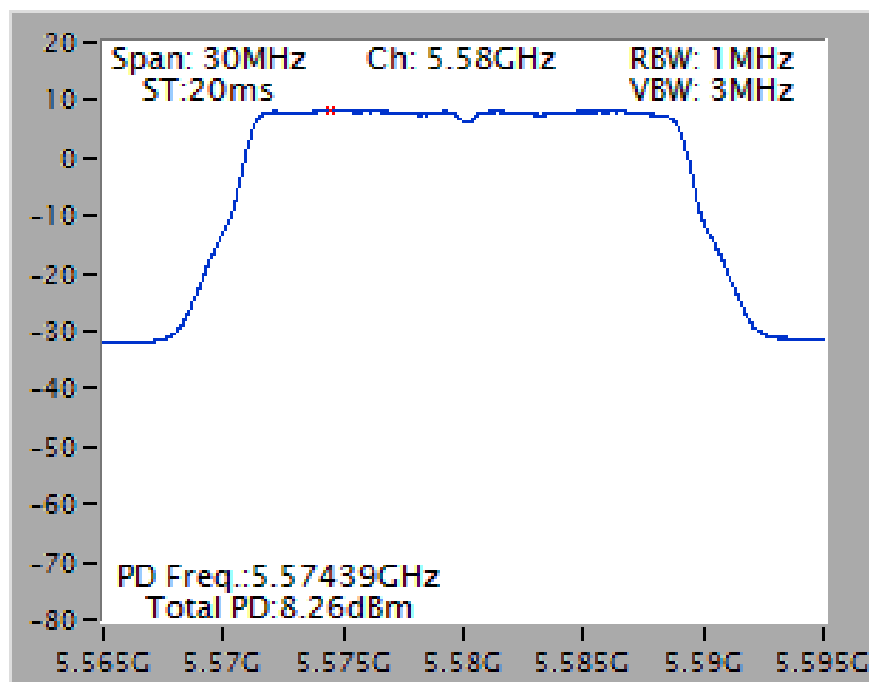


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

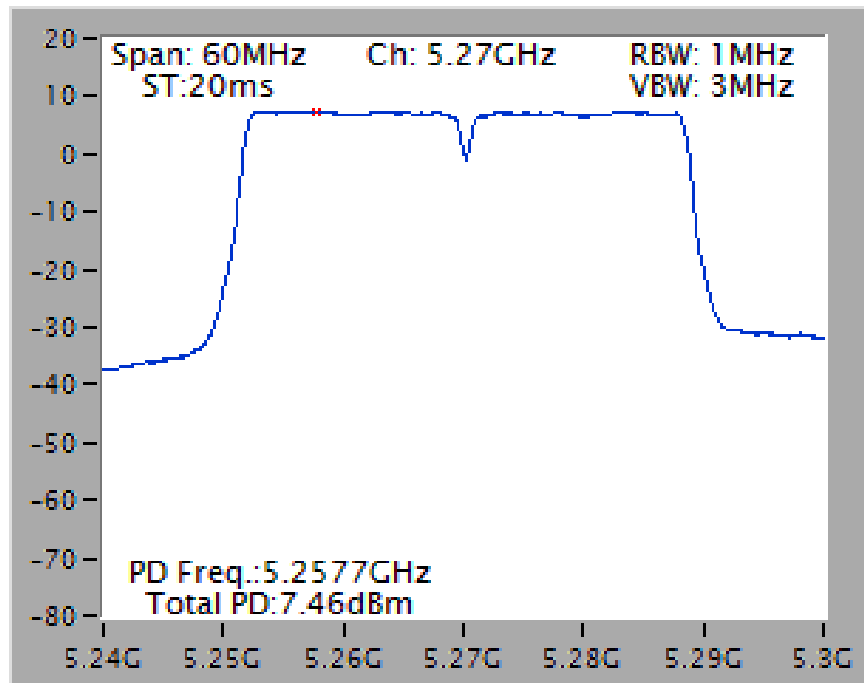


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5550 MHz

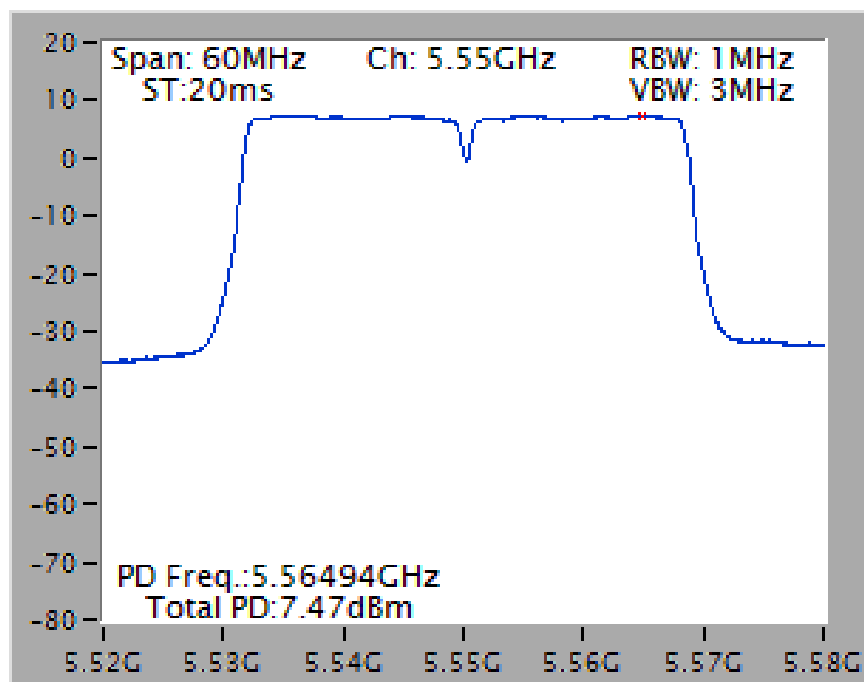

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

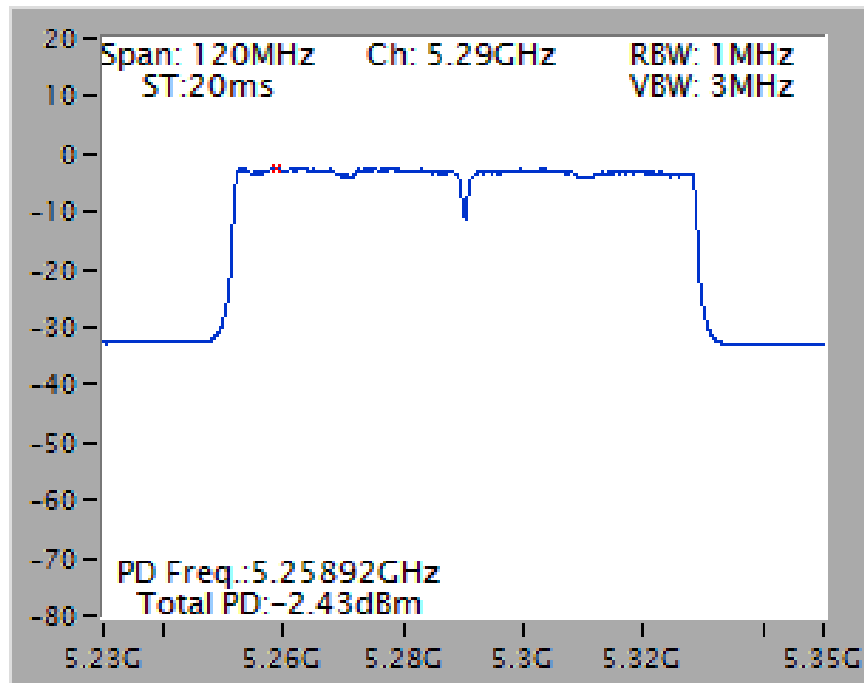


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

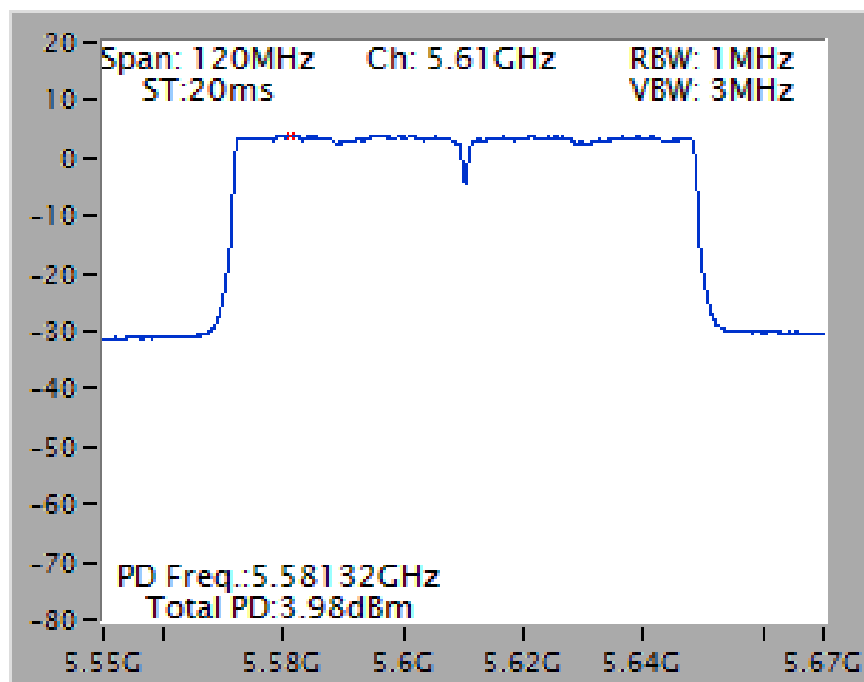


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

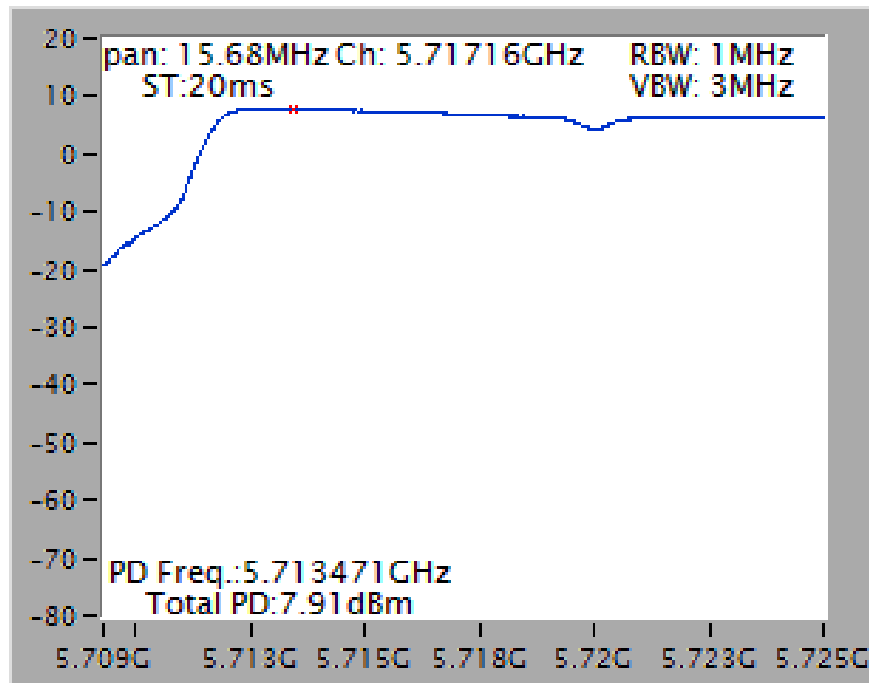


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

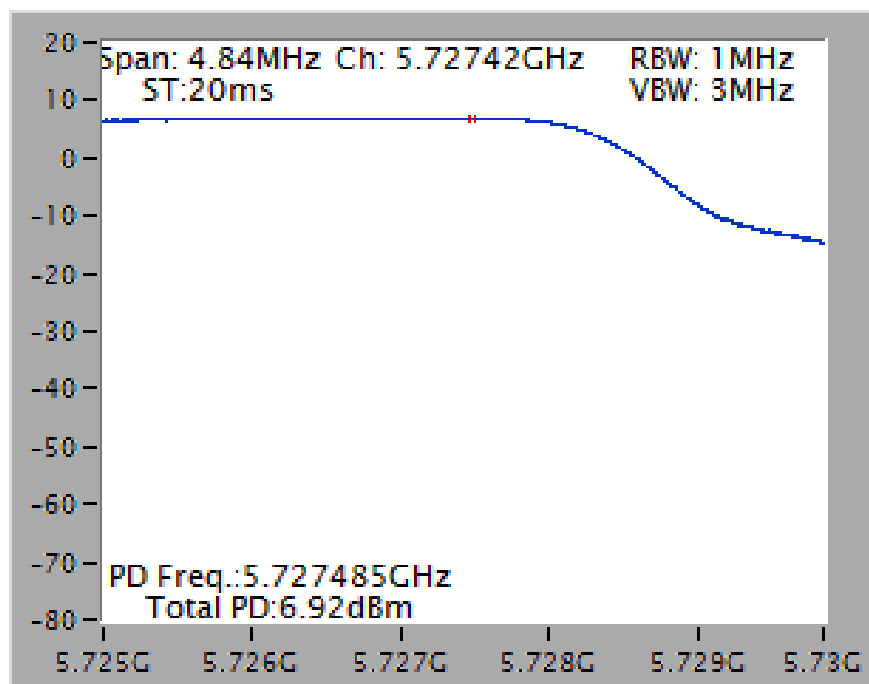


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

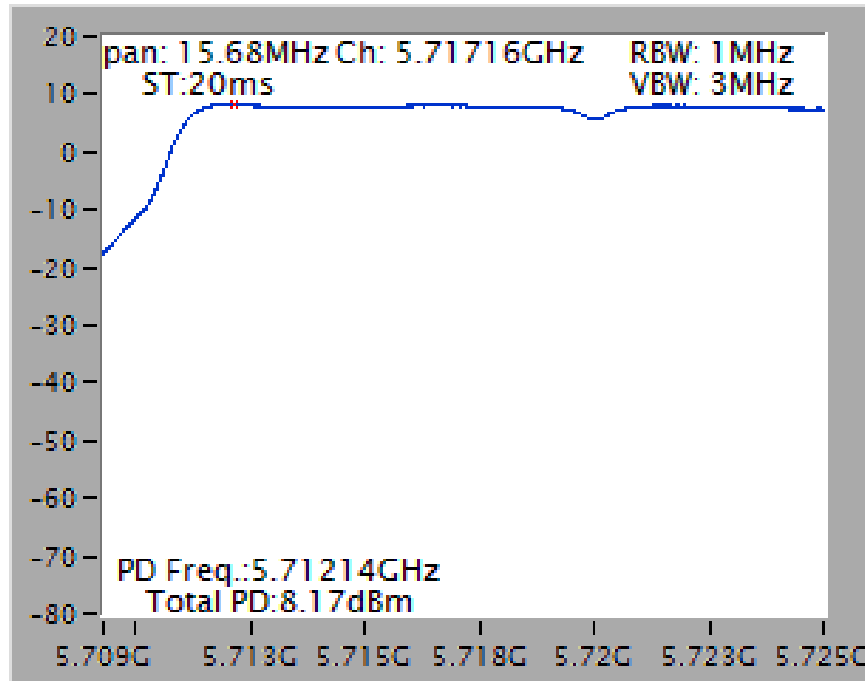


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

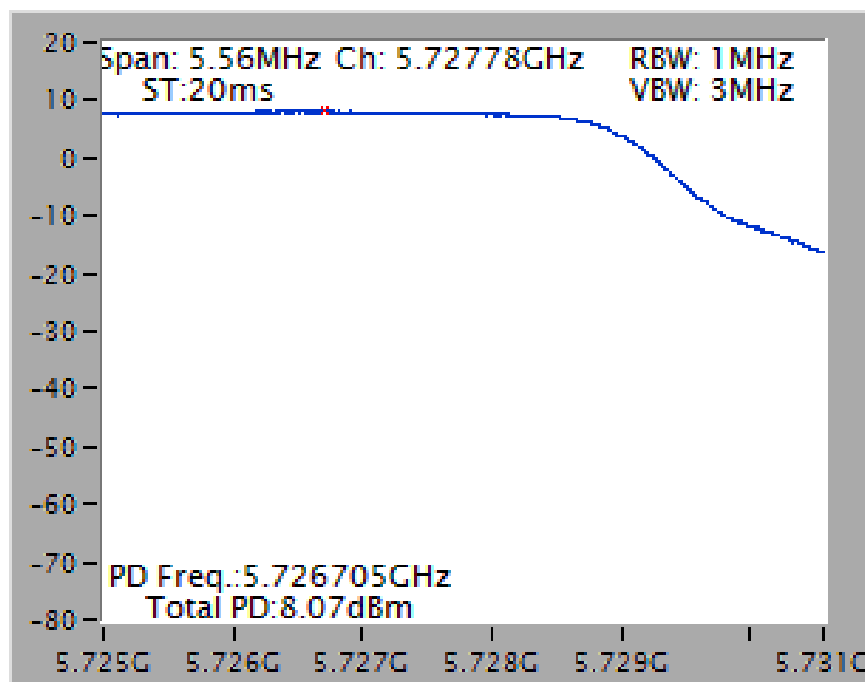


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

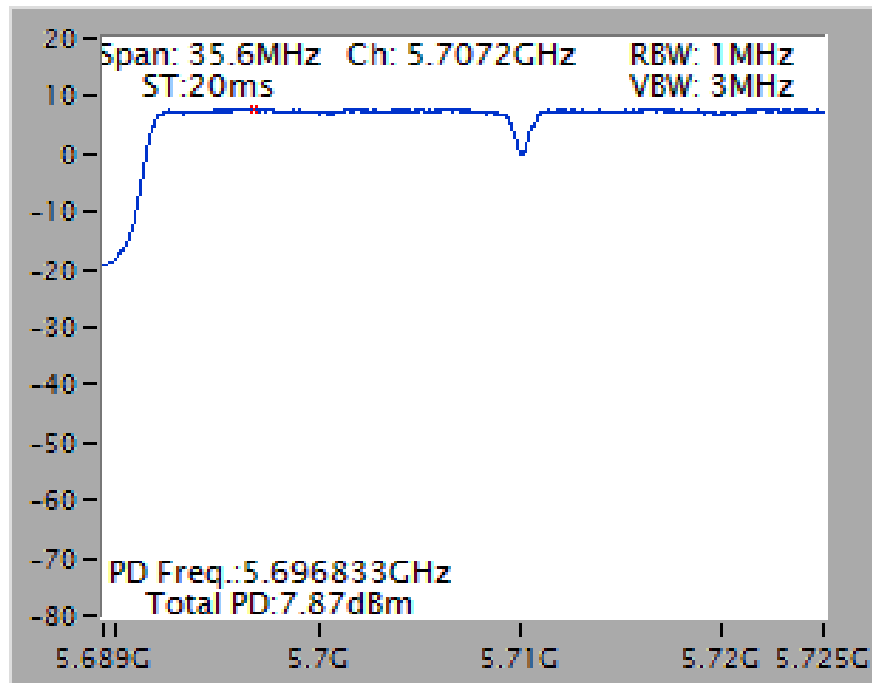


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

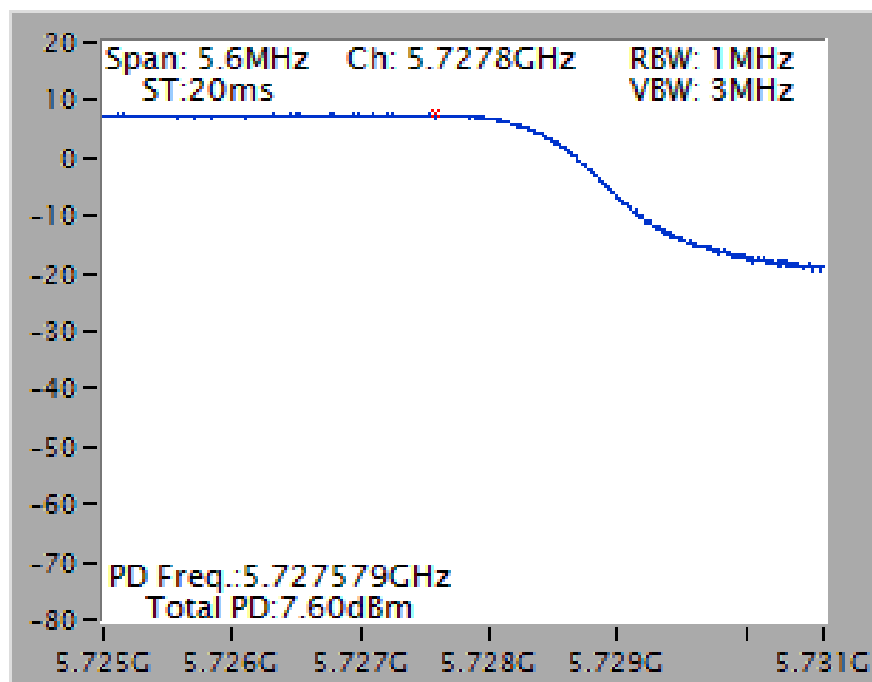

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

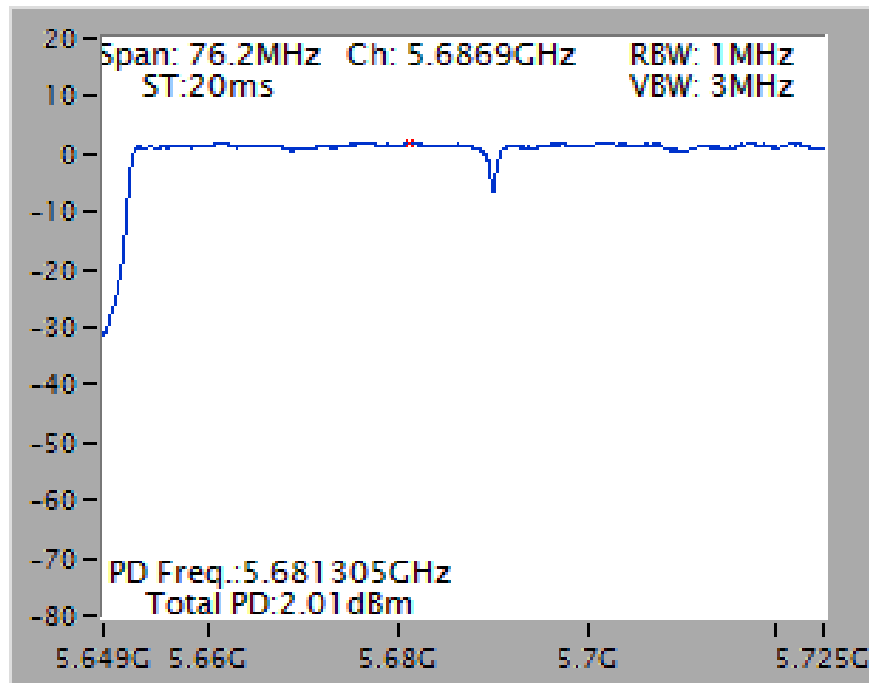


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

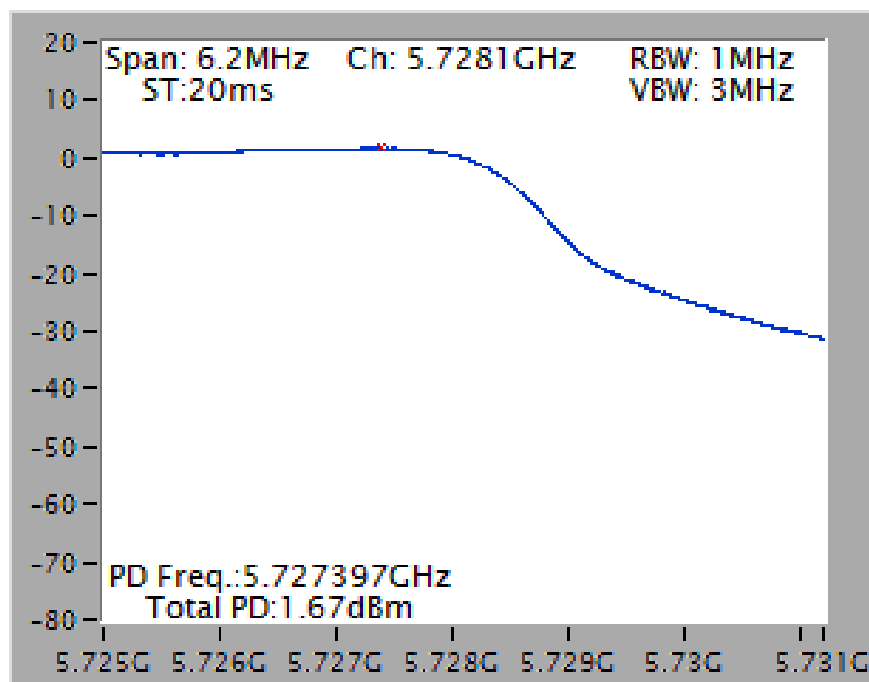


Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 1TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5320 MHz

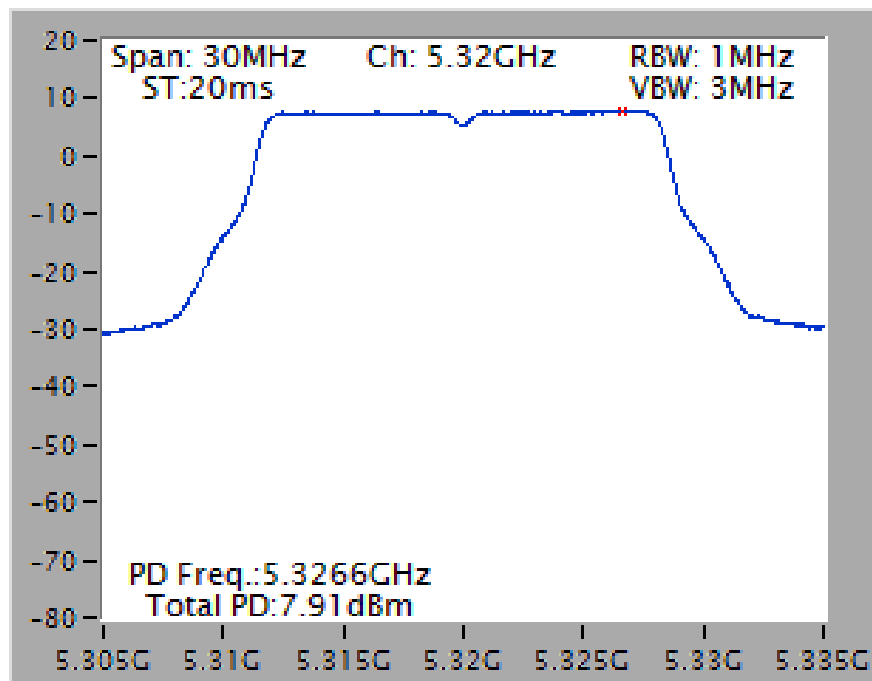


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5500 MHz

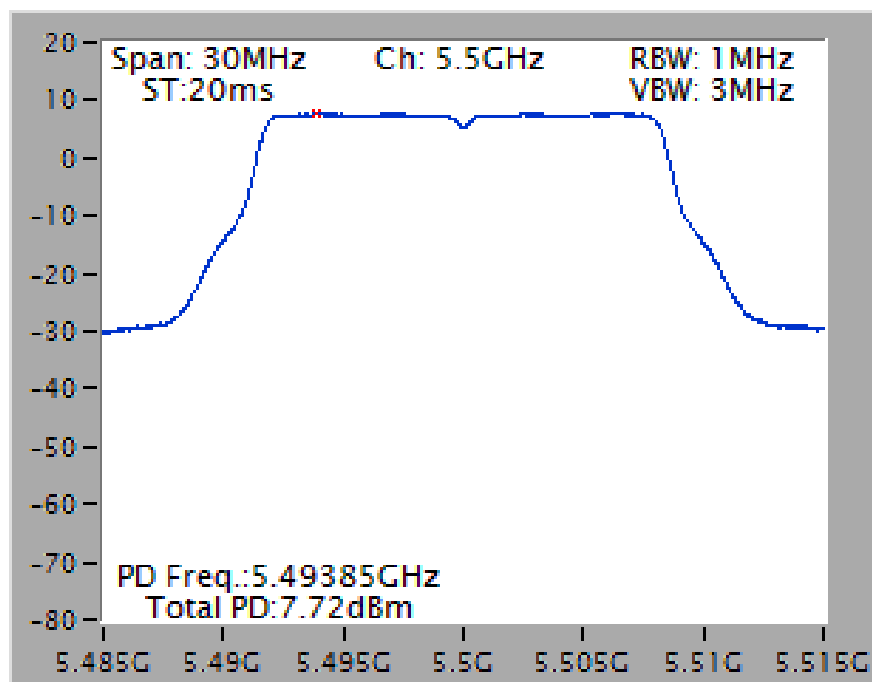


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5260 MHz

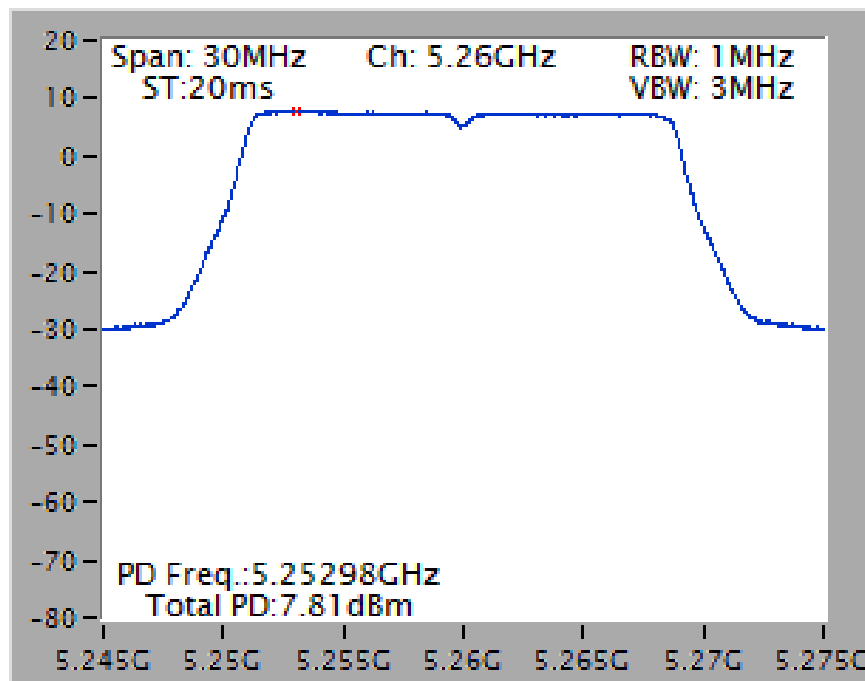


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5580 MHz

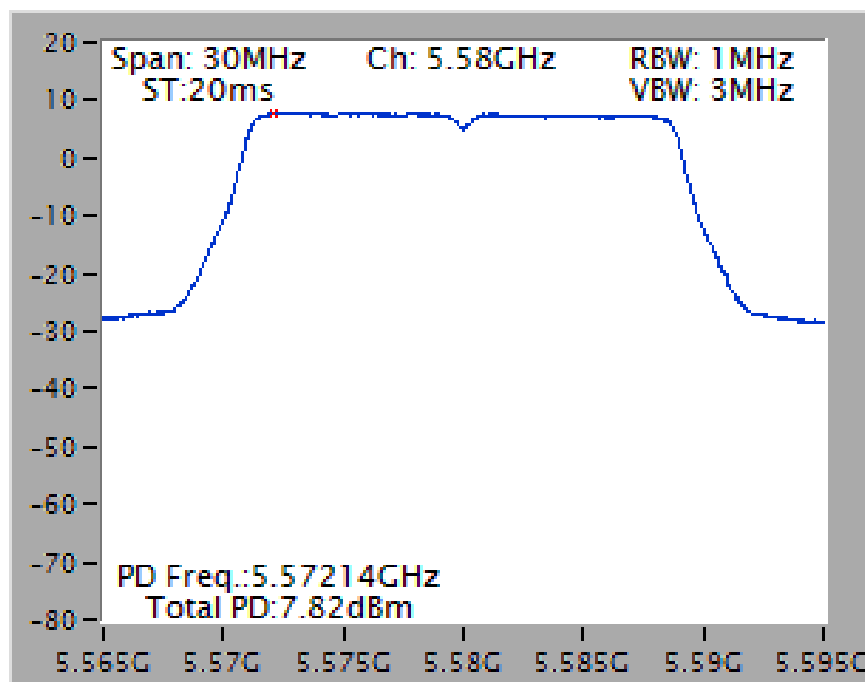


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5270 MHz

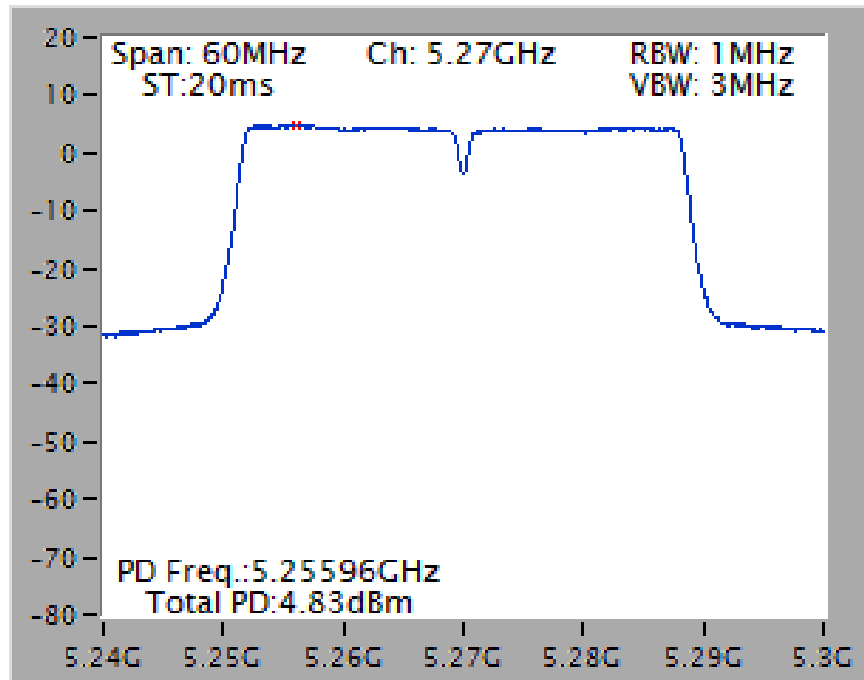


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5550 MHz

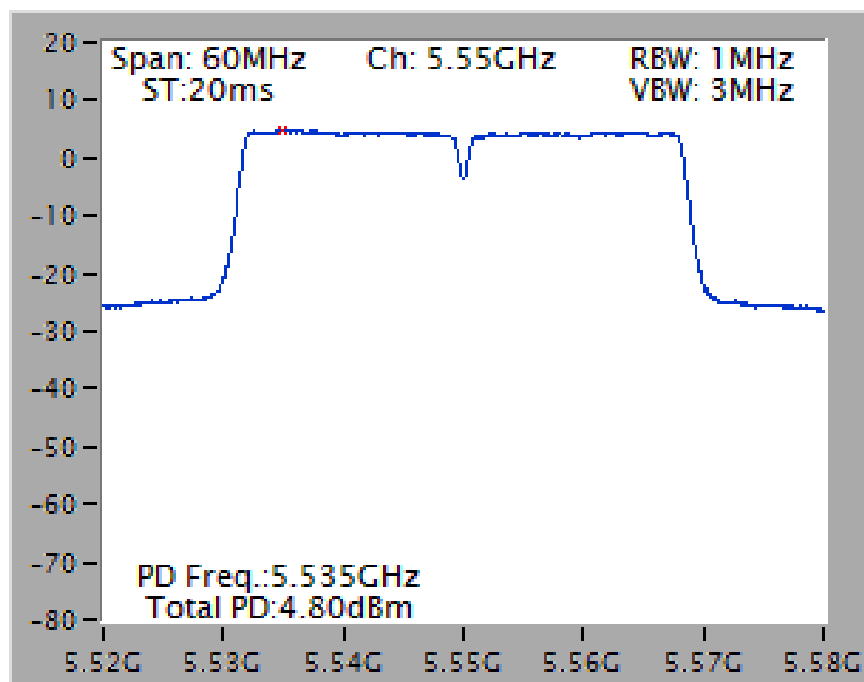

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5290 MHz

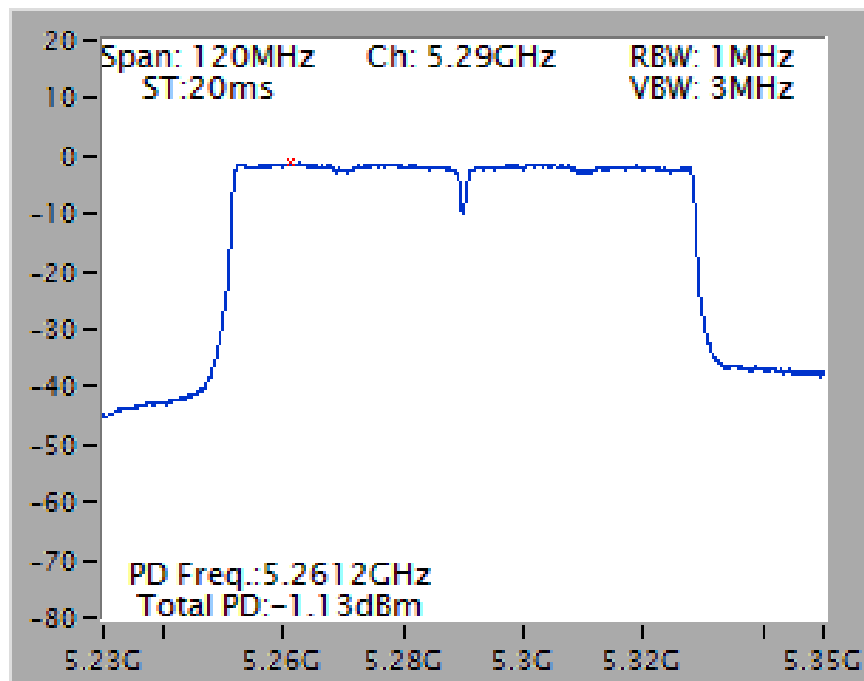


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5610 MHz

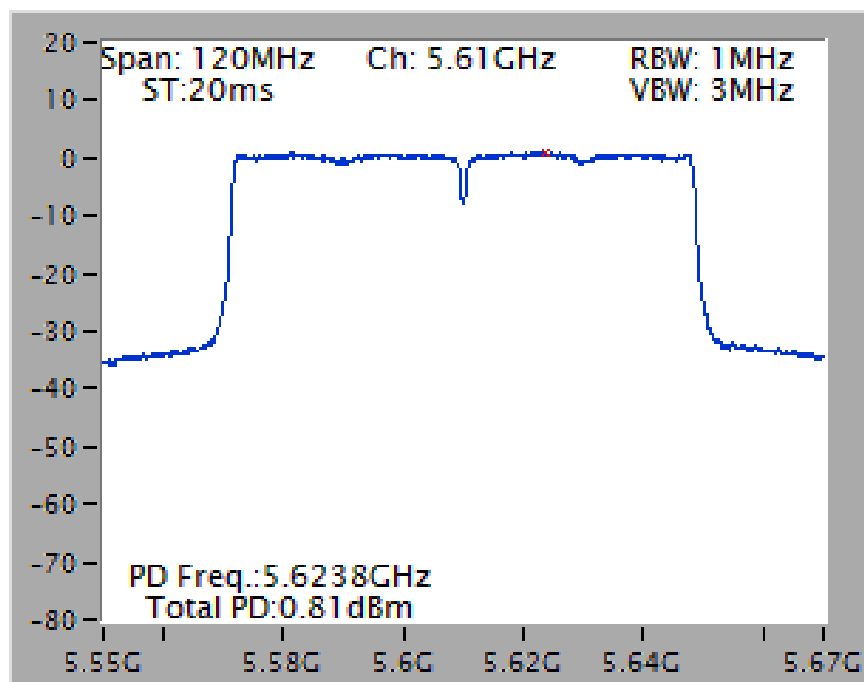


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 2C)

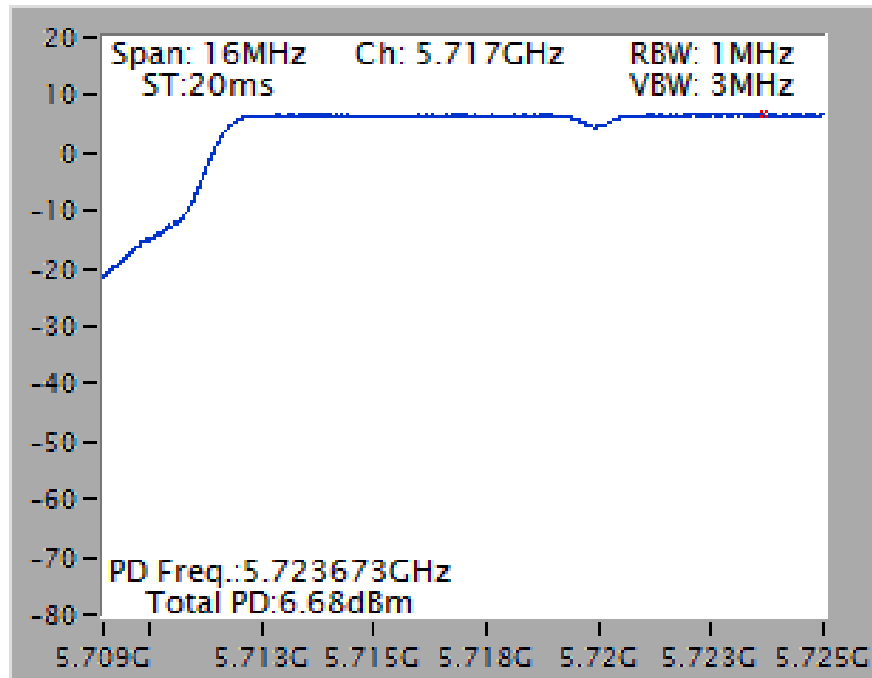

Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 3)

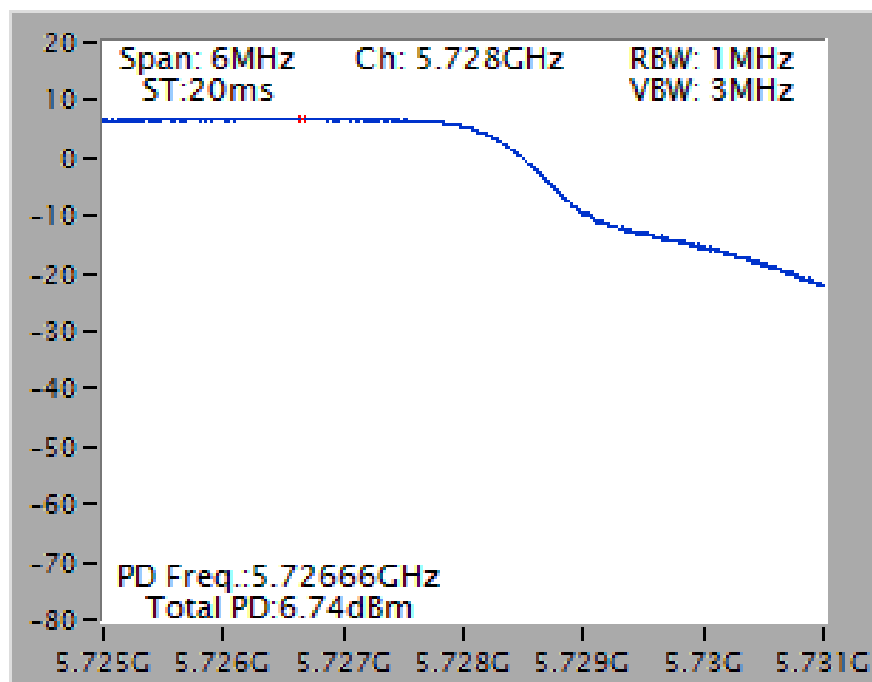

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

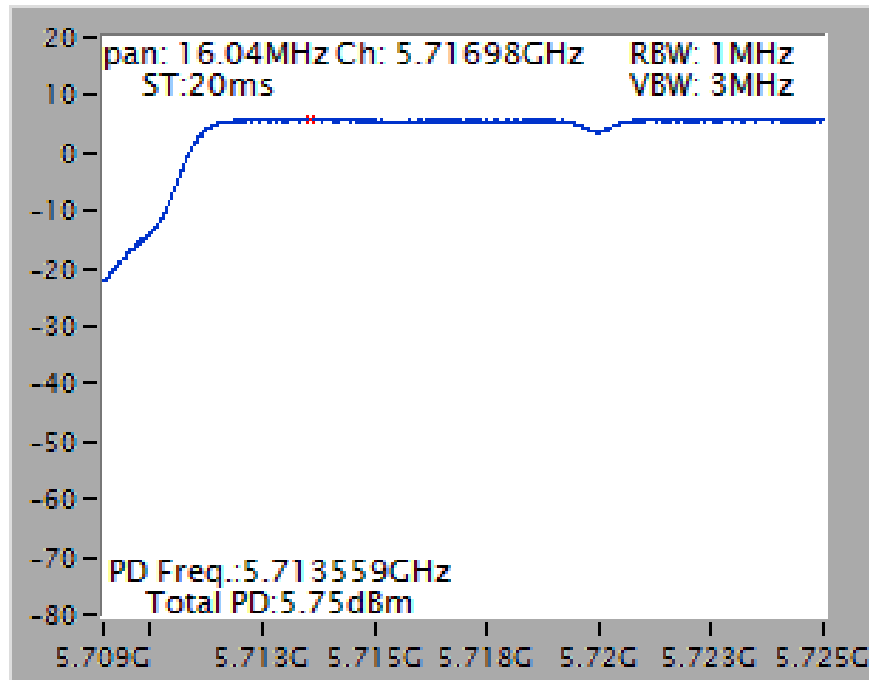

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

