




FCC RADIO TEST REPORT

FCC ID : UZ7CR6080PC
Equipment : HC Cradle
Brand Name : Zebra
Model Name : CR6080-PC
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 15, 2020 and testing was started from May 27, 2020 and completed on Jun. 08, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Reviewed by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example.....	12
3 Test Result.....	13
3.1 Number of Channel Measurement	13
3.2 Hopping Channel Separation Measurement	15
3.3 Dwell Time Measurement.....	22
3.4 20dB and 99% Bandwidth Measurement	24
3.5 Output Power Measurement.....	36
3.6 Conducted Band Edges Measurement.....	38
3.7 Conducted Spurious Emission Measurement	45
3.8 Radiated Band Edges and Spurious Emission Measurement	55
3.9 AC Conducted Emission Measurement.....	60
3.10 Antenna Requirements.....	62
4 List of Measuring Equipment	63
5 Uncertainty of Evaluation.....	65
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR050617-01A	01	Initial issue of report	Aug. 17, 2020
FR050617-01A	02	Revise antenna information	Aug. 20, 2020

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting only	-
3.5	15.247(b)(1)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 7.36 dB at 75.590 MHz
3.9	15.207	AC Conducted Emission	Pass	Under limit 6.88 dB at 0.536 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Celery Wei

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	HC Cradle
Brand Name	Zebra
Model Name	CR6080-PC
FCC ID	UZ7CR6080PC
EUT supports Radios application	NFC/WPC/WPT Bluetooth BR/EDR/LE
HW Version	EV2
SW Version	N14
MFD	29APR20
EUT Stage	Engineering sample

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V6W0WW
USB Cable 1 (Type C)	Brand Name	Zebra	Part Number	CB-000722-01
USB Cable 2 (Type C)	Brand Name	Zebra	Part Number	CB-000723-01

Supported Unit Used in Test Configuration and System				
Scanner	Brand Name	Zebra	Model Number	CS6080

1.2. Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 6.42 dBm (0.0044 W) Bluetooth EDR (2Mbps) : 8.33 dBm (0.0068 W) Bluetooth EDR (3Mbps) : 8.77 dBm (0.0075 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.843 MHz Bluetooth EDR (2Mbps) : 1.182 MHz Bluetooth EDR (3Mbps) : 1.173 MHz
Antenna Type	Chip Antenna type with gain 2.07 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH16-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

Channel	Frequency	Bluetooth Average Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	6.38 dBm	6.36 dBm	6.32 dBm
Ch39	2441MHz	5.89 dBm	5.74 dBm	5.70 dBm
Ch78	2480MHz	5.78 dBm	5.47 dBm	5.45 dBm

Channel	Frequency	Bluetooth Average Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	6.41 dBm	6.43 dBm	6.34 dBm
Ch39	2441MHz	5.91 dBm	5.80 dBm	5.72 dBm
Ch78	2480MHz	5.80 dBm	5.52 dBm	5.46 dBm

Channel	Frequency	Bluetooth Average Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	6.47 dBm	6.45 dBm	6.35 dBm
Ch39	2441MHz	5.94 dBm	5.82 dBm	5.75 dBm
Ch78	2480MHz	5.84 dBm	5.58 dBm	5.52 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	6.42 dBm	6.39 dBm	6.37 dBm
Ch39	2441MHz	5.80 dBm	5.79 dBm	5.78 dBm
Ch78	2480MHz	5.53 dBm	5.50 dBm	5.49 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	8.33 dBm	8.29 dBm	8.28 dBm
Ch39	2441MHz	8.10 dBm	8.08 dBm	8.07 dBm
Ch78	2480MHz	8.01 dBm	8.00 dBm	7.99 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	8.77 dBm	8.72 dBm	8.71 dBm
Ch39	2441MHz	8.59 dBm	8.55 dBm	8.53 dBm
Ch78	2480MHz	8.53 dBm	8.49 dBm	8.48 dBm

Remark: The data rate was set in 3Mbps for all the test items due to the highest RF output power.

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower), and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.


- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : Scanner (CS6080) + Bluetooth Idle + NFC Link + Wireless Charging + USB Cable (Charging with AC Adapter)		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 3Mbps, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, the tests were performed with USB Cable 1.			

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

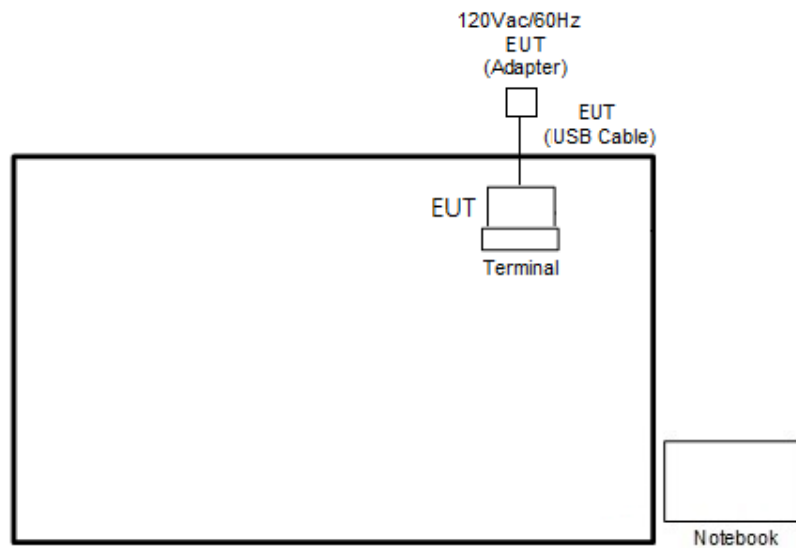

<Bluetooth Tx Mode>

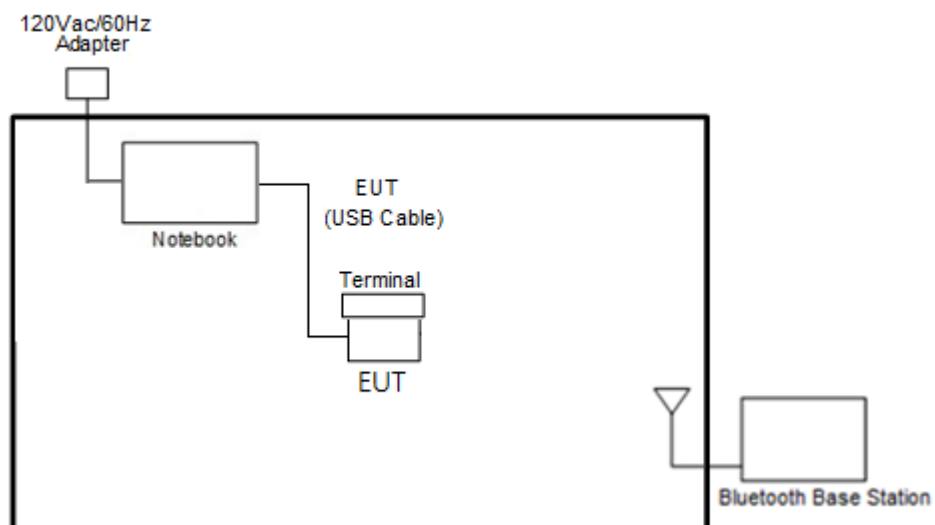

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
2.	Notebook	DELL	Latitude E3340	FCC DoC/ Contains FCC ID: PD97260NGU	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility “BT Regulatory Test App V1.3.8.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.


3.1.4 Test Setup

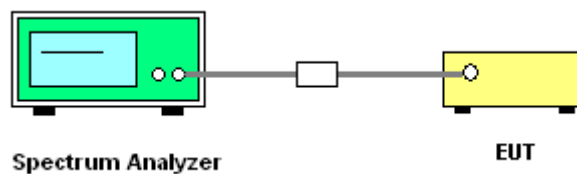


**3.1.5 Test Result of Number of Hopping Frequency**

Test Engineer :	Owen Yang	Temperature :	21~25°C
		Relative Humidity :	51~54%

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

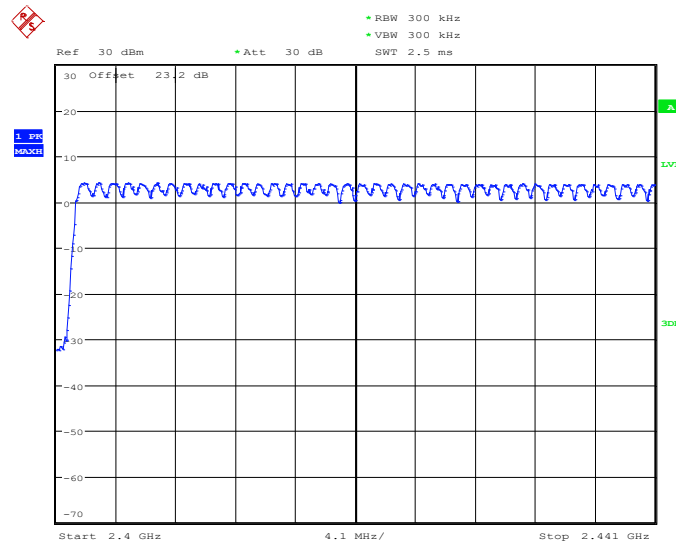Number of Hopping Channel Plot on Channel 00 - 78

Date: 8.JUL.2020 13:41:17

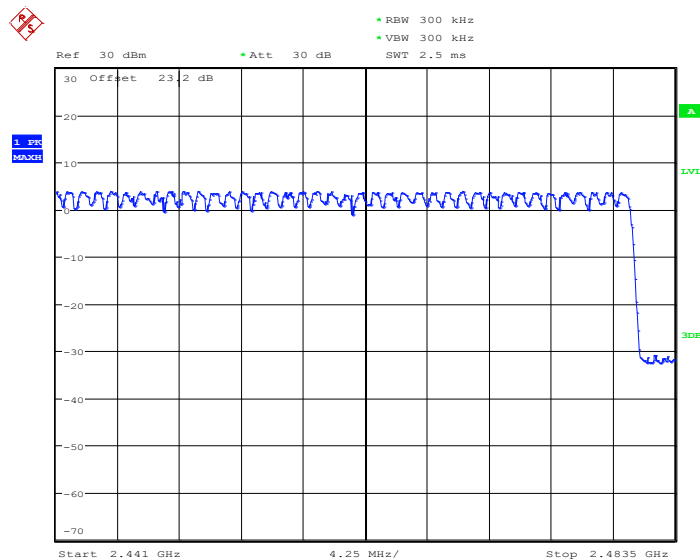

Date: 8.JUL.2020 13:42:28

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

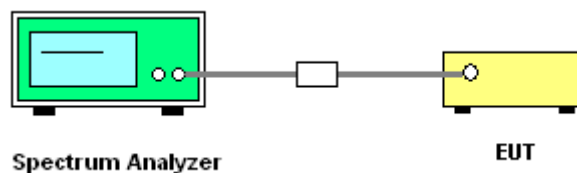

**3.2.5 Test Result of Hopping Channel Separation**


Test Engineer :	Owen Yang	Temperature :	21~25℃
		Relative Humidity :	51~54%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	1.000	0.6220	Pass
DH	1Mbps	1	39	2441	1.000	0.6233	Pass
DH	1Mbps	1	78	2480	1.000	0.6213	Pass
2DH	2Mbps	1	0	2402	1.000	0.8947	Pass
2DH	2Mbps	1	39	2441	1.000	0.7860	Pass
2DH	2Mbps	1	78	2480	1.000	0.8900	Pass
3DH	3Mbps	1	0	2402	1.000	0.8613	Pass
3DH	3Mbps	1	39	2441	1.000	0.8613	Pass
3DH	3Mbps	1	78	2480	1.000	0.8653	Pass




<1Mbps>

Channel Separation Plot on Channel 00 - 01

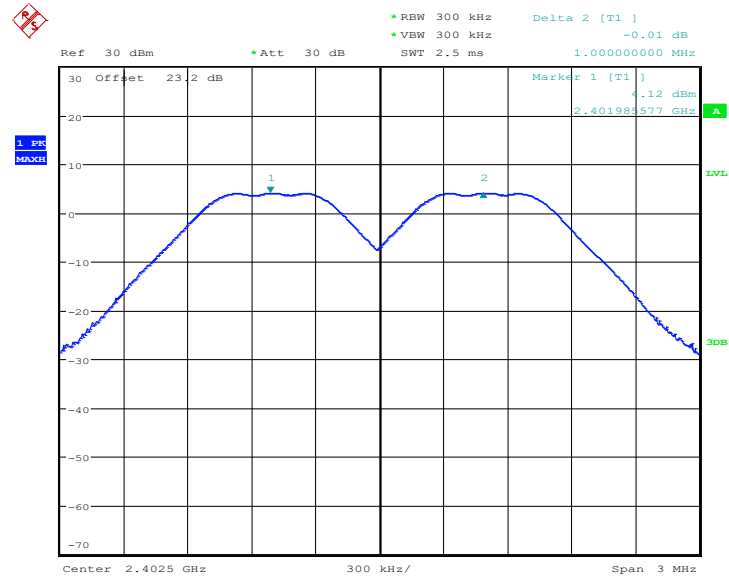

Date: 8.JUL.2020 13:54:18


Channel Separation Plot on Channel 39 - 40

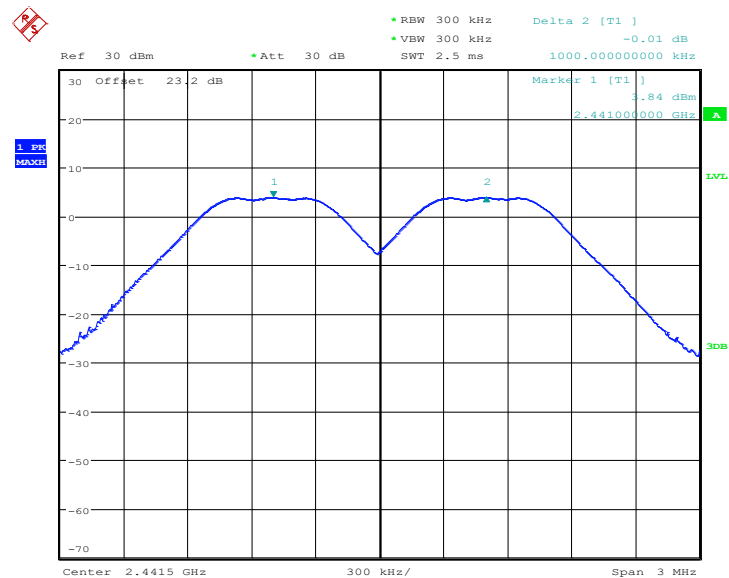

Date: 8.JUL.2020 14:07:07




Channel Separation Plot on Channel 77 - 78

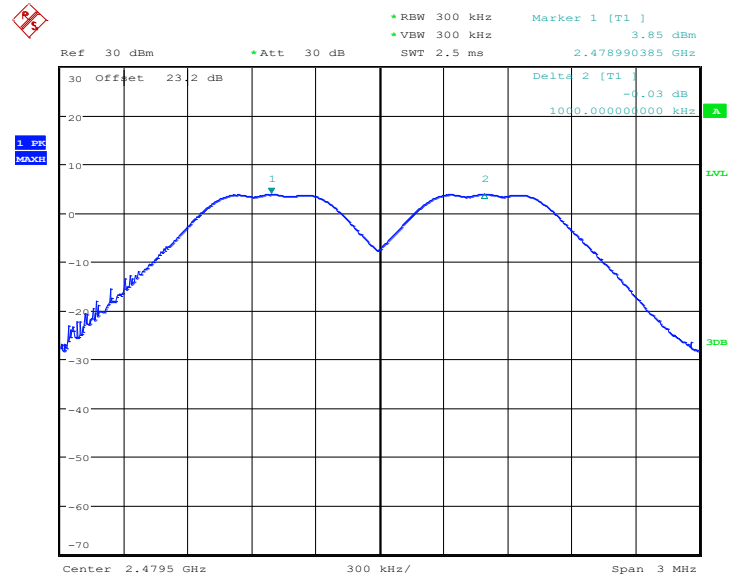

Date: 8.JUL.2020 17:22:54

<2Mbps>

Channel Separation Plot on Channel 00 - 01

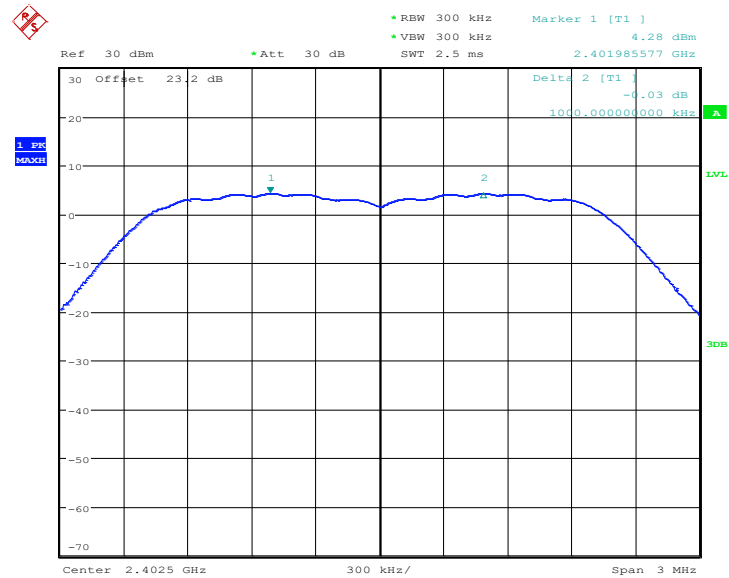

Date: 8.JUL.2020 14:19:42





Ref 30 dBm Att 30 dB RBW 300 kHz VBW 300 kHz SWT 2.5 ms Delta 2 [T1]

Marker 1 [T1] 4.32 dBm

2.401990385 GHz

30 Offset 23.2 dB

1 895 MHz

3dB

Center 2.4025 GHz Span 3 MHz

Date: 8.JUL.2020 14:57:44

1 999 MAG

Ref 30 dBm Att 30 dB

RBW 300 kHz VBW 300 kHz SWT 2.5 ms


Marker 1 [T1] 4.01 dBm 2.440990385 GHz

Delta 2 [T1] -0.02 dB 100.000000000 kHz

Center 2.4415 GHz 300 kHz/ Span 3 MHz

Date: 8.JUL.2020 15:07:00

Channel Separation Plot on Channel 77 - 78

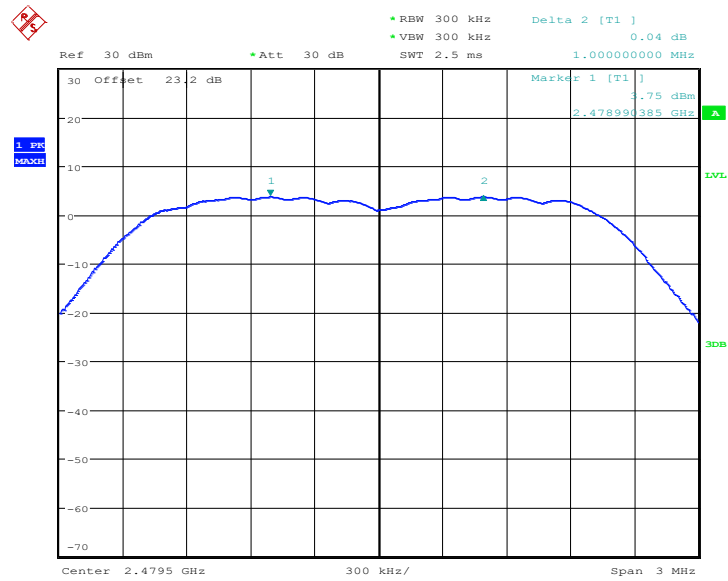

Date: 8.JUL.2020 15:12:16

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

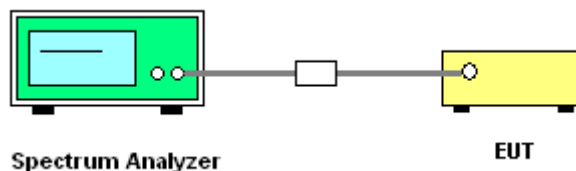




3.3.5 Test Result of Dwell Time

Test Engineer :	Owen Yang	Temperature :	21~25℃
		Relative Humidity :	51~54%

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

Package Transfer Time Plot

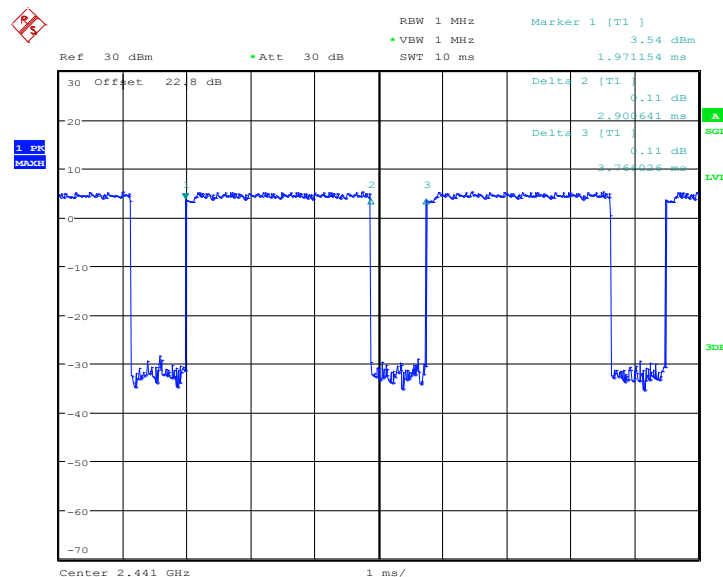

Date: 5.JUL.2020 15:39:51

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.

2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.

3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq$ 1-5% of the 99% bandwidth; VBW $\geq$ 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup



**3.4.5 Test Result of 20dB Bandwidth**


Test Engineer :	Owen Yang	Temperature :	21~25℃
		Relative Humidity :	51~54%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.933	Pass
DH	1Mbps	1	39	2441	0.935	Pass
DH	1Mbps	1	78	2480	0.932	Pass
2DH	2Mbps	1	0	2402	1.342	Pass
2DH	2Mbps	1	39	2441	1.337	Pass
2DH	2Mbps	1	78	2480	1.335	Pass
3DH	3Mbps	1	0	2402	1.292	Pass
3DH	3Mbps	1	39	2441	1.292	Pass
3DH	3Mbps	1	78	2480	1.298	Pass



1 RBW 30 kHz
 2 VBW 300 kHz
 3 SWT 10 ms
 4 Ref 30 dBm
 5 Att 30 dB
 6 Marker 1 [T1]
 7 -18.49 dBm
 8 2.401531410 GHz
 9 Delta 2 [T1]
 10 0.16 dB
 11 953.333333340 kHz
 12 1 dB
 13 1.4 dB
 14 -18.6 dBm
 15 2.401531410 GHz
 16 2.402 GHz
 17 200 kHz/
 18 Span 2 MHz
 19 30 dBm
 20 -70 dBm
 21 30 dB
 22 20 dB
 23 10 dB
 24 0 dB
 25 -10 dB
 26 -20 dB
 27 -30 dB
 28 -40 dB
 29 -50 dB
 30 -60 dB
 31 -70 dB
 32 1 dB
 33 1.4 dB
 34 -18.6 dBm
 35 2.401531410 GHz
 36 2.402 GHz
 37 200 kHz/
 38 Span 2 MHz
 39 30 dBm
 40 -70 dBm
 41 30 dB
 42 20 dB
 43 10 dB
 44 0 dB
 45 -10 dB
 46 -20 dB
 47 -30 dB
 48 -40 dB
 49 -50 dB
 50 -60 dB
 51 -70 dB
 52 1 dB
 53 1.4 dB
 54 -18.6 dBm
 55 2.401531410 GHz
 56 2.402 GHz
 57 200 kHz/
 58 Span 2 MHz
 59 30 dBm
 60 -70 dBm
 61 30 dB
 62 20 dB
 63 10 dB
 64 0 dB
 65 -10 dB
 66 -20 dB
 67 -30 dB
 68 -40 dB
 69 -50 dB
 70 -60 dB
 71 -70 dB
 72 1 dB
 73 1.4 dB
 74 -18.6 dBm
 75 2.401531410 GHz
 76 2.402 GHz
 77 200 kHz/
 78 Span 2 MHz
 79 30 dBm
 80 -70 dBm
 81 30 dB
 82 20 dB
 83 10 dB
 84 0 dB
 85 -10 dB
 86 -20 dB
 87 -30 dB
 88 -40 dB
 89 -50 dB
 90 -60 dB
 91 -70 dB
 92 1 dB
 93 1.4 dB
 94 -18.6 dBm
 95 2.401531410 GHz
 96 2.402 GHz
 97 200 kHz/
 98 Span 2 MHz
 99 30 dBm
 100 -70 dBm
 101 30 dB
 102 20 dB
 103 10 dB
 104 0 dB
 105 -10 dB
 106 -20 dB
 107 -30 dB
 108 -40 dB
 109 -50 dB
 110 -60 dB
 111 -70 dB
 112 1 dB
 113 1.4 dB
 114 -18.6 dBm
 115 2.401531410 GHz
 116 2.402 GHz
 117 200 kHz/
 118 Span 2 MHz
 119 30 dBm
 120 -70 dBm
 121 30 dB
 122 20 dB
 123 10 dB
 124 0 dB
 125 -10 dB
 126 -20 dB
 127 -30 dB
 128 -40 dB
 129 -50 dB
 130 -60 dB
 131 -70 dB
 132 1 dB
 133 1.4 dB
 134 -18.6 dBm
 135 2.401531410 GHz
 136 2.402 GHz
 137 200 kHz/
 138 Span 2 MHz
 139 30 dBm
 140 -70 dBm
 141 30 dB
 142 20 dB
 143 10 dB
 144 0 dB
 145 -10 dB
 146 -20 dB
 147 -30 dB
 148 -40 dB
 149 -50 dB
 150 -60 dB
 151 -70 dB
 152 1 dB
 153 1.4 dB
 154 -18.6 dBm
 155 2.401531410 GHz
 156 2.402 GHz
 157 200 kHz/
 158 Span 2 MHz
 159 30 dBm
 160 -70 dBm
 161 30 dB
 162 20 dB
 163 10 dB
 164 0 dB
 165 -10 dB
 166 -20 dB
 167 -30 dB
 168 -40 dB
 169 -50 dB
 170 -60 dB
 171 -70 dB
 172 1 dB
 173 1.4 dB
 174 -18.6 dBm
 175 2.401531410 GHz
 176 2.402 GHz
 177 200 kHz/
 178 Span 2 MHz
 179 30 dBm
 180 -70 dBm
 181 30 dB
 182 20 dB
 183 10 dB
 184 0 dB
 185 -10 dB
 186 -20 dB
 187 -30 dB
 188 -40 dB
 189 -50 dB
 190 -60 dB
 191 -70 dB
 192 1 dB
 193 1.4 dB
 194 -18.6 dBm
 195 2.401531410 GHz
 196 2.402 GHz
 197 200 kHz/
 198 Span 2 MHz
 199 30 dBm
 200 -70 dBm
 201 30 dB
 202 20 dB
 203 10 dB
 204 0 dB
 205 -10 dB
 206 -20 dB
 207 -30 dB
 208 -40 dB
 209 -50 dB
 210 -60 dB
 211 -70 dB
 212 1 dB
 213 1.4 dB
 214 -18.6 dBm
 215 2.401531410 GHz
 216 2.402 GHz
 217 200 kHz/
 218 Span 2 MHz
 219 30 dBm
 220 -70 dBm
 221 30 dB
 222 20 dB
 223 10 dB
 224 0 dB
 225 -10 dB
 226 -20 dB
 227 -30 dB
 228 -40 dB
 229 -50 dB
 230 -60 dB
 231 -70 dB
 232 1 dB
 233 1.4 dB
 234 -18.6 dBm
 235 2.401531410 GHz
 236 2.402 GHz
 237 200 kHz/
 238 Span 2 MHz
 239 30 dBm
 240 -70 dBm
 241 30 dB
 242 20 dB
 243 10 dB
 244 0 dB
 245 -10 dB
 246 -20 dB
 247 -30 dB
 248 -40 dB
 249 -50 dB
 250 -60 dB
 251 -70 dB
 252 1 dB
 253 1.4 dB
 254 -18.6 dBm
 255 2.401531410 GHz
 256 2.402 GHz
 257 200 kHz/
 258 Span 2 MHz
 259 30 dBm
 260 -70 dBm
 261 30 dB
 262 20 dB
 263 10 dB
 264 0 dB
 265 -10 dB
 266 -20 dB
 267 -30 dB
 268 -40 dB
 269 -50 dB
 270 -60 dB
 271 -70 dB
 272 1 dB
 273 1.4 dB
 274 -18.6 dBm
 275 2.401531410 GHz
 276 2.402 GHz
 277 200 kHz/
 278 Span 2 MHz
 279 30 dBm
 280 -70 dBm
 281 30 dB
 282 20 dB
 283 10 dB
 284 0 dB
 285 -10 dB
 286 -20 dB
 287 -30 dB
 288 -40 dB
 289 -50 dB
 290 -60 dB
 291 -70 dB
 292 1 dB
 293 1.4 dB
 294 -18.6 dBm
 295 2.401531410 GHz
 296 2.402 GHz
 297 200 kHz/
 298 Span 2 MHz
 299 30 dBm
 300 -70 dBm
 301 30 dB
 302 20 dB
 303 10 dB
 304 0 dB
 305 -10 dB
 306 -20 dB
 307 -30 dB
 308 -40 dB
 309 -50 dB
 310 -60 dB
 311 -70 dB
 312 1 dB


20 dB Bandwidth Plot on Channel 39

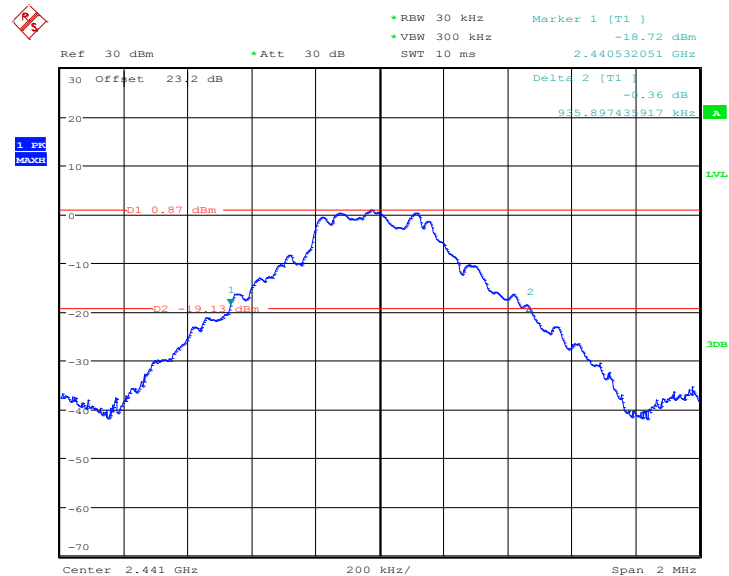

Page Number : 26 of 65
Issued Date : Aug. 20, 2020
Report Version : 02




20 dB Bandwidth Plot on Channel 78

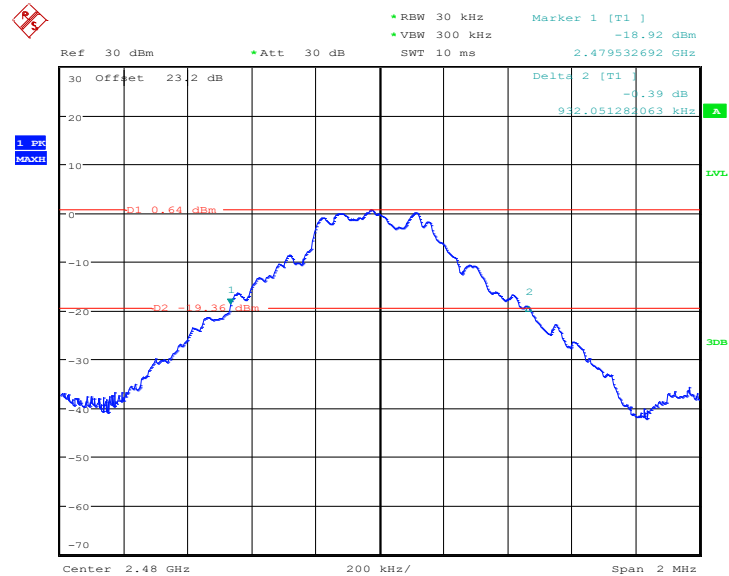

Date: 8.JUL.2020 14:14:01

<2Mbps>

20 dB Bandwidth Plot on Channel 00

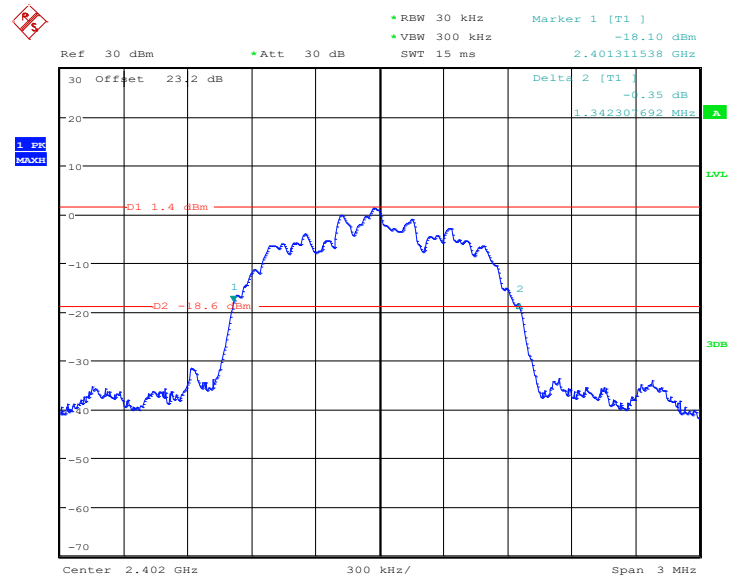

Date: 8.JUL.2020 14:22:13



20 dB Bandwidth Plot on Channel 78





20 dB Bandwidth Plot on Channel 00




20 dB Bandwidth Plot on Channel 39





20 dB Bandwidth Plot on Channel 78

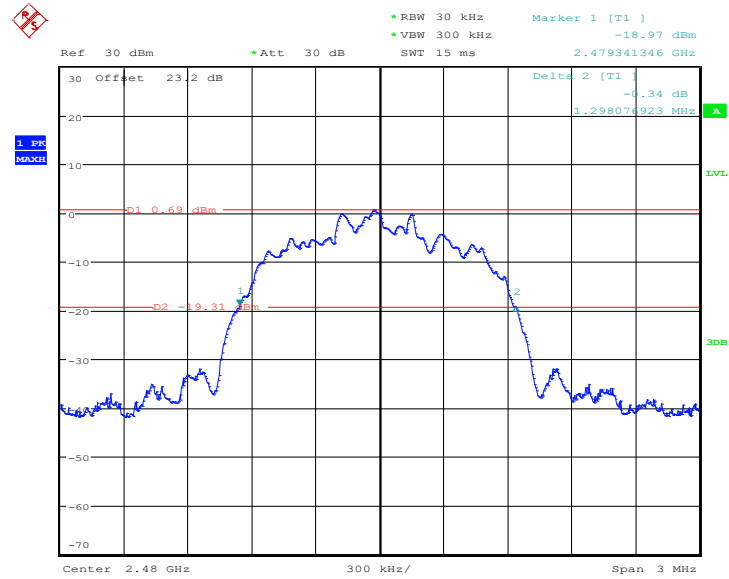

Date: 8.JUL.2020 15:14:06




3.4.6 Test Result of 99% Occupied Bandwidth

Test Engineer :	Owen Yang	Temperature :	21~25℃
		Relative Humidity :	51~54%

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.839	Pass
DH	1Mbps	1	39	2441	0.842	Pass
DH	1Mbps	1	78	2480	0.843	Pass
2DH	2Mbps	1	0	2402	1.179	Pass
2DH	2Mbps	1	39	2441	1.179	Pass
2DH	2Mbps	1	78	2480	1.182	Pass
3DH	3Mbps	1	0	2402	1.170	Pass
3DH	3Mbps	1	39	2441	1.173	Pass
3DH	3Mbps	1	78	2480	1.173	Pass

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

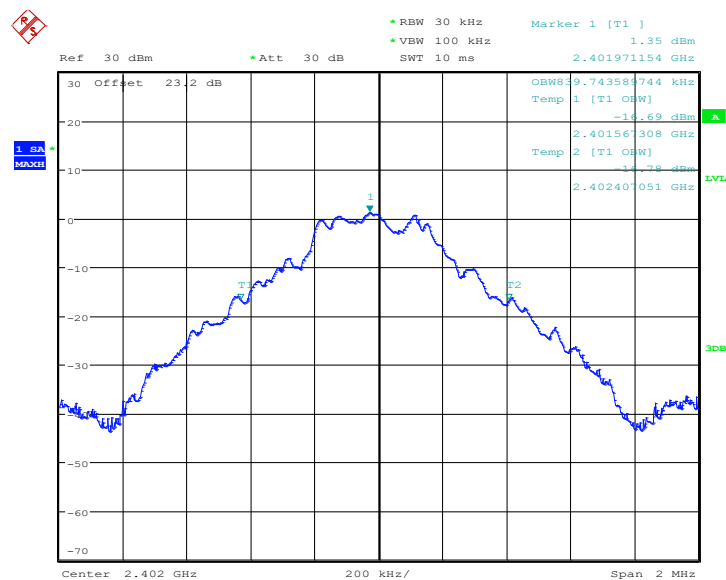

Date: 8.JUL.2020 14:02:44




99% Occupied Bandwidth Plot on Channel 39

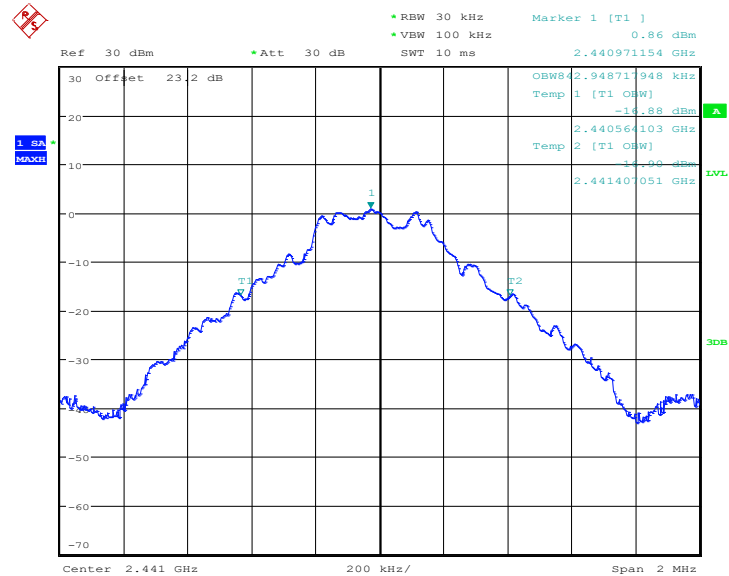

Date: 8.JUL.2020 14:08:54

99% Occupied Bandwidth Plot on Channel 78

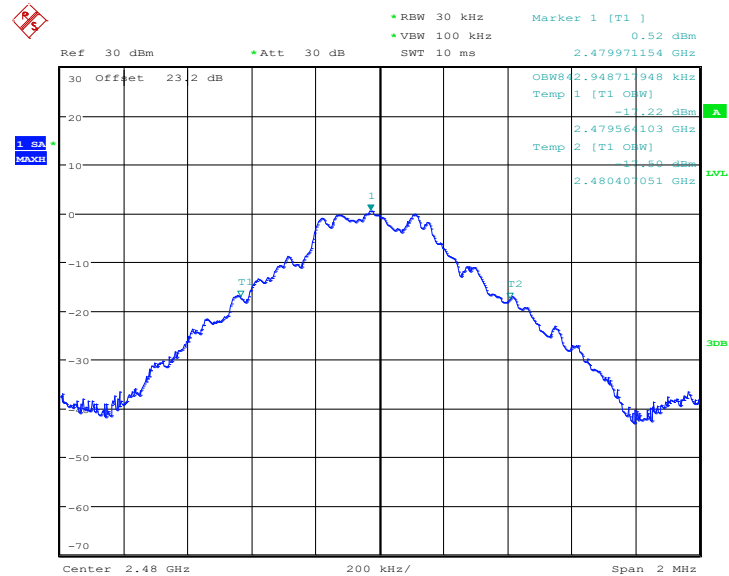


Date: 8.JUL.2020 14:16:05




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

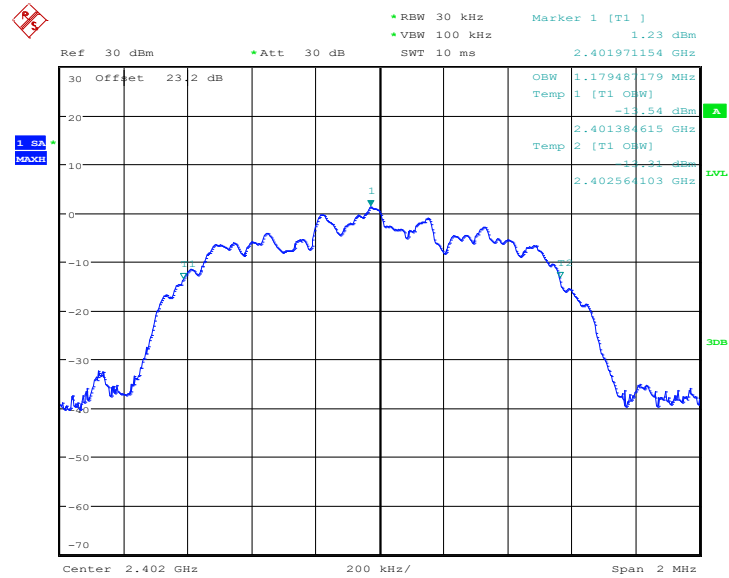

Date: 8.JUL.2020 14:24:16


99% Occupied Bandwidth Plot on Channel 39

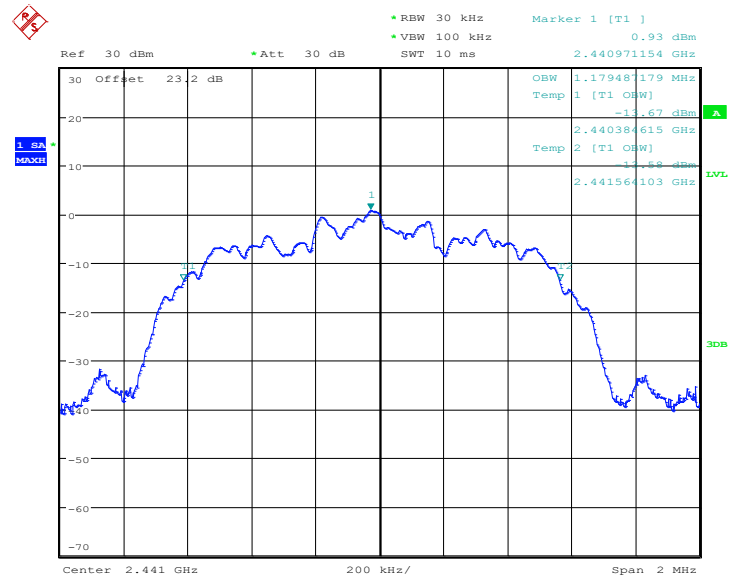

Date: 8.JUL.2020 14:30:55




99% Occupied Bandwidth Plot on Channel 78

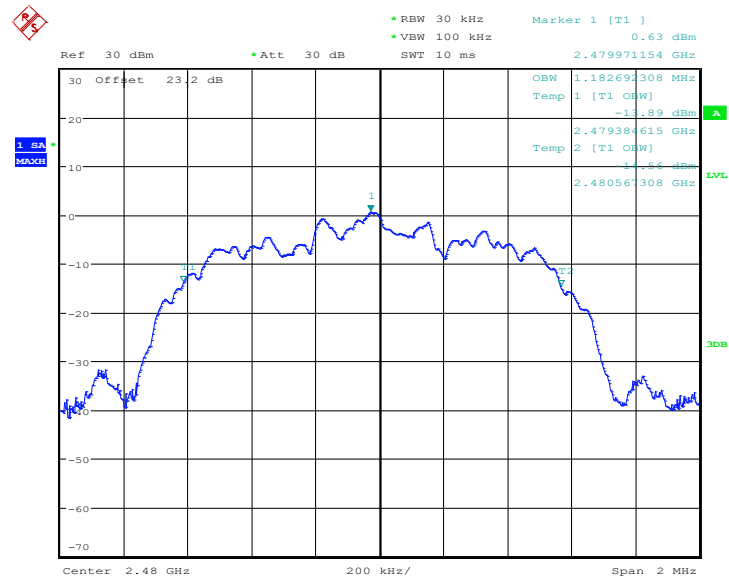

Date: 8.JUL.2020 14:48:09

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

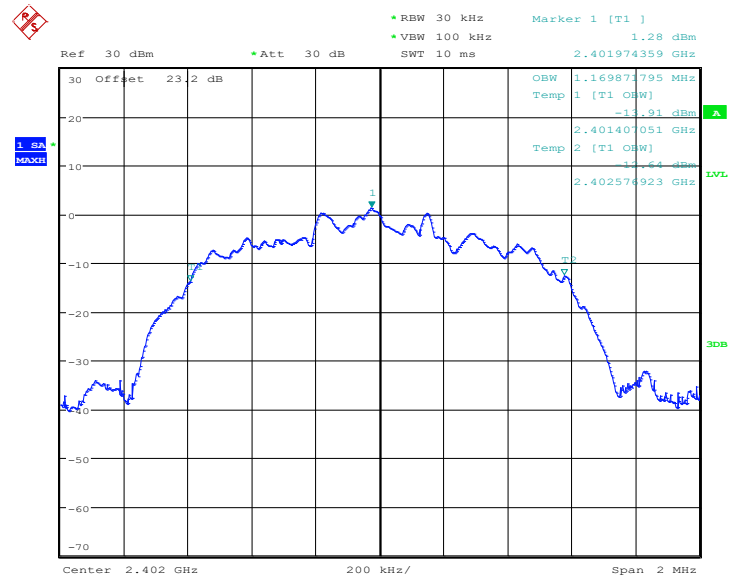

Date: 8.JUL.2020 15:00:29




99% Occupied Bandwidth Plot on Channel 39

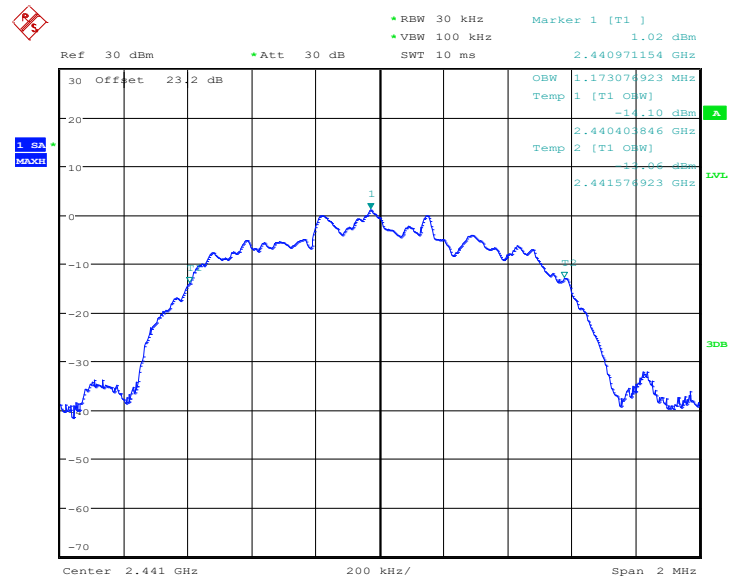

Date: 8.JUL.2020 15:08:39

99% Occupied Bandwidth Plot on Channel 78

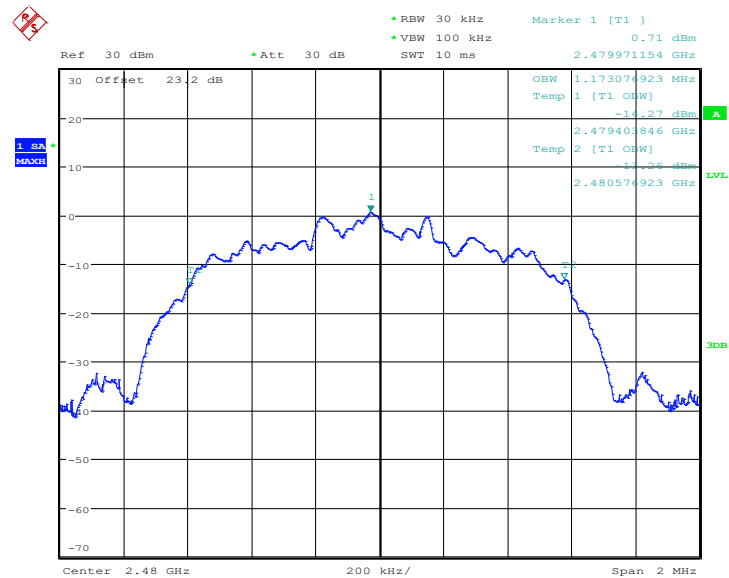

Date: 8.JUL.2020 15:15:41

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

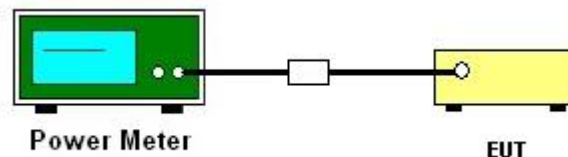



3.5.5 Test Result of Peak Output Power

Test Engineer :	Owen Yang	Temperature :	21~25℃
		Relative Humidity :	51~54%

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	6.42	20.97	Pass
	39	1	5.80	20.97	Pass
	78	1	5.53	20.97	Pass

2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	8.33	20.97	Pass
	39	1	8.10	20.97	Pass
	78	1	8.01	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	8.77	20.97	Pass
	39	1	8.59	20.97	Pass
	78	1	8.53	20.97	Pass

3.5.6 Test Result of Average Output Power (Reporting Only)

Test Engineer :	Owen Yang	Temperature :	21~25℃
		Relative Humidity :	51~54%

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	6.38	5.17
	39	1	5.89	5.17
	78	1	5.78	5.17

2DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
2DH1	0	1	6.43	1.85
	39	1	5.80	1.85
	78	1	5.52	1.85

3DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
3DH1	0	1	6.47	5.05
	39	1	5.94	5.05
	78	1	5.84	5.05

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

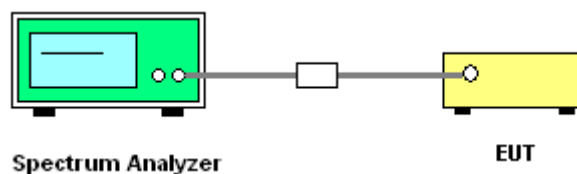




3.6.5 Test Result of Conducted Band Edges

Test Engineer :	Owen Yang	Temperature :	21~25°C
		Relative Humidity :	51~54%


<1Mbps>

Low Band Edge Plot on Channel 00

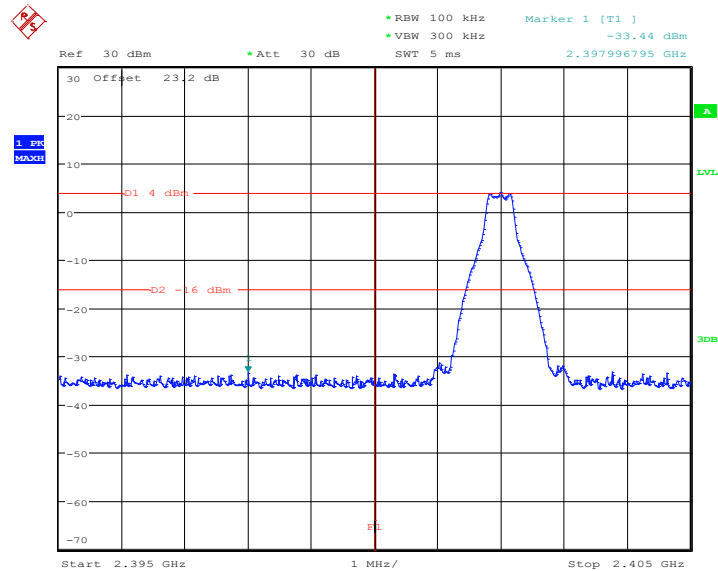

Date: 8.JUL.2020 14:01:58

High Band Edge Plot on Channel 78

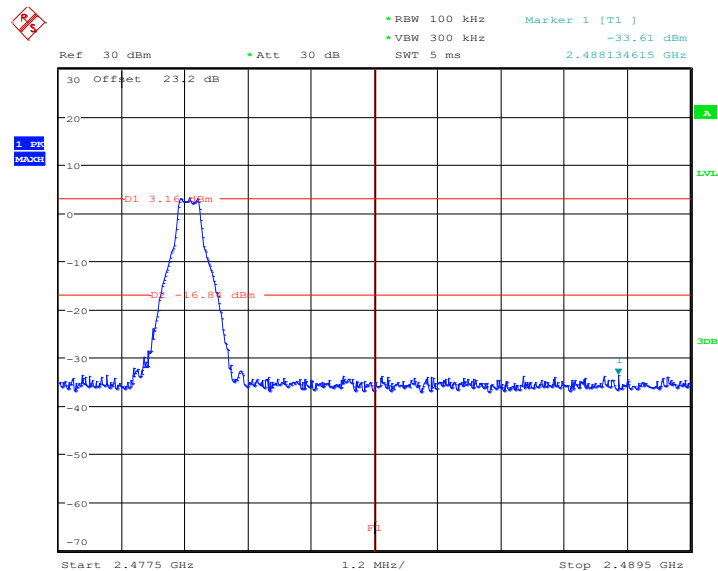


Date: 8.JUL.2020 14:15:04




<2Mbps>

Low Band Edge Plot on Channel 00

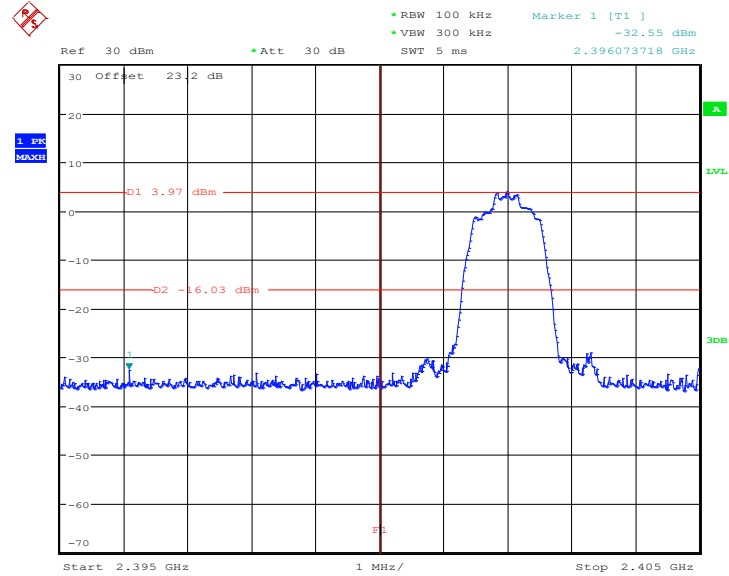

Date: 8.JUL.2020 14:23:15

High Band Edge Plot on Channel 78

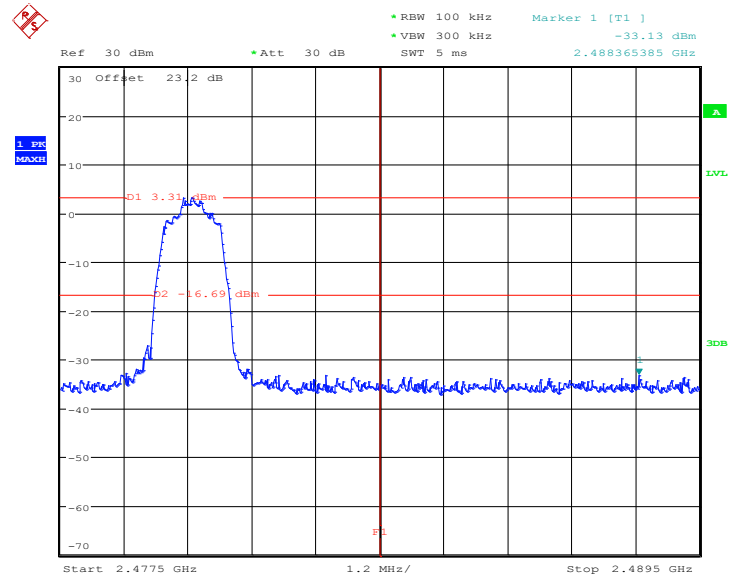


Date: 8.JUL.2020 14:46:40




<3Mbps>

Low Band Edge Plot on Channel 00

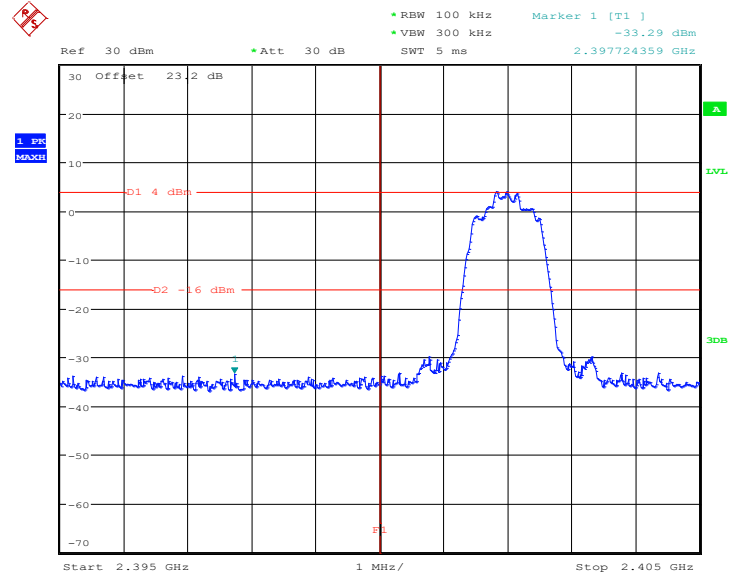

Date: 8.JUL.2020 14:59:43

High Band Edge Plot on Channel 78

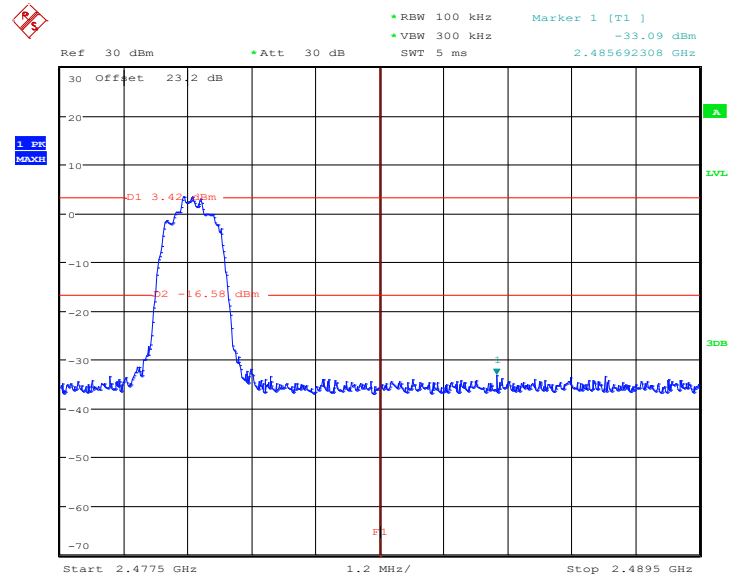

Date: 8.JUL.2020 15:14:41



Hopping Mode Low Band Edge Plot



Ref 30 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] -32.50 dBm 2.486711538 GHz

30 Offset 23.2 dB

1.95 MAXH

D1 -2.95 dBm

D2 -17.05 dBm

F1


Start 2.4775 GHz 1.2 MHz/ Stop 2.4895 GHz

Date: 8.JUL.2020 13:45:29




<2Mbps>

Hopping Mode Low Band Edge Plot

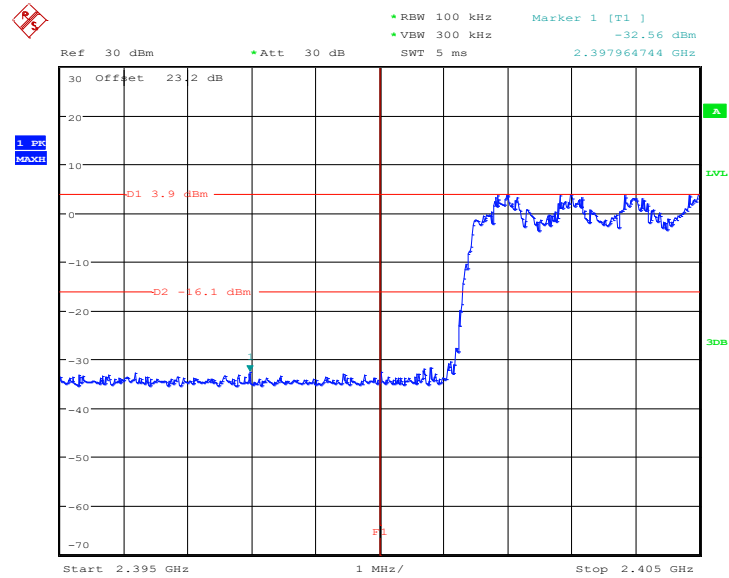

Date: 8.JUL.2020 13:47:41

Hopping Mode High Band Edge Plot

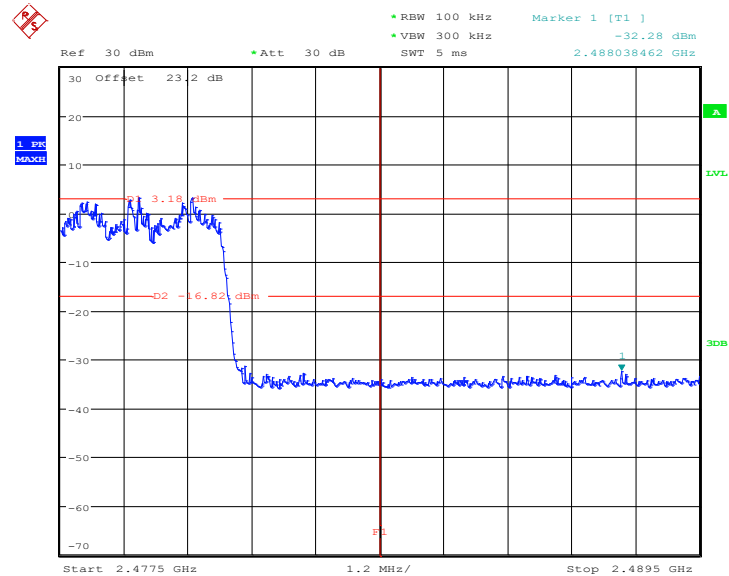


Date: 8.JUL.2020 13:49:13




<3Mbps>

Hopping Mode Low Band Edge Plot

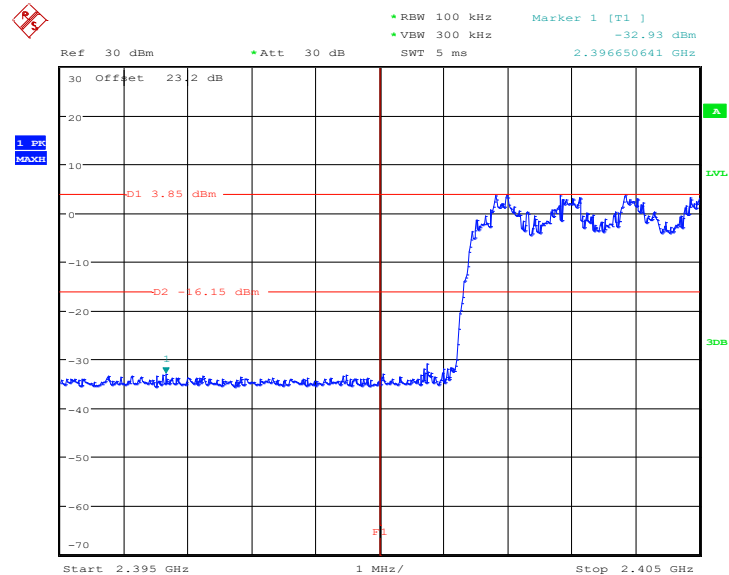

Date: 8.JUL.2020 13:50:45

Hopping Mode High Band Edge Plot

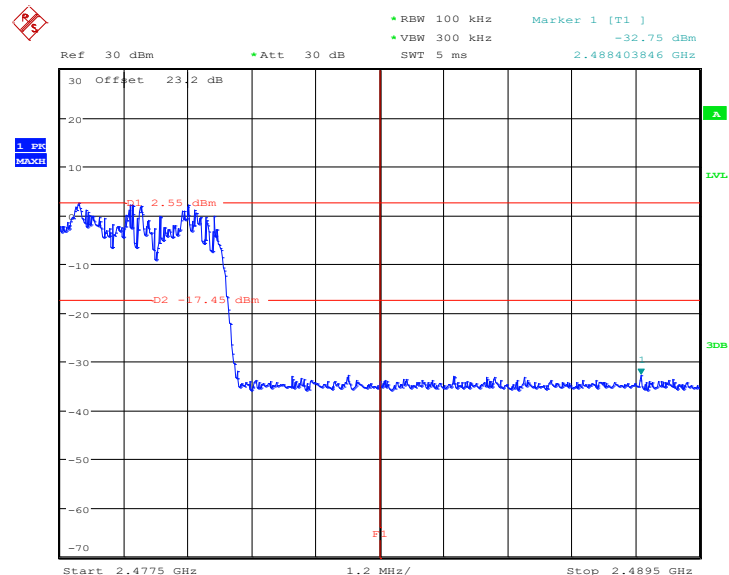

Date: 8.JUL.2020 13:52:06

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

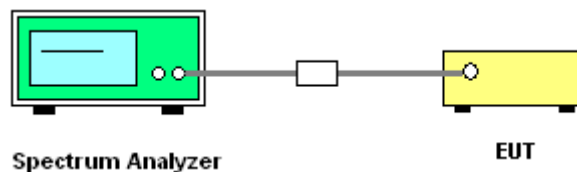




3.7.5 Test Result of Conducted Spurious Emission

Test Engineer :	Owen Yang	Temperature :	21~25°C
		Relative Humidity :	51~54%


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

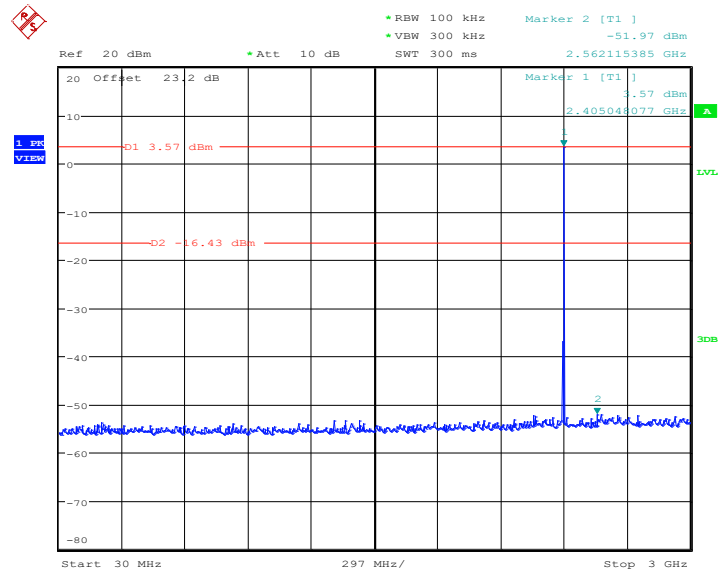

Date: 8.JUL.2020 14:05:24


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

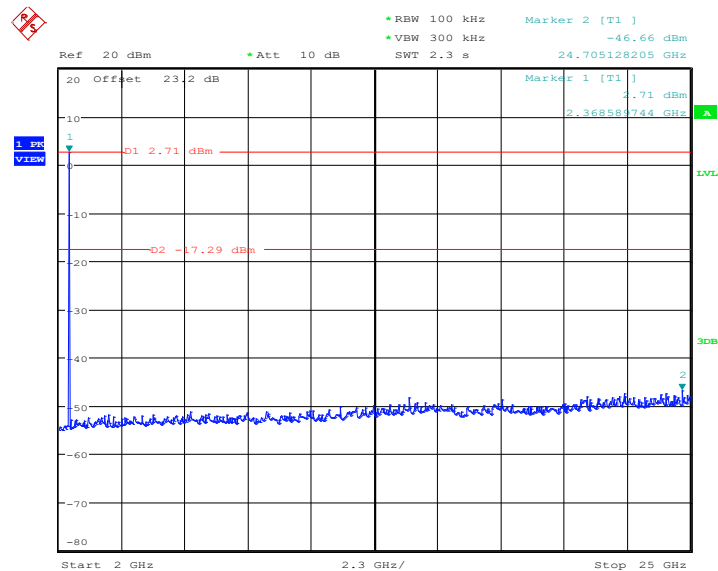

Date: 8.JUL.2020 14:05:54




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

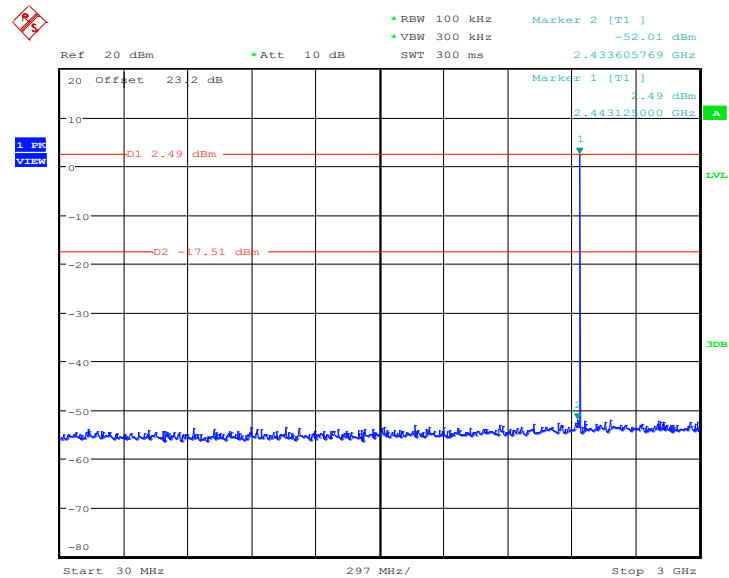


Date: 8.JUL.2020 14:10:21


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

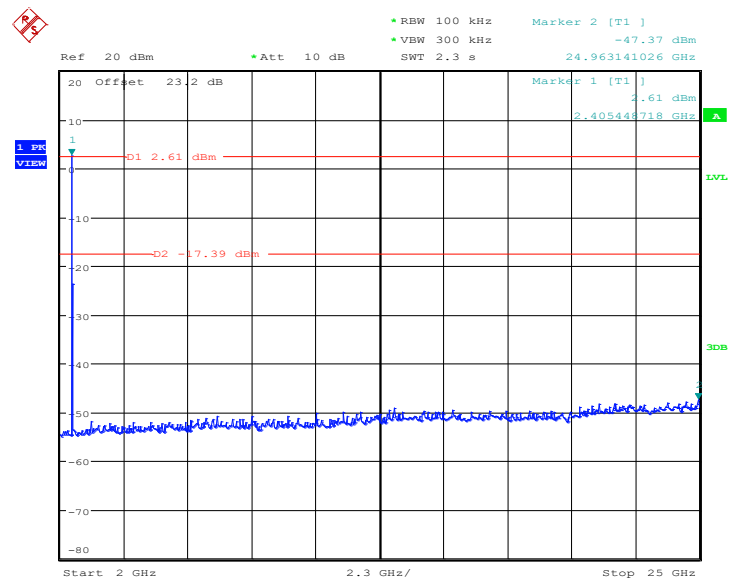


Date: 8.JUL.2020 14:10:52

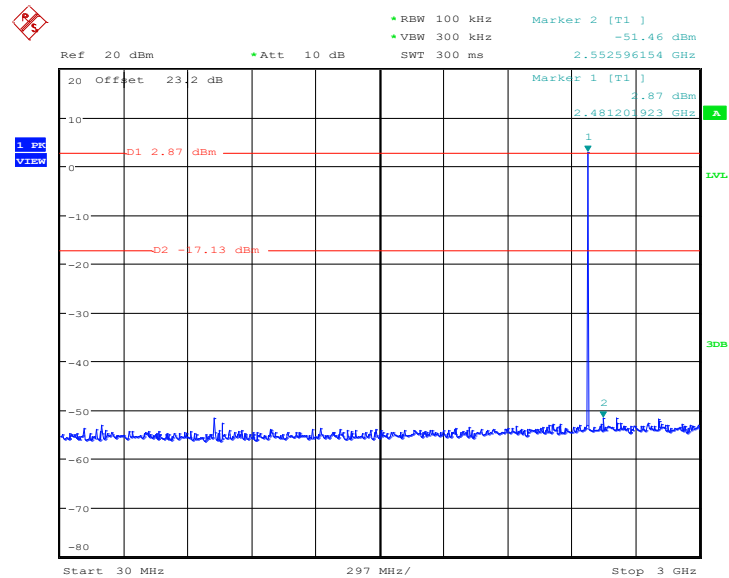**CSE Plot on Ch 78 between 30MHz ~ 3 GHz**


Date: 8.JUL.2020 14:17:31

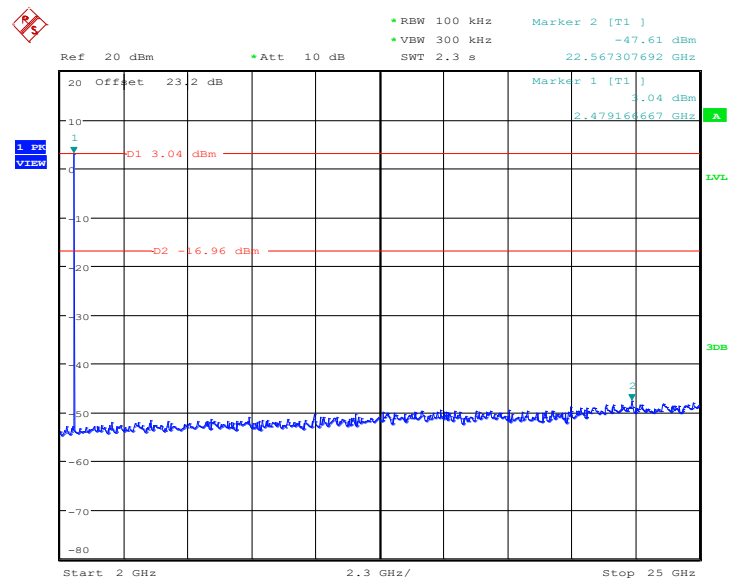CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 8.JUL.2020 14:18:01

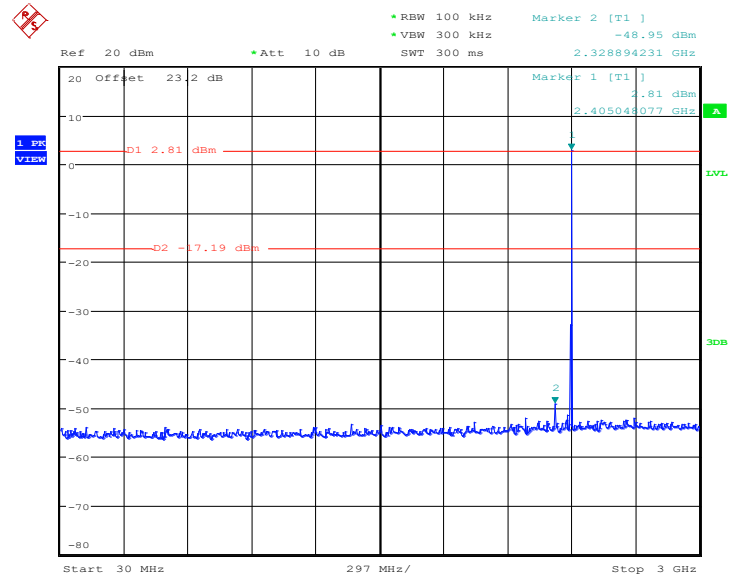**<2Mbps>****CSE Plot on Ch 00 between 30MHz ~ 3 GHz**


Date: 8.JUL.2020 14:25:30

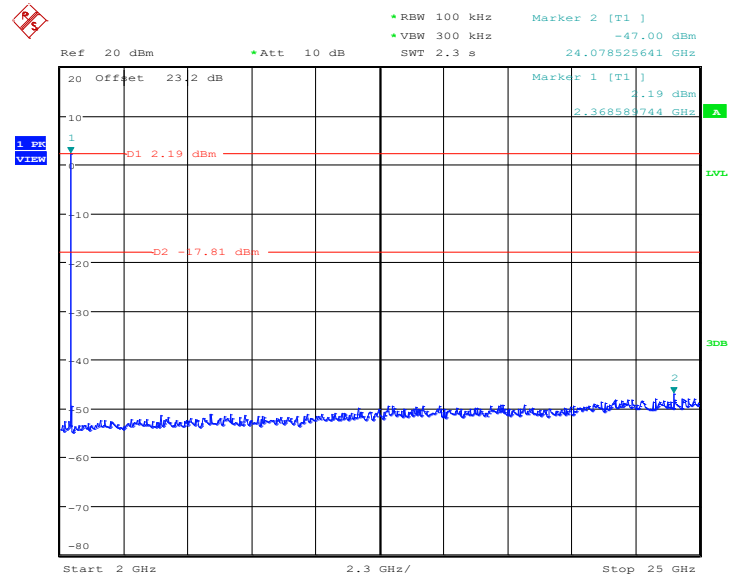CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

Date: 8.JUL.2020 14:26:02




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

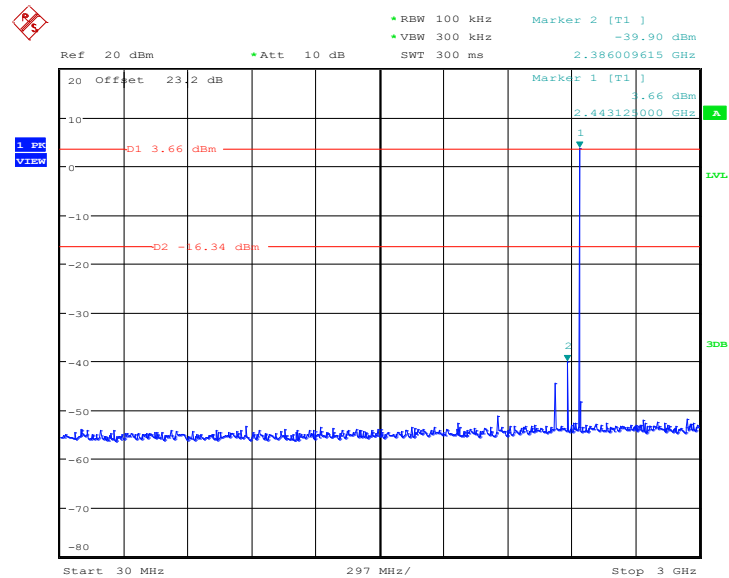

Date: 8.JUL.2020 14:39:13


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

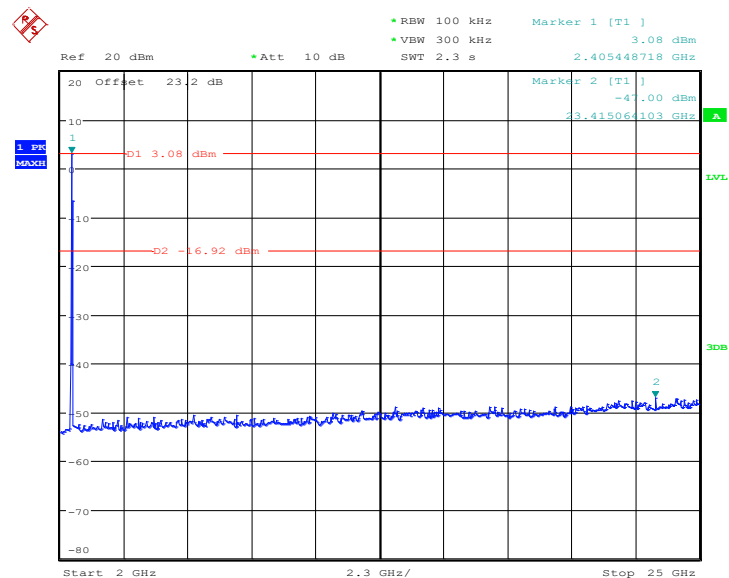

Date: 8.JUL.2020 14:40:53




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

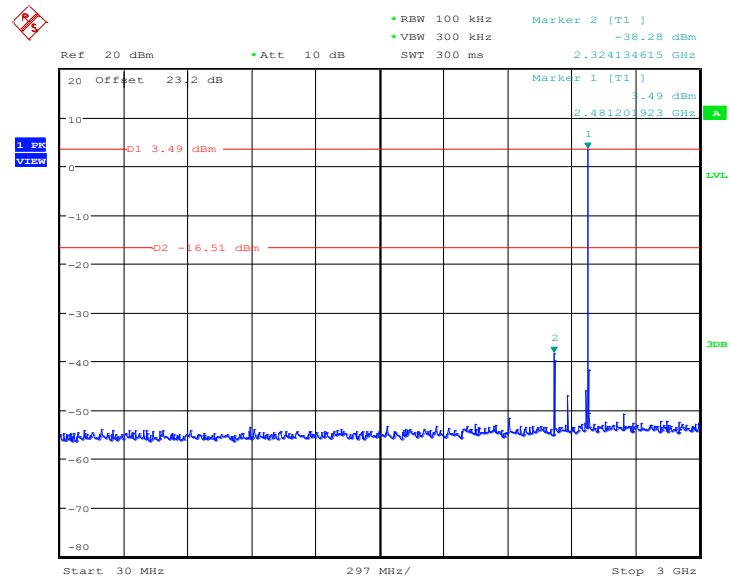


Date: 8.JUL.2020 14:54:20


CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

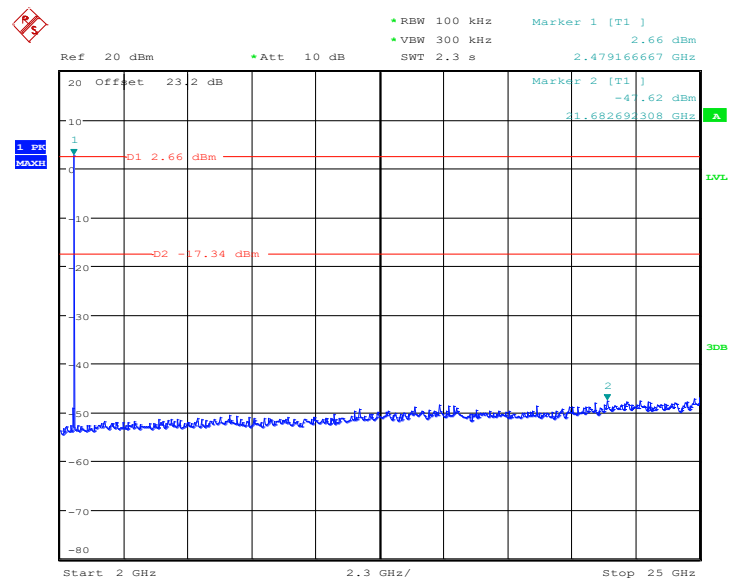

Date: 8.JUL.2020 14:55:41

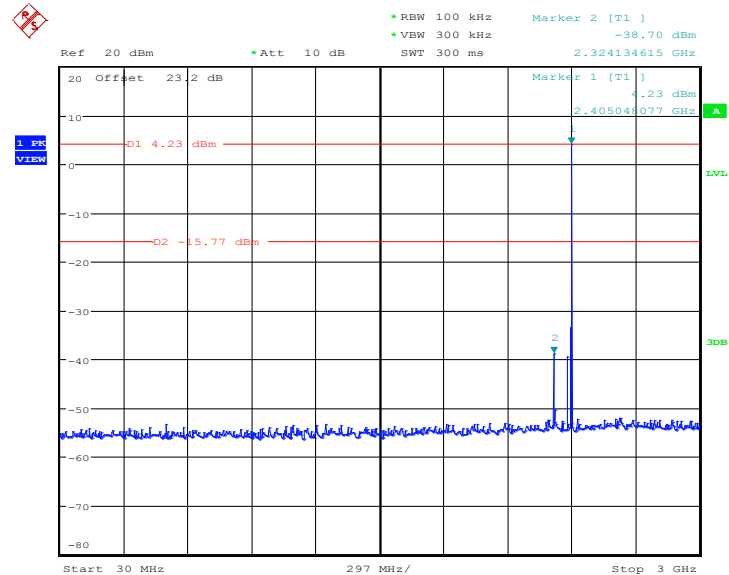**<3Mbps>****CSE Plot on Ch 00 between 30MHz ~ 3 GHz**


Date: 8.JUL.2020 15:04:59

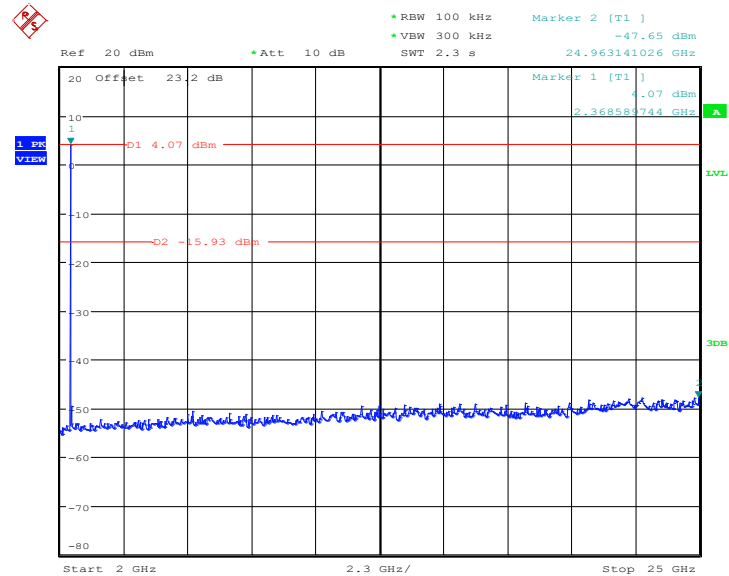CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

Date: 8.JUL.2020 15:05:30




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

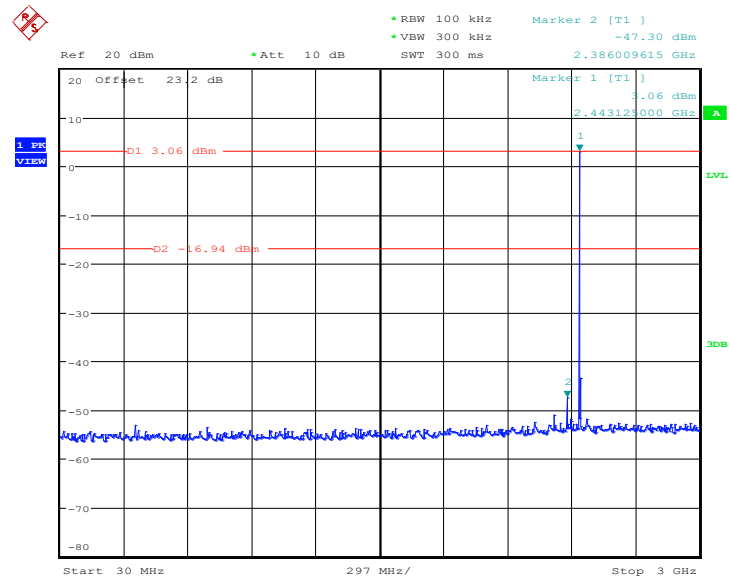


Date: 8.JUL.2020 15:10:49


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

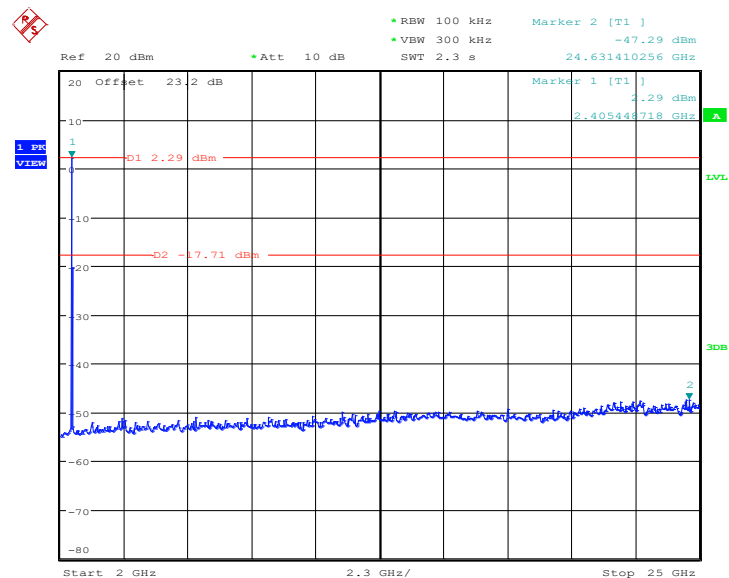

Date: 8.JUL.2020 15:11:19

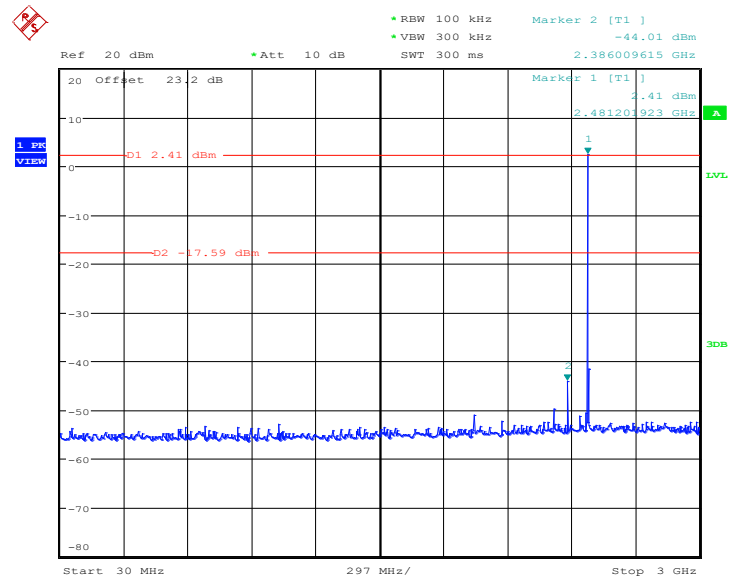**CSE Plot on Ch 78 between 30MHz ~ 3 GHz**

Date: 8.JUL.2020 15:18:44

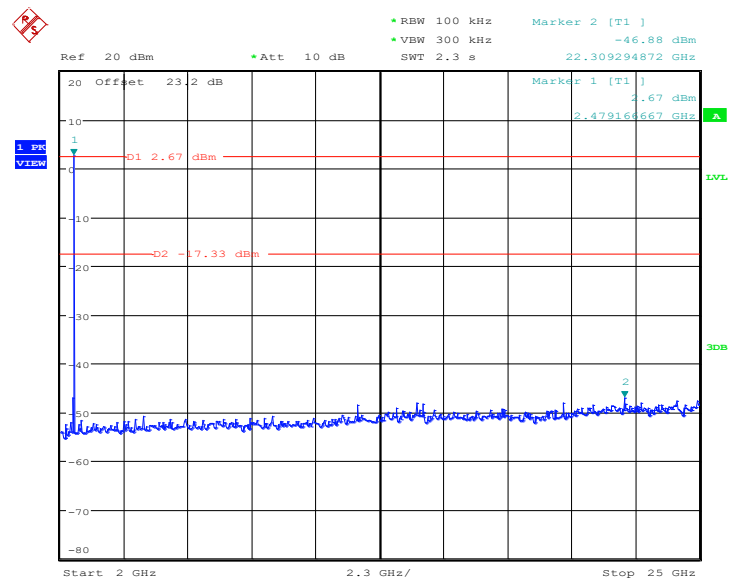CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 8.JUL.2020 15:19:15



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring equipment of this test report.

3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

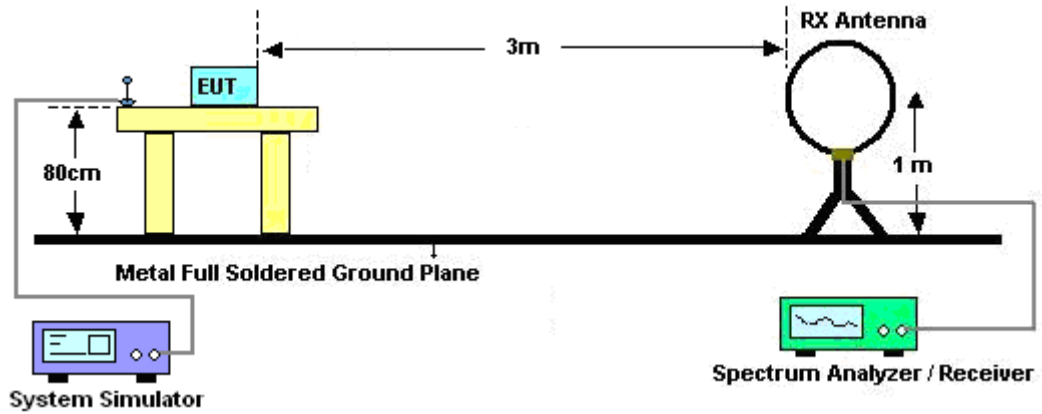


For radiated emissions from 30MHz to 1GHz

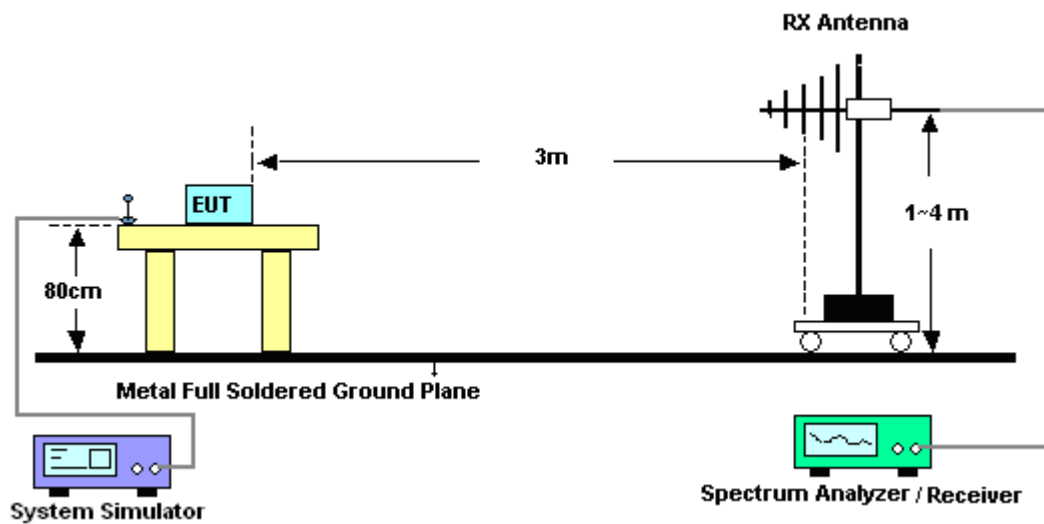

For radiated emissions above 1GHz

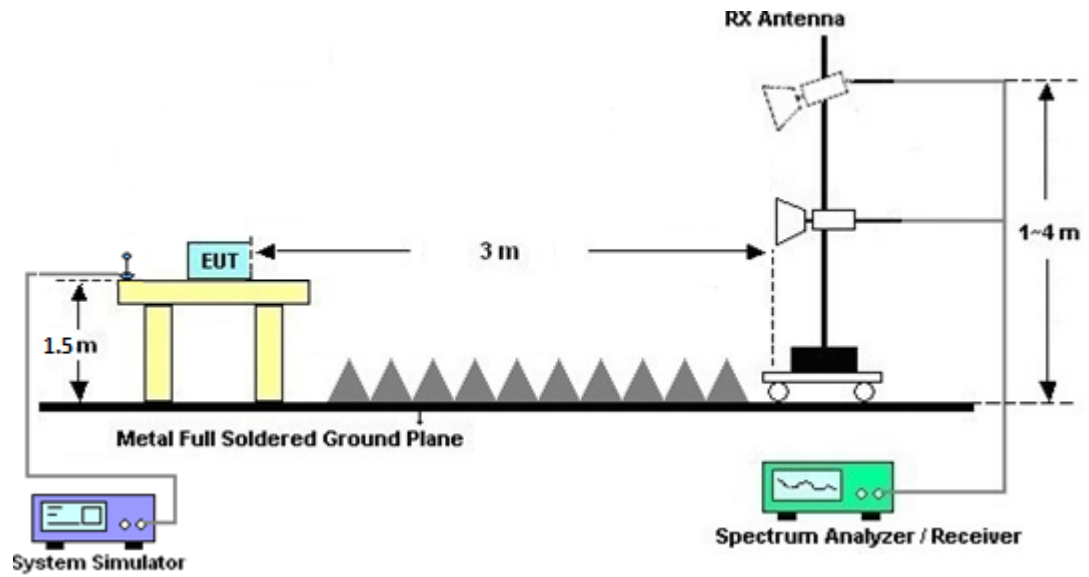

For radiated emissions above 18GHz

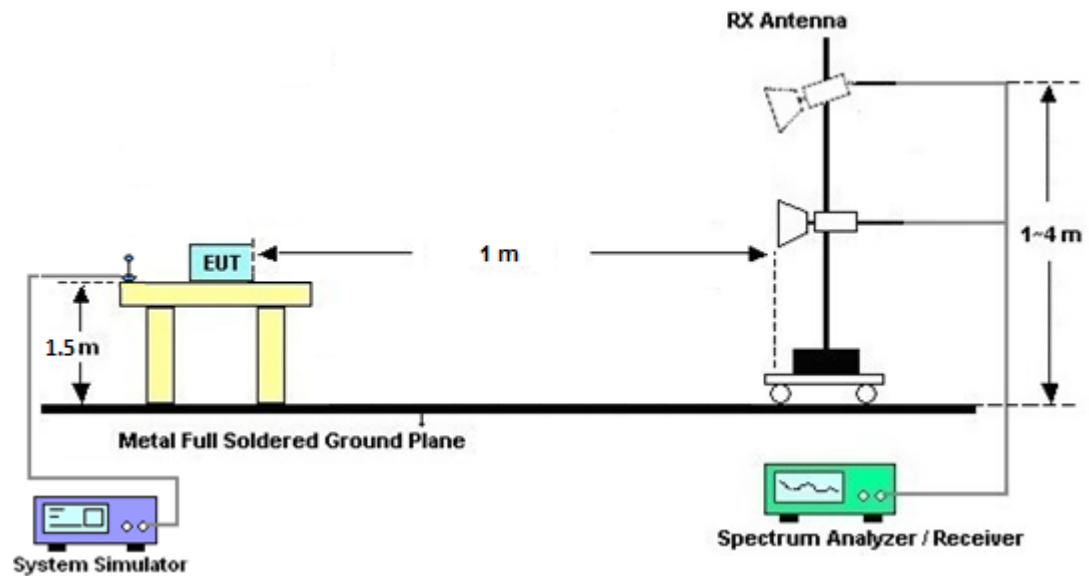



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

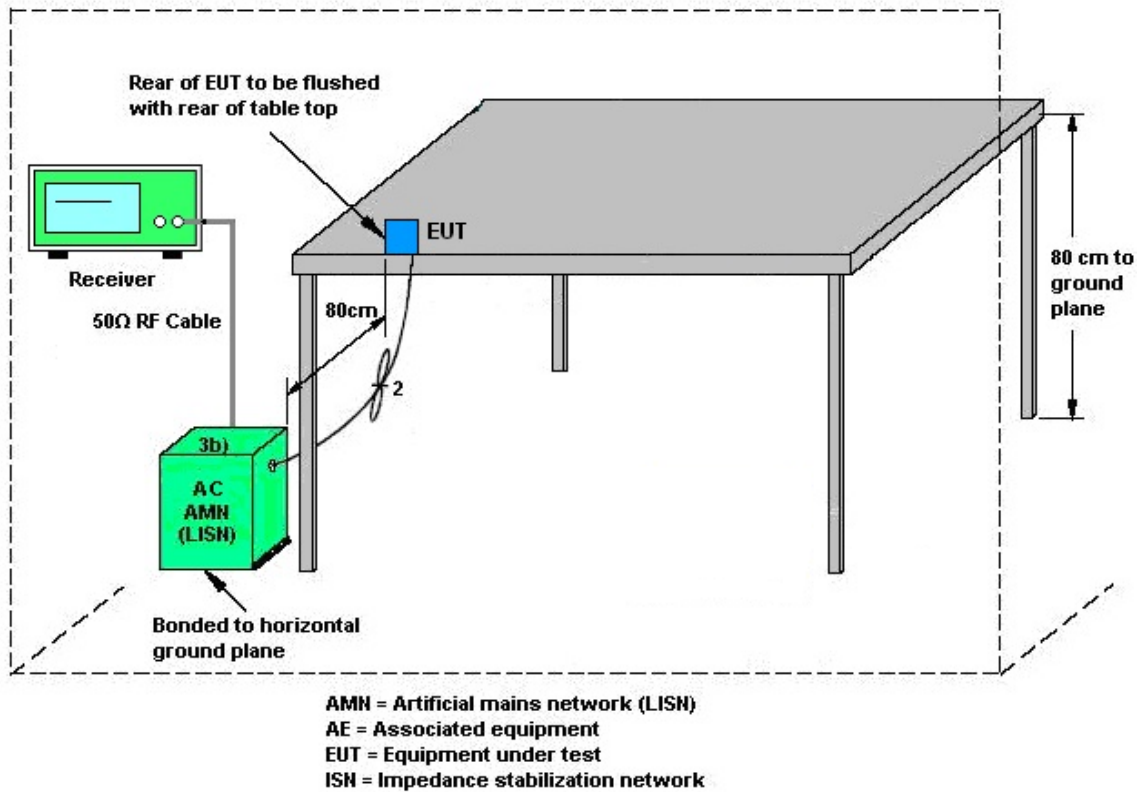

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 09, 2020	Jun. 03, 2020~ Jun. 09, 2020	Jan. 08, 2021	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL6111D&0 0802N1D01N- 06	47020&06	30MHz to 1GHz	Oct. 12, 2019	Jun. 03, 2020~ Jun. 09, 2020	Oct. 11, 2020	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-152 2	1G~18GHz	Sep. 19, 2019	Jun. 03, 2020~ Jun. 09, 2020	Sep. 18, 2020	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 980	18GHz~40GHz	Jan. 10, 2020	Jun. 03, 2020~ Jun. 09, 2020	Jan. 09, 2021	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Oct. 01, 2019	Jun. 03, 2020~ Jun. 09, 2020	Sep. 30, 2020	Radiation (03CH16-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0055007	1GHz~18GHz	Mar. 31, 2020	Jun. 03, 2020~ Jun. 09, 2020	Mar. 30, 2021	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~40GHz	Dec. 13, 2019	Jun. 03, 2020~ Jun. 09, 2020	Dec. 12, 2020	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY532702 64	1GHz~26.5GHz	Dec. 11, 2019	Jun. 03, 2020~ Jun. 09, 2020	Dec. 10, 2020	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY572901 11	3Hz~26.5GHz	Dec. 05, 2019	Jun. 03, 2020~ Jun. 09, 2020	Dec. 04, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11680/ 4PE	NA	Aug. 30, 2019	Jun. 03, 2020~ Jun. 09, 2020	Aug. 29, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11688/ 4PE	NA	Aug. 30, 2019	Jun. 03, 2020~ Jun. 09, 2020	Aug. 29, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300 -5757	NA	Aug. 30, 2019	Jun. 03, 2020~ Jun. 09, 2020	Aug. 29, 2020	Radiation (03CH16-HY)
Hygrometer	TECPEL	DTM-303B	TP161243	N/A	Jun. 17, 2019	Jun. 03, 2020~ Jun. 09, 2020	Jun. 16, 2020	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Jun. 03, 2020~ Jun. 09, 2020	N/A	Radiation (03CH16-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 27, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	May 27, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 07, 2019	May 27, 2020	Nov. 06, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	May 27, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 27, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	May 27, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	May 27, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Jun. 08, 2020	Jun. 16, 2020	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 27, 2019	Jun. 08, 2020	Dec. 26, 2020	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 27, 2019	Jun. 08, 2020	Dec. 26, 2020	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSQ	200578/026	20Hz~26.5GHz	Jul. 10, 2019	Jun. 08, 2020	Jul. 09, 2020	Conducted (TH05-HY)
BT Base Station	Rohde & Schwarz	CBT	101136	BT 3.0	Oct. 27, 2019	Jun. 08, 2020	Oct. 26, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Aug. 22, 2019	Jun. 08, 2020	Aug. 21, 2020	Conducted (TH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.7
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9
---	-----

Appendix A. AC Conducted Emission Test Results


Test Engineer :	Howard Huang	Temperature :	21~24°C
		Relative Humidity :	42~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line

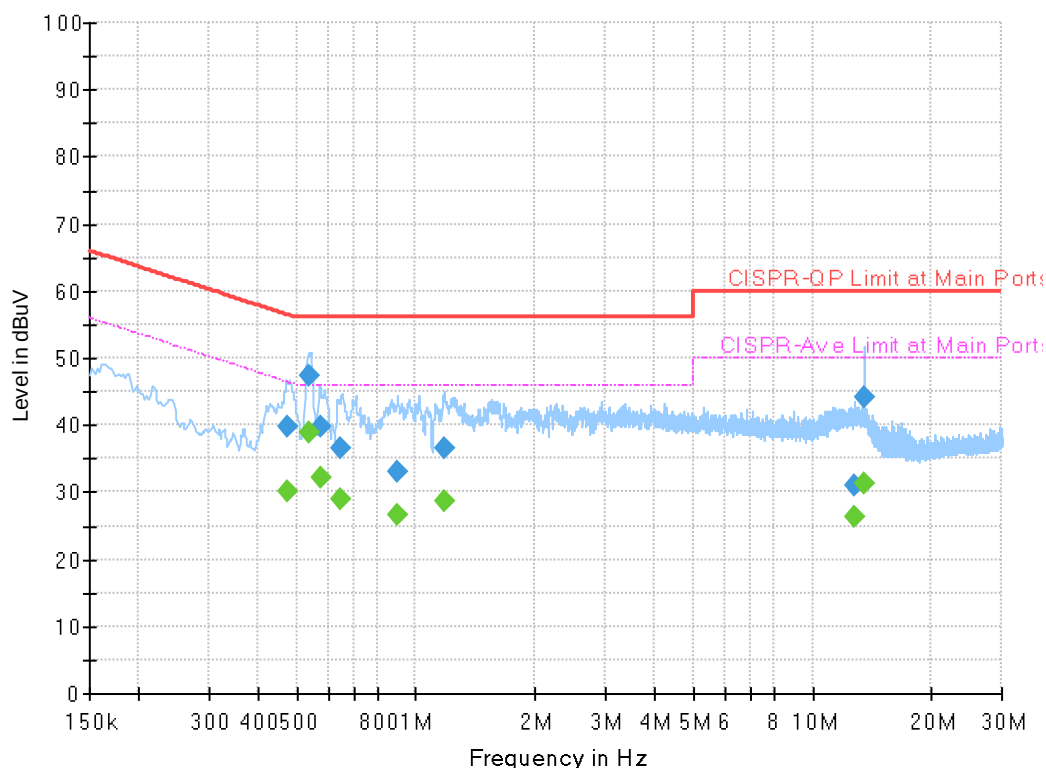

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.476250	---	30.04	46.40	16.36	L1	OFF	19.6
0.476250	39.77	---	56.40	16.63	L1	OFF	19.6
0.536010	---	38.91	46.00	7.09	L1	OFF	19.6
0.536010	47.29	---	56.00	8.71	L1	OFF	19.6
0.575250	---	32.17	46.00	13.83	L1	OFF	19.6
0.575250	39.78	---	56.00	16.22	L1	OFF	19.6
0.645000	---	28.87	46.00	17.13	L1	OFF	19.6
0.645000	36.47	---	56.00	19.53	L1	OFF	19.6
0.899430	---	26.48	46.00	19.52	L1	OFF	19.6
0.899430	32.92	---	56.00	23.08	L1	OFF	19.6
1.178520	---	28.71	46.00	17.29	L1	OFF	19.6
1.178520	36.56	---	56.00	19.44	L1	OFF	19.6
12.714000	---	26.30	50.00	23.70	L1	OFF	20.2
12.714000	30.96	---	60.00	29.04	L1	OFF	20.2
13.560000	---	31.33	50.00	18.67	L1	OFF	20.2
13.560000	44.02	---	60.00	15.98	L1	OFF	20.2

Test Engineer :	Howard Huang	Temperature :	21~24°C
		Relative Humidity :	42~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

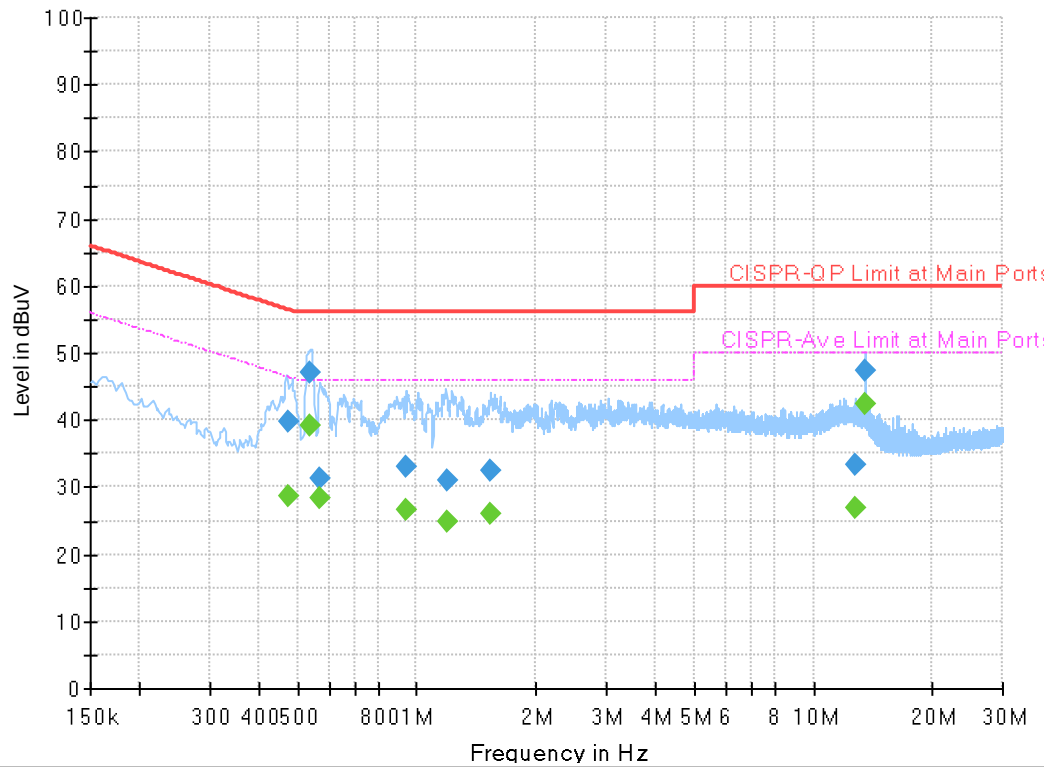
Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.474000	39.66	---	56.44	16.78	N	OFF	19.6
0.474000	---	28.71	46.44	17.73	N	OFF	19.6
0.536190	47.18	---	56.00	8.82	N	OFF	19.6
0.536190	---	39.12	46.00	6.88	N	OFF	19.6
0.567690	31.39	---	56.00	24.61	N	OFF	19.6
0.567690	---	28.29	46.00	17.71	N	OFF	19.6
0.939660	33.07	---	56.00	22.93	N	OFF	19.6
0.939660	---	26.71	46.00	19.29	N	OFF	19.6
1.189500	31.13	---	56.00	24.87	N	OFF	19.6
1.189500	---	24.86	46.00	21.14	N	OFF	19.6
1.532580	32.47	---	56.00	23.53	N	OFF	19.6
1.532580	---	26.09	46.00	19.91	N	OFF	19.6
12.705000	33.41	---	60.00	26.59	N	OFF	20.2
12.705000	---	26.83	50.00	23.17	N	OFF	20.2
13.560000	47.30	---	60.00	12.70	N	OFF	20.2
13.560000	---	42.42	50.00	7.58	N	OFF	20.2



Appendix B. Radiated Spurious Emission

Test Engineer :	Karl Hou, CR Liao and Andy Yang	Temperature :	20~25°C
		Relative Humidity :	50~60%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2376.57	56.48	-17.52	74	50.42	27.69	8.15	29.78	139	8	P	H
		2376.57	31.72	-22.28	54	-	-	-	-	-	-	A	H
	*	2402	101.92	-	-	95.92	27.6	8.19	29.79	139	8	P	H
	*	2402	77.16	-	-	-	-	-	-	-	-	A	H
													H
													H
		2376.36	49.74	-24.26	74	43.68	27.69	8.15	29.78	372	319	P	V
		2376.36	24.98	-29.02	54	-	-	-	-	-	-	A	V
	*	2402	97.16	-	-	91.16	27.6	8.19	29.79	372	319	P	V
	*	2402	72.4	-	-	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		2376.64	57.25	-16.75	74	51.19	27.69	8.15	29.78	140	10	P	H
		2376.64	32.49	-21.51	54	-	-	-	-	-	-	A	H
	*	2441	103.5	-	-	97.45	27.6	8.26	29.81	140	10	P	H
	*	2441	78.74	-	-	-	-	-	-	-	-	A	H
		2491.74	47.58	-26.42	74	41.55	27.52	8.34	29.83	140	10	P	H
		2491.74	22.82	-31.18	54	-	-	-	-	-	-	A	H
		2376.78	52.03	-21.97	74	45.97	27.69	8.15	29.78	399	329	P	V
		2376.78	27.27	-26.73	54	-	-	-	-	-	-	A	V
	*	2441	98.97	-	-	92.92	27.6	8.26	29.81	399	329	P	V
	*	2441	74.21	-	-	-	-	-	-	-	-	A	V
		2490.55	46.06	-27.94	74	40.04	27.52	8.33	29.83	399	329	P	V
		2490.55	21.3	-32.7	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	104.17	-	-	98.13	27.54	8.32	29.82	138	8	P	H
	*	2480	79.41	-	-	-	-	-	-	-	-	A	H
		2483.52	57.46	-16.54	74	51.43	27.53	8.32	29.82	138	8	P	H
		2483.52	32.7	-21.3	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	100.89	-	-	94.85	27.54	8.32	29.82	393	329	P	V
	*	2480	76.13	-	-	-	-	-	-	-	-	A	V
		2483.76	54.13	-19.87	74	48.1	27.53	8.32	29.82	393	329	P	V
		2483.76	29.37	-24.63	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	49.48	-24.52	74	65.05	31.11	12.4	59.08	100	0	P	H
		4804	24.72	-29.28	54	-	-	-	-	-	-	A	H
													H
													H
		4804	51.99	-22.01	74	67.56	31.11	12.4	59.08	100	0	P	V
		4804	27.23	-26.77	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	48.83	-25.17	74	64.41	31.07	12.48	59.13	100	0	P	H
		4882	24.07	-29.93	54	-	-	-	-	-	-	A	H
		7323	49.11	-24.89	74	55.49	36.49	15.68	58.55	100	0	P	H
		7323	24.35	-29.65	54	-	-	-	-	-	-	A	H
		4882	50.64	-23.36	74	66.22	31.07	12.48	59.13	100	0	P	V
		4882	25.88	-28.12	54	-	-	-	-	-	-	A	V
		7323	49.88	-24.12	74	56.26	36.49	15.68	58.55	100	0	P	V
		7323	25.12	-28.88	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	43.28	-30.72	74	58.64	31.26	12.56	59.18	100	0	P	H
		4960	18.52	-35.48	54	-	-	-	-	-	-	A	H
		7440	49.06	-24.94	74	55.08	36.58	15.78	58.38	100	0	P	H
		7440	24.3	-29.7	54	-	-	-	-	-	-	A	H
		4960	46.04	-27.96	74	61.4	31.26	12.56	59.18	100	0	P	V
		4960	21.28	-32.72	54	-	-	-	-	-	-	A	V
		7440	51.26	-22.74	74	57.28	36.58	15.78	58.38	100	0	P	V
		7440	26.5	-27.5	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission above 18GHz

2.4GHz BT (SHF)

[illegible]

Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		104.69	33.12	-10.38	43.5	47.21	16.42	1.74	32.25	100	0	P	H
		216.24	28.59	-17.41	46	43.14	15.24	2.54	32.33	-	-	P	H
		311.3	35.29	-10.71	46	45.19	19.36	3.08	32.34	-	-	P	H
		504.33	27.08	-18.92	46	31.37	24.02	3.77	32.08	-	-	P	H
		587.75	31.04	-14.96	46	33.01	25.8	4.17	31.94	-	-	P	H
		746.83	35.18	-10.82	46	34.63	28.1	4.7	32.25	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
		75.59	32.64	-7.36	40	50.79	12.73	1.46	32.34	100	0	P	V
		167.74	29.23	-14.27	43.5	43.49	15.75	2.29	32.3	-	-	P	V
		323.91	30.73	-15.27	46	40.42	19.52	3.11	32.32	-	-	P	V
		545.07	27.57	-18.43	46	30.9	24.69	3.99	32.01	-	-	P	V
		640.13	28.74	-17.26	46	30.02	26.4	4.33	32.01	-	-	P	V
		744.89	31.08	-14.92	46	30.54	28.1	4.69	32.25	-	-	P	V
													V
													V
													V
													V
													V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Karl Hou, CR Liao and Andy Yang	Temperature :	20~25°C
		Relative Humidity :	50~60%

Note symbol



-L	Low channel location
-R	High channel location

2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01	Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01


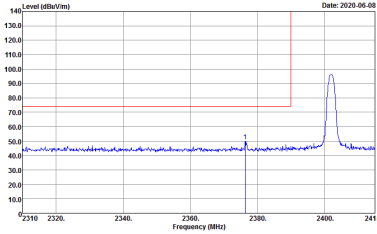
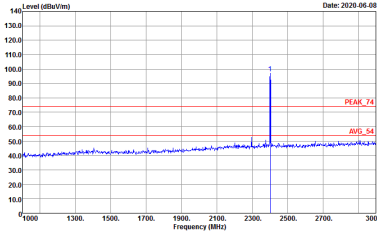


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01

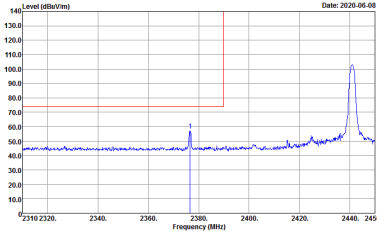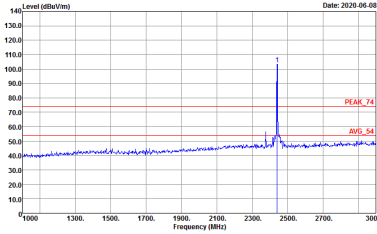
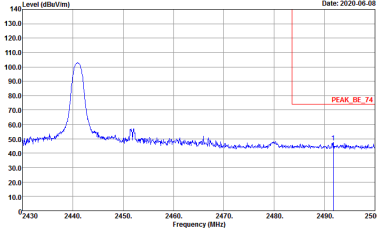


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01	Left blank

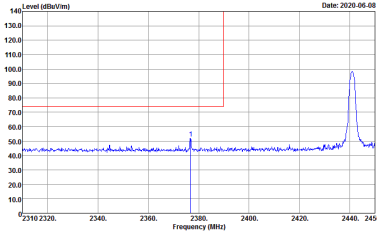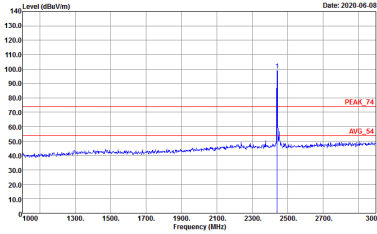
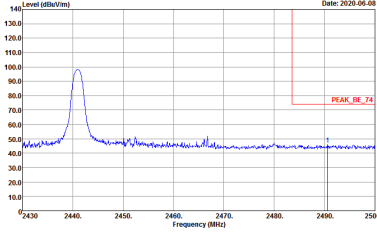


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL Detector : Peak Project : 050617-01	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 050617-01
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL Detector : Peak Project : 050617-01	Left blank

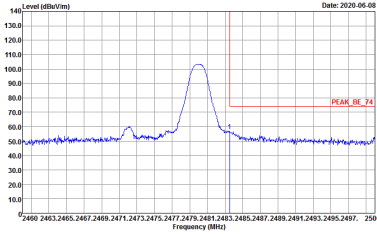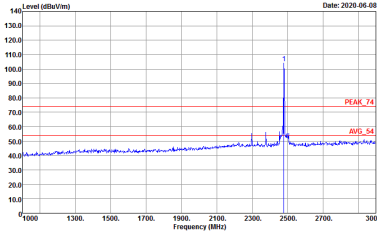

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01

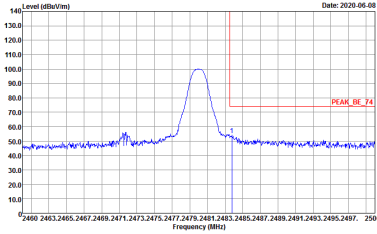
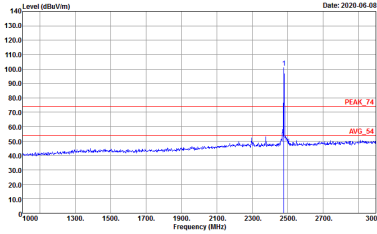


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 050617-01





2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

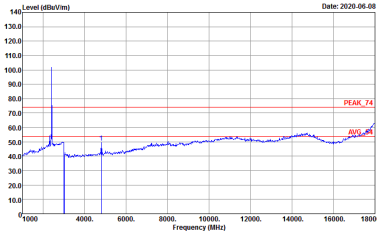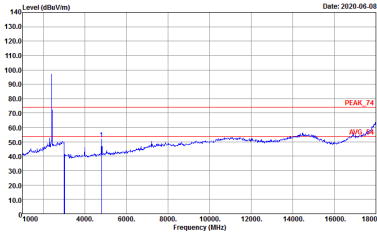BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-1FY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 050617-01	 Site : 03CH16-1FY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 050617-01

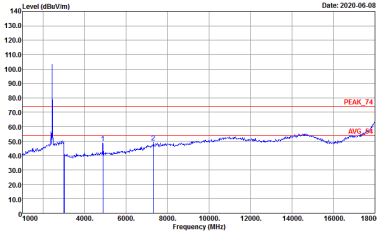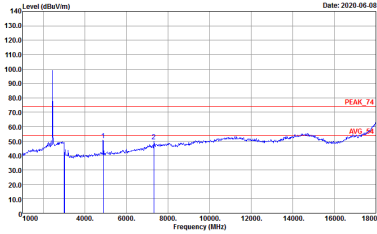

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH39 2441MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 050617-01	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 050617-01

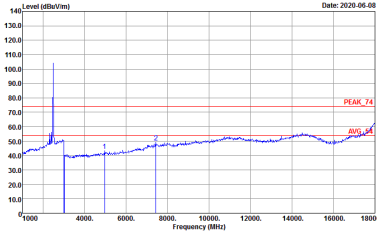
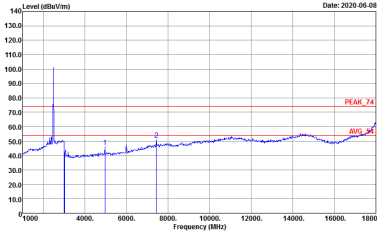


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH78 2480MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 050617-01	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 050617-01



Emission above 18GHz



2.4GHz BT (SHF)

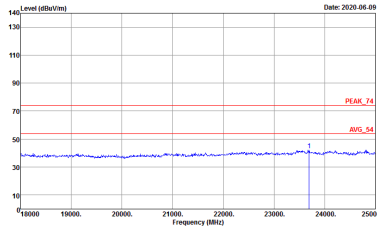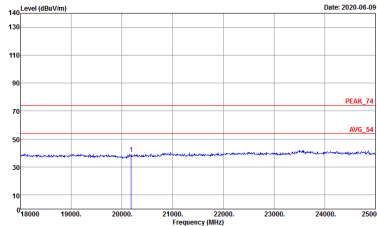BT	2.4GHz 2400~2483.5MHz	
	BT SHF	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-HY Condition : PEAK_74 In SHF HORN 88H49170584 HORIZONTAL Detector : Peak Project : 050617-01	 Site : 03CH16-HY Condition : PEAK_74 In SHF HORN 88H49170584 VERTICAL Detector : Peak Project : 050617-01





Emission below 1GHz

2.4GHz BT (LF)

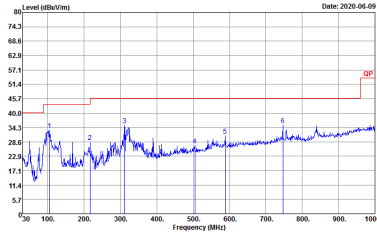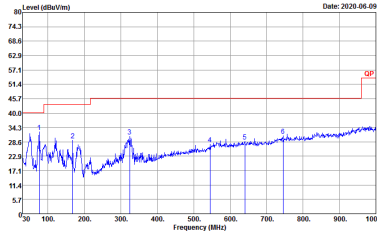BT	2.4GHz 2400~2483.5MHz	
	BT LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH16-HY Condition : QP 3m BTL06_47020406 HORIZONTAL Detector : Peak Project : 050617-01	 Site : 03CH16-HY Condition : QP 3m BTL06_47020406 VERTICAL Detector : Peak Project : 050617-01

Appendix D. Duty Cycle Plots

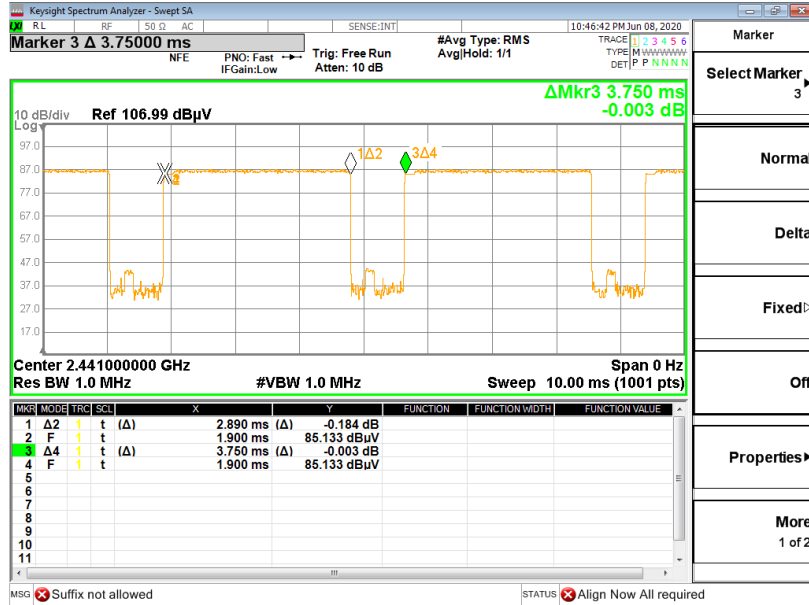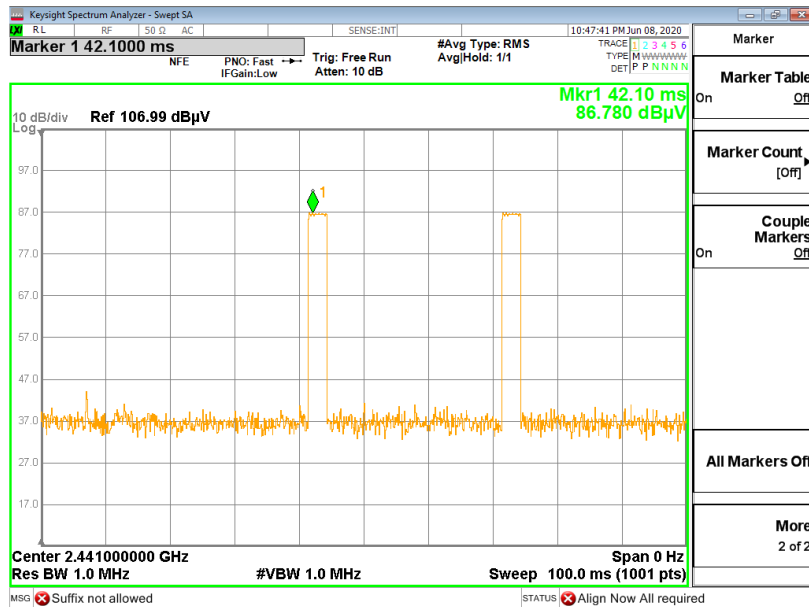3DH5 on time (One Pulse) Plot on Channel 39

on time (Count Pulses) Plot on Channel 39

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.8 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100 \text{ ms}) = -24.76 \text{ dB}$$