



# FCC RADIO TEST REPORT

**FCC ID** : UZ7CR8288SC  
**Equipment** : Standard Cradle  
**Brand Name** : Zebra  
**Model Name** : CR8288-SC  
**Applicant** : Zebra Technologies Corporation  
3 Overlook Point, Lincolnshire, IL 60069 USA  
**Manufacturer** : Zebra Technologies Corporation  
3 Overlook Point, Lincolnshire, IL 60069 USA  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Apr. 21, 2025 and testing was performed from May 15, 2025 to Jun. 09, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sportun International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT .....	6
1.4 Testing Location .....	6
1.5 Applicable Standards.....	7
<b>2 Test Configuration of Equipment Under Test.....</b>	<b>8</b>
2.1 Carrier Frequency Channel .....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system .....	11
2.5 EUT Operation Test Setup .....	11
2.6 Measurement Results Explanation Example.....	11
<b>3 Test Result.....</b>	<b>12</b>
3.1 Number of Channel Measurement .....	12
3.2 Hopping Channel Separation Measurement .....	13
3.3 Dwell Time Measurement.....	14
3.4 20dB and 99% Bandwidth Measurement .....	15
3.5 Output Power Measurement.....	16
3.6 Conducted Band Edges Measurement.....	17
3.7 Conducted Spurious Emission Measurement .....	18
3.8 Radiated Band Edges and Spurious Emission Measurement .....	19
3.9 AC Conducted Emission Measurement.....	23
3.10 Antenna Requirements.....	25
<b>4 List of Measuring Equipment .....</b>	<b>26</b>
<b>5 Measurement Uncertainty.....</b>	<b>28</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission Test Result</b>	
<b>Appendix D. Duty Cycle Plots</b>	
<b>Appendix E. Setup Photographs</b>	



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Pass	-
3.5	15.247(b)(1) 15.247(b)(4)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	4.97 dB under the limit at 480.08 MHz
3.9	15.207	AC Conducted Emission	Pass	9.32 dB under the limit at 0.15 MHz
3.10	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Yuri Huang



## 1 General Description

### 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Standard Cradle
Brand Name	Zebra
Model Name	CR8288-SC
FCC ID	UZ7CR8288SC
EUT supports Radios application	Bluetooth and WPT
HW Version	PC-002191-02
FW Version	CAAGNS00-001-N16D0
MFD	20MAR25
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
5V Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V4W0US
12V Adaptor	Brand Name	Zebra	Part Number	PWR-BGA12V50W0WW
USB cable with 12V supply, 7ft	Brand Name	Zebra	Model Name	CBA-U42-S07PAR
USB cable with 5V supply, 7ft	Brand Name	Zebra	Model Name	CBA-U21-S07ZBR
USB cable with 12V supply, 15ft	Brand Name	Zebra	Model Name	CBA-U44-S15PAR
USB cable with 5V supply, 15ft	Brand Name	Zebra	Model Name	CBA-U30-S15ZBR
RS232 with 5V supply, 7ft	Brand Name	Zebra	Model Name	CBA-R01-S07PBR
RS232 with 5V supply, 20ft	Brand Name	Zebra	Model Name	CBA-R06-C20PBR
RS232 with 12v supply, 7FT	Brand Name	Zebra	Model Name	CBA-R12-S07PAR
RS232 with 12v supply, 15FT	Brand Name	Zebra	Model Name	CBA-R21-S15PAR
USB-C cable, 7ft	Brand Name	Zebra	Model Name	CBA-U65-S07ZAR
USB-C cable, 7ft	Brand Name	Zebra	Model Name	CBL-U67-S07ZAR
USB-C cable, 7ft	Brand Name	Zebra	Model Name	CBL-U68-S07ZAR

Supported Unit Used in Test Configuration and System				
Scanner	Brand Name	Zebra	Part Number	DS8288



## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
<b>Tx/Rx Channel Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	79
<b>Maximum Output Power to Antenna</b>	Bluetooth BR (1Mbps): 4.36 dBm (0.0027 W) Bluetooth EDR (2Mbps): 5.67 dBm (0.0037 W) Bluetooth EDR (3Mbps): 5.85 dBm (0.0038 W)
<b>99% Occupied Bandwidth</b>	Bluetooth BR (1Mbps): 0.921 MHz Bluetooth EDR (2Mbps): 1.190 MHz Bluetooth EDR (3Mbps): 1.175 MHz
<b>Antenna Type / Gain</b>	PCB Trace Antenna with gain 5.32 dBi
<b>Type of Modulation</b>	Bluetooth BR (1Mbps): GFSK Bluetooth EDR (2Mbps): π/4-DQPSK Bluetooth EDR (3Mbps): 8-DPSK

## 1.3 Modification of EUT

No modifications made to the EUT during the testing.

## 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b> CO05-HY(TAF Code: 1190)
<b>Remark:</b> The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory	

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, 03CH22-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786



## 1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-



## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurements, the measured emission level of the EUT was maximized by rotating the EUT on a turntable and adjusting the orientation of the EUT and its antenna in two orthogonal axes (X: flat, Y: portrait; Z: not applicable), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst plane, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
  
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
Conducted Test Cases	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
AC Conducted Emission	Mode 1 :Bluetooth Link between Scanner (DS8288) and Cradle (CR8288-SC) + Scanner (DS8288) Scan bar code + Cradle (CR8288-SC) USB cable (CBA-U42-S07PAR) (Data Link with NB)		
Remark:	<ol style="list-style-type: none"><li>1. For Radiated Test Cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.</li><li>2. For Radiated Test Cases, the tests were performed with, USB-C cable, 7ft (CBL-U67-S07ZAR)</li><li>3. The detailed Radiated test modes are shown in Appendix C.</li></ol>		

## 2.3 Connection Diagram of Test System

### <AC Conducted Emission Mode>

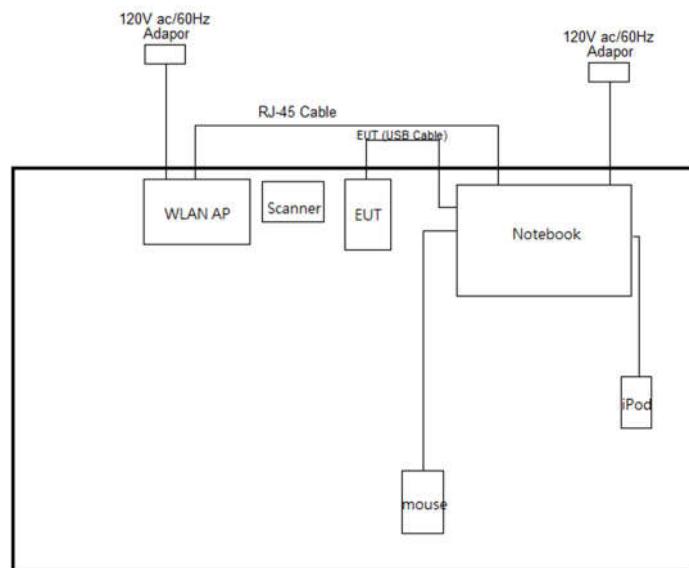

### <Bluetooth Tx Mode>

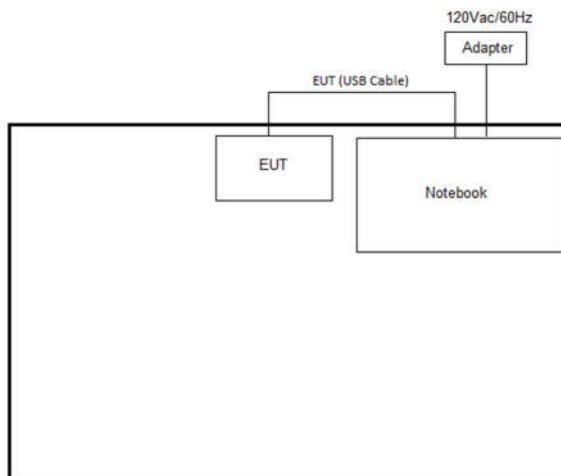



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC52U	MSQ-RTAC52U	N/A	Unshielded, 1.8m
2.	iPod	Apple	A1285	DoC	Shielded, 1.0m	N/A
3.	NOTEBOOK	Dell	Latitude 3420	FCC DoC	N/A	Unshielded, 1.8m
4.	Notebook	DELL	Latitude5310	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

The RF test items, utility “BT Regulatory Test App\_v2.2.0.0 1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300 kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

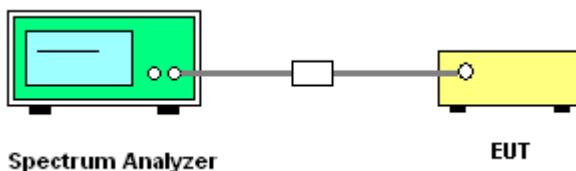

##### 3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 300 kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

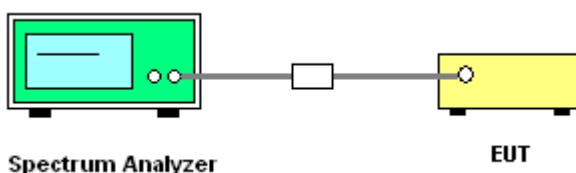

### 3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

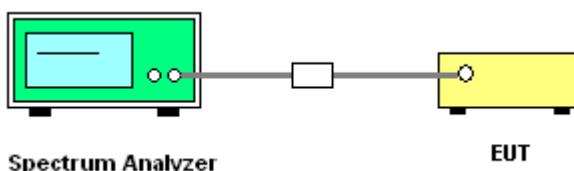

#### 3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

## 3.4 20dB and 99% Bandwidth Measurement

### 3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1-5% of the 99% bandwidth; VBW  $\geq$  3 \* RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
6. Measure and record the results in the test report.

### 3.4.4 Test Setup

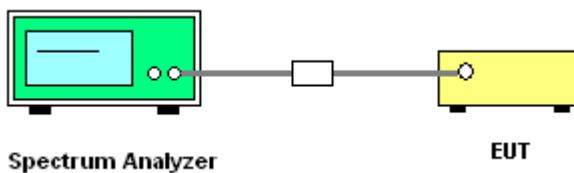

### 3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

### 3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.5 Output Power Measurement

### 3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi.


### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

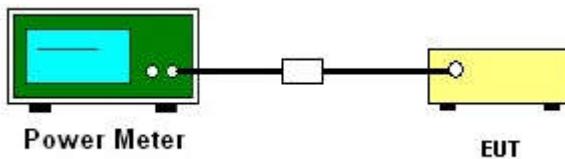

### 3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

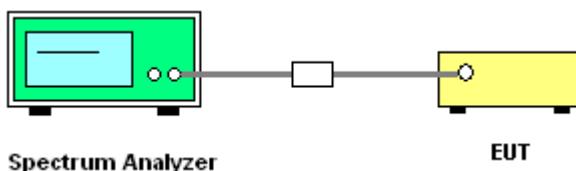

### 3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

### 3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurious must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup

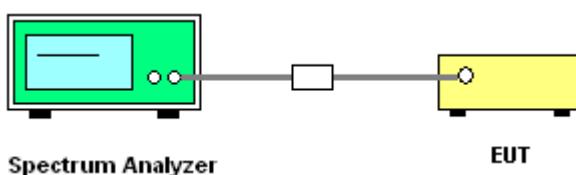

### 3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.



## 3.8 Radiated Band Edges and Spurious Emission Measurement

### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.8.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




### 3.8.3 Test Procedures

1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz, RBW = 1 MHz for  $f > 1$  GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 \cdot \log_{10}$  (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.


Note: The average levels are calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from  $20 \log_{10}$  (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated test below 30MHz

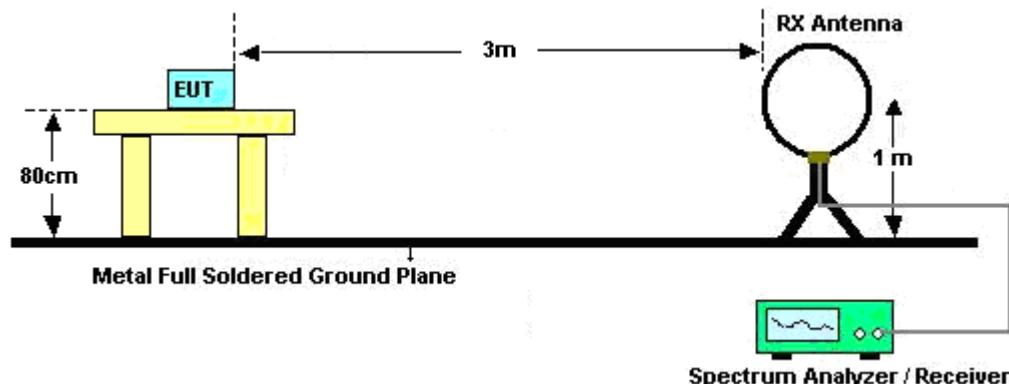


For radiated test from 30MHz to 1GHz

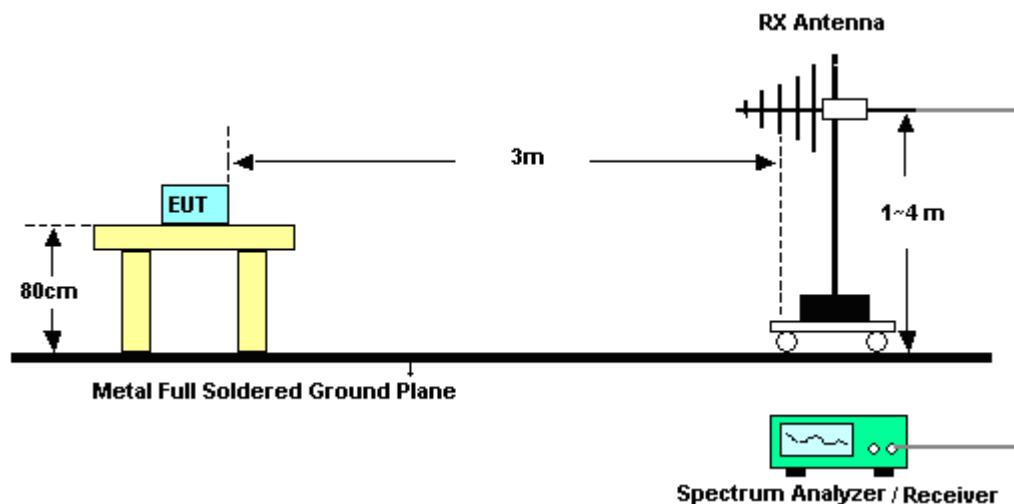

For radiated test from 1GHz to 18GHz

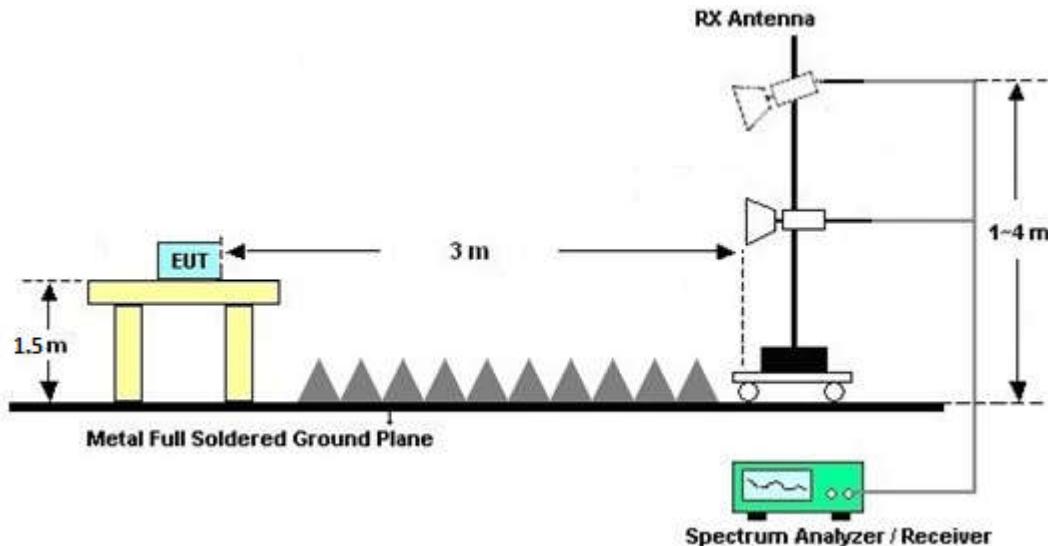

For radiated test above 18GHz

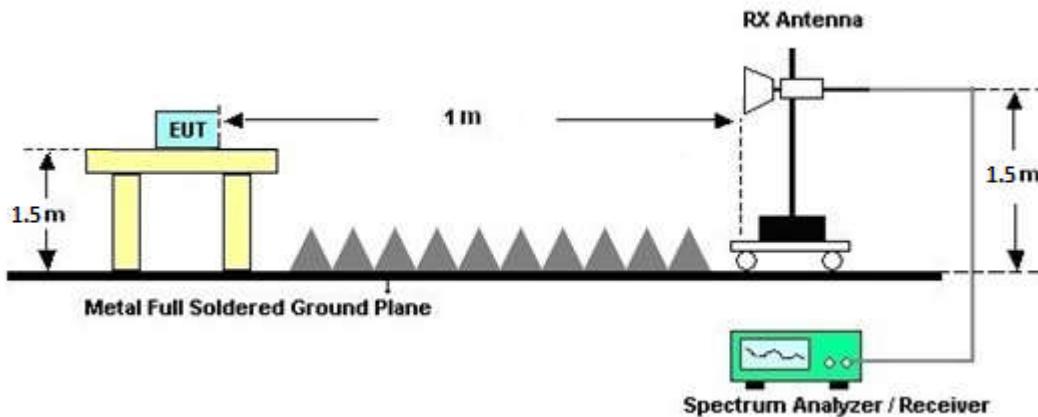

### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.8.7 Duty Cycle

Please refer to Appendix D.

### 3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C.



## 3.9 AC Conducted Emission Measurement

### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.9.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.9.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

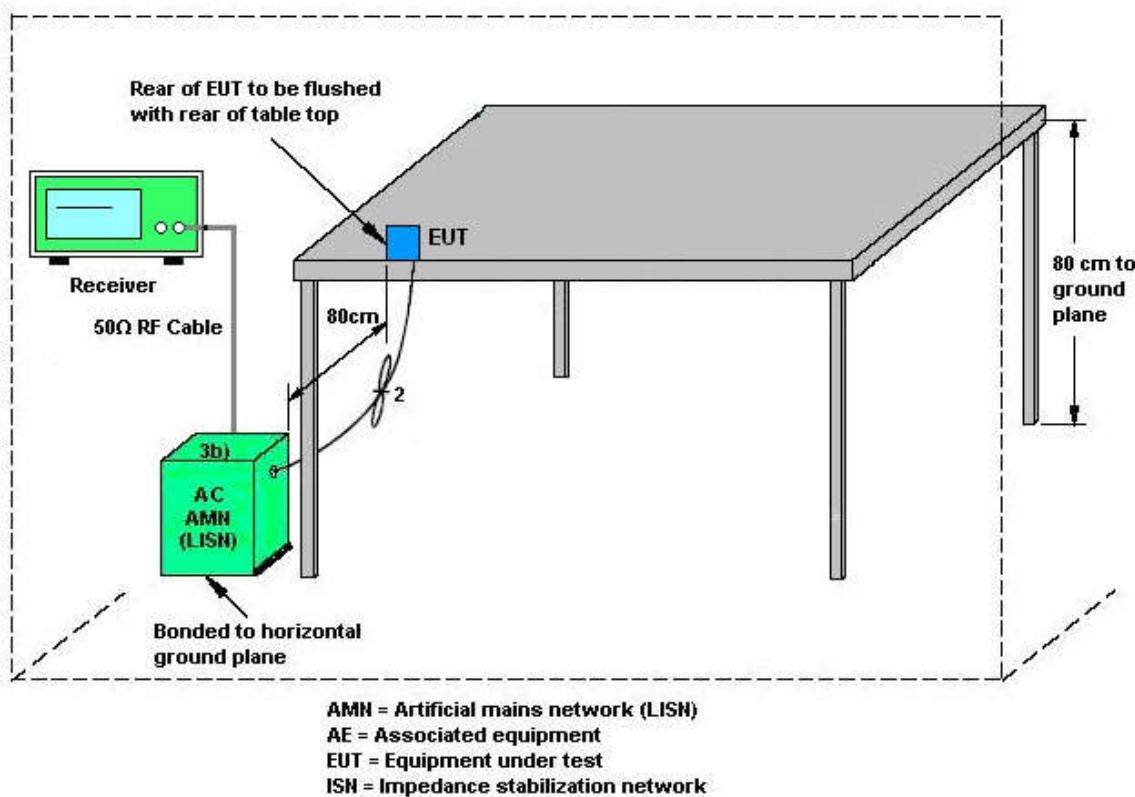

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## 3.10 Antenna Requirements

### 3.10.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 3.10.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 09, 2025	N/A	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 14, 2024	Jun. 09, 2025	Oct. 13, 2025	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 12, 2024	Jun. 09, 2025	Dec. 11, 2025	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 14, 2024	Jun. 09, 2025	Nov. 13, 2025	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jun. 09, 2025	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 30, 2024	Jun. 09, 2025	Jul. 29, 2025	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT24082501	N/A	Oct. 15, 2024	Jun. 09, 2025	Oct. 14, 2025	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	May 17,2025 ~ May 27,2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Jun. 26, 2024	May 17,2025 ~ May 27,2025	Jun. 25, 2025	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Jun. 25, 2024	May17,2025 ~ May 27,2025	Jun. 24, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	May 17,2025 ~ May 27,2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instrument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	May 17,2025 ~ May 27,2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	May 17,2025 ~ May 27,2025	N/A	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	May 15, 2025 ~ May 20, 2025	Aug. 28, 2025	Radiation (03CH22-HY)
Bilog Antenna with 6dB	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Dec. 17, 2024	May 15, 2025 ~ May 20, 2025	Dec. 16, 2025	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 14, 2024	May 15, 2025 ~ May 20, 2025	Jul. 13, 2025	Radiation (03CH22-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02038	1GHz~18GHz	Jul. 29, 2024	May 15, 2025 ~ May 20, 2025	Jul. 28, 2025	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1225	18GHz-40GHz	Jun. 24, 2024	May 15, 2025 ~ May 20, 2025	Jun. 23, 2025	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 27, 2024	May 15, 2025 ~ May 20, 2025	Sep. 26, 2025	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060872	18-40GHz	Nov. 29, 2024	May 15, 2025 ~ May 20, 2025	Nov. 28, 2025	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Sep. 24, 2024	May 15, 2025 ~ May 20, 2025	Sep. 23, 2025	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211469	N/A	Dec. 24, 2024	May 15, 2025 ~ May 20, 2025	Dec. 23, 2025	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 15, 2025 ~ May 20, 2025	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 15, 2025 ~ May 20, 2025	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 15, 2025 ~ May 20, 2025	N/A	Radiation (03CH22-HY)
Software	Audix	E3	RK-002347	N/A	N/A	May 15, 2025 ~ May 20, 2025	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	May 15, 2025 ~ May 20, 2025	Mar. 05, 2025	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,804611/2,804615/2	N/A	Oct. 23, 2024	May 15, 2025 ~ May 20, 2025	Oct. 22, 2025	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER/EMCI	SUCOFLEX 102/EMCI01Y-KM-KM-500/EMCI01Y-KM-KM-9000	804611/2,240914,25043351,25043350	N/A	May. 19, 2025	May 19, 2025 ~ May 20, 2025	May 18, 2026	Radiation (03CH22-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.7 dB
--	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.6 dB
--	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.2 dB
--	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
--	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.7 dB
--	--------

## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Shiming Liu	Temperature:	21~25	°C
Test Date:	2025/5/17~2025/5/27	Relative Humidity:	51~54	%


TEST RESULTS DATA									
20dB and 99% Occupied Bandwidth and Hopping Channel Separation									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	1.054	0.919	1.003	0.7024	Pass
DH	1Mbps	1	39	2441	1.055	0.919	1.159	0.7036	Pass
DH	1Mbps	1	78	2480	1.054	0.921	0.999	0.7024	Pass
2DH	2Mbps	1	0	2402	1.348	1.190	0.999	0.8986	Pass
2DH	2Mbps	1	39	2441	1.349	1.189	0.990	0.8994	Pass
2DH	2Mbps	1	78	2480	1.347	1.189	1.007	0.8982	Pass
3DH	3Mbps	1	0	2402	1.309	1.175	1.007	0.8728	Pass
3DH	3Mbps	1	39	2441	1.312	1.175	1.003	0.8746	Pass
3DH	3Mbps	1	78	2480	1.311	1.175	1.155	0.8740	Pass

TEST RESULTS DATA						
Dwell Time						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time (hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH5	79	106.670	2.89	0.31	0.4	Pass
3DH5 (AFH)	20	53.330	2.89	0.15	0.4	Pass

TEST RESULTS DATA					
Peak Power Table					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	4.23	20.97	Pass
	39	1	4.36	20.97	Pass
	78	1	4.13	20.97	Pass
2DH1	0	1	5.32	20.97	Pass
	39	1	5.48	20.97	Pass
	78	1	5.67	20.97	Pass
3DH1	0	1	5.49	20.97	Pass
	39	1	5.71	20.97	Pass
	78	1	5.85	20.97	Pass

TEST RESULTS DATA				
Average Power Table				
(Reporting Only)				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	4.02	5.14
	39	1	4.14	5.14
	78	1	3.88	5.14
2DH1	0	1	2.65	5.07
	39	1	2.91	5.07
	78	1	3.09	5.07
3DH1	0	1	2.73	5.07
	39	1	2.94	5.07
	78	1	3.14	5.07


TEST RESULTS DATA			
Number of Hopping Frequency			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

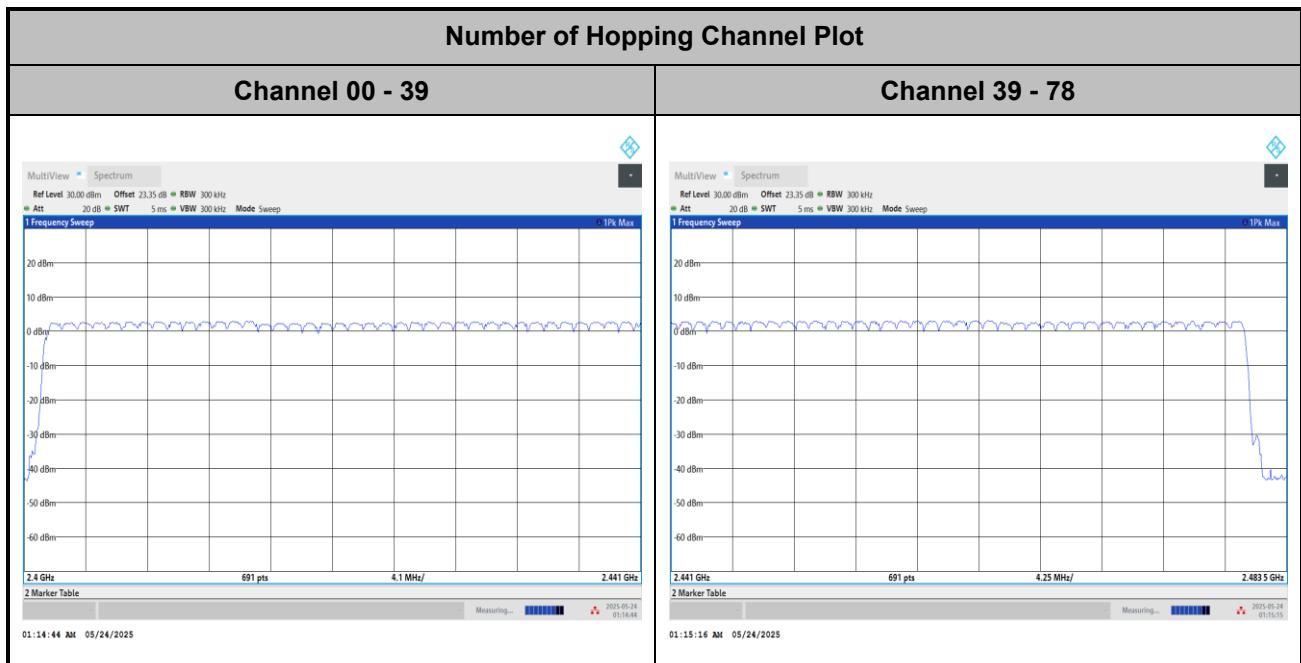**Number of Hopping Frequency**




## Hopping Channel Separation

<1Mbps>

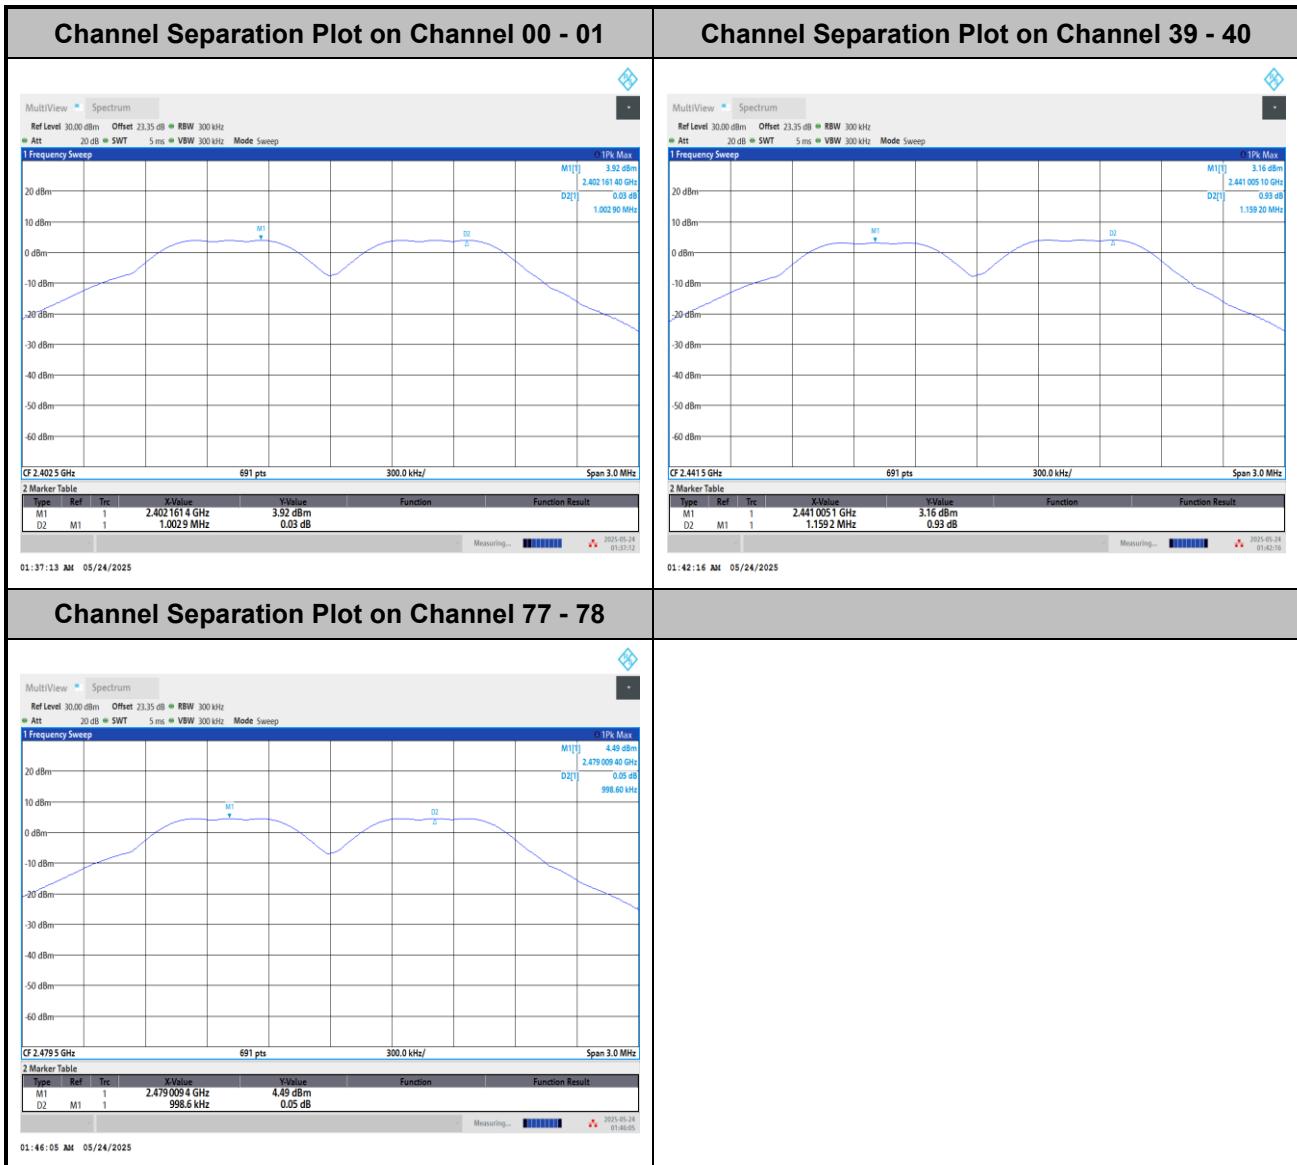





&lt;2Mbps&gt;

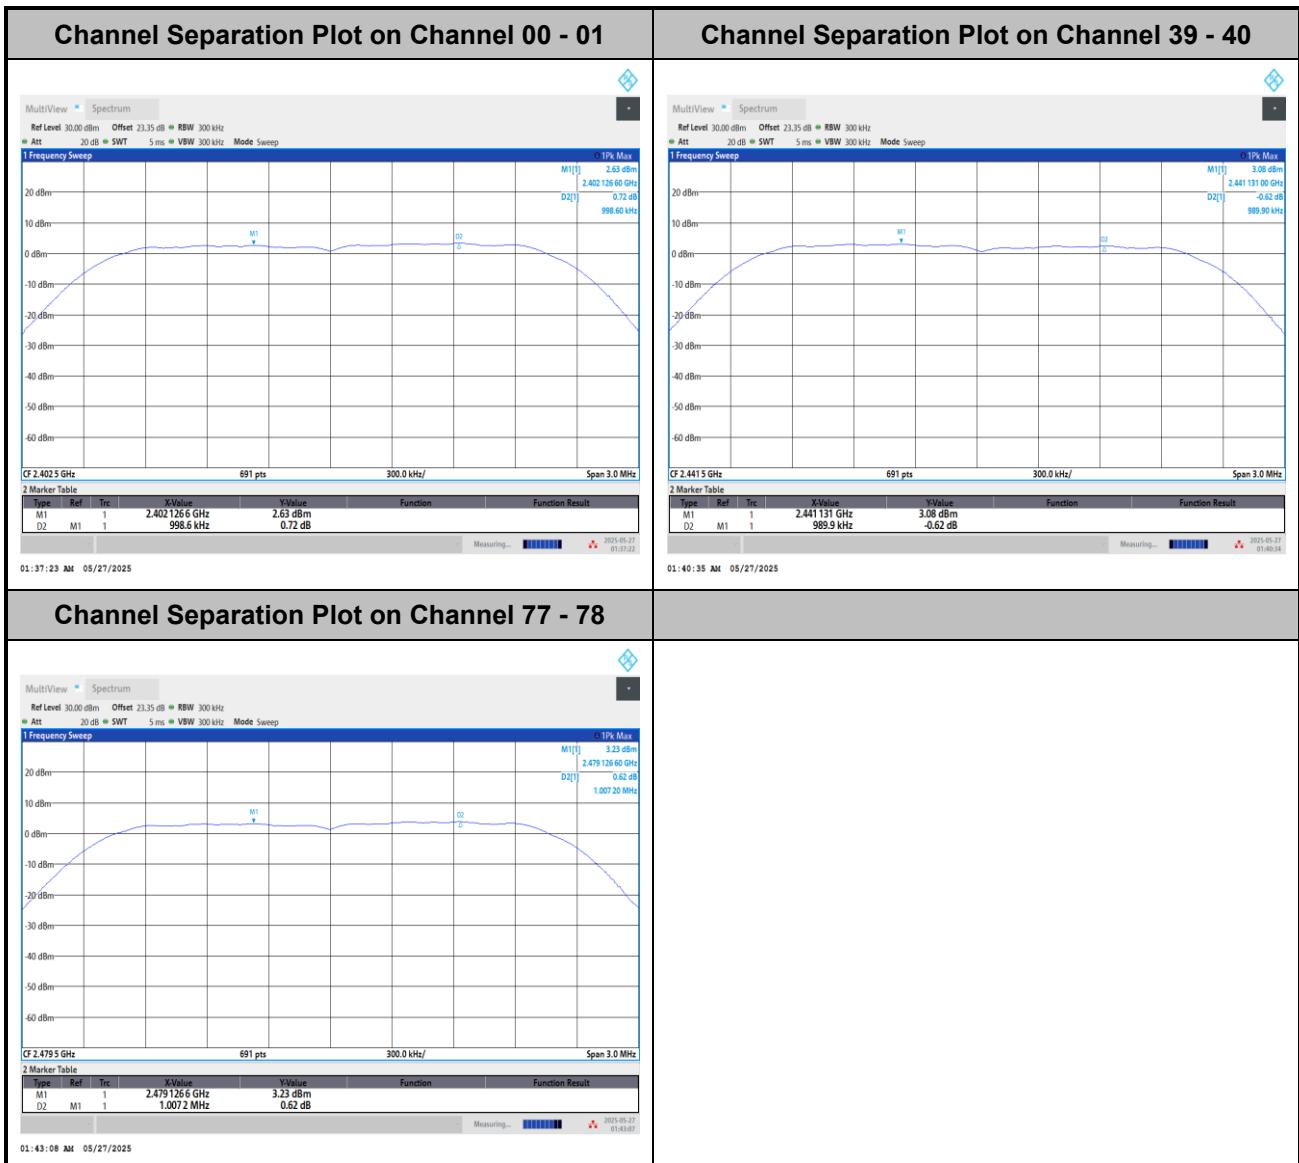




&lt;3Mbps&gt;

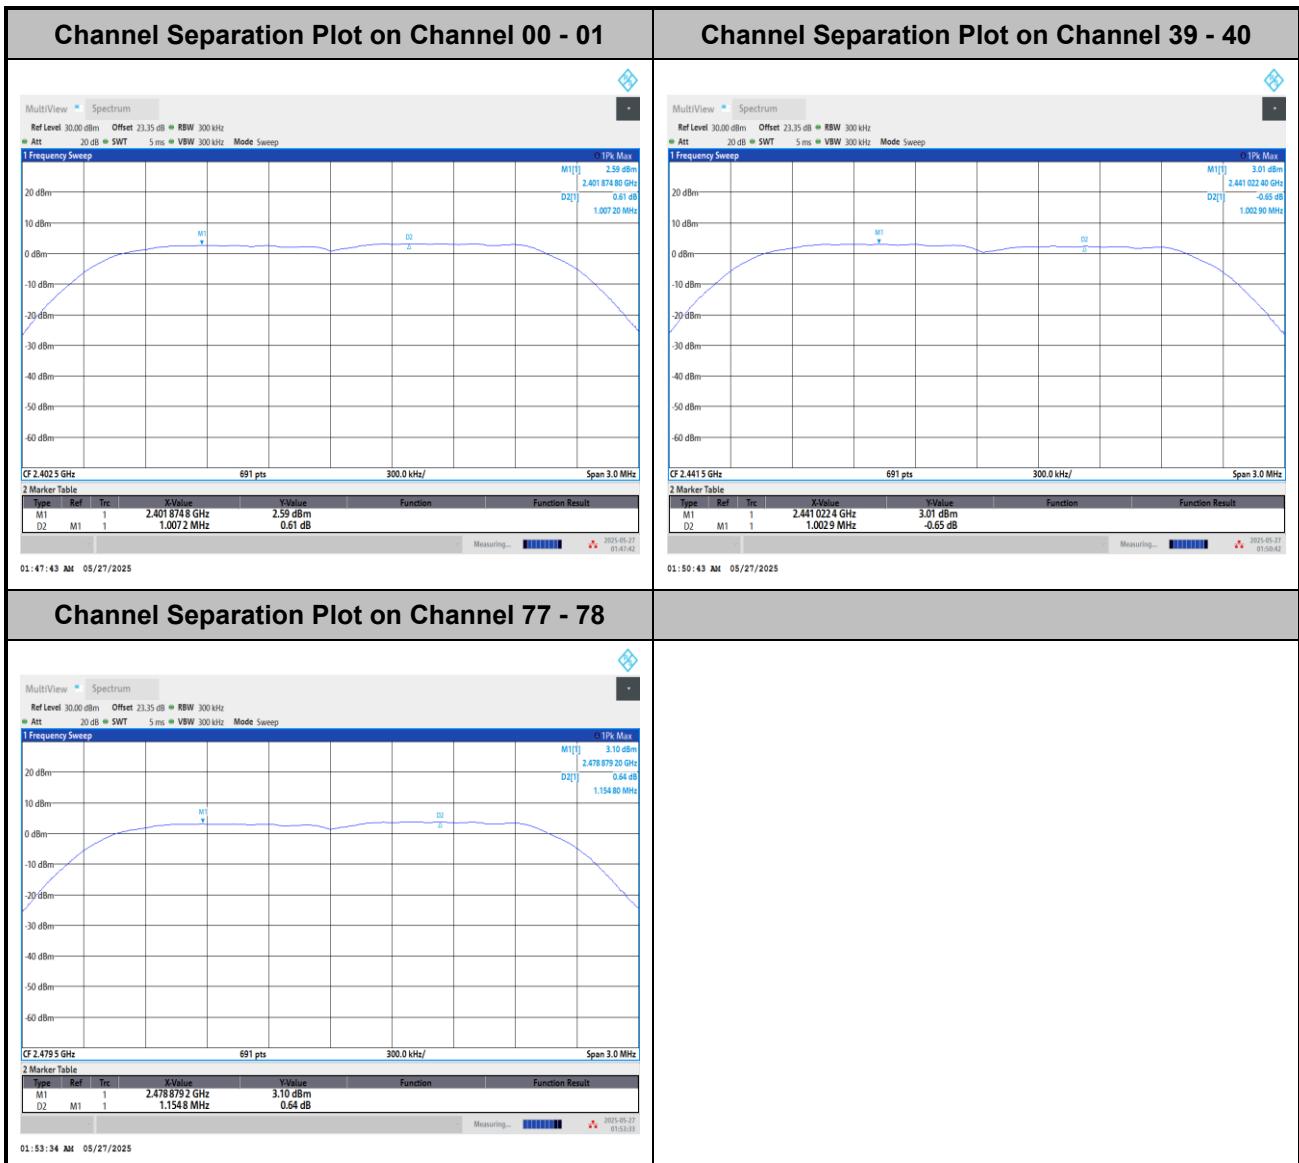

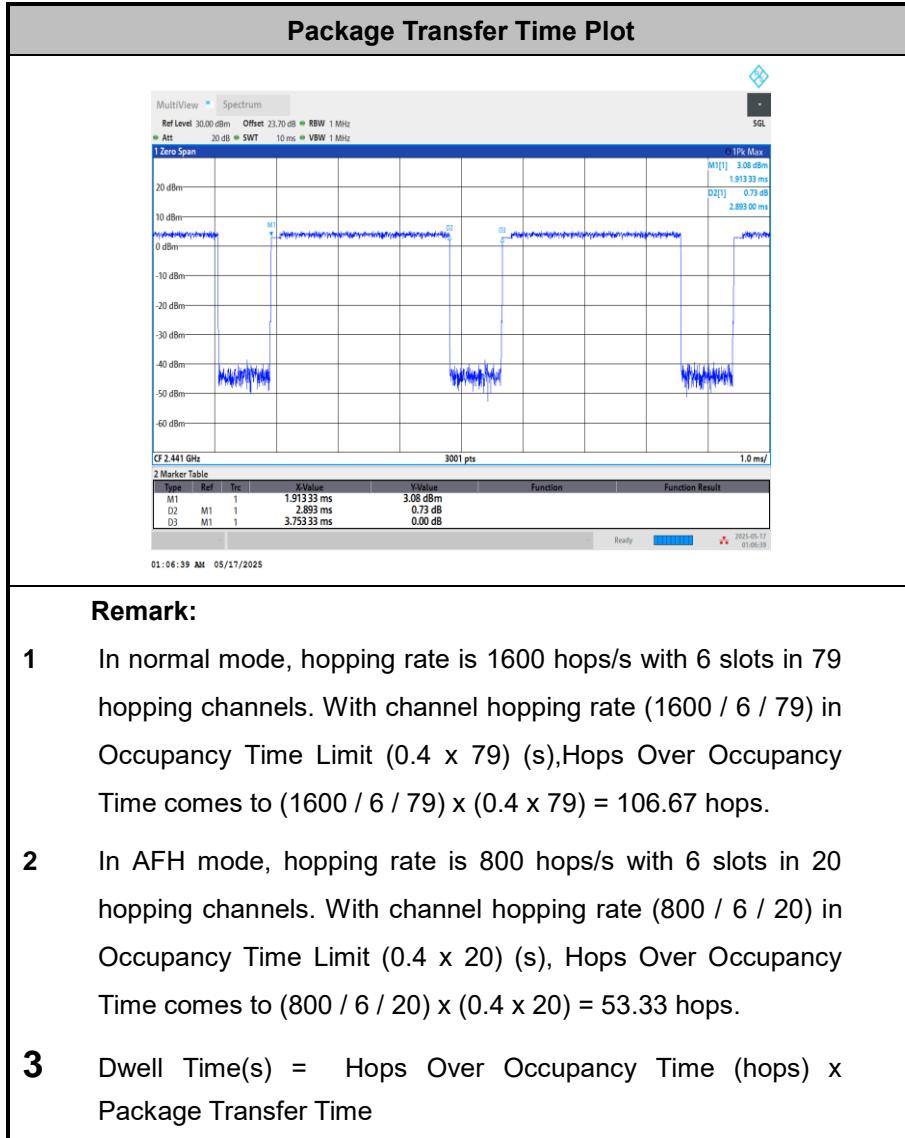**Dwell Time**


**20dB Bandwidth**

&lt;1Mbps&gt;

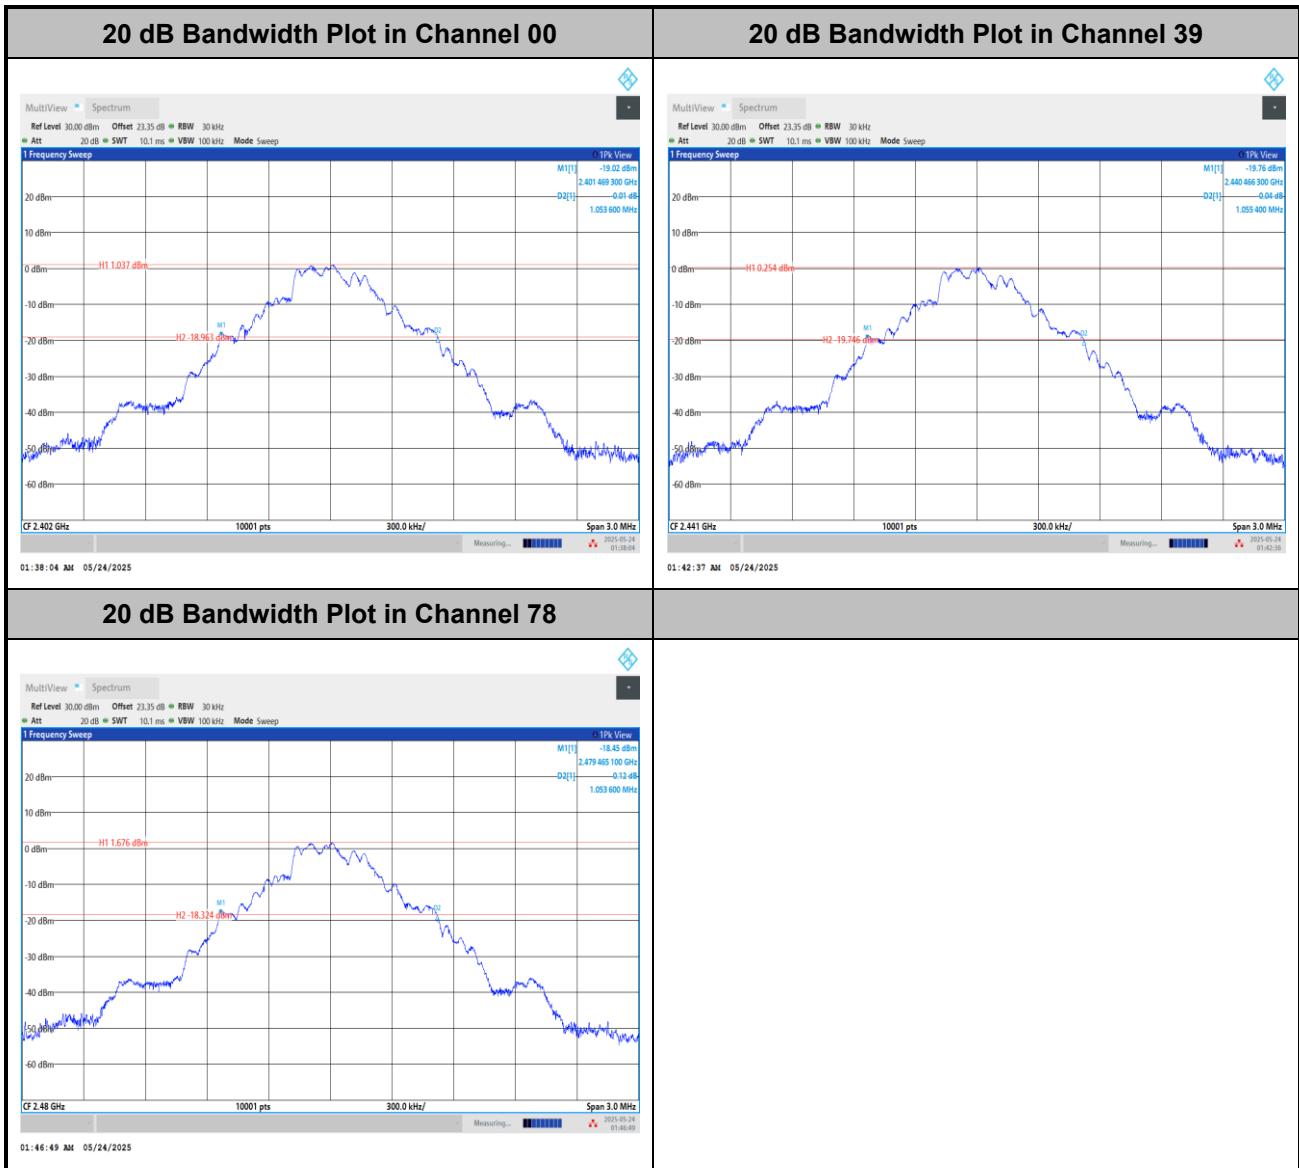




&lt;2Mbps&gt;

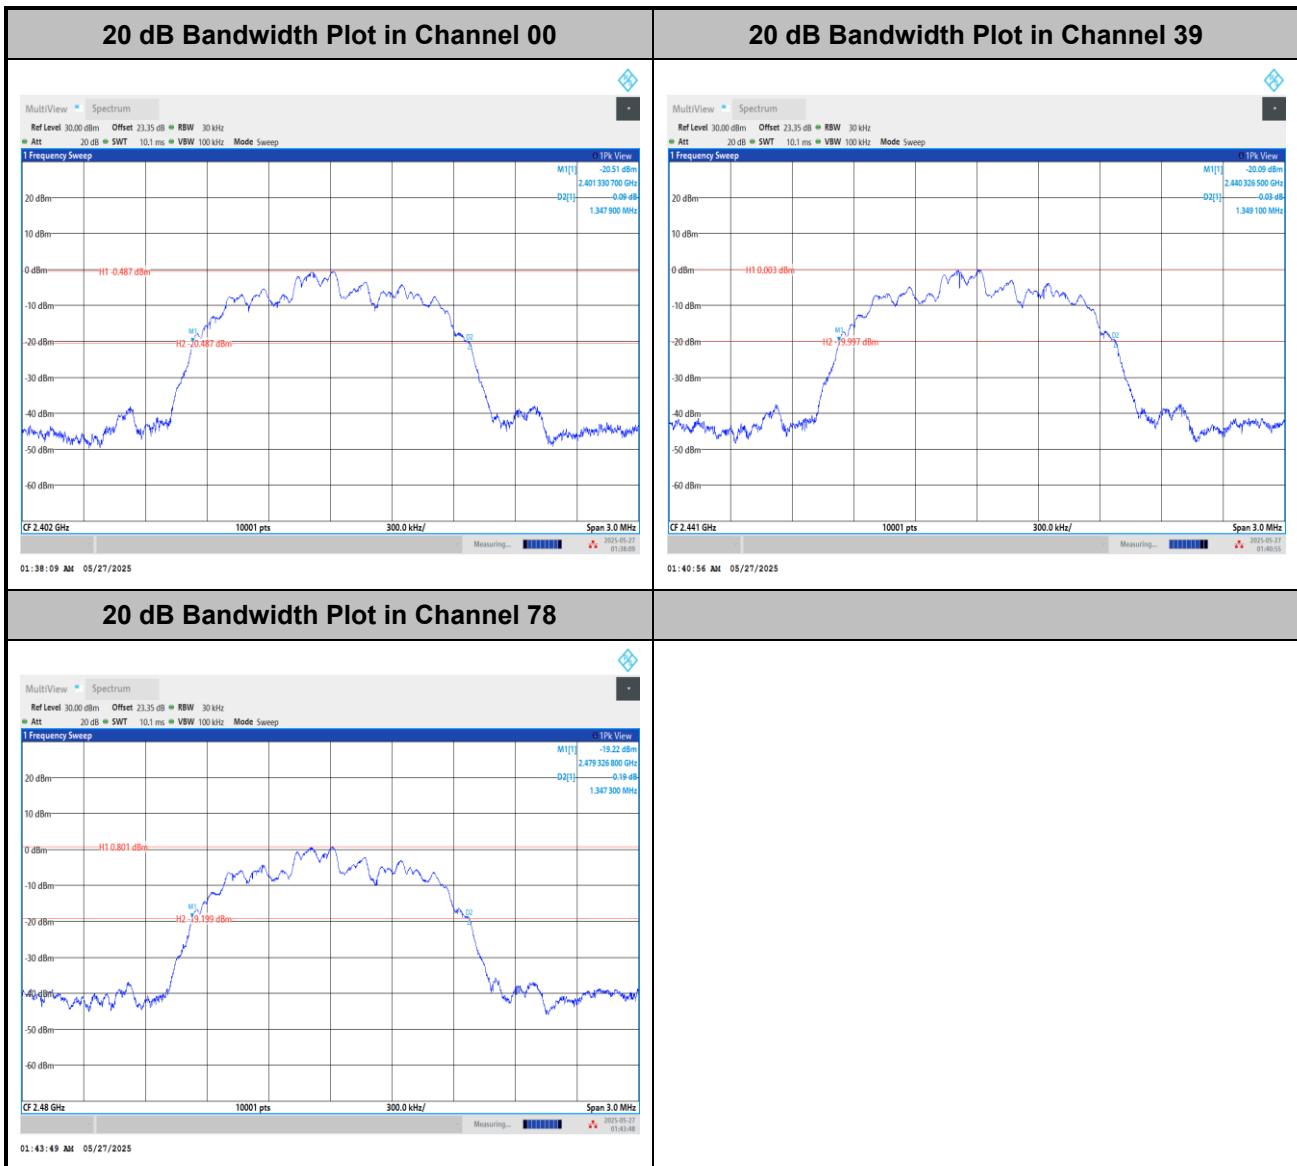




&lt;3Mbps&gt;

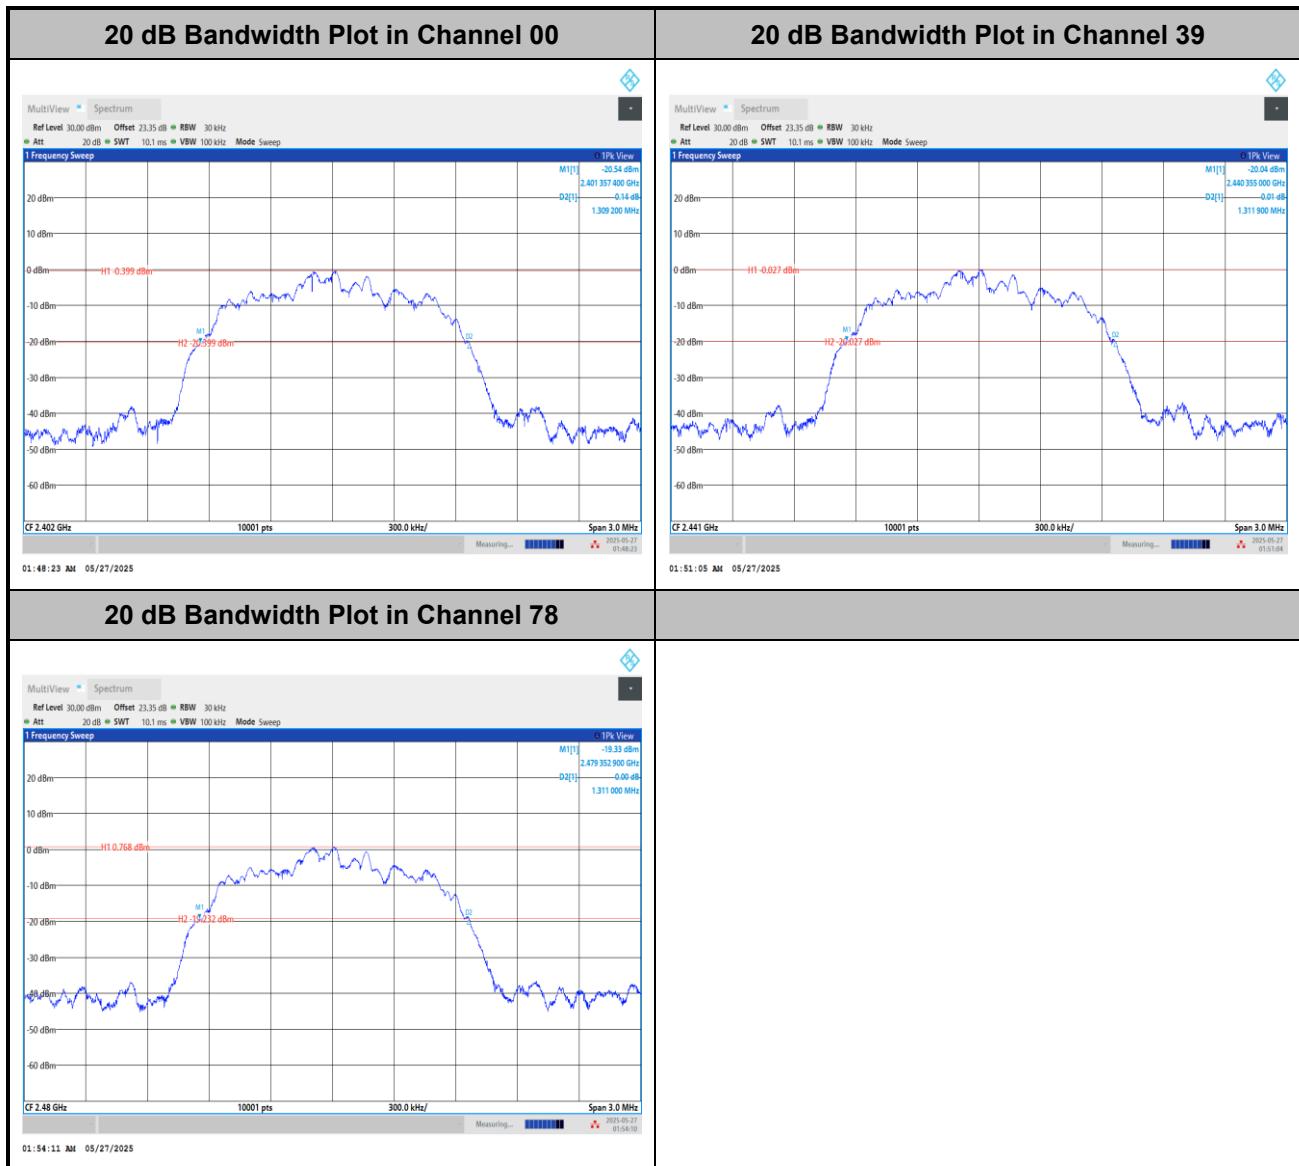


**99% Occupied Bandwidth**

&lt;1Mbps&gt;

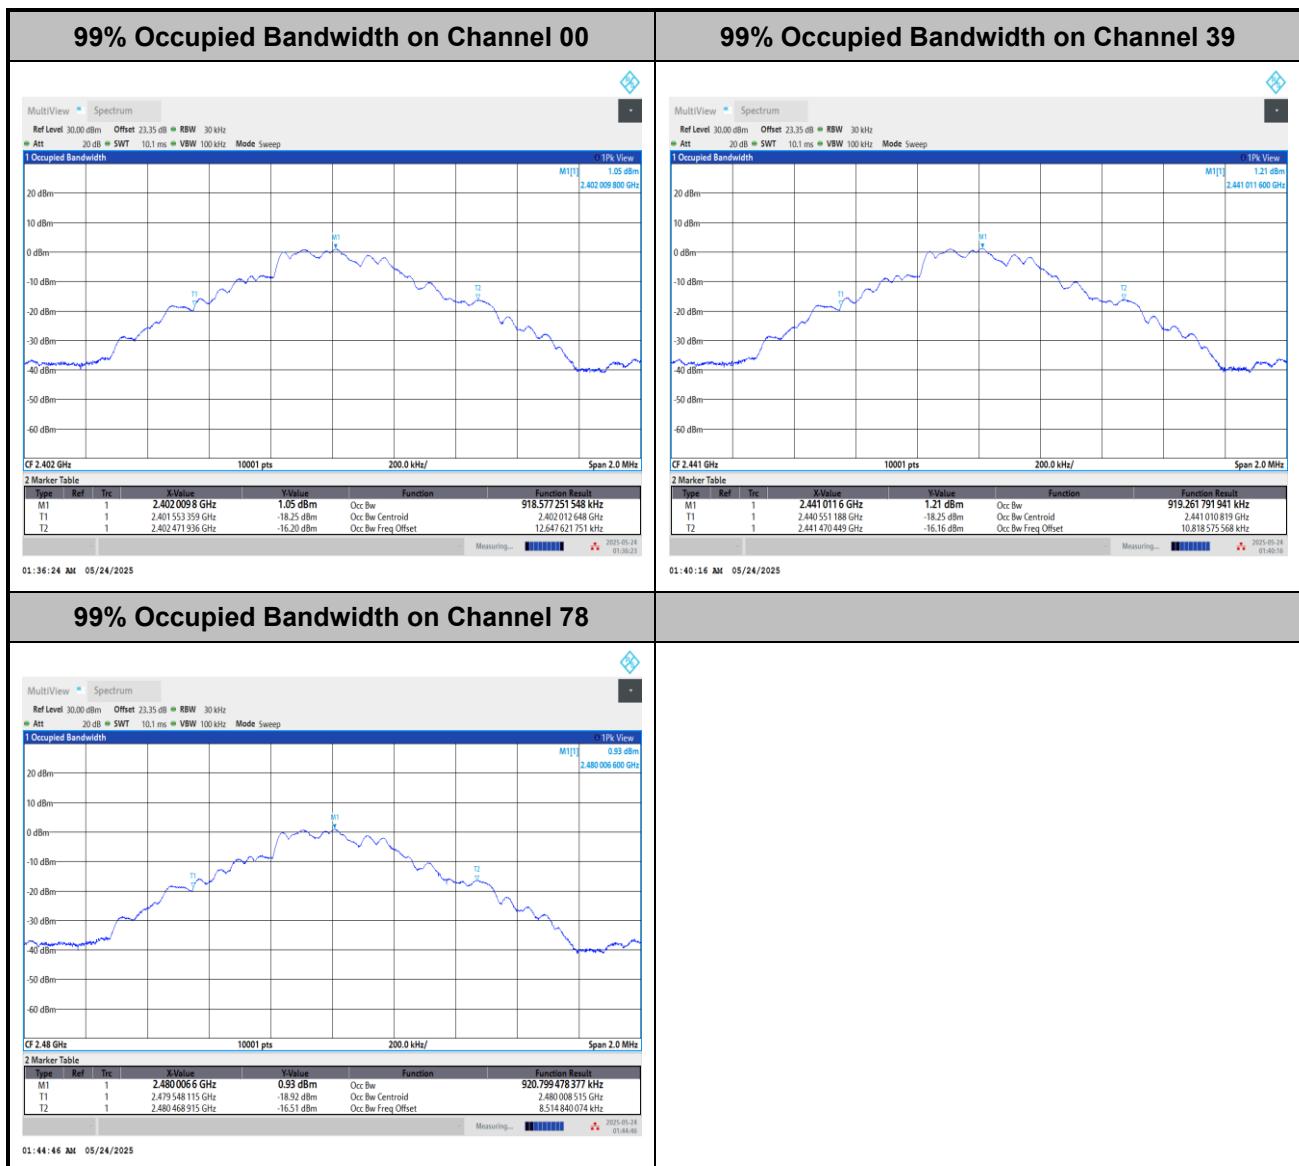




&lt;2Mbps&gt;

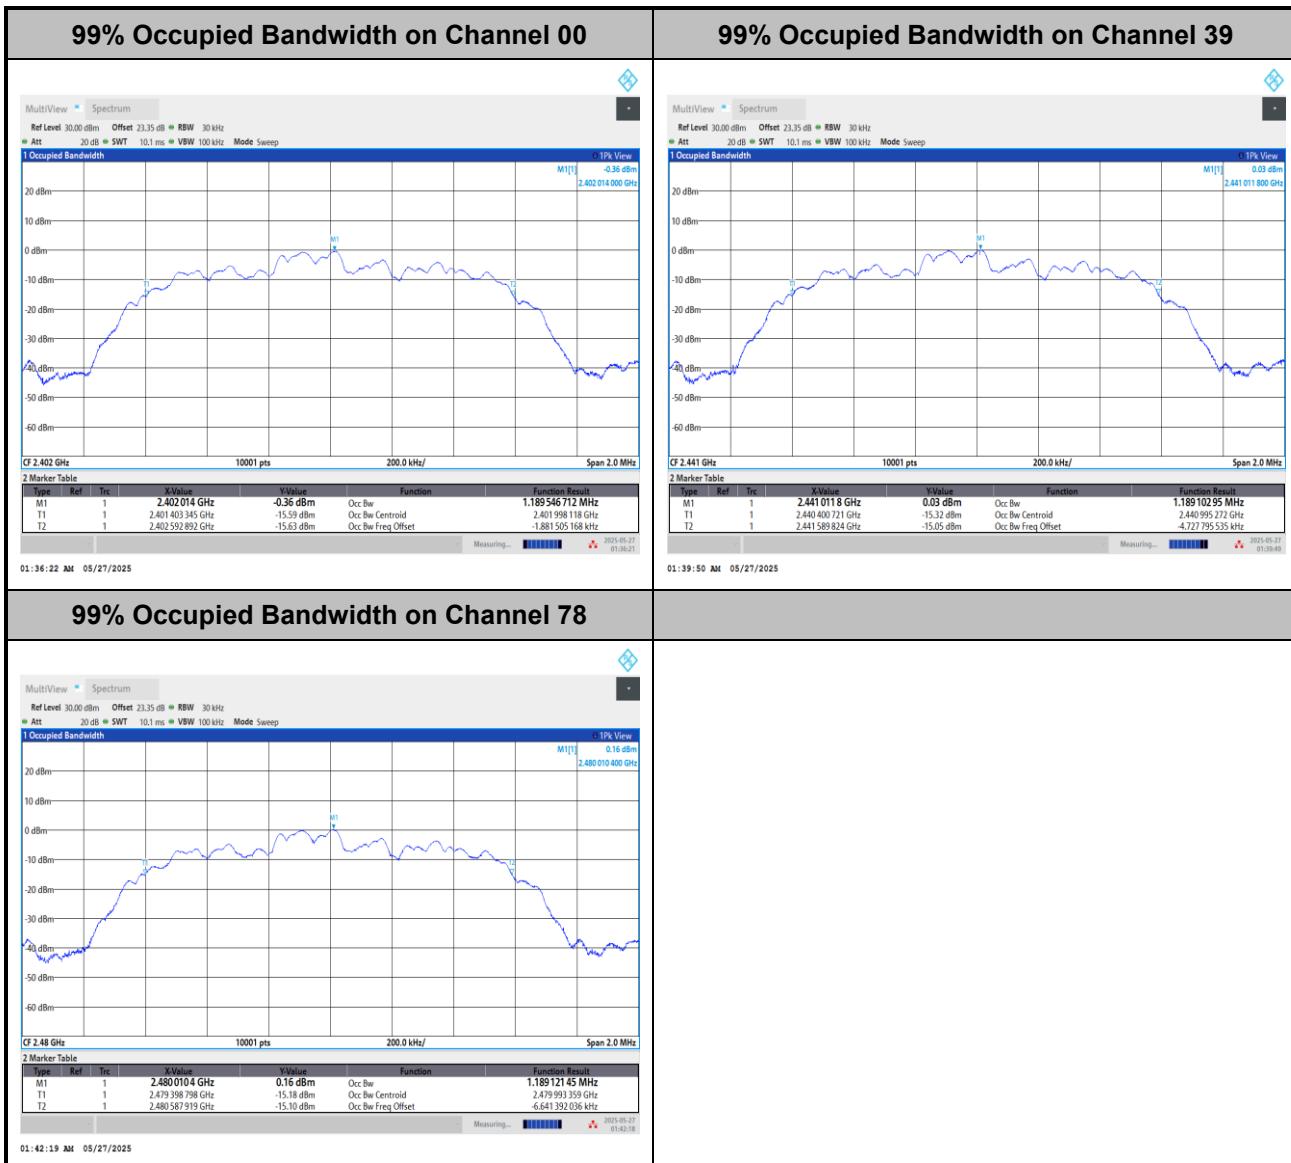




&lt;3Mbps&gt;

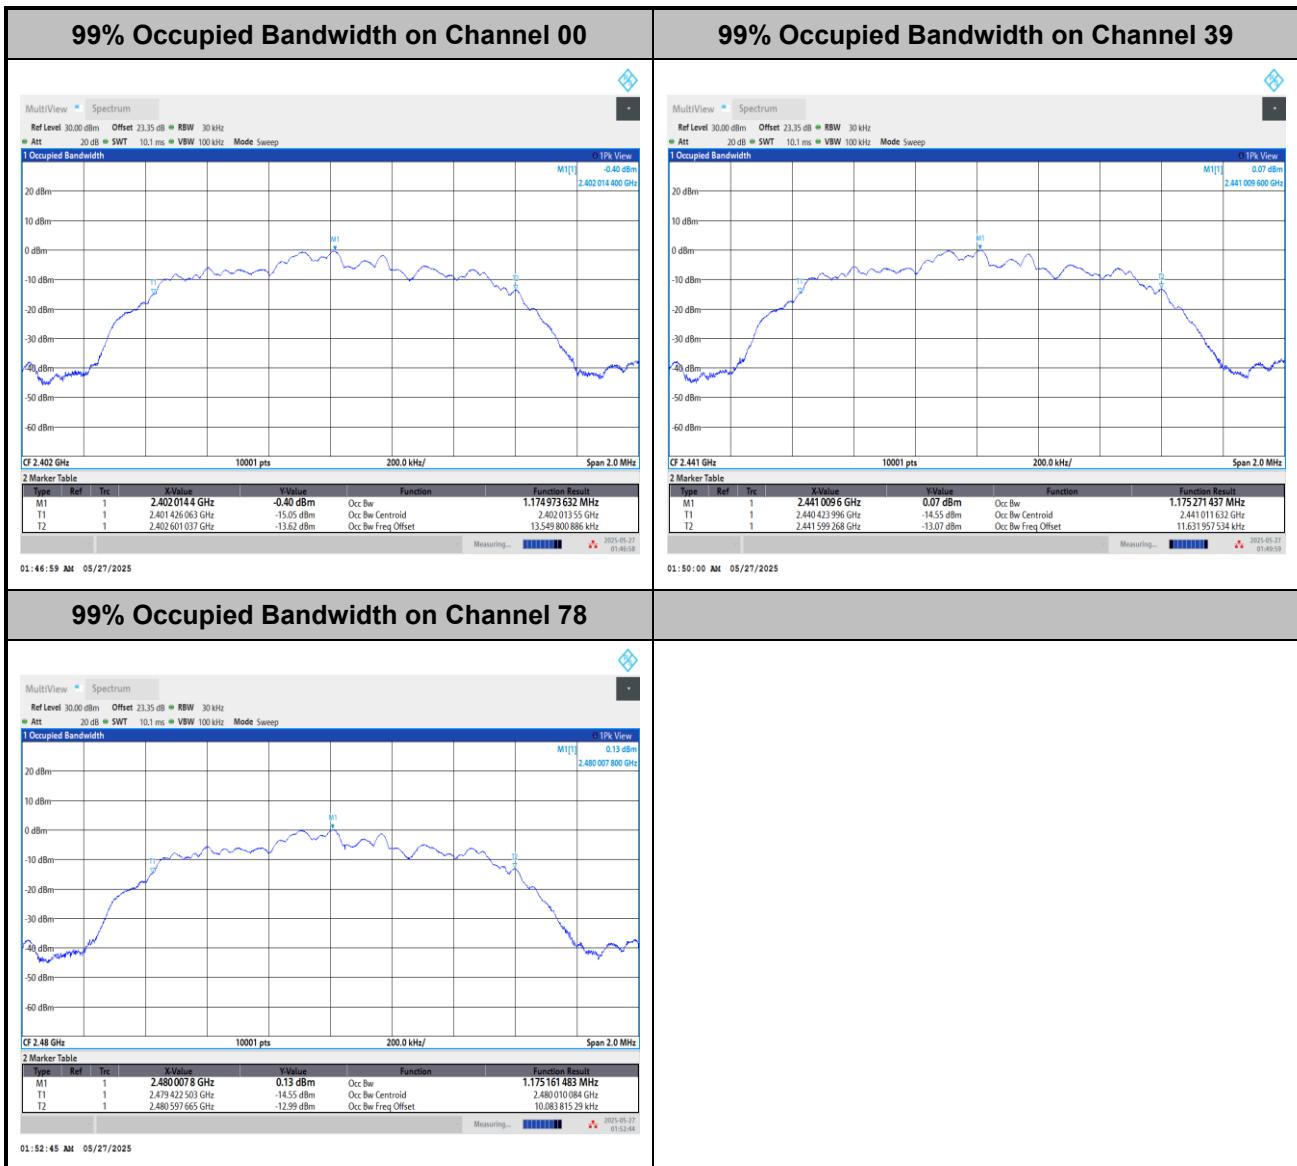




## Band Edges

<1Mbps>

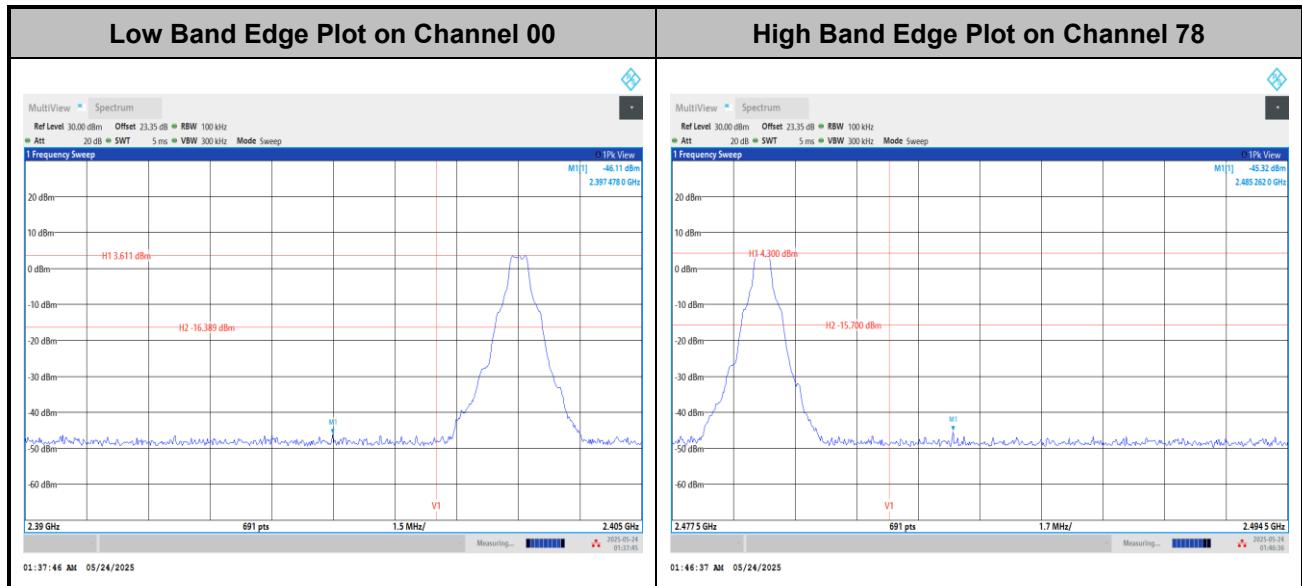




&lt;2Mbps&gt;

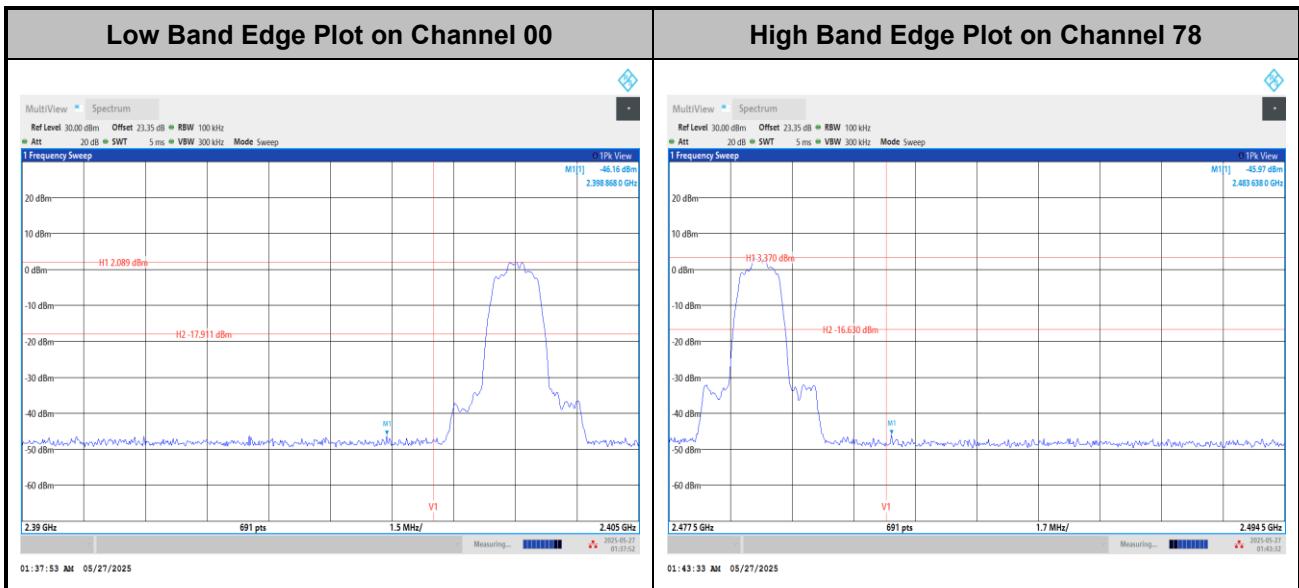




&lt;3Mbps&gt;

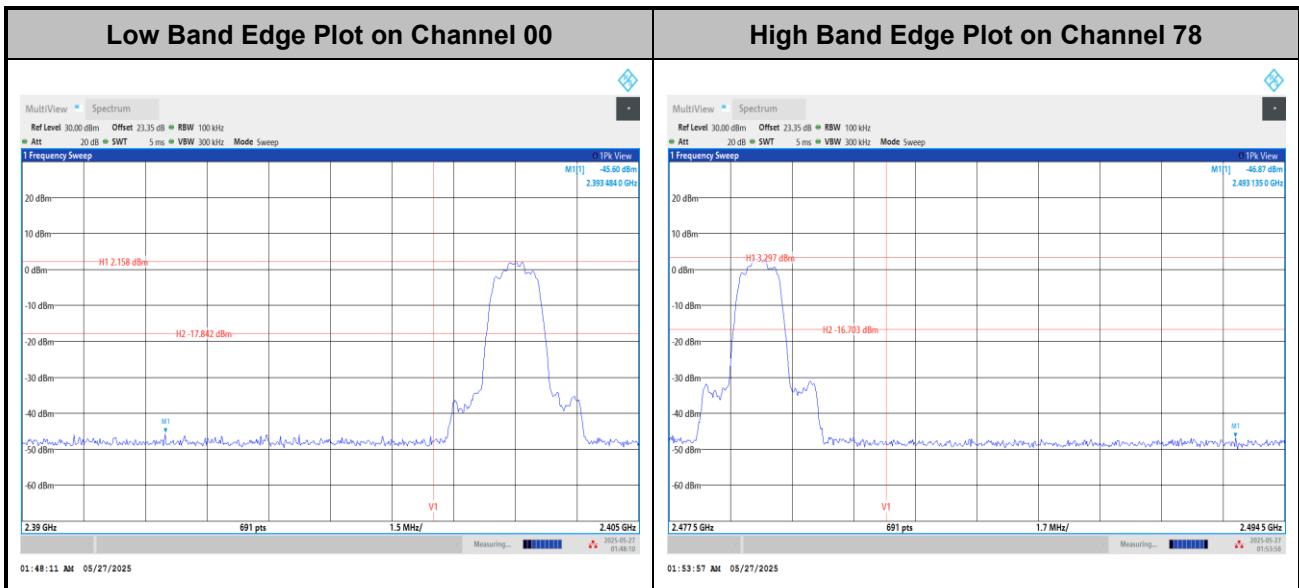




## Hopping Mode Band Edges

<1Mbps>

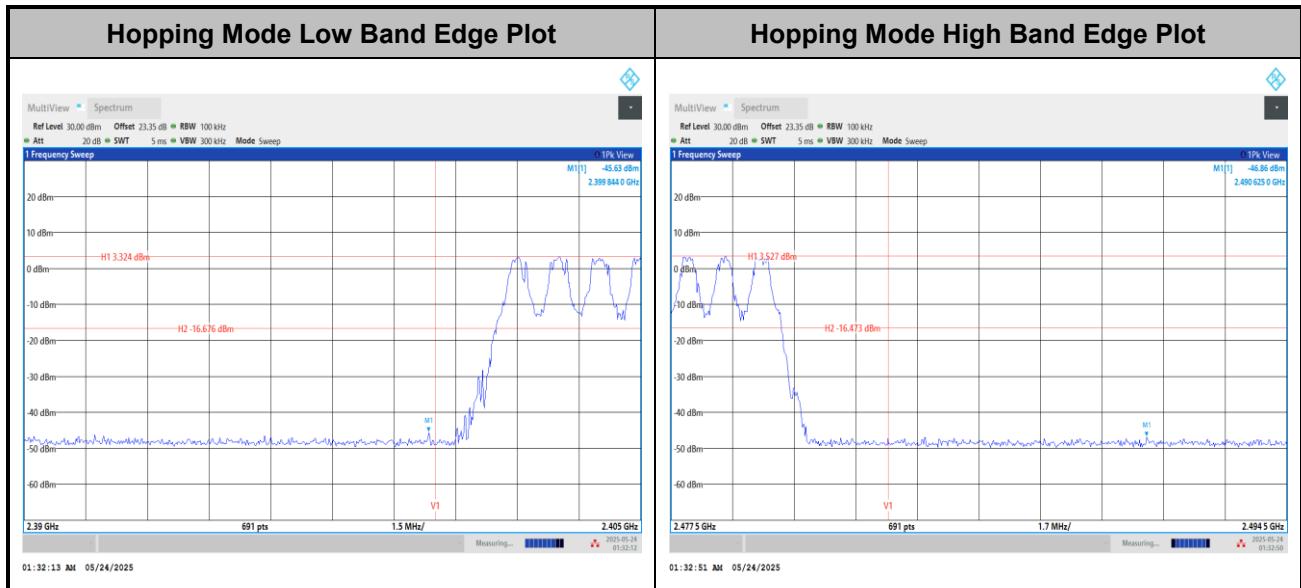




&lt;2Mbps&gt;

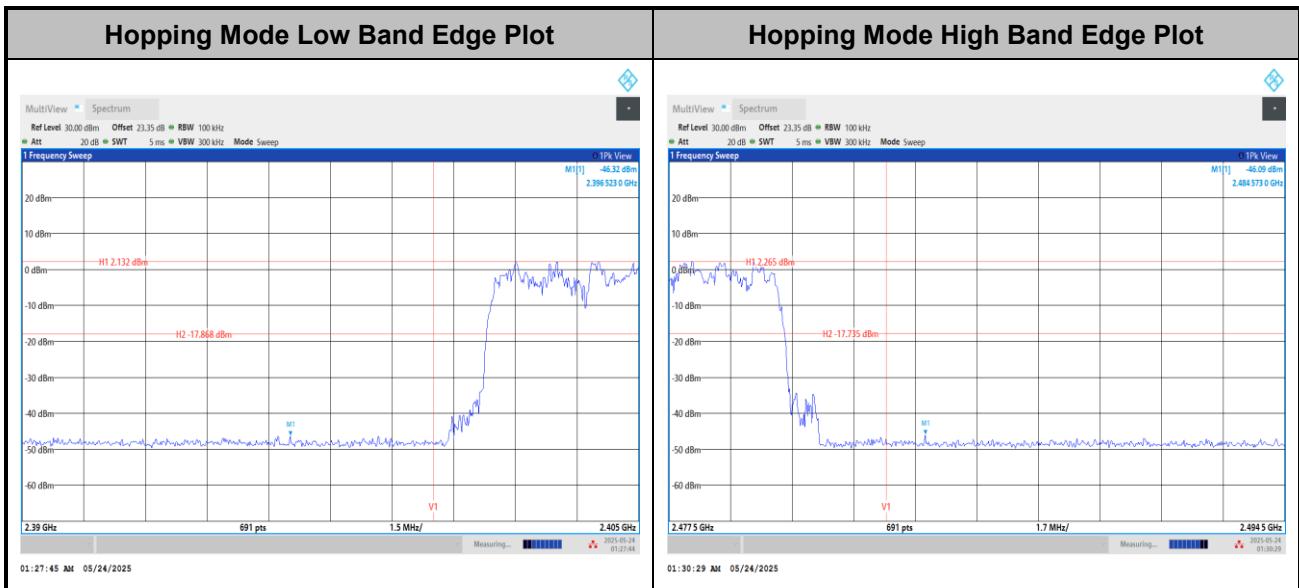




&lt;3Mbps&gt;

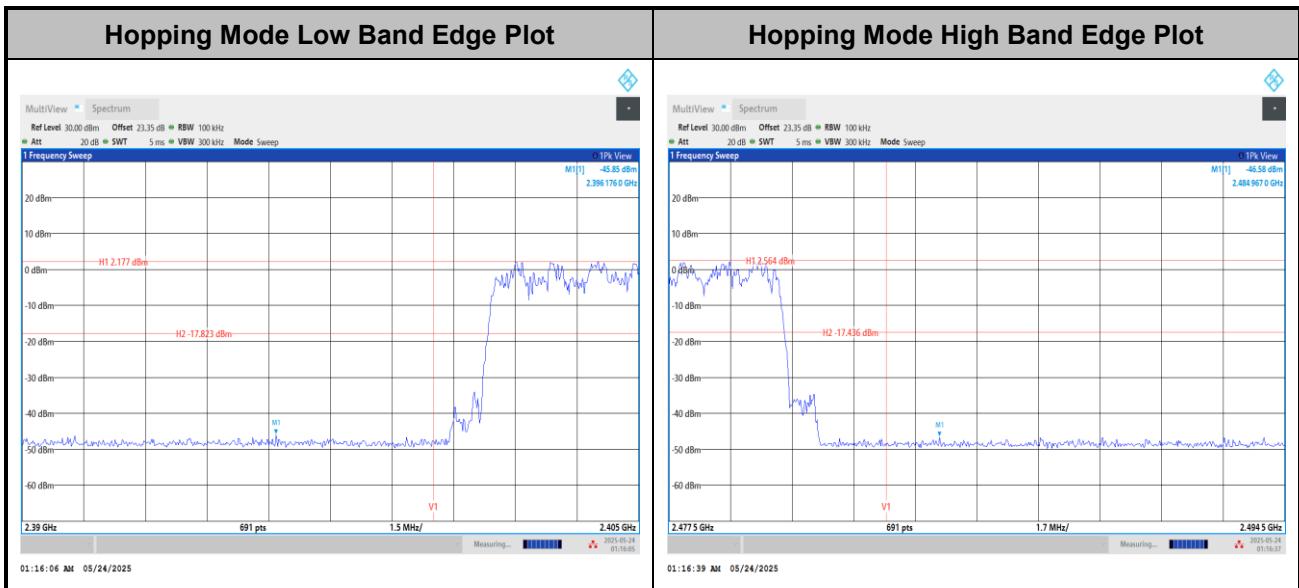




## Conducted Spurious Emission

<1Mbps>

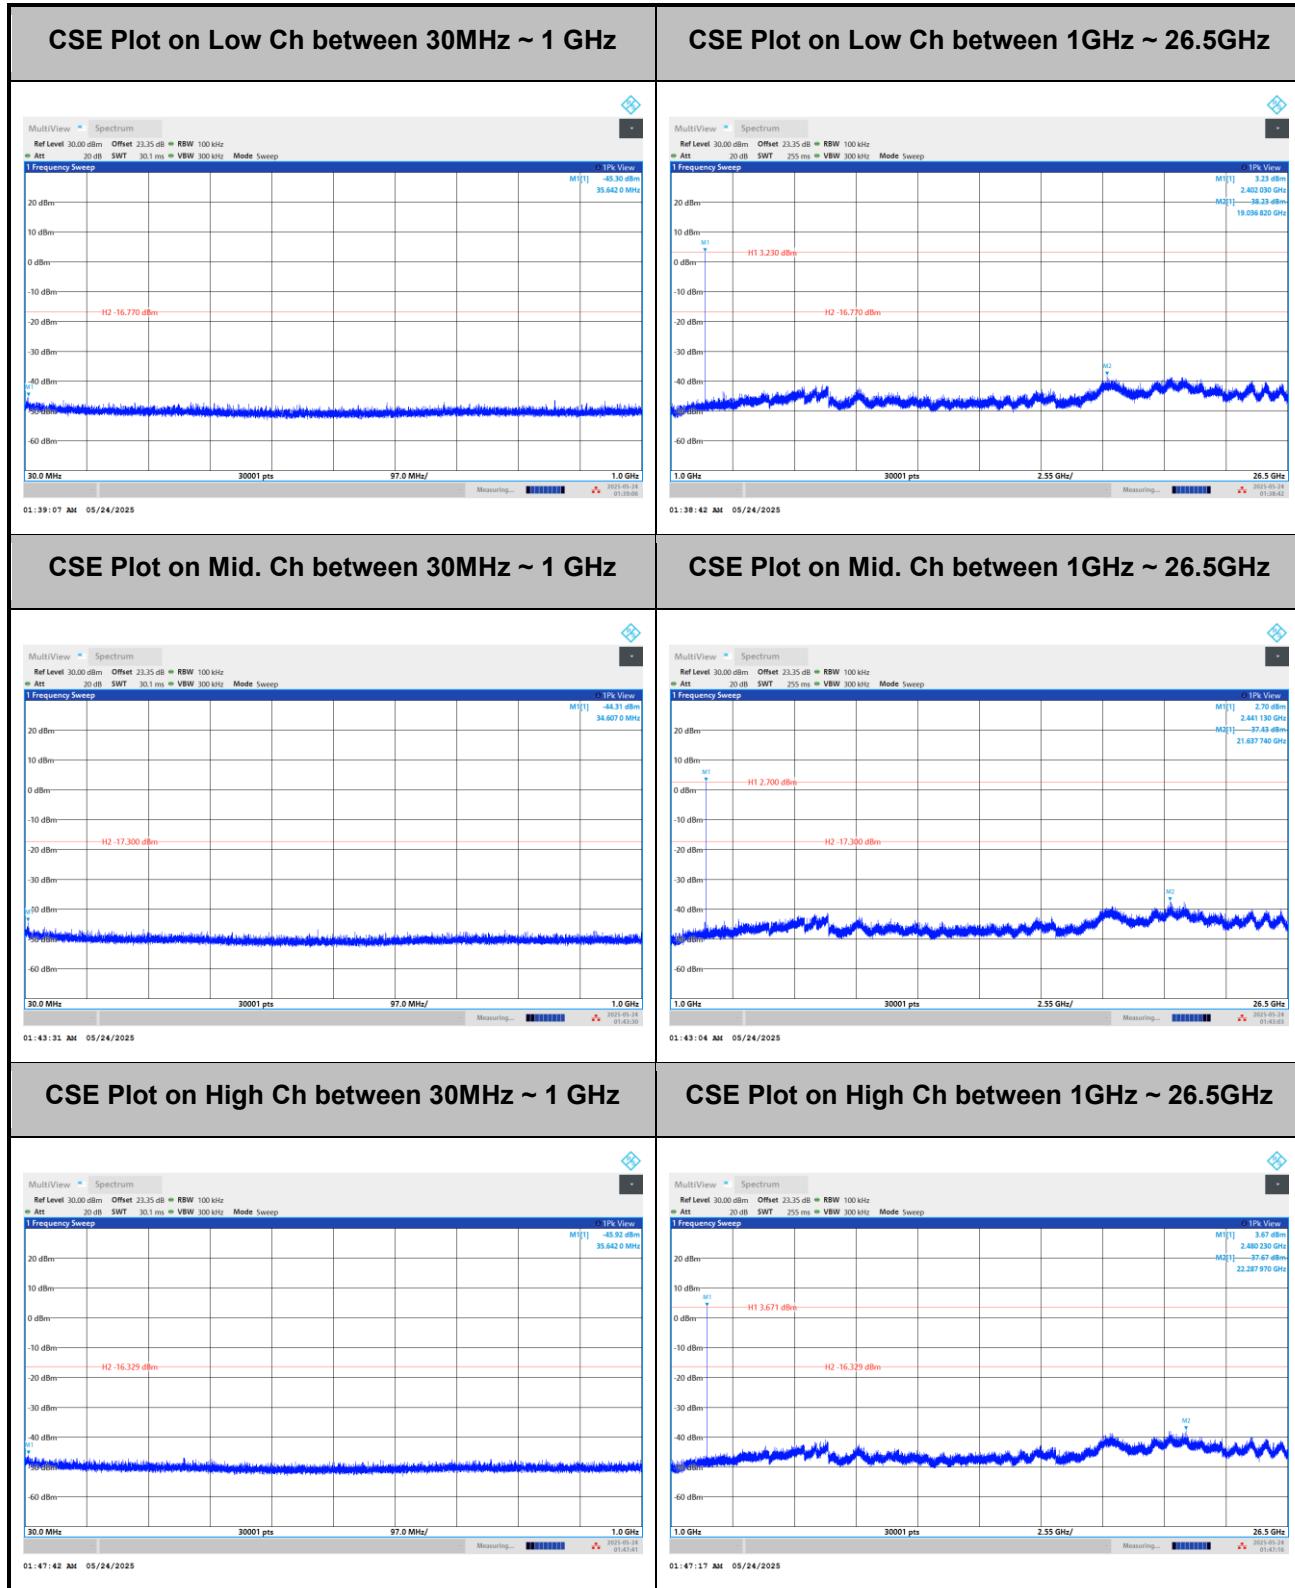




&lt;2Mbps&gt;

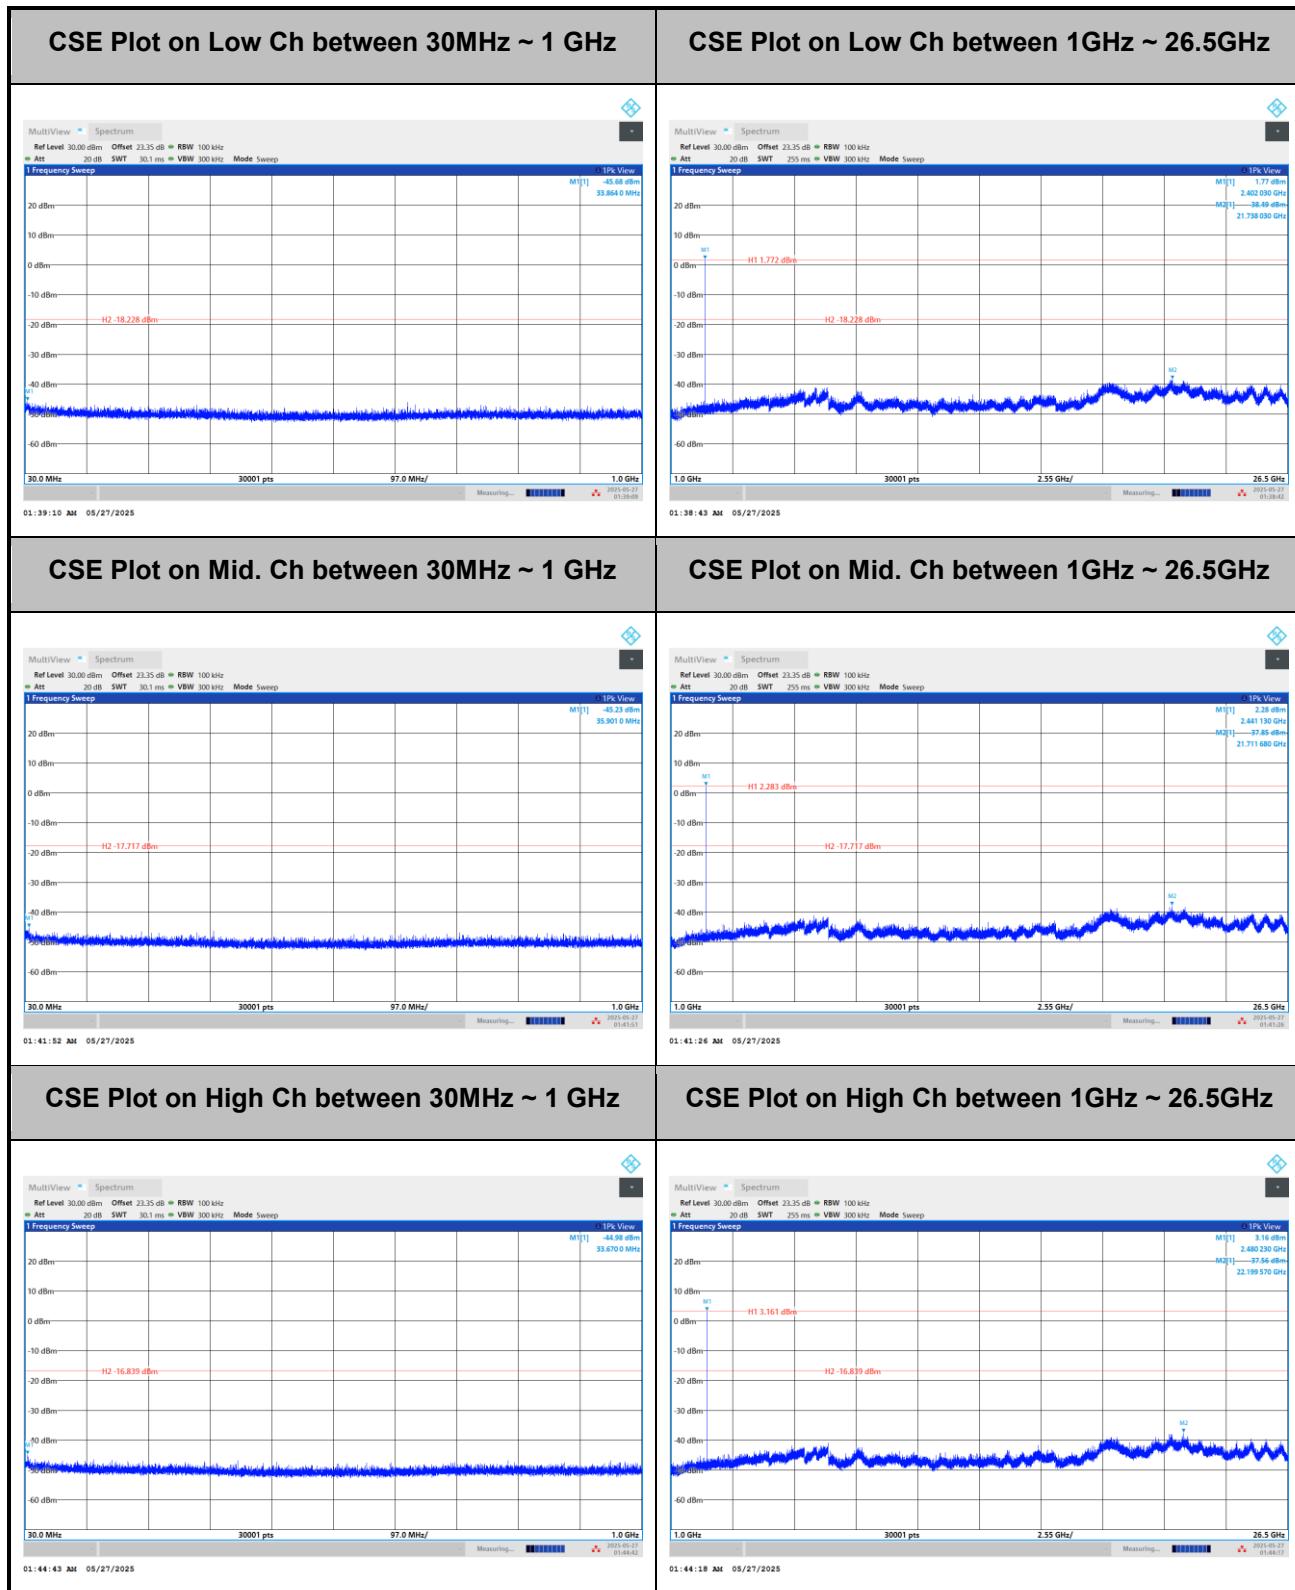



&lt;3Mbps&gt;

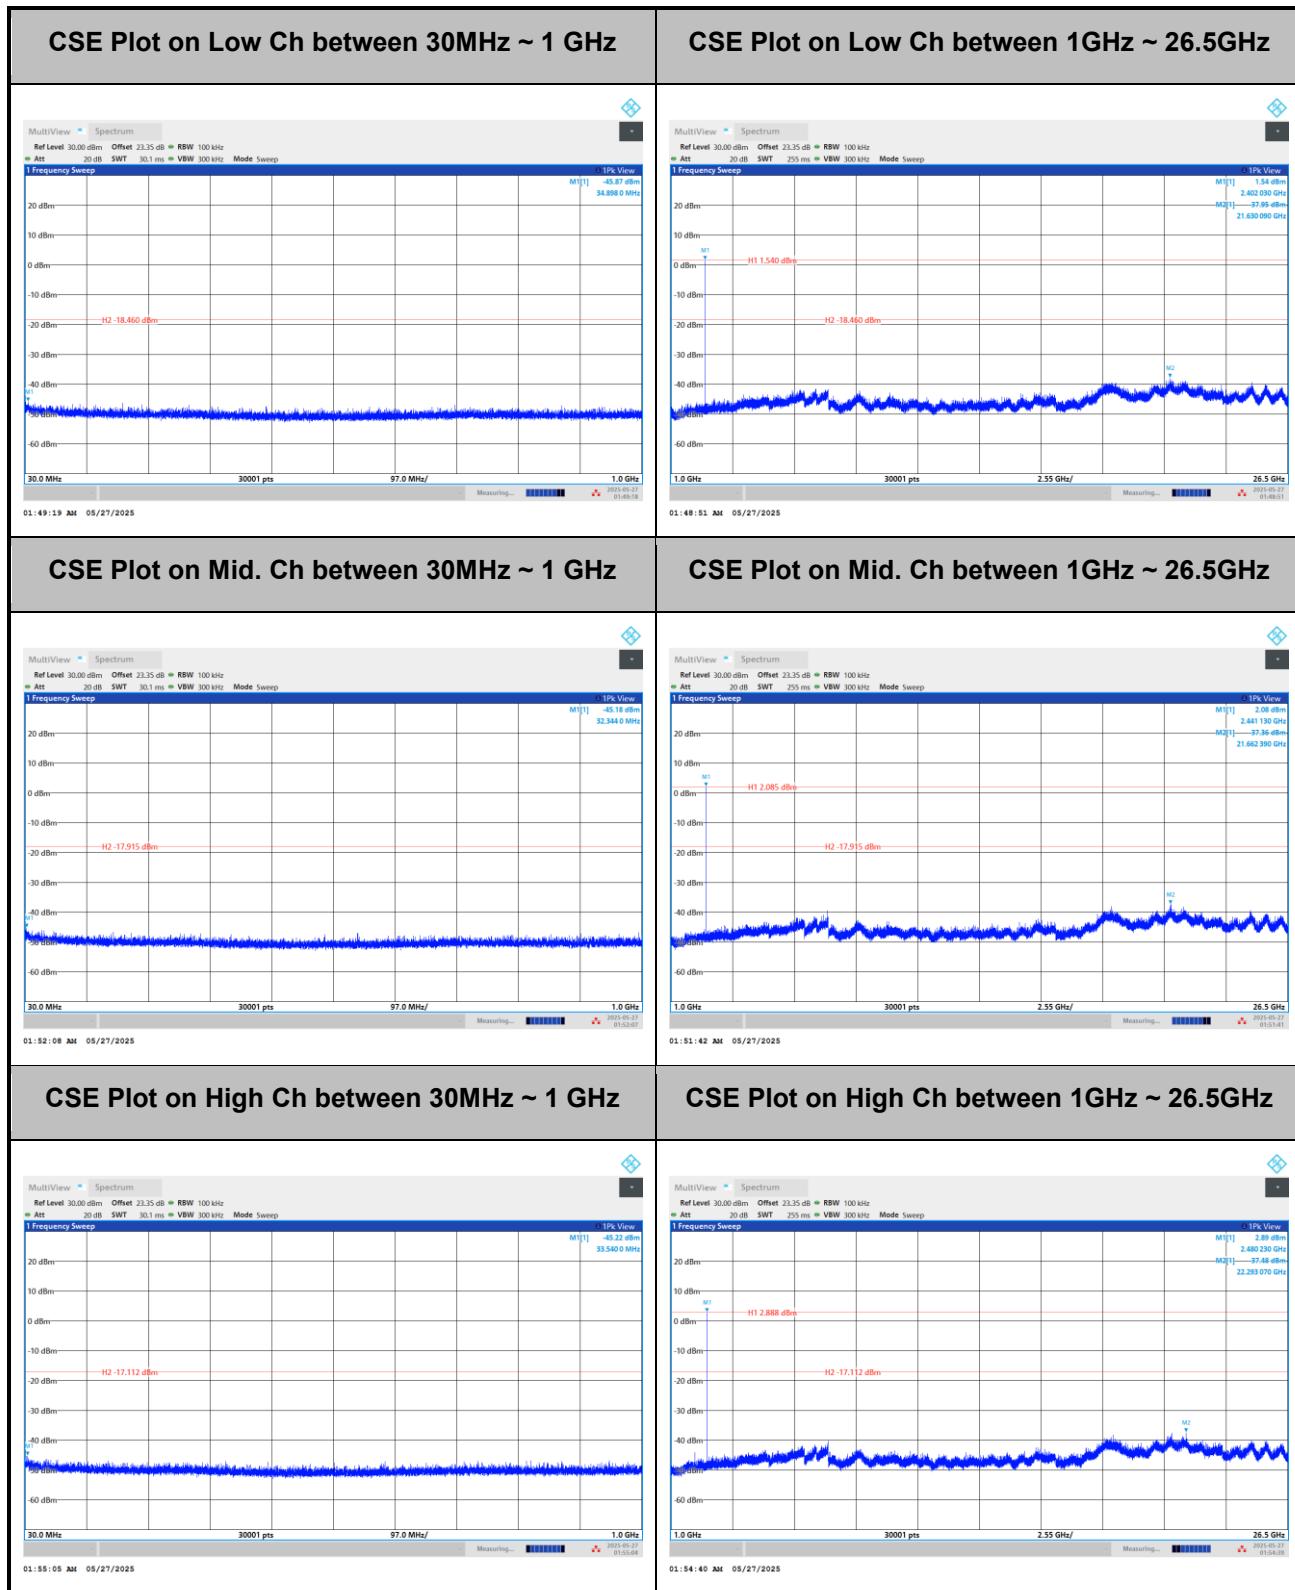




## Appendix B. AC Conducted Emission Test Results

<b>Test Engineer :</b>	Liu Ying Qi and Brian Chen	<b>Temperature :</b>	23 ~ 24°C
		<b>Relative Humidity :</b>	53.4 ~ 54.4%

## EUT Information

Report NO : 541704  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

### Full Spectrum

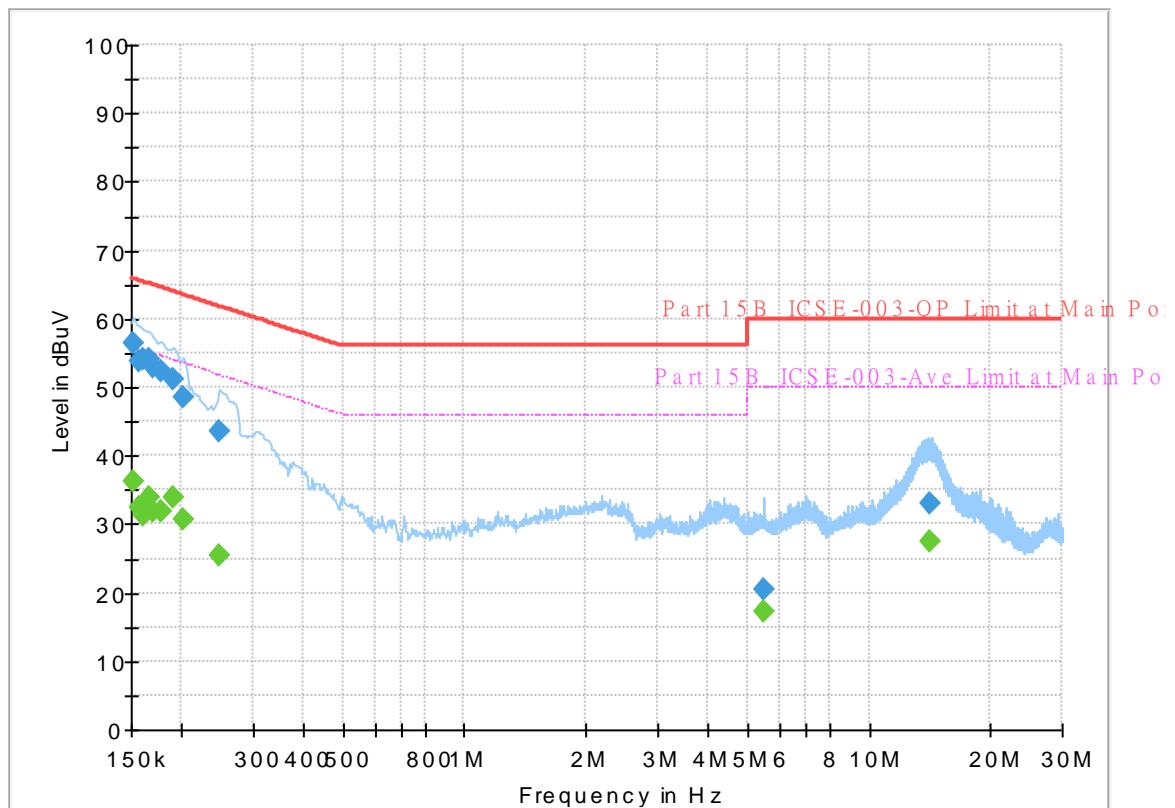

## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	36.18	55.88	19.70	L1	OFF	19.8
0.152250	56.56	---	65.88	9.32	L1	OFF	19.8
0.156750	---	32.55	55.63	23.08	L1	OFF	19.8
0.156750	53.85	---	65.63	11.78	L1	OFF	19.8
0.161250	---	31.16	55.40	24.24	L1	OFF	19.8
0.161250	54.01	---	65.40	11.39	L1	OFF	19.8
0.165750	---	33.80	55.17	21.37	L1	OFF	19.8
0.165750	54.22	---	65.17	10.95	L1	OFF	19.8
0.170250	---	31.76	54.95	23.19	L1	OFF	19.8
0.170250	53.00	---	64.95	11.95	L1	OFF	19.8
0.177000	---	31.76	54.63	22.87	L1	OFF	19.8
0.177000	52.26	---	64.63	12.37	L1	OFF	19.8
0.190500	---	33.89	54.02	20.13	L1	OFF	19.8
0.190500	51.06	---	64.02	12.96	L1	OFF	19.8
0.201750	---	30.79	53.54	22.75	L1	OFF	19.8
0.201750	48.55	---	63.54	14.99	L1	OFF	19.8
0.246750	---	25.54	51.87	26.33	L1	OFF	19.8
0.246750	43.56	---	61.87	18.31	L1	OFF	19.8
5.518500	---	17.40	50.00	32.60	L1	OFF	20.0
5.518500	20.48	---	60.00	39.52	L1	OFF	20.0
14.145000	---	27.36	50.00	22.64	L1	OFF	20.1


CO05-HY

Report No. : FR541704A  
6/9/2025

14.145000	33.07	---	60.00	26.93	L1	OFF	20.1
-----------	-------	-----	-------	-------	----	-----	------

**EUT Information**

Report NO : 541704  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

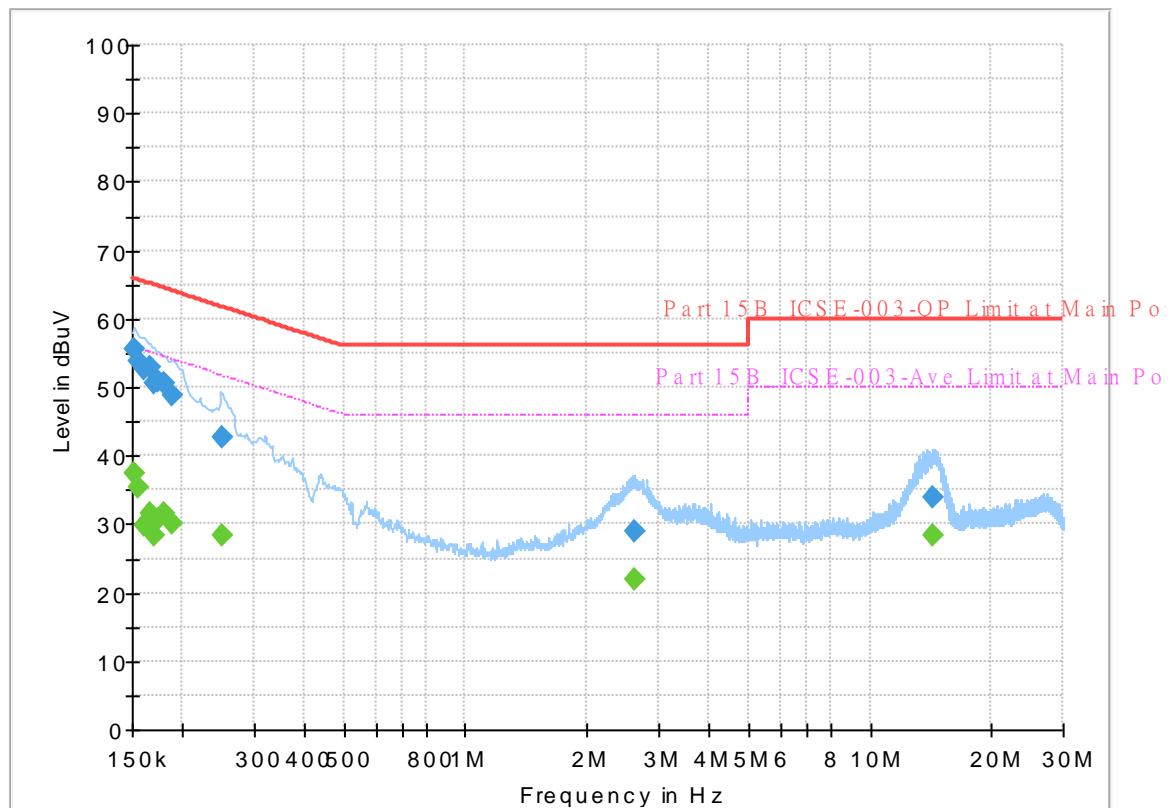**Full Spectrum****Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	37.35	55.88	18.53	N	OFF	19.8
0.152250	55.67	---	65.88	10.21	N	OFF	19.8
0.154500	---	35.45	55.75	20.30	N	OFF	19.8
0.154500	53.83	---	65.75	11.92	N	OFF	19.8
0.161250	---	29.79	55.40	25.61	N	OFF	19.8
0.161250	52.68	---	65.40	12.72	N	OFF	19.8
0.165750	---	31.54	55.17	23.63	N	OFF	19.8
0.165750	52.95	---	65.17	12.22	N	OFF	19.8
0.170250	---	28.27	54.95	26.68	N	OFF	19.8
0.170250	50.52	---	64.95	14.43	N	OFF	19.8
0.174750	---	30.78	54.73	23.95	N	OFF	19.8
0.174750	50.76	---	64.73	13.97	N	OFF	19.8
0.179250	---	31.59	54.52	22.93	N	OFF	19.8
0.179250	50.55	---	64.52	13.97	N	OFF	19.8
0.188250	---	30.05	54.11	24.06	N	OFF	19.8
0.188250	48.93	---	64.11	15.18	N	OFF	19.8
0.251250	---	28.29	51.72	23.43	N	OFF	19.8
0.251250	42.75	---	61.72	18.97	N	OFF	19.8
2.620500	---	22.01	46.00	23.99	N	OFF	19.8
2.620500	28.94	---	56.00	27.06	N	OFF	19.8
14.318250	---	28.28	50.00	21.72	N	OFF	20.2

CO05-HY

Report No. : FR541704A  
6/9/2025

14.318250	33.98	---	60.00	26.02	N	OFF	20.2
-----------	-------	-----	-------	-------	---	-----	------



## Appendix C. Radiated Spurious Emission Test Data

<b>Test Engineer :</b>	Ken Kuo and York Huang	<b>Relative Humidity :</b>	20.8~22.6
		<b>Temperature :</b>	54.5~ 58.9

### Note symbol

-L	Low channel location
-R	High channel location

## C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	Bluetooth BR_GFSK	00	2402	3Mbps	-	-
Mode 2	2400-2483.5	SISO	Bluetooth BR_GFSK	39	2441	3Mbps	-	-
Mode 3	2400-2483.5	SISO	Bluetooth BR_GFSK	78	2480	3Mbps	-	-
Mode 4	2400-2483.5	SISO	Bluetooth BR_GFSK	39	2441	3Mbps	-	LF



## C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth BR_GFSK	00	2385.90	42.63	74.00	-31.37	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	00	4804.00	47.18	74.00	-26.82	H	Peak	Pass	-	Harmonic
2	Bluetooth BR_GFSK	39	2492.92	44.48	74.00	-29.52	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	39	7323.00	51.38	74.00	-22.62	V	Peak	Pass	-	Harmonic
3	Bluetooth BR_GFSK	78	2483.75	47.10	74.00	-26.90	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	78	7440.00	49.31	74.00	-24.69	H	Peak	Pass	-	Harmonic
4	LF	39	480.08	41.03	46.00	-4.97	H	QP	Pass	-	LF






Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91280_02838_240729 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2385.90</td><td>42.63</td><td>74.00</td><td>-31.37</td><td>38.19</td><td>27.36</td><td>8.62</td><td>32.58</td><td>0.46 313 220 PEAK</td></tr><tr><td>2</td><td>2385.90</td><td>17.87</td><td>54.00</td><td>-36.13</td><td>--</td><td>--</td><td>--</td><td>--</td><td>313 220 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2385.90	42.63	74.00	-31.37	38.19	27.36	8.62	32.58	0.46 313 220 PEAK	2	2385.90	17.87	54.00	-36.13	--	--	--	--	313 220 AVERAGE	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91280_02838_240729 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>103.66</td><td>-----</td><td>-----</td><td>99.15</td><td>27.42</td><td>8.65</td><td>32.60</td><td>0.46 313 220 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>78.90</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>313 220 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2402.00	103.66	-----	-----	99.15	27.42	8.65	32.60	0.46 313 220 PEAK	2	2402.00	78.90	-----	-----	--	--	--	--	313 220 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
1	2385.90	42.63	74.00	-31.37	38.19	27.36	8.62	32.58	0.46 313 220 PEAK																																																																									
2	2385.90	17.87	54.00	-36.13	--	--	--	--	313 220 AVERAGE																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
1	2402.00	103.66	-----	-----	99.15	27.42	8.65	32.60	0.46 313 220 PEAK																																																																									
2	2402.00	78.90	-----	-----	--	--	--	--	313 220 AVERAGE																																																																									



Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74_3m_91280_02838_240729 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SHT:Auto</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2352.50</td><td>42.47</td><td>74.00</td><td>-31.53</td><td>38.14</td><td>27.30</td><td>8.56</td><td>32.56</td><td>0.46 400 181 PEAK</td></tr><tr><td>2</td><td>2352.50</td><td>17.71</td><td>54.00</td><td>-36.29</td><td>--</td><td>--</td><td>--</td><td>--</td><td>400 181 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2352.50	42.47	74.00	-31.53	38.14	27.30	8.56	32.56	0.46 400 181 PEAK	2	2352.50	17.71	54.00	-36.29	--	--	--	--	400 181 AVERAGE	<p>Site : 03CH22-HY Condition: PEAK_74_3m_91280_02838_240729 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SHT:Auto</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.12</td><td>-----</td><td>-----</td><td>96.61</td><td>27.42</td><td>8.65</td><td>32.60</td><td>0.46 400 181 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>76.36</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>400 181 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2402.00	101.12	-----	-----	96.61	27.42	8.65	32.60	0.46 400 181 PEAK	2	2402.00	76.36	-----	-----	--	--	--	--	400 181 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
1	2352.50	42.47	74.00	-31.53	38.14	27.30	8.56	32.56	0.46 400 181 PEAK																																																																									
2	2352.50	17.71	54.00	-36.29	--	--	--	--	400 181 AVERAGE																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
1	2402.00	101.12	-----	-----	96.61	27.42	8.65	32.60	0.46 400 181 PEAK																																																																									
2	2402.00	76.36	-----	-----	--	--	--	--	400 181 AVERAGE																																																																									

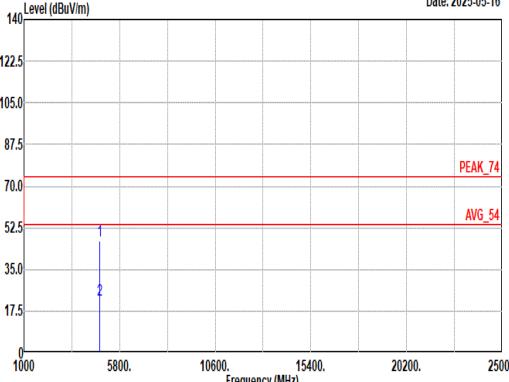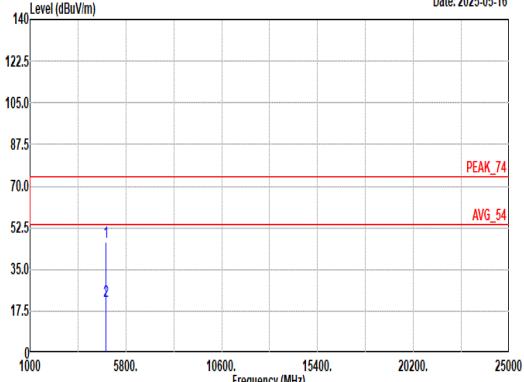

Mode	1																																																																			
	Harmonic																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																			
ANT	SISO																																																																			
Pol.	Horizontal																																																																			
Peak	 <p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL</p> <table border="1"><thead><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>47.18</td><td>74.00</td><td>-26.82</td><td>33.87</td><td>32.32</td><td>12.42</td><td>33.67</td><td>1.41</td><td>-- PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>22.42</td><td>54.00</td><td>-31.58</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Average</td></tr></tbody></table>	Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	1	4804.00	47.18	74.00	-26.82	33.87	32.32	12.42	33.67	1.41	-- PEAK	2	4804.00	22.42	54.00	-31.58	--	--	--	--	--	-- Average	 <p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL</p> <table border="1"><thead><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>46.40</td><td>74.00</td><td>-27.68</td><td>33.09</td><td>32.32</td><td>12.42</td><td>33.67</td><td>1.41</td><td>-- PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>21.64</td><td>54.00</td><td>-32.36</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Average</td></tr></tbody></table>	Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	1	4804.00	46.40	74.00	-27.68	33.09	32.32	12.42	33.67	1.41	-- PEAK	2	4804.00	21.64	54.00	-32.36	--	--	--	--	--	-- Average
Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
1	4804.00	47.18	74.00	-26.82	33.87	32.32	12.42	33.67	1.41	-- PEAK																																																										
2	4804.00	22.42	54.00	-31.58	--	--	--	--	--	-- Average																																																										
Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
1	4804.00	46.40	74.00	-27.68	33.09	32.32	12.42	33.67	1.41	-- PEAK																																																										
2	4804.00	21.64	54.00	-32.36	--	--	--	--	--	-- Average																																																										
Avg																																																																				

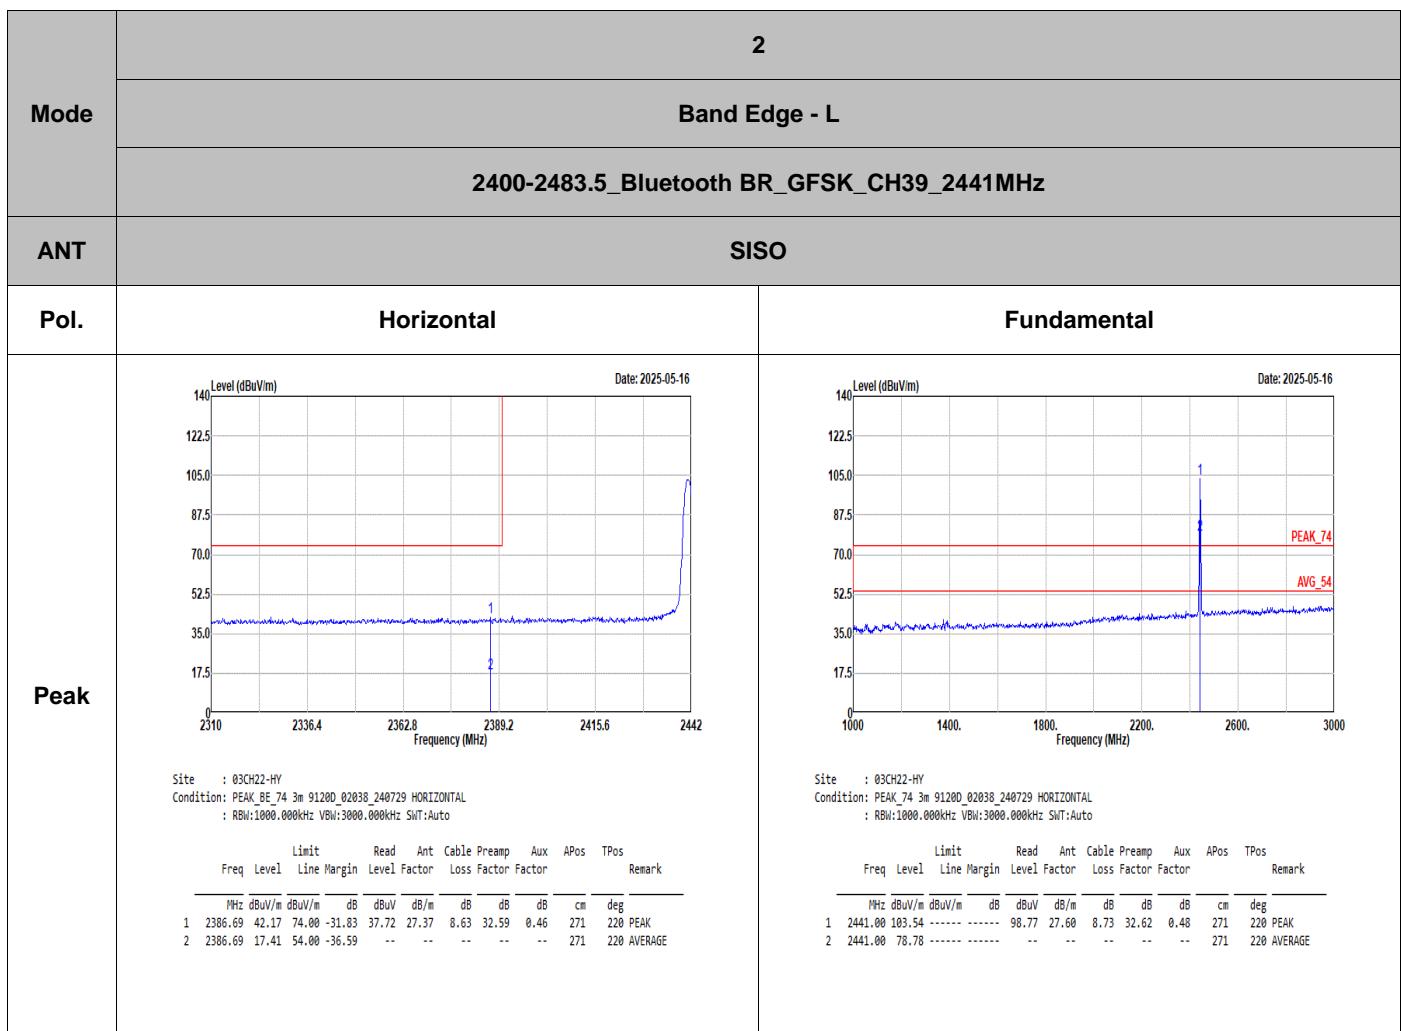



Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																									
ANT	SISO																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Level (dB<sub>UV</sub>/m)</p> <p>Date: 2025-05-16</p> <p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91280_02638_240729 HORIZONTAL : RBW:1.000.000kHz VBW:3000.000kHz SIT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2492.92</td><td>44.48</td><td>74.00</td><td>-29.52</td><td>39.42</td><td>27.00</td><td>8.82</td><td>32.66</td><td>0.52 271 220 PEAK</td></tr><tr><td>2</td><td>2492.92</td><td>19.72</td><td>54.00</td><td>-34.28</td><td>--</td><td>--</td><td>--</td><td>--</td><td>271 220 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2492.92	44.48	74.00	-29.52	39.42	27.00	8.82	32.66	0.52 271 220 PEAK	2	2492.92	19.72	54.00	-34.28	--	--	--	--	271 220 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
1	2492.92	44.48	74.00	-29.52	39.42	27.00	8.82	32.66	0.52 271 220 PEAK																																	
2	2492.92	19.72	54.00	-34.28	--	--	--	--	271 220 AVERAGE																																	



Mode	2																																																							
	Band Edge - L																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																							
ANT	SISO																																																							
Pol.	Vertical	Fundamental																																																						
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74_3m_91280_02838_240729 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SFT:Auto</p> <p>Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark</p> <table><thead><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>2384.18</td><td>43.25</td><td>74.00</td><td>-30.75</td><td>38.83</td><td>27.34</td><td>8.62</td><td>32.58 0.46 400 177 PEAK</td></tr><tr><td>2</td><td>2384.18</td><td>18.49</td><td>54.00</td><td>-35.51</td><td>--</td><td>--</td><td>--</td><td>-- 400 177 AVERAGE</td></tr></tbody></table>	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark	1	2384.18	43.25	74.00	-30.75	38.83	27.34	8.62	32.58 0.46 400 177 PEAK	2	2384.18	18.49	54.00	-35.51	--	--	--	-- 400 177 AVERAGE	<p>Site : 03CH22-HY Condition: PEAK_74_3m_91280_02838_240729 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SFT:Auto</p> <p>Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark</p> <table><thead><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>2441.00</td><td>101.43</td><td>-----</td><td>-----</td><td>96.66</td><td>27.60</td><td>8.73</td><td>32.62 0.48 400 177 PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>76.67</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>-- 400 177 AVERAGE</td></tr></tbody></table>	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark	1	2441.00	101.43	-----	-----	96.66	27.60	8.73	32.62 0.48 400 177 PEAK	2	2441.00	76.67	-----	-----	--	--	--	-- 400 177 AVERAGE
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
1	2384.18	43.25	74.00	-30.75	38.83	27.34	8.62	32.58 0.46 400 177 PEAK																																																
2	2384.18	18.49	54.00	-35.51	--	--	--	-- 400 177 AVERAGE																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
1	2441.00	101.43	-----	-----	96.66	27.60	8.73	32.62 0.48 400 177 PEAK																																																
2	2441.00	76.67	-----	-----	--	--	--	-- 400 177 AVERAGE																																																





Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Level (dBuV/m)</p> <p>Date: 2025-05-16</p> <p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91280_02638_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SIT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2493.22</td><td>43.16</td><td>74.00</td><td>-30.84</td><td>38.10</td><td>27.00</td><td>8.82</td><td>32.66</td><td>0.52 400 177 PEAK</td></tr><tr><td>2</td><td>2493.22</td><td>18.40</td><td>54.00</td><td>-35.60</td><td>--</td><td>--</td><td>--</td><td>--</td><td>400 177 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2493.22	43.16	74.00	-30.84	38.10	27.00	8.82	32.66	0.52 400 177 PEAK	2	2493.22	18.40	54.00	-35.60	--	--	--	--	400 177 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
1	2493.22	43.16	74.00	-30.84	38.10	27.00	8.82	32.66	0.52 400 177 PEAK																																	
2	2493.22	18.40	54.00	-35.60	--	--	--	--	400 177 AVERAGE																																	



Mode	2																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																								
ANT	SISO																																																																																																																								
Pol.	Horizontal																																																																																																																								
Peak																																																																																																																									
	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91280_02038_240729 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4882.00</td><td>46.63</td><td>74.00</td><td>-27.37</td><td>33.20</td><td>32.56</td><td>12.49</td><td>33.67</td><td>1.24</td></tr><tr><td>2</td><td>4882.00</td><td>21.87</td><td>54.00</td><td>-32.13</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>49.37</td><td>74.00</td><td>-24.03</td><td>32.40</td><td>36.71</td><td>15.41</td><td>36.61</td><td>1.01</td></tr><tr><td>4</td><td>7323.00</td><td>25.21</td><td>54.00</td><td>-28.79</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	4882.00	46.63	74.00	-27.37	33.20	32.56	12.49	33.67	1.24	2	4882.00	21.87	54.00	-32.13	--	--	--	--	-- PEAK	3	7323.00	49.37	74.00	-24.03	32.40	36.71	15.41	36.61	1.01	4	7323.00	25.21	54.00	-28.79	--	--	--	--	-- Average	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91280_02038_240729 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4882.00</td><td>46.94</td><td>74.00</td><td>-27.06</td><td>33.51</td><td>32.56</td><td>12.49</td><td>33.67</td><td>1.24</td></tr><tr><td>2</td><td>4882.00</td><td>22.18</td><td>54.00</td><td>-31.82</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Average</td></tr><tr><td>3</td><td>7323.00</td><td>51.38</td><td>74.00</td><td>-22.62</td><td>33.81</td><td>36.71</td><td>15.41</td><td>36.61</td><td>1.01</td></tr><tr><td>4</td><td>7323.00</td><td>26.62</td><td>54.00</td><td>-27.38</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	4882.00	46.94	74.00	-27.06	33.51	32.56	12.49	33.67	1.24	2	4882.00	22.18	54.00	-31.82	--	--	--	--	-- Average	3	7323.00	51.38	74.00	-22.62	33.81	36.71	15.41	36.61	1.01	4	7323.00	26.62	54.00	-27.38	--	--	--	--
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																																																																	
1	4882.00	46.63	74.00	-27.37	33.20	32.56	12.49	33.67	1.24																																																																																																																
2	4882.00	21.87	54.00	-32.13	--	--	--	--	-- PEAK																																																																																																																
3	7323.00	49.37	74.00	-24.03	32.40	36.71	15.41	36.61	1.01																																																																																																																
4	7323.00	25.21	54.00	-28.79	--	--	--	--	-- Average																																																																																																																
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																																																																	
1	4882.00	46.94	74.00	-27.06	33.51	32.56	12.49	33.67	1.24																																																																																																																
2	4882.00	22.18	54.00	-31.82	--	--	--	--	-- Average																																																																																																																
3	7323.00	51.38	74.00	-22.62	33.81	36.71	15.41	36.61	1.01																																																																																																																
4	7323.00	26.62	54.00	-27.38	--	--	--	--	-- PEAK																																																																																																																

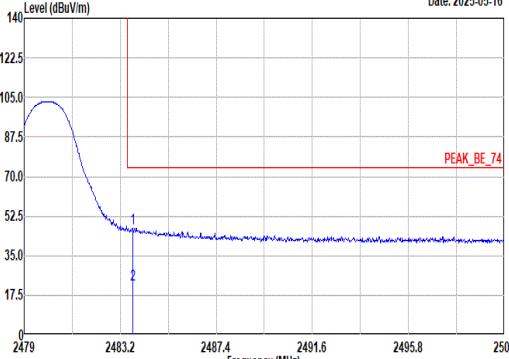
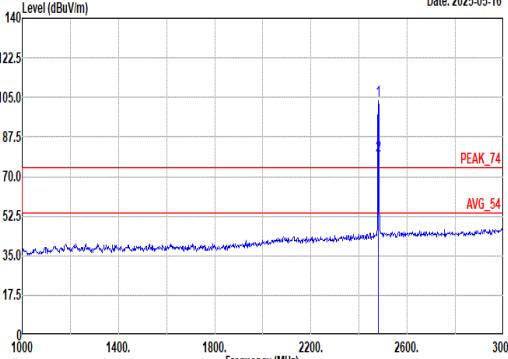


Mode	3																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal																																																																																	
Peak	 <p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91280_02838_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SIT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.75</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>42.12</td><td>27.74</td><td>8.80</td><td>32.65</td><td>0.51 293 218 PEAK</td></tr><tr><td>2</td><td>2483.75</td><td>22.34</td><td>54.00</td><td>-31.66</td><td>--</td><td>--</td><td>--</td><td>--</td><td>293 218 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2483.75	47.10	74.00	-26.90	42.12	27.74	8.80	32.65	0.51 293 218 PEAK	2	2483.75	22.34	54.00	-31.66	--	--	--	--	293 218 AVERAGE	 <p>Site : 03CH22-HY Condition: PEAK_74 3m 91280_02838_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SIT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>103.78</td><td>-----</td><td>-----</td><td>98.84</td><td>27.70</td><td>8.80</td><td>32.65</td><td>0.51 293 218 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>79.02</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2480.00	103.78	-----	-----	98.84	27.70	8.80	32.65	0.51 293 218 PEAK	2	2480.00	79.02	-----	-----	--	--	--	--	-- AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	2483.75	47.10	74.00	-26.90	42.12	27.74	8.80	32.65	0.51 293 218 PEAK																																																																									
2	2483.75	22.34	54.00	-31.66	--	--	--	--	293 218 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	2480.00	103.78	-----	-----	98.84	27.70	8.80	32.65	0.51 293 218 PEAK																																																																									
2	2480.00	79.02	-----	-----	--	--	--	--	-- AVERAGE																																																																									





Mode	3																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																									
ANT	SISO																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91280_02838_240729 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> <p>Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark</p> <table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.77</td><td>45.71</td><td>74.00</td><td>-28.29</td><td>48.73</td><td>27.74</td><td>8.80</td><td>32.65</td><td>0.51</td><td>400</td><td>174 PEAK</td></tr><tr><td>2</td><td>2483.77</td><td>20.95</td><td>54.00</td><td>-33.05</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>400</td><td>174 AVERAGE</td></tr></tbody></table>		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.77	45.71	74.00	-28.29	48.73	27.74	8.80	32.65	0.51	400	174 PEAK	2	2483.77	20.95	54.00	-33.05	--	--	--	--	--	400	174 AVERAGE	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91280_02838_240729 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> <p>Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark</p> <table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>101.03</td><td>-----</td><td>-----</td><td>96.09</td><td>27.70</td><td>8.80</td><td>32.65</td><td>0.51</td><td>400</td><td>174 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>76.27</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>400</td><td>174 AVERAGE</td></tr></tbody></table>		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	101.03	-----	-----	96.09	27.70	8.80	32.65	0.51	400	174 PEAK	2	2480.00	76.27	-----	-----	--	--	--	--	--	400	174 AVERAGE
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2483.77	45.71	74.00	-28.29	48.73	27.74	8.80	32.65	0.51	400	174 PEAK																																																															
2	2483.77	20.95	54.00	-33.05	--	--	--	--	--	400	174 AVERAGE																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2480.00	101.03	-----	-----	96.09	27.70	8.80	32.65	0.51	400	174 PEAK																																																															
2	2480.00	76.27	-----	-----	--	--	--	--	--	400	174 AVERAGE																																																															

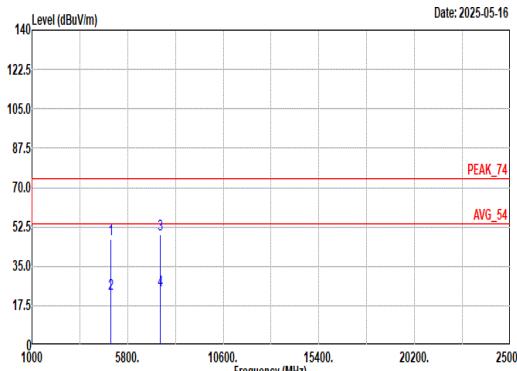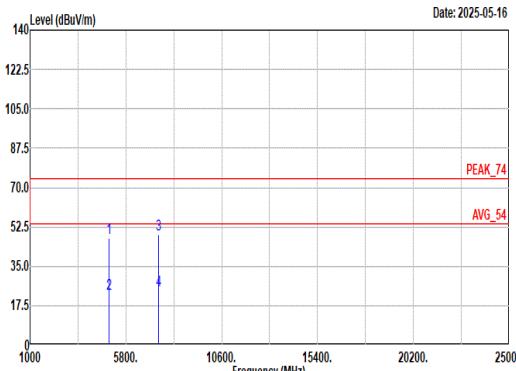


Mode	3																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																								
ANT	SISO																																																																																																																								
Pol.	Horizontal																																																																																																																								
Peak																																																																																																																									
	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91280_02038_240729 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>47.24</td><td>74.00</td><td>-26.76</td><td>33.51</td><td>32.98</td><td>12.56</td><td>33.67</td><td>1.08</td></tr><tr><td>2</td><td>4960.00</td><td>22.48</td><td>54.00</td><td>-31.52</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- PEAK</td></tr><tr><td>3</td><td>7440.00</td><td>49.31</td><td>74.00</td><td>-24.69</td><td>32.16</td><td>36.30</td><td>15.55</td><td>36.79</td><td>1.03</td></tr><tr><td>4</td><td>7440.00</td><td>24.55</td><td>54.00</td><td>-29.45</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	4960.00	47.24	74.00	-26.76	33.51	32.98	12.56	33.67	1.08	2	4960.00	22.48	54.00	-31.52	--	--	--	--	-- PEAK	3	7440.00	49.31	74.00	-24.69	32.16	36.30	15.55	36.79	1.03	4	7440.00	24.55	54.00	-29.45	--	--	--	--	-- Average	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91280_02038_240729 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>33.86</td><td>32.98</td><td>12.56</td><td>33.67</td><td>1.08</td></tr><tr><td>2</td><td>4960.00</td><td>22.83</td><td>54.00</td><td>-31.17</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Average</td></tr><tr><td>3</td><td>7440.00</td><td>49.00</td><td>74.00</td><td>-25.00</td><td>31.85</td><td>36.30</td><td>15.55</td><td>36.79</td><td>1.03</td></tr><tr><td>4</td><td>7440.00</td><td>24.24</td><td>54.00</td><td>-29.76</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	4960.00	47.59	74.00	-26.41	33.86	32.98	12.56	33.67	1.08	2	4960.00	22.83	54.00	-31.17	--	--	--	--	-- Average	3	7440.00	49.00	74.00	-25.00	31.85	36.30	15.55	36.79	1.03	4	7440.00	24.24	54.00	-29.76	--	--	--	--
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																																
1	4960.00	47.24	74.00	-26.76	33.51	32.98	12.56	33.67	1.08																																																																																																																
2	4960.00	22.48	54.00	-31.52	--	--	--	--	-- PEAK																																																																																																																
3	7440.00	49.31	74.00	-24.69	32.16	36.30	15.55	36.79	1.03																																																																																																																
4	7440.00	24.55	54.00	-29.45	--	--	--	--	-- Average																																																																																																																
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																																
1	4960.00	47.59	74.00	-26.41	33.86	32.98	12.56	33.67	1.08																																																																																																																
2	4960.00	22.83	54.00	-31.17	--	--	--	--	-- Average																																																																																																																
3	7440.00	49.00	74.00	-25.00	31.85	36.30	15.55	36.79	1.03																																																																																																																
4	7440.00	24.24	54.00	-29.76	--	--	--	--	-- PEAK																																																																																																																

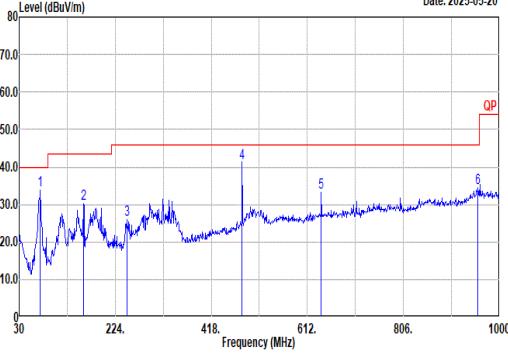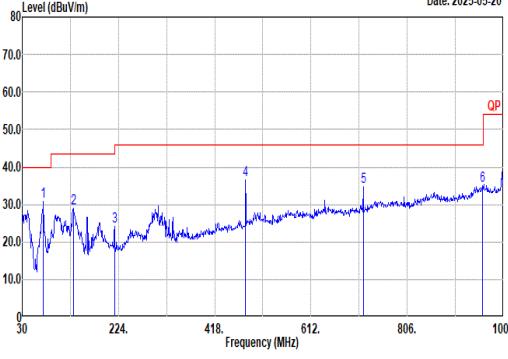

Mode	4																																																																																																																																																																	
	LF																																																																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																	
ANT	SISO																																																																																																																																																																	
Pol.	Horizontal																																																																																																																																																																	
QP/ Peak	 <p>Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 HORIZONTAL</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>72.68</td><td>33.92</td><td>48.00</td><td>-6.08</td><td>52.66</td><td>12.53</td><td>1.40</td><td>32.70</td><td>0.03</td></tr><tr><td>2</td><td>159.98</td><td>38.12</td><td>43.50</td><td>-13.38</td><td>44.16</td><td>16.40</td><td>2.12</td><td>32.64</td><td>0.08</td></tr><tr><td>3</td><td>247.28</td><td>26.03</td><td>46.00</td><td>-19.97</td><td>37.72</td><td>18.32</td><td>2.56</td><td>32.62</td><td>0.05</td></tr><tr><td>4</td><td>480.08</td><td>41.03</td><td>46.00</td><td>-4.97</td><td>46.42</td><td>23.60</td><td>3.64</td><td>32.79</td><td>0.16</td></tr><tr><td>5</td><td>640.13</td><td>33.25</td><td>46.00</td><td>-12.75</td><td>35.15</td><td>26.60</td><td>4.21</td><td>32.79</td><td>0.08</td></tr><tr><td>6</td><td>956.35</td><td>34.30</td><td>46.00</td><td>-11.70</td><td>28.79</td><td>31.50</td><td>5.08</td><td>31.28</td><td>0.21</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	72.68	33.92	48.00	-6.08	52.66	12.53	1.40	32.70	0.03	2	159.98	38.12	43.50	-13.38	44.16	16.40	2.12	32.64	0.08	3	247.28	26.03	46.00	-19.97	37.72	18.32	2.56	32.62	0.05	4	480.08	41.03	46.00	-4.97	46.42	23.60	3.64	32.79	0.16	5	640.13	33.25	46.00	-12.75	35.15	26.60	4.21	32.79	0.08	6	956.35	34.30	46.00	-11.70	28.79	31.50	5.08	31.28	0.21	 <p>Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 VERTICAL</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>72.68</td><td>30.74</td><td>48.00</td><td>-9.26</td><td>49.48</td><td>12.53</td><td>1.40</td><td>32.70</td><td>0.03</td></tr><tr><td>2</td><td>132.82</td><td>29.11</td><td>43.50</td><td>-14.39</td><td>42.45</td><td>17.40</td><td>1.87</td><td>32.66</td><td>0.05</td></tr><tr><td>3</td><td>216.24</td><td>24.25</td><td>46.00</td><td>-21.75</td><td>39.53</td><td>14.92</td><td>2.38</td><td>32.62</td><td>0.04</td></tr><tr><td>4</td><td>480.08</td><td>36.47</td><td>46.00</td><td>-9.53</td><td>41.86</td><td>23.60</td><td>3.64</td><td>32.79</td><td>0.16</td></tr><tr><td>5</td><td>717.73</td><td>34.60</td><td>46.00</td><td>-11.40</td><td>35.69</td><td>27.11</td><td>4.46</td><td>32.77</td><td>0.11</td></tr><tr><td>6</td><td>958.29</td><td>35.08</td><td>46.00</td><td>-10.92</td><td>29.55</td><td>31.50</td><td>5.08</td><td>31.26</td><td>0.21</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	72.68	30.74	48.00	-9.26	49.48	12.53	1.40	32.70	0.03	2	132.82	29.11	43.50	-14.39	42.45	17.40	1.87	32.66	0.05	3	216.24	24.25	46.00	-21.75	39.53	14.92	2.38	32.62	0.04	4	480.08	36.47	46.00	-9.53	41.86	23.60	3.64	32.79	0.16	5	717.73	34.60	46.00	-11.40	35.69	27.11	4.46	32.77	0.11	6	958.29	35.08	46.00	-10.92	29.55	31.50	5.08	31.26	0.21
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	72.68	33.92	48.00	-6.08	52.66	12.53	1.40	32.70	0.03																																																																																																																																																									
2	159.98	38.12	43.50	-13.38	44.16	16.40	2.12	32.64	0.08																																																																																																																																																									
3	247.28	26.03	46.00	-19.97	37.72	18.32	2.56	32.62	0.05																																																																																																																																																									
4	480.08	41.03	46.00	-4.97	46.42	23.60	3.64	32.79	0.16																																																																																																																																																									
5	640.13	33.25	46.00	-12.75	35.15	26.60	4.21	32.79	0.08																																																																																																																																																									
6	956.35	34.30	46.00	-11.70	28.79	31.50	5.08	31.28	0.21																																																																																																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	72.68	30.74	48.00	-9.26	49.48	12.53	1.40	32.70	0.03																																																																																																																																																									
2	132.82	29.11	43.50	-14.39	42.45	17.40	1.87	32.66	0.05																																																																																																																																																									
3	216.24	24.25	46.00	-21.75	39.53	14.92	2.38	32.62	0.04																																																																																																																																																									
4	480.08	36.47	46.00	-9.53	41.86	23.60	3.64	32.79	0.16																																																																																																																																																									
5	717.73	34.60	46.00	-11.40	35.69	27.11	4.46	32.77	0.11																																																																																																																																																									
6	958.29	35.08	46.00	-10.92	29.55	31.50	5.08	31.26	0.21																																																																																																																																																									



## Appendix D. Duty Cycle Plots

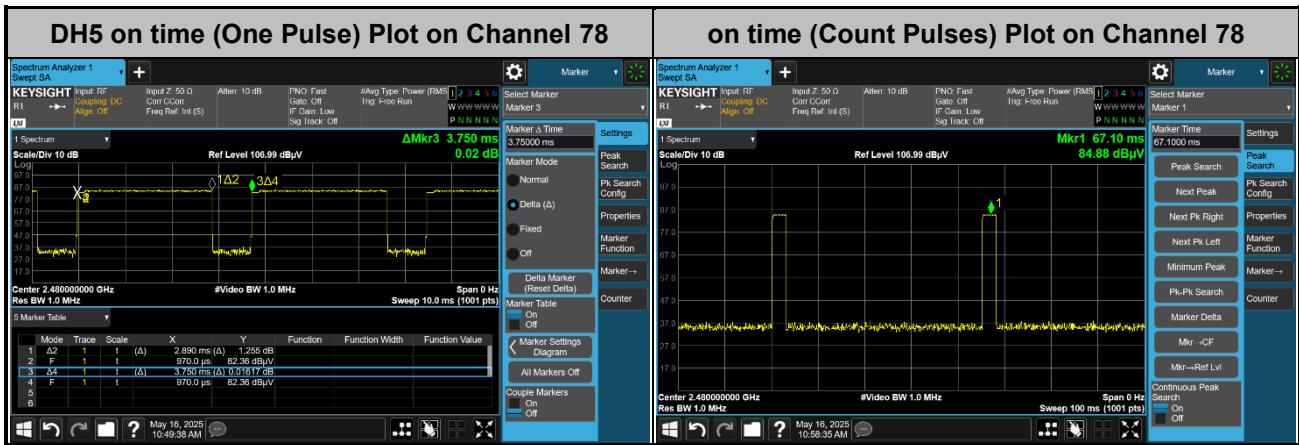

### Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

### Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100 \text{ ms} / 57.8 \text{ ms}] = 2 \text{ hops}$   
Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100 \text{ ms}) = -24.76 \text{ dB}$$