


# RF Exposure Report

FCC ID : UZ7CR8288SC  
Brand Name : Zebra  
Equipment : Standard Cradle  
Model Name : CR8288-SC  
Applicant : Zebra Technologies Corporation  
3 Overlook Point, Lincolnshire, IL 60069 USA  
Manufacture : Zebra Technologies Corporation  
3 Overlook Point, Lincolnshire, IL 60069 USA  
Standard : FCC 47 CFR Part 2.1091

The product was received on Apr. 21, 2025 and testing was started from May 14, 2025 and completed on May 14, 2025. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1091 and has been pass the FCC requirement.

The results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



## **Table of Contents**

|                                                    |    |
|----------------------------------------------------|----|
| 1. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) ..... | 4  |
| 2. RF EXPOSURE LIMIT .....                         | 5  |
| 3. SYSTEM DESCRIPTION AND SETUP .....              | 6  |
| 4. EQUIPMENT LIST .....                            | 9  |
| 5. SYSTEM VALIDATION .....                         | 9  |
| 6. RF EXPOSURE RESULTS.....                        | 10 |
| 7. UNCERTAINTY.....                                | 11 |
| 8. REFERENCE .....                                 | 12 |

**Appendix A. Plots of System Performance Check**

**Appendix B. Plots of Highest Measurement Result**

**Appendix C. DASY Calibration Certificate**

**Appendix D. Test Setup Photo**



**Revision History**

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FA541704   | Rev. 01 | Initial issue of report | Jul. 04, 2025 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

**1. Description of Equipment Under Test (EUT)**

| Product Feature & Specification |                    |
|---------------------------------|--------------------|
| FCC ID                          | UZ7CR8288SC        |
| Equipment                       | Standard Cradle    |
| Brand Name                      | Zebra              |
| Model Name                      | CR8288-SC          |
| Frequency Range                 | 115 KHz~135 KHz    |
| Mode                            | ASK                |
| HW Version                      | PC-002191-02       |
| FW Version                      | CAAGNS00-001-N16D0 |
| MFD                             | 20MAR25            |

## 2. RF Exposure Limit

### <Limits for Maximum Permissible Exposure>

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency(RF) radiation as specified in § 1.1307(b)

| Frequency range (MHz)                                   | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|---------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposure         |                               |                               |                                     |                          |
| 0.3-3.0                                                 | 614                           | 1.63                          | * 100                               | 6                        |
| 3.0-30                                                  | 1842/f                        | 4.89/f                        | * 900/f <sup>2</sup>                | 6                        |
| 30-300                                                  | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300-1,500                                               |                               |                               | f/300                               | 6                        |
| 1,500-100,000                                           |                               |                               | 5                                   | 6                        |
| (B) Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
| 0.3-1.34                                                | 614                           | 1.63                          | * 100                               | 30                       |
| 1.34-30                                                 | 824/f                         | 2.19/f                        | * 180/f <sup>2</sup>                | 30                       |
| 30-300                                                  | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1,500                                               |                               |                               | f/1500                              | 30                       |
| 1,500-100,000                                           |                               |                               | 1.0                                 | 30                       |


f = frequency in MHz

\* = Plane-wave equivalent power density

(1) Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when a person is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure. The phrase fully aware in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of transient persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. Such training is not required for transient persons, but they must receive written and/or verbal information and notification (for example, using signs) concerning their exposure potential and appropriate means available to mitigate their exposure. The phrase exercise control means that an exposed person is allowed to and knows how to reduce or avoid exposure by administrative or engineering controls and work practices, such as use of personal protective equipment or time averaging of exposure.

(2) General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

### 3. System Description and Setup

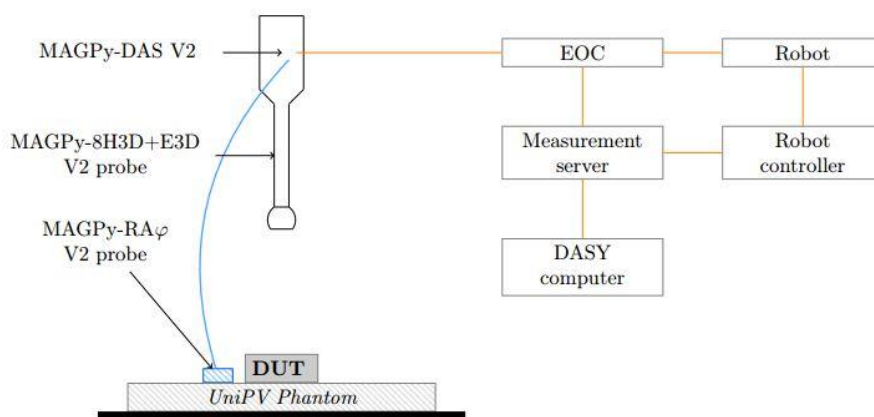

#### General Note:

1. DASY8 Module WPT v2.6+ is a special solution for high precision evaluations in the laboratory. The precision is achieved by combining the MAGPy system with the DASY robotics system and Sim4Life simulation platform. It is the first and only fully automated system for demonstrating compliance of WPT devices.
2. The setup figure shows a typical setup for the measurements with DASY8 Module WPT. The MAGPy-8H3D+E3D V2 probe with MAGPy-DAS V2 is mounted on a TX-90 or TX2-90 robot allowing to scan volumes as large as  $2000 \times 1000 \times 1500$  mm with a precision of  $\pm 0.2$  mm. The H-field distributions can be analyzed directly and the values are compared to the reference level, or they are converted into Maxwell field and used as excitations for determining the basic restriction quantities for further dosimetric analysis with the Magneto Quasi-Static (MQS) solver. This specific solution is optimized for evaluation of H-field sources (3kHz–10MHz) and demonstration of compliance (3kHz–4 MHz)
3. Since the DASY8 Module WPT system alternatively, curve-fitting techniques may be used to estimate the field value(s) at distance based on measurements taken at larger distances. The test equipment permits the estimation of fields at 0mm separation distance based on measurements near the surface; Maxwell total field reconstruction is employed.
4. The DASY8 Module WPT with MAGPy-8H3D+E3D V2 Probe is capable of measuring the H-field in frequency and time-domain in the frequency band from 3 kHz to 10 MHz, covering a dynamic range from 0.1 to  $>3100$  A/m.
5. The DASY8 Module WPT provides the relation between an externally applied H-field to each of the three sensors and the corresponding ADC reading over the frequency range from 3 kHz to 10 MHz. The frequency-dependent adjustment factors are used to determine the incident measured H-field from an ADC reading. For the frequency range from 1 to 10 MHz, the adjustment factors are applied with finite impulse response (FIR) filters directly inside the MAGPy-8H3D+E3D V2 in time-domain and frequencies  $<1$  MHz in the frequency domain in the PC-based post-processing software.
6. In summary, this system of DASY8 Module WPT with MAGPy-8H3D+E3D V2 Probe fully meets the requirements of SPR002 Issue2 table A2


#### Probe Spec

The MAGPy-8H3D+E3D V2 probe consists of eight isotropic H-field sensors and one isotropic E-field sensor:  
Probe design:

- Probe length: 335 mm
- Probe tip diameter: 60 mm
- 8H3D: eight isotropic 1 cm3-H-field sensors, arranged at the corners of a 22 mm cube
- First isotropic H-field sensor plane: 7.5 mm from the tip
- E3D: one isotropic E-field sensor (dipole / monopole)

Sensor specifications:

- Frequency range: 3 kHz – 10 MHz
- H-field dynamic range: 0.1 A/m – 3200 A/m ( $0.12 \mu\text{T}$  – 4 mT)
- H-field extrapolation uncertainty: 0.6 dB ( $k = 2$ )
- E-field dynamic range: 0.08 V/m – 2000 V/m

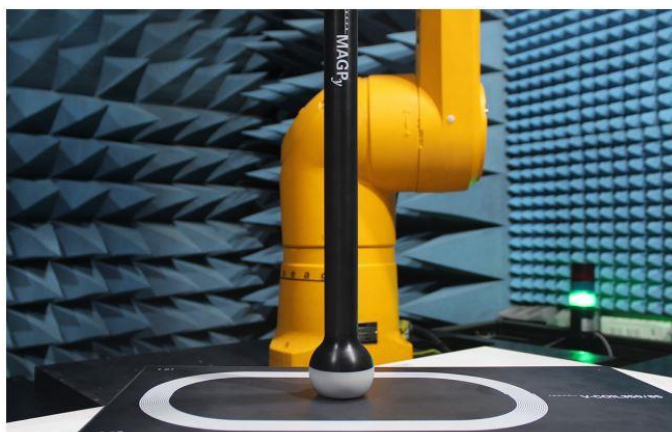

- **Compliance Evaluation**

DASY8 Module WPT SW version v2.6+ offers compliance evaluation with respect to:


- **Reference levels** on the basis of the incident *H*- and *E*-fields measured from the volume scan
- **Basic restrictions** on the basis of the peak induced *E*-field, peak induced current density, and
- **peak spatial-average SAR** calculated from the Sim4Life simulation.

Since SPEAG release a DASY8 Module WPT system (*SW Module WPT V2.6+*) for E and H-Field measurement, and also the system support Sim4Life plug-in includes the components to import the 3D H-field scan data (*H<sub>x</sub>*, *H<sub>y</sub>*, *H<sub>z</sub>* values in the measurement volume) to the Sim4Life simulation platform. And a magneto quasi-static (MQS) simulation is automatically setup to solve for a lossy halfspace Phantom setup. The lossy half-space has muscle tissue dielectric properties ( $\sigma = 0.75$  S/m,  $\rho = 1000$  kg/m<sup>3</sup>), The induced electric (*E*-) fields and **specific absorption rate (SAR)** are assessed with Sim4Life's Quasi-Static EM Solver (P-EM-QS) using only the measured data.

The post-processing engine determines the maximum induced E-field, current density, and SAR values in a homogeneous half-space of muscle tissue equivalent media (half-space muscle phantom) positioned at the compliance distance. In general, the compliance distance corresponds to the closest point (with respect to the exposure source) the human body (e.g., a part of the hand) can reach during the operation of the source.

The relative dielectric constant, conductivity, and mass density of the homogeneous phantom used in the simulations were 55, 0.75 S/m, and 1000 kg/m<sup>3</sup> respectively, which correspond to the phantom.

## ● Simulation Results

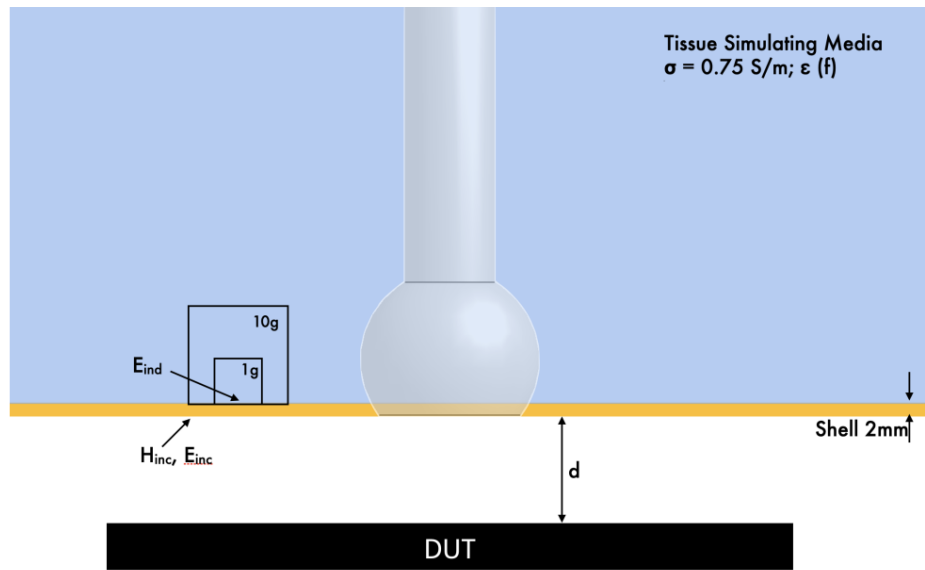

The distance used in the test raw data for simulation and compliance evaluation results is defined as the spacing between the top surface of the DUT and the bottom surface of the fictive phantom shell (with a thickness of 2 mm). In this case, the evaluation is made at distance  $d$ . Typically  $d = 0$ , i.e., at the DUT surface. The evaluation locations of the incident fields (i.e.,  $H_{inc}$  and  $E_{inc}$ ) as well as the induced fields (e.g.,  $E_{ind}$ , psSAR1g, and psSAR10g) are also illustrated.

**The following settings is used in the Dasy8 module WPT v2.6 software:**

1. Total field evaluation: ON
2. Multi-frequency: ON
3. Coverage Factor: ON

**The test plots in appendix B provided by the Dasy8 module WPT software is include the following information:**

1. The field distribution, with a clear illustration of the -20 dB boundary. It is recommended to use the auto extend mode to ensure the full -20 dB boundary is assessed.
2. All three tables produced by the system including the "incident fields, and induced quantities in the standardized phantom and anatomical model", "Standard compliance evaluation, Absolute" and "Standard compliance evaluation, Relative" tables.
3. The test plot(s) shall clearly display the fundamental frequency, amplitude, and all emissions within the frequency range from 3 kHz to 10 MHz.

## 4. Equipment List

| Manufacturer | Name of Equipment                                    | Type/Model     | Serial Number | Calibration   |               |
|--------------|------------------------------------------------------|----------------|---------------|---------------|---------------|
|              |                                                      |                |               | Last Cal.     | Due Date      |
| SPEAG        | Near-field Electric and Megnetic Field Sensor System | MAGPy-8H3D+E3D | 3059          | May. 15, 2024 | May. 14, 2025 |
| SPEAG        | Near-field Electric and Megnetic Field Sensor System | MAGPy-DAS      | 3064          | May. 15, 2024 | May. 14, 2025 |
| SPEAG        | Calibration Procedure for MAGPy Validation Source    | V-Coil350/85   | 1023          | May. 22, 2024 | May. 21, 2025 |

## 5. System Validiation

SPEAG developed the evaluation system DASY8 Module WPT for small-to-large size wireless power transfer (WPT) devices that combines subsystems of DASY8, MAGPy, and Sim4Life. The IT'IS Foundation was mandated to develop the system check and validation sources for WPT evaluations.

Below table shows the target value and measured value after normalized to 1A and comparing to the Target value provided by SPEAG calibration, the verification data should be within its specification of 1.24dB.

| Test Date | Calibrated Parameters (kHz) | Distance of the Virtual Phantom from the Surface (mm) |   | Peak H-field (A/m) | Induced peak current density 1cm <sup>2</sup> area avg.(A/m <sup>2</sup> ) | Induced peak E-field (V/m) |       |           | peak spatial SAR (mW/kg) |          |
|-----------|-----------------------------|-------------------------------------------------------|---|--------------------|----------------------------------------------------------------------------|----------------------------|-------|-----------|--------------------------|----------|
|           |                             |                                                       |   |                    |                                                                            | cube avg.                  | Local | line avg. | 1g avg.                  | 10g avg. |
| 2025/5/14 | 85                          | Target                                                | 0 | 208                | 2.35                                                                       | 3.35                       | 3.38  | 3.39      | 6.5                      | 4.84     |
|           |                             |                                                       | 2 | 189                | 2.22                                                                       | 3.15                       | 3.18  | 3.19      | 5.81                     | 4.38     |
|           |                             | Raw Measurement                                       | 0 | 210                | 2.45                                                                       | 3.48                       | 3.51  | 3.52      | 7.11                     | 5.35     |
|           |                             |                                                       | 2 | 191                | 2.32                                                                       | 3.29                       | 3.32  | 3.33      | 6.39                     | 4.88     |
|           |                             | Deviation (dB)                                        | 0 | 0.08               | 0.36                                                                       | 0.33                       | 0.33  | 0.33      | 0.39                     | 0.44     |
|           |                             |                                                       | 2 | 0.09               | 0.38                                                                       | 0.38                       | 0.37  | 0.37      | 0.41                     | 0.47     |

## **6. RF Exposure Results**

### **General Note:**

1. For WPT evaluation was performed with client with < 15% battery state, equal 50% and > 85% battery state will verify worst configuration found from 15% state.
2. Consider the client device in charging will away human body, for RF exposure was performed at 20cm separation distance.

| Plot No. | Position | Test Distance (mm) | Client Battery State | Measured Hinc (A/m) | Measured Einc (V/m) | Hinc Limit (A/m) | Einc Limit (V/m) | Hinc Result | Einc Result |
|----------|----------|--------------------|----------------------|---------------------|---------------------|------------------|------------------|-------------|-------------|
|          | Front    | 200                | < 15%                | 0.0785              | 0.712               | 1.63             | 614              | Pass        | Pass        |
|          | Back     | 200                | < 15%                | 0.0612              | 0.421               | 1.63             | 614              | Pass        | Pass        |
|          | Edge1    | 200                | < 15%                | 0.0352              | 0.59                | 1.63             | 614              | Pass        | Pass        |
|          | Edge2    | 200                | < 15%                | 0.064               | 0.476               | 1.63             | 614              | Pass        | Pass        |
| 1        | Edge3    | 200                | < 15%                | 0.129               | 0.757               | 1.63             | 614              | Pass        | Pass        |
|          | Edge4    | 200                | < 15%                | 0.0522              | 0.723               | 1.63             | 614              | Pass        | Pass        |
|          | Edge3    | 200                | = 50%                | 0.123               | 0.688               | 1.63             | 614              | Pass        | Pass        |
|          | Edge3    | 200                | > 85%                | 0.118               | 0.661               | 1.63             | 614              | Pass        | Pass        |

### **Conclusion:**

The field strength limit refers to Part 1.1310 and the test result of exposure evaluation is compliance with MPE limit.

## 7. Uncertainty

| Uncertainty Budget for Peak Incident H-field |                         |             |         |      |                           |
|----------------------------------------------|-------------------------|-------------|---------|------|---------------------------|
| Error Description                            | Uncertainty Value (±dB) | Probability | Divisor | (Ci) | Standard Uncertainty (dB) |
| <b>Measurement System</b>                    |                         |             |         |      |                           |
| Amplitude calibration uncertainty            | 0.35                    | N           | 1       | 1    | 0.35                      |
| Probe anisotropy                             | 0.60                    | R           | 1.732   | 1    | 0.35                      |
| Probe dynamic linearity                      | 0.20                    | R           | 1.732   | 1    | 0.12                      |
| Probe frequency domain response              | 0.30                    | R           | 1.732   | 1    | 0.17                      |
| Probe frequency linear interp. fit           | 0.15                    | R           | 1.732   | 1    | 0.09                      |
| Spatial averaging                            | 0.10                    | R           | 1.732   | 1    | 0.06                      |
| Parasitic E-field sensitivity                | 0.10                    | R           | 1.732   | 1    | 0.06                      |
| Detection limit                              | 0.15                    | R           | 1.732   | 1    | 0.09                      |
| Readout electronics                          | 0.0                     | N           | 1       | 1    | 0.0                       |
| Probe positioning                            | 0.19                    | N           | 1       | 1    | 0.19                      |
| Repeatability                                | 0.10                    | N           | 1       | 1    | 0.10                      |
| Surface field reconstruction                 | 0.30                    | N           | 1       | 1    | 0.30                      |
| Combined uncertainty ( k = 1)                |                         |             |         |      | 0.67 dB                   |
| Expanded uncertainty ( k = 2)                |                         |             |         |      | 1.33 dB                   |

| Uncertainty Budget for Peak Incident E-field |                         |             |         |      |                           |
|----------------------------------------------|-------------------------|-------------|---------|------|---------------------------|
| Error Description                            | Uncertainty Value (±dB) | Probability | Divisor | (Ci) | Standard Uncertainty (dB) |
| <b>Measurement System</b>                    |                         |             |         |      |                           |
| Amplitude calibration uncertainty            | 0.53                    | N           | 1       | 1    | 0.53                      |
| Probe anisotropy                             | 0.80                    | R           | 1.732   | 1    | 0.46                      |
| Probe dynamic linearity                      | 1.00                    | R           | 1.732   | 1    | 0.58                      |
| Probe frequency domain response              | 0.30                    | R           | 1.732   | 1    | 0.17                      |
| Probe frequency linear interp. fit           | 0.15                    | R           | 1.732   | 1    | 0.09                      |
| Parasitic H-field sensitivity                | 0.20                    | R           | 1.732   | 1    | 0.12                      |
| Detection limit                              | 0.15                    | R           | 1.732   | 1    | 0.09                      |
| Readout electronics                          | 0                       | N           | 1       | 1    | 0                         |
| Repeatability                                | 0.10                    | N           | 1       | 1    | 0.10                      |
| Combined uncertainty ( k = 1)                |                         |             |         |      | 0.95 dB                   |
| Expanded uncertainty ( k = 2)                |                         |             |         |      | 1.89 dB                   |

## **8. Reference**

1. Ilkka Laakso, Valerio De Santis, Silvano Cruciani, Tommaso Campi, and Mauro Feliziani, "Modelling of induced electric fields based on incompletely known magnetic fields", *Physics in Medicine & Biology*, vol. 62, no. 16, pp. 6567, 2017
2. Sami Gabriel, RW Lau, and Camelia Gabriel, "The dielectric properties of biological tissues: li. measurements in the frequency range 10 hz to 20 GHz", *Physics in medicine & biology*, vol. 41, no. 11, pp. 2251, 1996
3. ICNIRP, "Guidelines for limiting exposure to time-varying electric, magnetic and electromagnetic fields (up to 300 GHz)", *Health Physics*, vol. 74, pp. 494–522, 1998.
4. IEEE C95.1, IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz, IEEE Standards Department, International Committee on Electromagnetic Safety, The Institute of Electrical and Electronics Engineers, Inc. 3 Park Avenue, New York, NY 10016-5997, USA, 2019.
5. International Commission on Non-Ionizing Radiation Protection et al., "Guidelines for limiting exposure to electromagnetic fields (100 kHz to 300 GHz)", *Health Physics*, vol. 118, no. 5, pp. 483– 524, 2020.
6. WR Smythe, "Static and dynamic electricity, 2nd edition", p. 266, 1989.
7. IEC/IEEE 62704-1, Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices, 30 MHz–6 GHz – Part 1: General Requirements for using the Finite Difference Time Domain (FDTD) Method for SAR Calculations, International Electrotechnical Commission (IEC), IEC Technical Committee 106, Geneva, Switzerland, 2017.
8. IEC/IEEE 62704-4, Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices, 30 MHz–6 GHz – Part 1: General Requirements for using the Finite-Element Method (FEM) for SAR Calculations, International Electrotechnical Commission (IEC), IEC Technical Committee 106, Geneva, Switzerland, 2020
9. Assessment methods of the human exposure to electric and magnetic fields from wireless power transfer systems. Models, instrumentation, measurement and numerical methods and procedures (frequency range of 1 kHz to 30 MHz), IEC PAS 63184:2021