



Spot Check Evaluation

FCC ID : UZ7EM45A1
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45A1
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 22(H), 24(E), 27(L), 27(D), 27(H), 27(F),
27(M), 27(N), 27(O), 27(Q), 90(S), 90(R), 96
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart E §15.407

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION	4
1.1 Product Feature of Equipment Under Test	4
1.2 Modification of EUT	5
1.3 Testing Site.....	5
1.4 Test Software	5
1.5 Applicable Standards	6
2 RE-USE OF MEASURED DATA	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section	9
3 LIST OF MEASURING EQUIPMENT	20
4 MEASUREMENT UNCERTAINTY	23
APPENDIX A. TEST SETUP PHOTOGRAPHS	
APPENDIX B. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460505-02Q	Rev. 01	Initial issue of report	Feb. 12, 2025



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A1
FCC ID	UZ7EM45A1
IMEI Code	Conducted: 354708620060822/354708620063123 Conduction: 354708620060426/354708620064352 Radiation: 354708620060269/ 354708620064113 DFS/CBP: 354708620060657/354708620063206
HW Version	DV
SW Version	14-24-09.00-UG-U00-PRD-ATH-04
MFD	09DEC24
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO2-01



1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS DFS01-KS 03CH02-KS 03CH04-KS 03CH06-KS	CN1257	314309

1.4 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
3.	03CH04-KS	AUDIX	E3	210616
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 22(H), 24(E), 27(L), 27(D), 27(H), 27(F), 27(M), 27(N), 27(O), 27(Q), 90(S), 90(R), 96
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: EM45A1, FCC ID: UZ7EM45A1) is electrically identical to the reference device (Model: EM45A2, FCC ID: UZ7EM45A2) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA460505-02.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: UZ7EM45A1.

2.2 Model Difference Information

The **main** difference between FCC ID: UZ7EM45A2 and FCC ID: UZ7EM45A1 is as below:

- Removed RFID function.
- Antenna 1 removed WWAN TX function, keep supported Low bands and Middle bands RX function.

Other differences and all the details of similarity and difference can be found in the confidential documents (UZ7EM45A1 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	UZ7EM45A2	Full test	FR460505A	UZ7EM45A1	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	UZ7EM45A2	Full test	FR460505B	UZ7EM45A1	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	UZ7EM45A2	Full test	FR460505C	UZ7EM45A1	Spot check	Y, All test items
	DXX (NFC)	13.56	UZ7EM45A2	Full test	FR460505D	UZ7EM45A1	Spot check	Y, All test items
15E	U-NII	5180~5240	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5260~5320	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5500~5720	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5745~5825	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5260~5320 5500~5720	UZ7EM45A2	Full test	FZ460505	UZ7EM45A1	Spot check	Y, All test items
	6CD	5925~7125	UZ7EM45A2	Full test	FR460505G FR460505H	UZ7EM45A1	Spot check	Y, All test items
22, 24, 27, 90, 96,	PCE (WCDMA)	Band II, IV, V	UZ7EM45A2	Full test	FG460505A	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B2/4/5/7/12/13/17/25/ 26/30/38/41/66/71 ULCA 5B/7C/38C 41C/66B/66C	UZ7EM45A2	Full test	FG460505B FG460505C FG460505D FG460505G FG460505J	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B14 (90R)	UZ7EM45A2	Full test	FG460505E	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	UZ7EM45A2	Full test	FG460505F	UZ7EM45A1	Spot check	Y, All test items
	CBE (LTE)	B48/48C (Part96)	UZ7EM45A2	Full test	FG460505H FG460505I	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n2/n5/n7/n12/n13/n25/ n26/n30/n38/n41/n66/ n71/n77/n78	UZ7EM45A2	Full test	FG460505K FG460505L FG460505O FG460505R FG460505S	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n14 (90R)	UZ7EM45A2	Full test	FG460505M	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n26 (90S)	UZ7EM45A2	Full test	FG460505N	UZ7EM45A1	Spot check	Y, All test items
	CBE (NR)	n48/n77/n78 (Part96)	UZ7EM45A2	Full test	FG460505P FG460505Q	UZ7EM45A1	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH78)	Number of Channels	79	79	0	3
	Hopping Channel Separation	0.996	1.004	0.008	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.94	0.94	0	3
	99% Bandwidth	0.836	0.845	0.009	3
	Conducted Band Edges	-41.83	-44.27	2.44	3
	Conducted Spurious Emission	-45.65	-48	2.35	3
BT 1Mbps (CH39)	Radiated Band Edges and Radiated Spurious Emission	55.68	56.85	1.17	3
BT	AC Conducted Emission	11.93	10.83	1.1	3
BLE 1Mbps (CH39)	6dB Bandwidth	1.15	1.15	0	3
	99% Bandwidth	2.01	2.014	0.004	3
	Power Spectral Density	-9.33	-9.34	0.01	3
	Conducted Band Edges	-33.74	-33.98	0.24	3
	Conducted Spurious Emission	-51.53	-52.95	1.42	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	47.73	46.09	1.46	3
BLE	AC Conducted Emission	11.93	10.83	1.1	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth	8.08	8.08	0	3
	99% Bandwidth	13.467	13.387	0.08	3
	Power Spectral Density	-1.15	-1.27	0.12	3
	Conducted Band Edges	-47.96	-48.2	0.24	3
	Conducted Spurious Emission	-43.67	-45.68	2.01	3
WIFI 2.4G (802.11ax HE20 CH11)	Radiated Band Edges and Spurious Emission	52.29	49.61	2.68	3
WIFI 2.4G	AC Conducted Emission	11.93	10.83	1.1	3
WIFI 5G (802.11a CH149)	26dB Bandwidth	19.29	19.2	0.09	3
WIFI 5G (802.11a CH149)	99% Bandwidth	16.705	16.705	0	3
WIFI 5G (802.11a CH149)	Power Spectral Density	8.3	7.99	0.31	3
WIFI 5G (802.11a CH149)	Unwanted Emissions	16.31	16.31	0	3
WIFI 5G (11ax HE80 Ch42)	Radiated Band Edges and Spurious Emission	50.86	50.93	0.07	3
WIFI 5G	AC Conducted Emission	12.50	11.33	1.17	3
WIFI 5G (802.11a CH116)	DFS	0.851628	0.87852	0.026	3
FCC-WIFI 6G UNII-5 (802.11ax HE80 CH47 6185MHz)-6XD	26dB Emission Bandwidth	165.79	165.41	0.38	3
	99% Occupied Bandwidth	157.105	157.257	0.152	3
	Fundamental Maximum EIRP	17.30	17.00	0.30	3
	Fundamental Power Spectral Density	-3.33	-5.16	1.83	3
	In-Band Emissions	-12.47	-11.09	1.38	3



FCC-WIFI 6G UNII-5 (802.11ax HE80 CH47 6185MHz)-6CD	26dB Emission Bandwidth	165.79	165.41	0.38	3
	99% Occupied Bandwidth	157.105	157.257	0.152	3
	Fundamental Maximum EIRP	17.30	17.04	0.26	3
	Fundamental Power Spectral Density	-3.33	-5.16	1.83	3
	In-Band Emissions	-12.47	-11.09	1.38	3
WIFI 6G UNII-5 (802.11ax HE160 CH47 6185MHz)	Contention Based Protocol	-65.36	-65.88	0.52	3
6E (802.11ax HE20_Ch233)	Radiated Band Edges and Spurious Emission	66.93	67.17	0.24	3
WIFI 6G	AC Conducted Emission	11.52	12.62	1.1	3
Part 15C NFC	20dB Spectrum Bandwidth	2.48	2.48	0	3
	99% OBW Spectrum Bandwidth	2.10	2.11	0.01	3
	Frequency Stability	-22.9351	-20.8333	2.1018	3
	Field Strength of Fundamental Emissions	58.04	58.19	0.15	3
	Radiated Spurious Emissions	33.28	35.09	1.81	3
	AC Conducted Emissions	11.94	11.86	0.06	3

Mode	Test Item	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 96 SA_n77	Radiated Spurious Emission	-43.4	-43.69	0.29	3
Part 96 SA_n48	End User Device additional requirement	Pass	Pass	-	-
Part96 Band48CA	Equivalent Isotropic Radiated Power	20.99	20.96	0.203	3
	Peak-to-Average Ratio	6.43	6.22	0.21	3
	Occupied Bandwidth	32.80	32.80	0.00	3
	Conducted Band Edge	-40.19	-40.98	0.79	3
	Conducted Spurious Emission	-48.81	-47.65	1.16	3
	Frequency Stability	0.0005	0.0011	0.0006	3



Conducted power for Unlicensed bands

Test Item	Mode	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	9.32	8.85	0.47	3
	BLE 1Mbps	9.12	8.87	0.25	3
	BLE 2Mbps	9.33	9.00	0.33	3
	11b, 2.4GHz	22.51	22.46	0.05	3
	11g, 2.4GHz	21.97	21.92	0.05	3
	11n HT20, 2.4GHz	21.27	21.20	0.07	3
	11ac VHT20, 2.4GHz	21.31	21.25	0.06	3
	11ax HE20, 2.4GHz	21.33	21.31	0.02	3
	11a, 5.2GHz	22.28	22.15	0.13	3
	11a, 5.3GHz	22.27	22.08	0.19	3
	11a, 5.5GHz	22.41	22.22	0.19	3
	11a, 5.8GHz	22.45	22.39	0.06	3
	11n HT20, 5.2GHz	21.20	21.11	0.09	3
	11n HT20, 5.3GHz	20.56	20.27	0.29	3
	11n HT20, 5.5GHz	21.42	21.01	0.41	3
	11n HT20, 5.8GHz	21.51	21.14	0.37	3
	11ac VHT20, 5.2GHz	21.25	21.16	0.09	3
	11ac VHT20, 5.3GHz	20.62	20.31	0.31	3
	11ac VHT20, 5.5GHz	21.46	21.04	0.42	3
	11ac VHT20, 5.8GHz	21.56	21.17	0.39	3
	11ax HE20, 5.2GHz	21.29	21.20	0.09	3
	11ax HE20, 5.3GHz	20.68	20.38	0.30	3
	11ax HE20, 5.5GHz	21.41	21.09	0.32	3
	11ax HE20, 5.8GHz	21.41	21.06	0.35	3
	11n HT40, 5.2GHz	20.45	20.03	0.42	3
	11n HT40, 5.3GHz	20.22	19.85	0.37	3
	11n HT40, 5.5GHz	20.52	20.33	0.19	3
	11n HT40, 5.8GHz	20.30	20.24	0.06	3
	11ac VHT40, 5.2GHz	20.51	20.08	0.43	3
	11ac VHT40, 5.3GHz	20.27	19.89	0.38	3
	11ac VHT40, 5.5GHz	20.55	20.39	0.16	3
	11ac VHT40, 5.8GHz	20.36	20.32	0.04	3
	11ax HE40, 5.2GHz	20.56	20.14	0.42	3
	11ax HE40, 5.3GHz	20.30	19.94	0.36	3
	11ax HE40, 5.5GHz	20.60	20.44	0.16	3
	11ax HE40, 5.8GHz	20.42	20.35	0.07	3
	11ac VHT80, 5.2GHz	20.25	20.02	0.23	3
	11ac VHT80, 5.3GHz	20.03	19.77	0.26	3
	11ac VHT80, 5.5GHz	20.18	20.01	0.17	3
	11ac VHT80, 5.8GHz	19.83	19.79	0.04	3
	11ax HE80, 5.2GHz	20.31	20.05	0.26	3
	11ax HE80, 5.3GHz	20.07	19.79	0.28	3
	11ax HE80, 5.5GHz	20.21	20.03	0.18	3
	11ax HE80, 5.8GHz	19.85	19.82	0.03	3
	11ac VHT160, 5.3GHz	19.21	19.11	0.10	3
	11ac VHT160, 5.5GHz	19.48	19.24	0.24	3
	11ax HE160, 5.3GHz	19.23	19.14	0.09	3
	11ax HE160, 5.5GHz	19.52	19.28	0.24	3
	6CD Indoor 11a, U-NII-5	7.13	7.06	0.07	3
	6CD Indoor 11a, U-NII-6	7.63	7.61	0.02	3
	6CD Indoor 11a, U-NII-7	6.43	6.38	0.05	3
	6CD Indoor 11a, U-NII-8	5.80	5.71	0.09	3
	6CD Indoor 11ax HE20, U-NII-5	10.68	10.47	0.21	3
	6CD Indoor 11ax HE20, U-NII-6	11.19	11.12	0.07	3



6CD Indoor 11ax HE20, U-NII-7	9.90	9.86	0.04	3
6CD Indoor 11ax HE20, U-NII-8	9.18	8.91	0.27	3
6CD Indoor 11ax HE40, U-NII-5	13.56	13.40	0.16	3
6CD Indoor 11ax HE40, U-NII-6	14.02	13.89	0.13	3
6CD Indoor 11ax HE40, U-NII-7	12.74	12.65	0.09	3
6CD Indoor 11ax HE40, U-NII-8	12.41	12.34	0.07	3
6CD Indoor 11ax HE80, U-NII-5	16.49	16.28	0.21	3
6CD Indoor 11ax HE80, U-NII-6	16.36	16.34	0.02	3
6CD Indoor 11ax HE80, U-NII-7	16.05	15.96	0.09	3
6CD Indoor 11ax HE80, U-NII-8	15.84	15.78	0.06	3
6CD Indoor 11ax HE160, U-NII-5	16.95	16.65	0.30	3
6CD Indoor 11ax HE160, U-NII-6	16.48	16.09	0.39	3
6CD Indoor 11ax HE160, U-NII-7	16.71	16.43	0.28	3
6CD Indoor 11ax HE160, U-NII-8	16.80	16.50	0.30	3
6CD Outdoor 11a, U-NII-5	17.02	16.53	0.49	3
6CD Outdoor 11a, U-NII-7	16.69	16.62	0.07	3
6CD Outdoor 11ax HE20, U-NII-5	16.95	16.55	0.40	3
6CD Outdoor 11ax HE20, U-NII-7	16.61	16.26	0.35	3
6CD Outdoor 11ax HE40, U-NII-5	16.90	16.60	0.30	3
6CD Outdoor 11ax HE40, U-NII-7	16.52	16.22	0.30	3
6CD Outdoor 11ax HE80, U-NII-5	16.85	16.52	0.33	3
6CD Outdoor 11ax HE80, U-NII-7	16.43	16.13	0.30	3
6CD Outdoor 11ax HE160, U-NII-5	16.95	16.65	0.30	3
6CD Outdoor 11ax HE160, U-NII-7	16.42	16.20	0.22	3

Conducted power for Licensed bands

Test Item	Mode	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	WCDMA II	23.97	23.79	0.18	3
	WCDMA IV	23.92	23.88	0.04	3
	WCDMA V	23.98	23.66	0.32	3
	LTE B2	23.66	23.24	0.42	3
	LTE B4	23.56	23.32	0.24	3
	LTE B5	23.69	23.35	0.34	3
	LTE B5B	23.65	23.52	0.13	3
	LTE B7	22.8	22.61	0.19	3
	LTE B7C	22.79	22.75	0.04	3
	LTE B12	23.89	23.65	0.24	3
	LTE B13	23.71	23.31	0.4	3
	LTE B14	23.83	23.38	0.45	3
	LTE B17	23.82	23.43	0.39	3
	LTE B25	23.68	23.19	0.49	3
	LTE B26L	23.47	23.26	0.21	3
	LTE B26H	23.71	23.26	0.45	3
	LTE B30	23.69	23.57	0.12	3
	LTE B66	23.60	23.28	0.32	3
	LTE B71	22.76	22.72	0.04	3
	LTE B38	22.77	22.70	0.07	3
	LTE B41	26.01	26.00	0.01	3
	LTE B38C	22.63	22.59	0.04	3
	LTE B41C	25.73	25.62	0.11	3
	LTE B48 part96	21.85	21.82	0.03	3
	LTE B48C part96	21.55	21.52	0.03	3
	LTE B66B	23.49	23.27	0.22	3
	LTE B66C	23.32	23.21	0.11	3



N13	24.27	23.96	0.31	3
N14	24.26	23.98	0.28	3
N26 L	24.45	24.06	0.39	3
N26 H	24.49	24.02	0.47	3
ENDC_48A_n66A	24.22	24.18	0.04	3
N77 270 MIMO	24.70	24.36	0.34	3
N78 270 MIMO	24.61	24.32	0.29	3
N77 part96 MIMO	22.31	22.25	0.06	3
N78 part96 MIMO	22.26	22.19	0.07	3
N77 27Q MIMO	24.45	24.12	0.33	3
N78 27Q MIMO	24.11	23.86	0.25	3
ENDC_5A_n2A	24.72	24.27	0.45	3
ENDC_12A_n25A	24.74	24.29	0.45	3
ENDC_2A_n5A	24.39	24.31	0.08	3
ENDC_2A_n7A	23.85	23.51	0.34	3
ENDC_2A_n12A	24.52	24.25	0.27	3
ENDC_2A_n30A	23.65	23.58	0.07	3
ENDC_2A_n38A	23.59	23.45	0.14	3
ENDC_2A_n41A	26.56	26.45	0.11	3
ENDC_2A_n71A	23.39	23.31	0.08	3
ENDC_2A_N77A 270	26.23	26.17	0.06	3
ENDC_2A_N78A 270	26.01	25.94	0.07	3
ENDC_2A_N77A 27Q	25.99	25.75	0.24	3
ENDC_2A_N78A 27Q	25.81	25.47	0.34	3
ENDC_2A_N77A part96	22.85	22.62	0.23	3
ENDC_2A_N78A part96	22.76	22.58	0.18	3
ENDC_2A_N48A part96	22.04	22.01	0.03	3

6CD- < indoor client>

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	001	5955	0.03	0.03	4.55	3.39	0.35	-0.85	4.90	2.54	24.00	Pass	4.5	

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	049	6195	Full	0.00	0.00	7.91	6.82	0.35	-0.85	8.26	5.97	24.00	Pass	8	8
HE40	MCS0	1	003	5965	Full	0.00	0.00	10.63	10.08	0.35	-0.85	10.98	9.23	24.00	Pass	11	11
HE80	MCS0	1	007	5985	Full	0.00	0.00	13.43	13.02	0.35	-0.85	13.78	12.17	24.00	Pass	14	14
HE160	MCS0	1	047	6185	Full	0.00	0.00	14.01	13.13	0.35	-0.85	14.36	12.28	24.00	Pass	14	14

U-NII-6 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6515	0.03	0.04	4.81	4.31	0.75	-2.44	5.56	1.87	24.00	Pass	5.5	5.5



U-NII-6 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	105	6475	Full	0.00	0.00	8.41	7.67	0.75	-2.44	9.16	5.23	24.00	Pass	9	9
HE40	MCS0	1	107	6485	Full	0.00	0.00	11.21	10.45	0.75	-2.44	11.96	8.01	24.00	Pass	12	12
HE80	MCS0	1	103	6465	Full	0.00	0.00	13.63	12.91	0.75	-2.44	14.38	10.47	24.00	Pass	14	14
HE160	MCS0	1	111	6505	Full	0.00	0.00	13.37	12.72	0.75	-2.44	14.12	10.28	24.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	117	6535	0.03	0.04	3.54	3.14	1.02	0.16	4.56	3.30	24.00	Pass	4	4

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	117	6535	Full	0.00	0.00	7.19	6.43	1.02	0.16	8.21	6.59	24.00	Pass	7.5	7.5
HE40	MCS0	1	123	6565	Full	0.00	0.00	9.97	9.19	1.02	0.16	10.99	9.35	24.00	Pass	10.5	10.5
HE80	MCS0	1	135	6625	Full	0.00	0.00	13.33	12.45	1.02	0.16	14.35	12.61	24.00	Pass	14	14
HE160	MCS0	1	175	6825	Full	0.00	0.00	13.25	13.51	1.02	0.16	14.27	13.67	24.00	Pass	14	14

U-NII-8 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	7095	0.03	0.04	2.72	2.58	0.70	1.66	3.42	4.24	24.00	Pass	3.5	3.5

U-NII-8 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	229	7095	Full	0.00	0.00	5.85	5.76	0.70	1.66	6.55	7.42	24.00	Pass	6.5	6.5
HE40	MCS0	1	227	7085	Full	0.00	0.00	9.27	9.26	0.70	1.66	9.97	10.92	24.00	Pass	10	10
HE80	MCS0	1	199	6945	Full	0.00	0.00	12.98	12.45	0.70	1.66	13.68	14.11	24.00	Pass	13.5	13.5
HE160	MCS0	1	207	6985	Full	0.00	0.00	13.22	13.58	0.70	1.66	13.92	15.24	24.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	001	5955	0.03	0.04	4.60	3.43	7.06	0.35		7.41	24.00	Pass	4.5	

U-NII-6 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	6515	0.03	0.04	4.84	4.35	7.61	0.75		8.36	24.00	Pass	5.5	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	117	6535	0.03	0.04	3.57	3.17	6.38	1.02		7.40	24.00	Pass	4	

U-NII-8 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	7095	0.03	0.04	2.74	2.65	5.71	1.66		7.37	24.00	Pass	3.5	

<SDM mode>

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	049	6195	Full	0.00	0.00	7.96	6.89	10.47	0.35		10.82	24.00	Pass	8	
HE40	MCS0	2	003	5965	Full	0.00	0.00	10.67	10.10	13.40	0.35		13.75	24.00	Pass	11	
HE80	MCS0	2	007	5985	Full	0.00	0.00	13.49	13.04	16.28	0.35		16.63	24.00	Pass	14	
HE160	MCS0	2	047	6185	Full	0.00	0.00	14.06	13.17	16.65	0.35		17.00	24.00	Pass	14	



U-NII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	105	6475	Full	0.00	0.00	8.44	7.76	11.12	0.75		11.87	24.00	Pass	9	
HE40	MCS0	2	107	6485	Full	0.00	0.00	11.24	10.48	13.89	0.75		14.64	24.00	Pass	12	
HE80	MCS0	2	103	6465	Full	0.00	0.00	13.68	12.95	16.34	0.75		17.09	24.00	Pass	14	
HE160	MCS0	2	111	6505	Full	0.00	0.00	13.40	12.74	16.09	0.75		16.84	24.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	117	6535	Full	0.00	0.00	7.22	6.44	9.86	1.02		10.88	24.00	Pass	7.5	
HE40	MCS0	2	123	6565	Full	0.00	0.00	10.02	9.22	12.65	1.02		13.67	24.00	Pass	10.5	
HE80	MCS0	2	135	6625	Full	0.00	0.00	13.35	12.51	15.96	1.02		16.98	24.00	Pass	14	
HE160	MCS0	2	175	6825	Full	0.00	0.00	13.29	13.55	16.43	1.02		17.45	24.00	Pass	14	

U-NII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	229	7095	Full	0.00	0.00	5.88	5.91	8.91	1.66		10.57	24.00	Pass	6.5	
HE40	MCS0	2	227	7085	Full	0.00	0.00	9.33	9.32	12.34	1.66		14.00	24.00	Pass	10	
HE80	MCS0	2	199	6945	Full	0.00	0.00	13.02	12.50	15.78	1.66		17.44	24.00	Pass	13.5	
HE160	MCS0	2	207	6985	Full	0.00	0.00	13.36	13.62	16.50	1.66		18.16	24.00	Pass	14	

<standard client >

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	049	6195	0.03	0.04	14.00	12.85	0.35	-0.85	14.35	12.00	30.00	Pass	14	



U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	049	6195	Full	0.00	0.00	13.99	12.97	0.35	-0.85	14.34	12.12	30.00	Pass	14	14
HE40	MCS0	1	051	6205	Full	0.00	0.00	14.02	13.03	0.35	-0.85	14.37	12.18	30.00	Pass	14	14
HE80	MCS0	1	055	6225	Full	0.00	0.00	13.88	13.01	0.35	-0.85	14.23	12.16	30.00	Pass	14	14
HE160	MCS0	1	047	6185	Full	0.00	0.00	14.01	13.13	0.35	-0.85	14.36	12.28	30.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	181	6855	0.03	0.04	13.58	13.45	1.02	0.16	14.60	13.61	30.00	Pass	14	14

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	117	6535	Full	0.00	0.00	13.63	12.76	1.02	0.16	14.65	12.92	30.00	Pass	14	14
HE40	MCS0	1	123	6565	Full	0.00	0.00	13.57	12.76	1.02	0.16	14.59	12.92	30.00	Pass	14	14
HE80	MCS0	1	167	6785	Full	0.00	0.00	13.37	12.76	1.02	0.16	14.39	12.92	30.00	Pass	14	14
HE160	MCS0	1	143	6665	Full	0.00	0.00	13.37	12.91	1.02	0.16	14.39	13.07	30.00	Pass	14	14

<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	049	6195	0.03	0.04	14.05	12.92	16.53	0.35		16.88	30.00	Pass	14	

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	049	6195	Full	0.00	0.00	14.02	13.00	16.55	0.35		16.90	30.00	Pass	14	
HE40	MCS0	2	051	6205	Full	0.00	0.00	14.06	13.07	16.60	0.35		16.95	30.00	Pass	14	
HE80	MCS0	2	055	6225	Full	0.00	0.00	13.92	13.05	16.52	0.35		16.87	30.00	Pass	14	
HE160	MCS0	2	047	6185	Full	0.00	0.00	14.06	13.17	16.65	0.35		17.00	30.00	Pass	14	



U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	181	6855	0.03	0.04	13.63	13.60	16.62	1.02		17.64	30.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	117	6535	Full	0.00	0.00	13.68	12.78	16.26	1.02		17.28	30.00	Pass	14	
HE40	MCS0	2	123	6565	Full	0.00	0.00	13.59	12.79	16.22	1.02		17.24	30.00	Pass	14	
HE80	MCS0	2	167	6785	Full	0.00	0.00	13.40	12.83	16.13	1.02		17.15	30.00	Pass	14	
HE160	MCS0	2	143	6665	Full	0.00	0.00	13.42	12.95	16.20	1.02		17.22	30.00	Pass	14	

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Nov. 05, 2024	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Nov. 05, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Nov. 05, 2024	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Nov. 05, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Nov. 05, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Nov. 05, 2024	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024~Feb. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 05, 2024	Oct. 09, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 05, 2024	NCR	CBP (DFS01-KS)
Signal Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Conducted (DFS01-KS)



MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY562004 17 /MY59360 210	9kHz~7.2GHz	Apr 17, 2024	Nov. 05, 2024	Apr 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Nov. 05, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 11, 2024	Oct. 24, 2024	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 24, 2024	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 18, 2024	Oct. 24, 2024	Aug. 17, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 24, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 02, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 02, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Nov. 02, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G, MAX 30dB	Oct. 11, 2024	Oct. 20, 2024	Oct. 10, 2025	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 10, 2024	Oct. 20, 2024	Sep. 09, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Oct. 20, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	Oct. 20, 2024	Aug. 15, 2025	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Oct. 20, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 20, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 05, 2024	Nov. 12, 2024	Jan. 04, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 12, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of Conducted Measurement(WIFI 6G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.04ppm
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement(NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	0.04ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22dB
---	--------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------



03CH04-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix B. Reference Report



FCC Part 96.47 Test Report

FCC ID : UZ7EM45A2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
Model Name : EM45A2
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : FCC Part 96.47
Test Date(s) : Jun. 21, 2024 ~ Jun. 26, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 PRODUCT FEATURE OF EQUIPMENT UNDER TEST.....	5
1.2 PRODUCT SPECIFICATION OF EQUIPMENT UNDER TEST	6
1.3 TESTING LOCATION.....	6
1.4 TEST SOFTWARE	6
1.5 APPLICABLE STANDARDS.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 CONNECTION DIAGRAM OF TEST SYSTEM	7
3 END USER DEVICE ADDITIONAL REQUIREMENT	8
3.1 TEST REQUIREMENT	8
3.2 TEST PROCEDURE.....	8
3.3 TEST RESULT	9
4 LIST OF MEASURING EQUIPMENT	13
APPENDIX A. TEST SETUP PHOTO	



History of this test report

Report No.	Version	Description	Issued Date
FG460505Q	01	Initial issue of report	Sep. 05, 2024

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3	96.47	End User Device additional requirement	Pass	-



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A2
FCC ID	UZ7EM45A2
IMEI Code	352991990029039/352991990029328
HW Version	EV2.5
SW Version	13-32-08.00-TG-U06-STD-ATH-04
MFD	08AUG24
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory			
Battery	Brand Name	Zebra	Model
			BT-000501
			Part Number
			BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n48/n77/n78: 3550 MHz ~ 3700 MHz
Rx Frequency	5G NR n48/n77/n78: 3550 MHz ~ 3700 MHz
Antenna Type / Gain	5G NR n77/n78 <Ant.2>: PIFA Antenna /-1.13 dBi <Ant.3>: PIFA Antenna /0.50 dBi <Ant.4>: PIFA Antenna /-0.56 dBi <Ant.6>: PIFA Antenna /0.65 dBi 5G NR n48 <Ant.4>: PIFA Antenna /-0.56 dBi
Type of Modulation	DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)

1.3 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	DFS01-KS	CN1257	314309
Test Engineer	Chad Wang		
Temperature	20 ~ 24.5 °C		
Relative Humidity	40 ~ 60 %		

1.4 Test Software

Item	Site	Manufactor	Name	Version
1.	DFS01-KS	Sporton	DFS & Adaptivity Test Tools	1.0


1.5 Applicable Standards

- ♦ FCC Part 96.47
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- ♦ WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Connection Diagram of Test System

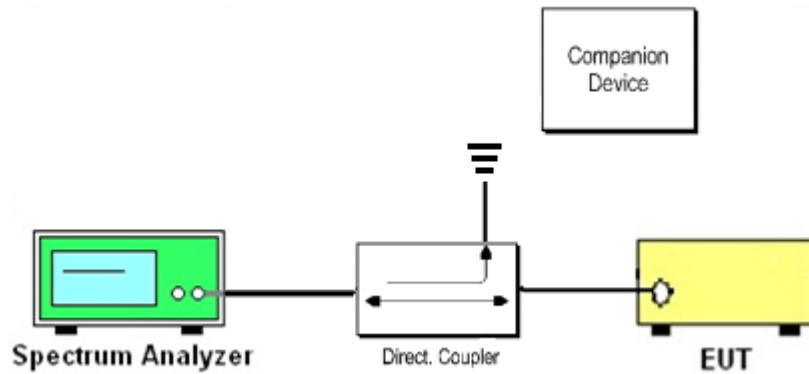

The companion device is certified CBRS (FCC ID: WBKRU4370)

3 End User Device additional requirement

3.1 Test Requirement

FCC Part 96.47

(a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

(1) An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

3.2 Test Procedure

Following procedure can be done by applying WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification, use the certified CBSD (FCC ID: WBKRU4370) as companion device to show compliance with Part 96.47 requirement for End User Device (EUD):

1. Configure SAS granted CBSD to operate at frequency 3560-3600MHz/ 3550-3650MHz & power level 34dBm/MHz
2. Enable AP service from CBSD Cloud management
3. Check EUD Tx Frequency and power
4. Disable AP service from CBSD Cloud management
5. Check EUD stops transmission within 10seconds.


6. Configure SAS granted CBSD to operate at frequency 3650-3690MHz/3600-3700MHz & power level 20dBm/MHz
7. Enable AP service from CBSD Cloud management
8. Check EUD Tx Frequency and power
9. Disable AP service from CBSD Cloud management
10. Check EUD stops transmission within 10seconds.

3.3 Test Result


For 5GNR n48

[Step 1] Setup with frequency 3560--3600MHz and power level 34dBm/MHz

[Step 3] Check EUD Tx Frequency and power

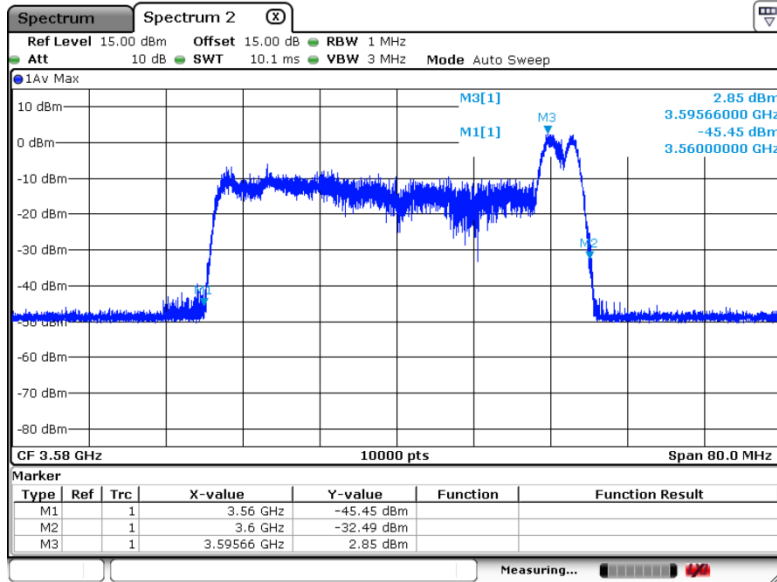


[Step 4.a.] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.

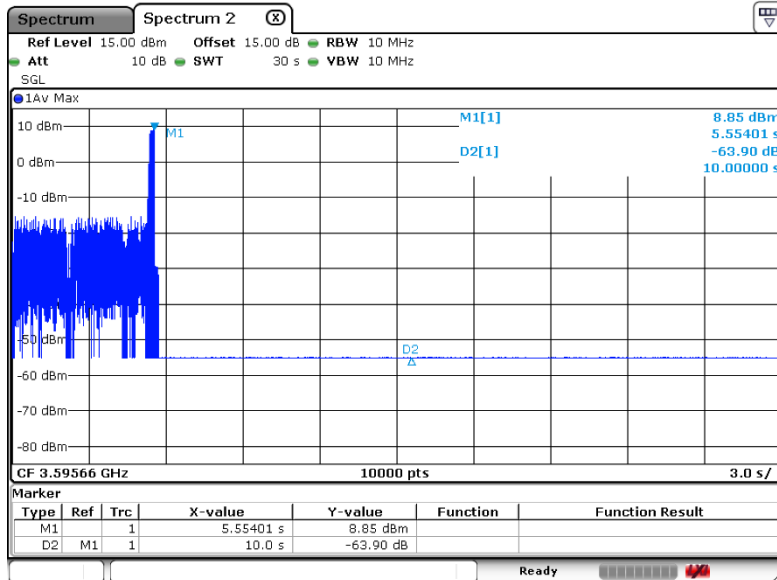


[Step 5] Setup with frequency 3650-3690MHz and power level 20dBm/MHz

[Step 7] Check EUD Tx Frequency and power

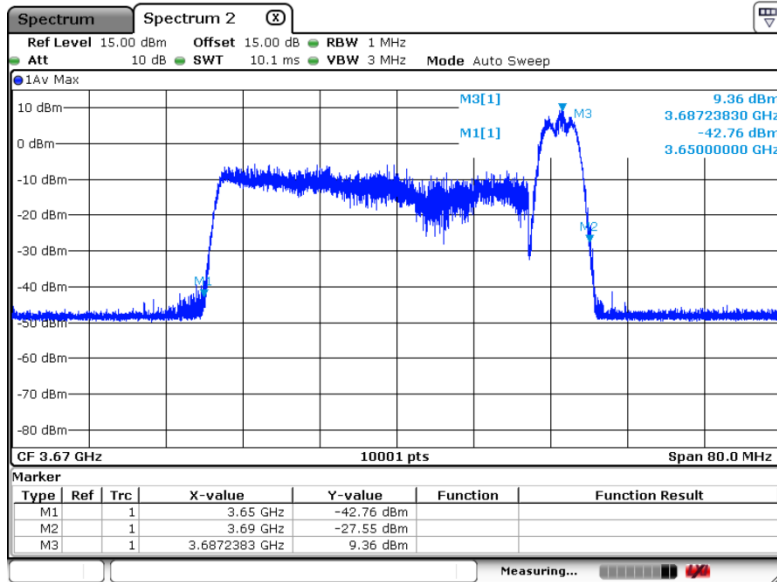

[Step 8.a.] After changing the frequency and power level,

The module (EUT) discontinues operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD. Test result is PASS.

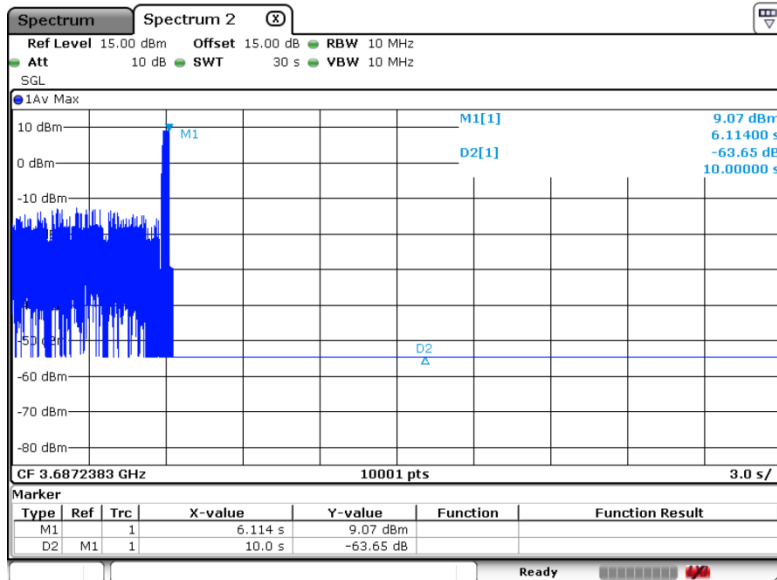





For 5GNR n78 cover n77

[Step 1] Setup with frequency 3550--3650MHz and power level 34dBm/MHz

[Step 3] Check EUD Tx Frequency and power

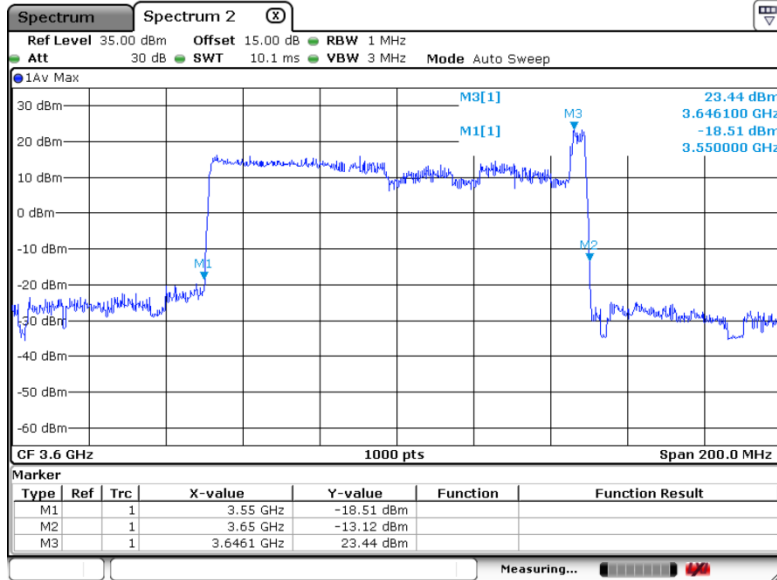


[Step 4.a.] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.

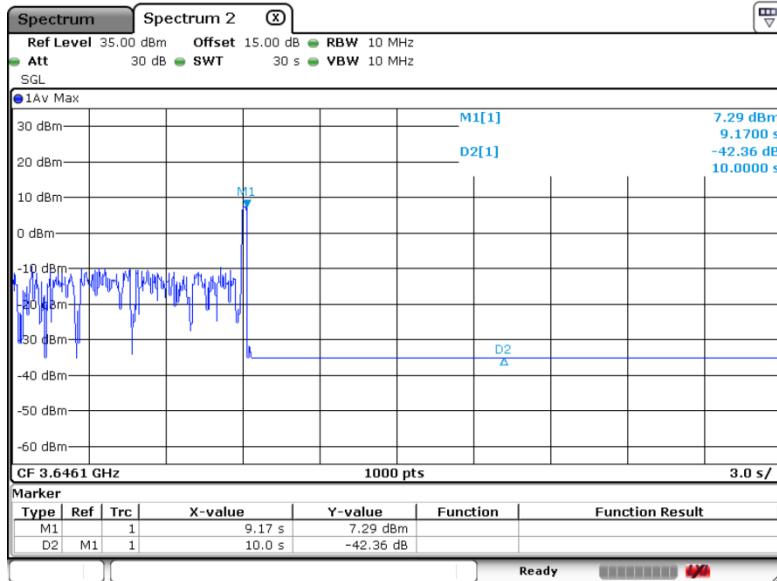


[Step 5] Setup with frequency 3600--3700MHz and power level 20dBm/MHz

[Step 7] Check EUD Tx Frequency and power

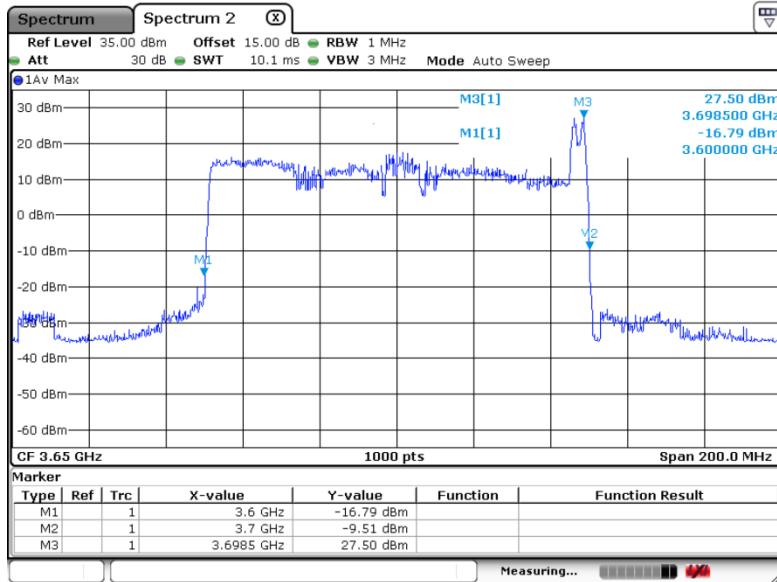

[Step 8.a.] After changing the frequency and power level,

The module (EUT) discontinues operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD. Test result is PASS.

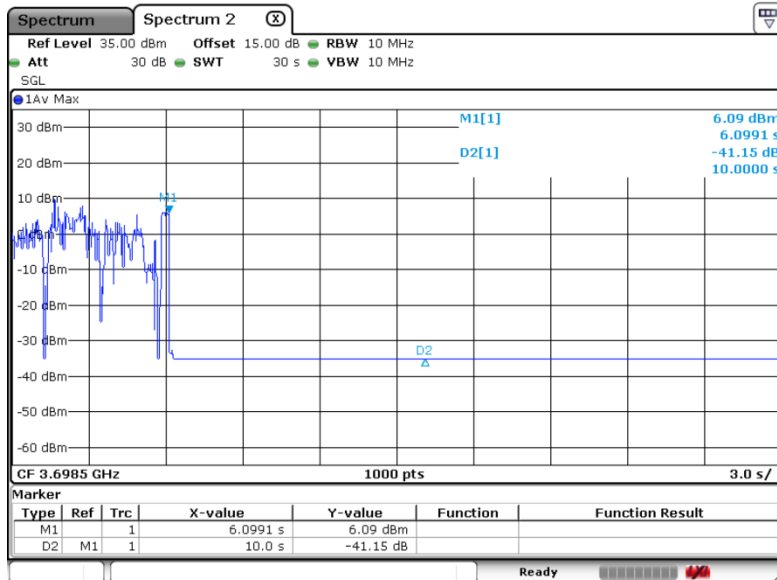



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 04, 2024	Jun. 21, 2024 ~ Jun. 26, 2024	Jan. 03, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Jun. 21, 2024 ~ Jun. 26, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Requirement.



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

----- THE END -----